YAMAHA

MUSIC SYNTHESIZER

MODX M6

MODX M7

MODX M8

Data List

For firmware version 3.00

Contents

Performance List 2
Performance Category List 27
Drum Kit Assign List 28
Waveform List 66
Live Set List 91
Arpeggio Type List 94
Effect Type List 157
Effect Parameter List 159
Effect Preset List 172
Effect Data Assign Table 176
Control List 198
Algorithm Chart 208
MIDI Data Format 212
MIDI Data Table 216
MIDI Implementation Chart 257
MIDI Messages in UMP Format 259

EN

Performance List

*1 The new Performances added by firmware version 3.00 update.

No.		Perfomance Name	Main Category	Sub Category
1		CFX + FM EP	Piano	Acoustic
2		CFX + FM EP 2	Piano	Acoustic
3		CFX Concert	Piano	Acoustic
4		CFX Stage	Piano	Acoustic
5		CFX Pop/Rock	Piano	Acoustic
6		CFX PopStudioGrand	Piano	Acoustic
7		CFX Moody	Piano	Acoustic
8		CFX & Pad	Piano	Acoustic
9		CFX & Pad 2	Piano	Acoustic
10		CFX & Orch	Piano	Acoustic
11		CFX & Orch 2	Piano	Acoustic
12		CFX Shrine	Piano	Acoustic
13		CFX Shrine 2	Piano	Acoustic
14		CFX Padded	Piano	Acoustic
15		CFX Padded 2	Piano	Acoustic
16		CFX & Pad & Sub	Piano	Acoustic
17		S700 for Montage	Piano	Acoustic
18		C7 Grand	Piano	Acoustic
19		C7	Piano	Acoustic
20		Imperial	Piano	Acoustic
21		Nashville C3	Piano	Acoustic
22		Nashville Vintage EQ	Piano	Acoustic
23		Hamburg Grand	Piano	Acoustic
24		Mellow Hamburg Grand	Piano	Acoustic
25		The Felt	Piano	Acoustic
26		Felt Piano	Piano	Acoustic
27		Composer Felt Piano	Piano	Acoustic
28		Cinematic Felt	Piano	Vintage
29		U1 Upright	Piano	Acoustic
30		U1 Upright 2	Piano	Acoustic
31		Upright Piano	Piano	Acoustic
32		Upright Mod 1	Piano	Acoustic
33		Upright Mod 2	Piano	Acoustic
34		Upright Tack Piano	Piano	Acoustic
35		Upright Atmos	Piano	Acoustic
36		Imaginary Upright	Piano	Acoustic
37		Cold Upright	Piano	Acoustic
38		Acoustic Piano DA	Piano	Modern
39		AcPiano+FMPiano DA	Piano	Modern
40		AcPf+FM Pf+Pad DA	Piano	Modern
41		Sky Keys	Piano	Acoustic
42		Full AP/EP/Pd/Str	Piano	Acoustic
43		Full AP/FMEP/Pd/St	Piano	Acoustic
44		FM EP & CFX Grand	Piano	Acoustic
45		FM EP & CFX Grand 2	Piano	Acoustic
46		Schlager Weapon 1	Piano	Modern
47		Lonely Keys	Piano	Acoustic
48		The New Ballad	Piano	Modern
49		CP80 Layer	Piano	Vintage
50		CP80	Piano	Vintage
51		CP80 Amp	Piano	Vintage
52		CP80 Chorus	Piano	Vintage
53		CP80 & Pad	Piano	Vintage
54		FM Grand Piano	Piano	Vintage
55		FM Digi Ac Piano	Piano	Vintage
56		FM Bright Piano	Piano	Vintage
57		FM Ragtime Piano	Piano	Vintage
58		DX CP	Piano	Vintage
59		FM Toy Piano	Piano	Vintage
60		The Bridge	Piano	Acoustic
61		The Prepared Piano	Piano	Acoustic
62		CFX Chill	Piano	Acoustic
63		NY Jam Sesh	Piano	Acoustic
64		Scoring Melancholy	Piano	Acoustic
65		Saturnalia	Piano	Electronic
66		NV Reverse	Piano	Acoustic
67		Praise and Worship	Piano	Modern
68		GrandPf & AN-X SynPd	Piano	Layer
69		Ballad Piano 3ngines	Piano	Layer
70		Felt Piano Pad	Piano	Layer

No.		Perfomance Name	Main Category	Sub Category
71		Kings Tea	Piano	Layer
72		October	Piano	Electronic
73		CFX Old Tapes	Piano	Vintage
74		LoFi Basement Piano	Piano	Vintage
75		Prepared Piano	Piano	Modern
76		Felt Reel Strange	Piano	Modern
77		Repeater	Piano	Modern
78		Shipwrecked Piano	Piano	Vintage
79		Nostalgia	Piano	Electronic
80		Vinyl Sample Piano	Piano	Vintage
81		Fairy Tale Piano	Piano	Layer
82		Backwards Felt	Piano	Electronic
83		Dystopian Piano	Piano	Modern
84		AN-X Analog Keys	Piano	Electronic
85		Tines 78	Keyboard	Electric Piano
86		Rd 78 Natural Drive	Keyboard	Electric Piano
87		Rd 78 Phazed	Keyboard	Electric Piano
88		Rd 78 Smooth	Keyboard	Electric Piano
89		Rd 78 & Pad	Keyboard	Electric Piano
90		73 Tine EP	Keyboard	Electric Piano
91		Rd 73	Keyboard	Electric Piano
92		Sparkles EP	Keyboard	Electric Piano
93		Rd 67 Stage	Keyboard	Electric Piano
94		Rd 67 Smooth	Keyboard	Electric Piano
95		Musky EP	Keyboard	Electric Piano
96		Rd 1 Gallery	Keyboard	Electric Piano
97		Rd 1 Gallery 2	Keyboard	Electric Piano
98		Rd 2 Gallery	Keyboard	Electric Piano
99		88 key Case Hard	Keyboard	Electric Piano
100		88 key Case Soft	Keyboard	Electric Piano
101		Case 73 Soft	Keyboard	Electric Piano
102		Case 75 Medium	Keyboard	Electric Piano
103		Case 75 Amp	Keyboard	Electric Piano
104		Case 78 Hard	Keyboard	Electric Piano
105		LoFi Tines	Keyboard	Electric Piano
106		Rd Old	Keyboard	Electric Piano
107		Rd Stage	Keyboard	Electric Piano
108		Golden EP	Keyboard	Electric Piano
109		SuperDynoChorus DI	Keyboard	Electric Piano
110		SuperDynoChorusAmp	Keyboard	Electric Piano
111		Rd Echo	Keyboard	Electric Piano
112		74 Phase	Keyboard	Electric Piano
113		Rd Soft Touch Wah	Keyboard	Electric Piano
114		Rd Phase	Keyboard	Electric Piano
115		Dyno Chorus Rd	Keyboard	Electric Piano
116		Rd Scratched	Keyboard	Electric Piano
117		Rd 78 Brite Tremolo	Keyboard	Electric Piano
118		Rd 75 Soft Dist	Keyboard	Electric Piano
119		Neo R&B Clean	Keyboard	Electric Piano
120		Rd HD Warm Chorus	Keyboard	Electric Piano
121		J Phased Rd 73	Keyboard	Electric Piano
122		Tine Transformer	Keyboard	Electric Piano
123		Nu Hybrid EP	Keyboard	Electric Piano
124		Rd & Pad	Keyboard	Electric Piano
125		EP goes to 11	Keyboard	Electric Piano
126		Case 73 + FM	Keyboard	Electric Piano
127		Early 80s DiscoPop	Keyboard	Electric Piano
128		Wr Gallery	Keyboard	Electric Piano
129		Wr Gallery 2	Keyboard	Electric Piano
130		Wr EP 2	Keyboard	Electric Piano
131		Wr EP 2 Bright	Keyboard	Electric Piano
132		Wr Tremolo Amp	Keyboard	Electric Piano
133		Wr Amp	Keyboard	Electric Piano
134		Wr Rock	Keyboard	Electric Piano
135		Wr Pops	Keyboard	Electric Piano
136		Wr Warm	Keyboard	Electric Piano
137		Wr Warm NaturalDrive	Keyboard	Electric Piano
138		Wr Wide	Keyboard	Electric Piano
139		70s Rock Wr	Keyboard	Electric Piano
140		Wr Warm Funk	Keyboard	Electric Piano

No.	Perfomance Name	Main Category	Sub Category
141	Wr Tapedeck	Keyboard	Electric Piano
142	Velo EP FX	Keyboard	Electric Piano
143	FM Wr 1	Keyboard	Electric Piano
144	FM Wr 2	Keyboard	Electric Piano
145	Ring Echo EP	Keyboard	Electric Piano
146	EP & Jazz Gt Comp	Keyboard	Electric Piano
147	Chill Me	Keyboard	Electric Piano
148	FM Piano DA	Keyboard	FM Piano
149	SparkleDegree Full	Keyboard	FM Piano
150	FM - What else	Keyboard	FM Piano
151	GS E.Piano	Keyboard	FM Piano
152	FM EP Brite > Comp	Keyboard	FM Piano
153	FM Roads	Keyboard	FM Piano
154	EP 1980	Keyboard	FM Piano
155	DX Road	Keyboard	FM Piano
156	The FM E.Piano	Keyboard	FM Piano
157	DX FM EP	Keyboard	FM Piano
158	Heart of FM EP	Keyboard	FM Piano
159	Urban EP	Keyboard	FM Piano
160	Full Tine 2	Keyboard	FM Piano
161	Gentle FM EP	Keyboard	FM Piano
162	Mellow DX AF1&2	Keyboard	FM Piano
163	TV Show FM EP	Keyboard	FM Piano
164	Glass Tines	Keyboard	FM Piano
165	Classic 80's DX7 EP	Keyboard	FM Piano
166	The TX816 E.Piano 1	Keyboard	FM Piano
167	The TX416 E.Piano 1	Keyboard	FM Piano
168	The TX816 E.Piano 2	Keyboard	FM Piano
169	The TX416 E.Piano 2	Keyboard	FM Piano
170	FM EP Plus	Keyboard	FM Piano
171	Margot's Song	Keyboard	FM Piano
172	FM Morph Keys	Keyboard	FM Piano
173	FM EP & Strings	Keyboard	FM Piano
174	Grace EP	Keyboard	FM Piano
175	FM Heavens Harp	Keyboard	FM Piano
176	Midnight Funk	Keyboard	FM Piano
177	FM EP Dyna Swell	Keyboard	FM Piano
178	Bell Tines	Keyboard	FM Piano
179	FM - What else X	Keyboard	FM Piano
180	DX Chill	Keyboard	FM Piano
181	Toy EP	Keyboard	Electric Piano
182	Toy EP Amp Hybrid	Keyboard	Electric Piano
183	Clavi Amp Gallery	Keyboard	Clavi
184	Nu Touch Clavi	Keyboard	Clavi
185	Super Clavi 2	Keyboard	Clavi
186	PhaserClavi Mt AF1	Keyboard	Clavi
187	Clavi/Toy EP Duo	Keyboard	Clavi
188	Power Clavi	Keyboard	Clavi
189	Clavi Touch Wah 2	Keyboard	Clavi
190	Clavi Amp Phaser AF1	Keyboard	Clavi
191	FM Clavi>FretlessB	Keyboard	Clavi
192	Clavi Stuff	Keyboard	Clavi
193	Hybrid Clavi	Keyboard	Clavi
194	EL Grand Clavi	Keyboard	Clavi
195	E.Harpsichord	Keyboard	Clavi
196	FM Harpsichord	Keyboard	Clavi
197	Harpsi > Celesta	Keyboard	Clavi
198	Easy Filter	Keyboard	Synth
199	Rotary Rd	Keyboard	Electric Piano
200	Out West	Keyboard	Electric Piano
201	ICE Theme	Keyboard	Electric Piano
202	Glavinet	Keyboard	FM Piano
203	Morph The EP MW	Keyboard	FM Piano
204	FM Morph Keys 2	Keyboard	FM Piano
205	NeoMorph FM	Keyboard	FM Piano
206	FM Piano	Keyboard	Electric Piano
207	French Tines	Keyboard	Electric Piano
208	Vintage Keys	Keyboard	Electric Piano
209	Redefined	Keyboard	Electric Piano
210	AN-X Syn E.Piano PAT	Keyboard	Electric Piano

No.	Perfomance Name	Main Category	Sub Category
211	Dyno Clav	Keyboard	Electronic
212	AN-X FM E.Piano	Keyboard	FM Piano
213	Super Bass Clav	Keyboard	FM Piano
214	AN-X Syn Clavi	Keyboard	Clavi
215	AN-X<>FM Clavi	Keyboard	Clavi
216	Sine Your Name	Keyboard	Synth
217	AN-X Glassy Sines	Keyboard	Synth
218	Synthy EP	Keyboard	Synth
219	Deception	Keyboard	Synth
220	Serengeti	Keyboard	Synth
221	Millenium	Keyboard	Synth
222	AN-X Pulse Designer	Keyboard	Synth
223	Gloved One	Keyboard	Synth
224	CS80 Arctic	Keyboard	Synth
225	Trippy Steps Split	Keyboard	Synth
226	Chordz 2 Chill 2	Keyboard	R&B/Hip Hop
227	BLJ Chill Suite	Keyboard	Electric Piano
228	EP-onymous	Keyboard	Electric Piano
229	Reso Keyz	Keyboard	Synth
230	Six Gang	Keyboard	Electronic
231	Wr 8ths	Keyboard	Electric Piano
232	One More Step	Keyboard	R&B/Hip Hop
233	All 9 Bars!	Organ	Tone Wheel
234	The Basics	Organ	Tone Wheel
235	8.8.8.8.6.2.2.0.0	Organ	Tone Wheel
236	8.8.8.8.6.2.2.0.0 2	Organ	Tone Wheel
237	Cool Drawbar Setting	Organ	Tone Wheel
238	Full Drawbars Clean	Organ	Tone Wheel
239	First Four Drive	Organ	Tone Wheel
240	Rock Bars	Organ	Tone Wheel
241	Lead Drawbars	Organ	Tone Wheel
242	Hot Smoky	Organ	Tone Wheel
243	J's Jazz	Organ	Tone Wheel
244	J's Jazz 2	Organ	Tone Wheel
245	Dave's Nu Organ	Organ	Tone Wheel
246	X Draw Organ	Organ	Tone Wheel
247	All Bar None	Organ	Tone Wheel
248	More Shade	Organ	Tone Wheel
249	The Jazz Organ	Organ	Tone Wheel
250	Jazz To All Out	Organ	Tone Wheel
251	Jazz To All Out 2	Organ	Tone Wheel
252	Soft Compin Organ	Organ	Tone Wheel
253	Gospel To Reggae	Organ	Tone Wheel
254	Curved To Straight	Organ	Tone Wheel
255	Groove Organ	Organ	Tone Wheel
256	The Preacher	Organ	Tone Wheel
257	The Preacher 2	Organ	Tone Wheel
258	Evens and Odds	Organ	Tone Wheel
259	Glassy	Organ	Tone Wheel
260	Two Blue Hands	Organ	Tone Wheel
261	Lovin' Happiness	Organ	Tone Wheel
262	Bowed Bars CV	Organ	Tone Wheel
263	The Grinder	Organ	Tone Wheel
264	Rock Organ 2	Organ	Tone Wheel
265	Overdriven Organ	Organ	Tone Wheel
266	Whiter Bars	Organ	Tone Wheel
267	Hybrid Organ	Organ	Tone Wheel
268	Rich Bars	Organ	Tone Wheel
269	Clarinet Bars	Organ	Tone Wheel
270	Rock Hard	Organ	Tone Wheel
271	Lake Fire	Organ	Tone Wheel
272	FM Full Organ	Organ	Tone Wheel
273	FM Draw Organ 1	Organ	Tone Wheel
274	FM Jazz Organ	Organ	Tone Wheel
275	FM Draw Organ 2	Organ	Tone Wheel
276	The FM DX7 Organ	Organ	Tone Wheel
277	FM Rock Organ 3	Organ	Tone Wheel
278	FM Rock Organ 4	Organ	Tone Wheel
279	Multi Bars Organ	Organ	Tone Wheel
280	Perc Alone	Organ	Tone Wheel

No.	Perfomance Name	Main Category	Sub Category
281	Up Close B	Organ	Tone Wheel
282	Go-Come Organ	Organ	Tone Wheel
283	FM YC Combo Organ	Organ	Combo
284	BOX FM Combo Organ	Organ	Combo
285	FM Perc Organ 1	Organ	Synth
286	FM Perc Organ 2	Organ	Synth
287	FM Perc Organ 3	Organ	Synth
288	FM Rock Organ 1	Organ	Synth
289	FM Rock Organ 2	Organ	Synth
290	Digital Tonewheels	Organ	Electronic
291	Bright Perc Organ	Organ	Synth
292	Foolish Organ	Organ	Rock/Pop
293	Flying Bars	Organ	Tone Wheel
294	Tempo Bars	Organ	Tone Wheel
295	Morse Organ	Organ	Tone Wheel
296	Cathedral	Organ	Pipe
297	Cathedral 2	Organ	Pipe
298	FM Church Pipes	Organ	Pipe
299	FM Pipe Organ	Organ	Pipe
300	FM Puff Organ	Organ	Pipe
301	FM Accordion 1	Organ	Pipe
302	FM Accordion 2	Organ	Pipe
303	AccordionTrnsfrmer	Organ	Pipe
304	Jahrmarkt	Organ	Pipe
305	ScotsAccordion MMM	Organ	Jazz/World
306	OrganSubBass Swell	Organ	Synth
307	Paddy Organ	Organ	Synth
308	Moody Organ MW	Organ	Synth
309	AN-X Synth Organ PAT	Organ	Synth
310	Syn AN-X Organ PAT	Organ	Synth
311	Complete Syn Organ	Organ	Synth
312	Drawbar Jam	Organ	Jazz/World
313	Steel Twin Gallery	Guitar	Acoustic
314	6 String Finger	Guitar	Acoustic
315	Picked Son of Gt	Guitar	Acoustic
316	Fingered Steel	Guitar	Acoustic
317	Picked Steel	Guitar	Acoustic
318	Flamenco Guitar	Guitar	Acoustic
319	Fiesta Guitar	Guitar	Acoustic
320	Ac Chicken Pick	Guitar	Acoustic
321	Fingered 12 String	Guitar	Acoustic
322	American 12 String	Guitar	Acoustic
323	American Steel Duo	Guitar	Acoustic
324	Two Acoustics 2	Guitar	Acoustic
325	Songwriter 2015	Guitar	Acoustic
326	Serenity	Guitar	Acoustic
327	Proximity Effect	Guitar	Acoustic
328	Acoustic Jam	Guitar	Acoustic
329	Nylon Dreams	Guitar	Acoustic
330	8 Amps and a TC	Guitar	Electric Clean
331	Clean Fingers	Guitar	Electric Clean
332	TC Clean Pick	Guitar	Electric Clean
333	Clean BalladFinger	Guitar	Electric Clean
334	Clean Ballad Pick	Guitar	Electric Clean
335	American Garage	Guitar	Electric Clean
336	Texas Chicken Pick	Guitar	Electric Clean
337	Duo TC Clean	Guitar	Electric Clean
338	Hybrid 1coil E.Gtr	Guitar	Electric Clean
339	French Br ED	Guitar	Electric Clean
340	1 Finger Gangster	Guitar	Electric Clean
341	Lead Feedbacker	Guitar	Distortion
342	Comp Hero	Guitar	Distortion
343	Modern Finger Hero	Guitar	Distortion
344	Texas Chicken MW	Guitar	Distortion
345	Modern Pick Hero	Guitar	Distortion
346	Duo TC Drive	Guitar	Distortion
347	FM Ac Guitar 1	Guitar	Synth
348	FM Ac Guitar 2	Guitar	Synth
349	FM Pick Guitar 1	Guitar	Synth
350	FM Pick Guitar 2	Guitar	Synth

No.	Perfomance Name	Main Category	Sub Category
351	FM Tight Guitar	Guitar	Synth
352	FM EPish Guitar	Guitar	Synth
353	FM The Jazz Guitar	Guitar	Synth
354	FM Clean E.Gt 1	Guitar	Synth
355	FM Clean E.Gt 2	Guitar	Synth
356	FM Clean 12st E.Gt	Guitar	Synth
357	FM Clean E.Gt 3	Guitar	Synth
358	FM Mute E.Gt	Guitar	Synth
359	FM Distortion E.Gt	Guitar	Synth
360	Rock Star	Guitar	Synth
361	Mondo Distorto AT	Guitar	Synth
362	FM Guitar SmartMorph	Guitar	Synth
363	Upright Bass AF1	Bass	Acoustic
364	Amp Boosted Slap	Bass	Electric
365	Faux Fretless	Bass	Electric
366	Bass+RideCym/Piano	Bass	Acoustic
367	Mini Sub	Bass	Synth
368	Pluck N Bass	Bass	Synth
369	Disco Bass	Bass	Synth
370	81Z Thump Bass	Bass	Synth
371	Silverboxx	Bass	Synth
372	AN-X Sticky Bass	Bass	Synth
373	Basic Analog	Bass	Synth
374	Smart Analog	Bass	Synth
375	Bassy funk	Bass	Synth
376	AN-X 3 Osc Attack	Bass	Synth
377	80s Syn Bass	Bass	Synth
378	AN-X 3 Osc Resonance	Bass	Synth
379	Classic Mini Bass	Bass	Synth
380	AN-X MG SynBass PAT	Bass	Synth
381	90s Syn Bass	Bass	Synth
382	New Grunge Bass	Bass	Synth
383	DX SuperBass+ DA	Bass	Synth
384	Bass Morpher	Bass	Synth
385	Dub Rock Bass	Bass	Synth
386	FM Boogie Syn Bass	Bass	Synth
387	FM The DX E.Bass	Bass	Synth
388	FM Hybrid Bass	Bass	Synth
389	FM Octaves	Bass	Synth
390	FM Wood Bass	Bass	Synth
391	FM Smooth WoodBass	Bass	Synth
392	FM Finger Bass	Bass	Synth
393	FM Prog Elec Bass	Bass	Synth
394	FM Pick Bass	Bass	Synth
395	FM Pick Pluck Bass	Bass	Synth
396	FM Owl Bass	Bass	Synth
397	FM Fretless Bass 1	Bass	Synth
398	FM Fretless Bass 2	Bass	Synth
399	FM Round Wound EB	Bass	Synth
400	FM Super Bass	Bass	Synth
401	FM SuperUnisonBass	Bass	Synth
402	FM Slap Bass	Bass	Synth
403	FM Syn Bass	Bass	Synth
404	FM Lately Bass	Bass	Synth
405	FM Flange Bass	Bass	Synth
406	Tear Bass	Bass	Synth
407	Judgement Bass	Bass	Synth
408	Round Sync	Bass	Synth
409	Phat Bass	Bass	Synth
410	Johnny Bass	Bass	Synth
411	FM Bass Gallery XL	Bass	Synth
412	Bass Pedal 2	Bass	Synth
413	Juicy Sawsquare	Bass	Synth
414	Funky Wet Bass	Bass	Synth
415	Vowel Bass	Bass	Synth
416	Seq Blue Bass	Bass	Synth
417	Y2K Syn Bass	Bass	Synth
418	Bass Talking	Bass	Synth
419	70s Legend	Bass	Synth
420	Good Boy	Bass	Synth

No.	Perfomance Name	Main Category	Sub Category
421	AN-X Vacuum Bass	Bass	Synth
422	Vintage Attack	Bass	Synth
423	AN-X Sync Bass	Bass	Synth
424	Modeled	Bass	Synth
425	Huge Analogue Bass	Bass	Synth
426	AN-X/FM NoiseAtkBass	Bass	Synth
427	Sync Synth Bass PAT	Bass	Synth
428	AN-X/FM MetalAtkBass	Bass	Synth
429	Funker Bass	Bass	Synth
430	Strong Bass	Bass	Synth
431	West Bass	Bass	Synth
432	AN-X Gritty Osc	Bass	Synth
433	Bassist One	Bass	Synth
434	Dum Drum Bass	Bass	Synth
435	T8 Bass	Bass	Synth
436	Rezz Bass	Bass	Synth
437	Analogue Bass	Bass	Synth
438	Boom Bass	Bass	Synth
439	Monster Sub	Bass	Synth
440	Slo-Mo Bass Drop	Bass	Synth
441	Tremble Bass	Bass	Synth
442	Roboto FM	Bass	Synth
443	Sweep Motion Bass	Bass	Synth
444	Dirty Shaper	Bass	Synth
445	FM Bouncer FX	Bass	Synth
446	Skein of lines	Bass	Electronic
447	Syn Bass + Sparkle	Bass	Synth
448	The Frog	Bass	Electronic
449	Folder Bass	Bass	Synth
450	Dupe Bass	Bass	Synth
451	Mega Complextro	Bass	Electronic
452	Analog Bassline Squ	Bass	Synth
453	Synth Stuff	Bass	Synth
454	Shred Bass	Bass	Synth
455	Analog Bassline Saw	Bass	Synth
456	Super AN-X Arp Bass	Bass	Synth
457	Ruston Way	Bass	Synth
458	Synchroluxe Nu	Bass	Synth
459	Analog Finger	Bass	Synth
460	Tame Me	Bass	Synth
461	Mr Producer	Bass	Synth
462	Control	Bass	Synth
463	Dub Me...SK	Bass	Synth
464	Chronic Circuits	Bass	Synth
465	T3 Uber funk	Bass	Synth
466	Warped Bass Traxx	Bass	Synth
467	FM Abstracts	Bass	Synth
468	Trap 'n' Bass	Bass	Electronic
469	Tektonic Dub	Bass	Synth
470	Stomp Box	Bass	Synth
471	Open Bass	Bass	Synth
472	Rackmount Bass	Bass	Electric
473	Funky Space	Bass	Electronic
474	Playground 4U	Bass	Synth
475	Solo 1stViolin AF1	Strings	Solo
476	Solo 2ndViolin AF1	Strings	Solo
477	Celtic Violin	Strings	Solo
478	Secret Violin	Strings	Solo
479	Solo Viola AF1	Strings	Solo
480	Solo Cello AF1	Strings	Solo
481	Cinema Str MW Oct	Strings	Ensemble
482	Cinema Seattle Str	Strings	Ensemble
483	Cinema Str & Brass	Strings	Ensemble
484	Cinema Str Spic MW	Strings	Ensemble
485	Cinema Str Trem MW	Strings	Ensemble
486	Strings Underscore	Strings	Ensemble
487	Seattle Violins 1	Strings	Ensemble
488	Seattle Violins 2	Strings	Ensemble
489	Seattle Violas	Strings	Ensemble
490	Seattle Cellos	Strings	Ensemble

No.	Perfomance Name	Main Category	Sub Category
491	Seattle Basses	Strings	Ensemble
492	Chamber Strings	Strings	Ensemble
493	Ballad Strings	Strings	Ensemble
494	Classical Strings	Strings	Ensemble
495	Romance Strings	Strings	Ensemble
496	Seattle Sections	Strings	Ensemble
497	A Few Strings	Strings	Ensemble
498	Rich Strings	Strings	Ensemble
499	String Sect Swell	Strings	Ensemble
500	St Ensemble K	Strings	Ensemble
501	Strings & Brass	Strings	Ensemble
502	Strings&BrassSwell	Strings	Ensemble
503	Hybrid Violins	Strings	Ensemble
504	Hybrid Violas	Strings	Ensemble
505	Hybrid Cellos	Strings	Ensemble
506	Romantico	Strings	Ensemble
507	Fiery Strings	Strings	Ensemble
508	Light-Hearted Orch	Strings	Ensemble
509	Fiery Spiccato	Strings	Ensemble
510	Ostinato Stacc MW/SK	Strings	Ensemble
511	sFz Tremolo BPM Sync	Strings	Ensemble
512	Share The Shed	Strings	Ensemble
513	Concert Harp	Strings	Pizzicato
514	Mellow Harp	Strings	Pizzicato
515	CelticHarpEthereal	Strings	Pizzicato
516	Celtic Harp Choral	Strings	Pizzicato
517	FM Harp	Strings	Pizzicato
518	Disk Dusk	Strings	Pizzicato
519	Pizzicato Strings	Strings	Pizzicato
520	Pizza Insomniato	Strings	Pizzicato
521	FM Strings	Strings	Synth
522	FM Syn Strings	Strings	Synth
523	FM Tron Strings	Strings	Synth
524	FM Square Strings	Strings	Synth
525	Yo Luv	Strings	Synth
526	Slow and Steady	Strings	Synth
527	Baroque Morphdown	Strings	Synth
528	PWM Strings Slow	Strings	Ensemble
529	AN-X PW Strings PAT	Strings	Synth
530	Gentle Syn Str PAT	Strings	Synth
531	String Ensemble PAT	Strings	Synth
532	AN-X Syn Orch PAT	Strings	Synth
533	Warm Soft SynStr PAT	Strings	Synth
534	Analog String Ensemb	Strings	Synth
535	Strings du Soleil	Strings	Synth
536	Big Analog Strings	Strings	Synth
537	String Salad	Strings	Synth
538	T Strings	Strings	Electronic
539	Wave Orhestra	Strings	Ensemble
540	Harp Hop	Strings	R&B/Hip Hop
541	Trumpet 3	Brass	Solo
542	Piccolo Trumpet	Brass	Solo
543	Scott's Teacher	Brass	Solo
544	Trombone	Brass	Solo
545	Bass Trombone	Brass	Solo
546	French Horn 2	Brass	Solo
547	Euphonium 2	Brass	Solo
548	Trumps and Bones	Brass	Solo
549	Attack Brass	Brass	Solo
550	Horn To Horns	Brass	Solo
551	Orch Trumpets	Brass	Orchestra
552	Trumpet Ensemble	Brass	Ensemble
553	Trumpets Swell	Brass	Ensemble
554	Orch Trombones	Brass	Orchestra
555	Trombone Ensemble	Brass	Ensemble
556	Trombones Swell	Brass	Ensemble
557	Orchestra Horns	Brass	Orchestra
558	Orchestral Horns	Brass	Orchestra
559	FrenchHornSection3	Brass	Ensemble
560	Fr Horns Swell	Brass	Ensemble

No.		Perfomance Name	Main Category	Sub Category
561		Orch Brass Tutti	Brass	Orchestra
562		Orch Brass Oct	Brass	Ensemble
563		Orchestral Brass	Brass	Ensemble
564		Orch Brass Swell	Brass	Ensemble
565		PopHorns Dyn Shake	Brass	Ensemble
566		Pop Horns Mellow	Brass	Ensemble
567		Modern Jazz Horns	Brass	Ensemble
568		Pop Horns Bright	Brass	Ensemble
569		Pop Horns Accent	Brass	Ensemble
570		Pop Horns Swell	Brass	Ensemble
571		Slow and Speedy	Brass	Ensemble
572		Pop Brass Swell	Brass	Ensemble
573		Orchestral Brass 2	Brass	Orchestra
574		AN-X Pd+HornsBombast	Brass	Orchestra
575		sFz Brass Tempo Sync	Brass	Ensemble
576		Big Band Ballad	Brass	Ensemble
577		Big Band Section	Brass	Ensemble
578		Gothic Choir & Brass	Brass	Ensemble
579		Section Brass	Brass	Ensemble
580		Hybrid Ana Brass	Brass	Synth
581		Brassy Synth MW	Brass	Synth
582		FM Dual Trumpets	Brass	Synth
583		FM Horn	Brass	Synth
584		FM Mallet Horn	Brass	Synth
585		FM Alps Horn	Brass	Synth
586		FM GX1 Brass 1	Brass	Synth
587		FM GX1 Brass 2	Brass	Synth
588		DX Brass	Brass	Synth
589		FM Warm Brass	Brass	Synth
590		FM CS80 Brass	Brass	Synth
591		FM JP Brass	Brass	Synth
592		FM The Brass	Brass	Synth
593		FM Brass	Brass	Synth
594		FM BrassEnsemble 1	Brass	Synth
595		FM BrassEnsemble 2	Brass	Synth
596		DX1 Fanfare Trumpets	Brass	Synth
597		DX1 Full Synth Brass	Brass	Synth
598		DX1 Tight Brass Sect	Brass	Synth
599		DX1 Synth Brass PAT	Brass	Synth
600		DX1 Double Horn Sect	Brass	Synth
601		DX1 Syn Brass Chorus	Brass	Synth
602		DX1 CS80 Brass	Brass	Synth
603		The Synth Brass 1	Brass	Synth
604		The Synth Brass 2	Brass	Synth
605		PopBrass & SynBrass	Brass	Synth
606		The Hybrid BRASS Sec	Brass	Synth
607		AN-X Syn Brass PAT	Brass	Synth
608		True Synth Brass PAT	Brass	Synth
609		AN-X Fat Vintage	Brass	Synth
610		Analog Stereo Horns	Brass	Synth
611		AN-X PW Horn PAT	Brass	Synth
612		Dual Oct CS80 PAT	Brass	Synth
613		Warm Me Up	Brass	Synth
614		CS80 Structure PAT	Brass	Synth
615		The Beyond	Brass	Synth
616		AN-X Brass Designer	Brass	Synth
617		Vampire Brass	Brass	Synth
618		AN-X PW Brass PAT	Brass	Synth
619		Utility Synth Horns	Brass	Synth
620		Neeyowng Brass	Brass	Synth
621		Alternate Wayz	Brass	Synth
622		Sweet Synths	Brass	Synth
623		Hiriser	Brass	Synth
624		OB Power Syn Brass	Brass	Synth
625		Dystopian Brass	Brass	Synth
626		Slow Vintage Brass	Brass	Synth
627		Trapped Brass!	Brass	Ensemble
628		Piccolo 2	Woodwind	Flute
629		Concert Flute	Woodwind	Flute
630		Latin Flutist	Woodwind	Flute

No.		Perfomance Name	Main Category	Sub Category
631		Penny Whistle	Woodwind	Flute
632		Low D Whistle	Woodwind	Flute
633		FM Pan Flute	Woodwind	Flute
634		Cinematic Flutes	Woodwind	Flute
635		Oboe 3	Woodwind	Woodwind
636		Orch Clarinet	Woodwind	Woodwind
637		Bassoon 3	Woodwind	Woodwind
638		Contra Bassoon	Woodwind	Woodwind
639		Wind Ensemble	Woodwind	Reed / Pipe
640		Inauguration	Woodwind	Woodwind
641		60s Movie Melody	Woodwind	Flute
642		FM Harmonica	Woodwind	Reed / Pipe
643		FM Saxophone	Woodwind	Saxophone
644		Classic Sine Ld	Syn Lead	Analog
645		CS15 Saw Lead	Syn Lead	Analog
646		Dynamic Perc Saw	Syn Lead	Analog
647		AN-X Stick Saw	Syn Lead	Analog
648		Wild Modulator	Syn Lead	Analog
649		Classic Mini SawLead	Syn Lead	Analog
650		Tacky Square	Syn Lead	Analog
651		Synth Harmonica PAT	Syn Lead	Analog
652		Porta-Ocarina	Syn Lead	Analog
653		Sticky Lead	Syn Lead	Analog
654		TouchFilter Lead PAT	Syn Lead	Analog
655		70s Fusion Lead	Syn Lead	Analog
656		AN-X Parisian Lead	Syn Lead	Analog
657		Synthpop Forever	Syn Lead	Analog
658		Street Sweeper	Syn Lead	Analog
659		Fortunate Dude	Syn Lead	Analog
660		Turn Up	Syn Lead	Analog
661		AN-X Trip Split	Syn Lead	Analog
662		Vintastic Moods	Syn Lead	Analog
663		Journey Sync Lead	Syn Lead	Analog
664		Classic Hard Sync	Syn Lead	Analog
665		Sync Scenes	Syn Lead	Analog
666		Super Sync	Syn Lead	Analog
667		Power Sync Lead PAT	Syn Lead	Analog
668		AN-X Cat Sync Lead	Syn Lead	Analog
669		AN-X Sync Dual	Syn Lead	Analog
670		AN-X Sync PWM Lead	Syn Lead	Analog
671		Sync'o'Lead	Syn Lead	Analog
672		Long Run	Syn Lead	Electronic
673		Splat!	Syn Lead	Analog
674		Sync Fire	Syn Lead	Analog
675		Frozen Computer	Syn Lead	Electronic
676		Quiet Journeymen	Syn Lead	Analog
677		Talkative Drive Lead	Syn Lead	Analog
678		British Wah	Syn Lead	Analog
679		Ahh	Syn Lead	Digital
680		Talking Solo Lead	Syn Lead	Digital
681		AN-X Vox Lead	Syn Lead	Analog
682		The Talker	Syn Lead	Analog
683		Chatter Box	Syn Lead	Digital
684		SK Super Waves	Syn Lead	Analog
685		Past Virtuosos	Syn Lead	Analog
686		Unison Dance Hook	Syn Lead	Analog
687		GnarLeed AT+MW FdBak	Syn Lead	Analog
688		Dyno Dance	Syn Lead	Analog
689		Big Solo Lead	Syn Lead	Digital
690		Dance Party Hits	Syn Lead	Dance
691		Tidal Lock	Syn Lead	Analog
692		AN-X Classic 5th	Syn Lead	Analog
693		AN-X 5thProgLead PAT	Syn Lead	Analog
694		Eccentric Saw Lead	Syn Lead	Analog
695		All The Chords	Syn Lead	Analog
696		Los Angeles, 2019	Syn Lead	Analog
697		Grit	Syn Lead	Analog
698		ArquadraX	Syn Lead	Analog
699		FM-XS Tennz	Syn Lead	Analog
700		The Puncher	Syn Lead	Analog

No.		Perfomance Name	Main Category	Sub Category
701		Faded Angry Saw Lead	Syn Lead	Analog
702		Trend Setter	Syn Lead	Electronic
703		Angry Amped Synth	Syn Lead	Analog
704		Beyond	Syn Lead	Analog
705		Mono Poly Lithic	Syn Lead	Analog
706		Play The Release	Syn Lead	Analog
707		Cubed Solo	Syn Lead	Analog
708		Press Start	Syn Lead	Analog
709		Expressive Chords	Syn Lead	Analog
710		Ravemaster	Syn Lead	Dance
711		ImpressionistWhistle	Syn Lead	Analog
712		AN-X Saw Pluck	Syn Lead	Analog
713		Theremin by MW & SK	Syn Lead	Analog
714		Singleline 2	Syn Lead	Analog
715		FM Vocal Lead	Syn Lead	Analog
716		Monster Lead	Syn Lead	Analog
717		MainRoomRiff Maker	Syn Lead	Dance
718		EDM PiTCh Bomb	Syn Lead	Dance
719		3o3 Talker	Syn Lead	Dance
720		ComercialLd & Cmp	Syn Lead	Dance
721		Major Fazor	Syn Lead	Dance
722		FM MotionSeq Ld DA	Syn Lead	Digital
723		FM Sync	Syn Lead	Digital
724		FM Syn Lead 1	Syn Lead	Digital
725		FM Syn Lead 2	Syn Lead	Digital
726		FM SynLeadSubHarmo	Syn Lead	Digital
727		FM Syn Lead 3	Syn Lead	Digital
728		Anemone Lead	Syn Lead	Analog
729		Milk & Honey	Syn Lead	Analog
730		Milky Way	Syn Lead	Analog
731		Dust to Gold	Syn Lead	Digital
732		Soft and Dirty FM	Syn Lead	Digital
733		Kool FM Disco Lead	Syn Lead	Digital
734		Hybrid Sync	Syn Lead	Digital
735		Mr. Coin	Syn Lead	Digital
736		FM Motion Lead	Syn Lead	Digital
737		Radiation	Syn Lead	Digital
738		Syncronizers	Syn Lead	Digital
739		Motion Grid	Syn Lead	Digital
740		Aogashima	Syn Lead	Analog
741		Star Poly	Syn Lead	Analog
742		Double Triller	Syn Lead	Digital
743		Arcade	Syn Lead	Dance
744		Growling Wolf	Syn Lead	Dance
745		Legato Pitcher	Syn Lead	Dance
746		Catatonix	Syn Lead	Dance
747		Elecktronic Chat	Syn Lead	Dance
748		Freaky Dancer	Syn Lead	Electronic
749		Flying Dub	Syn Lead	Digital
750		Iluminator	Syn Lead	Dance
751		WaveRunner MW DA	Syn Lead	Digital
752		SuperGlider MW DA	Syn Lead	Digital
753		Reflection Twinkle	Syn Lead	Analog
754		Synth Noise Vocoder	Syn Lead	Analog
755		Laser Trumpet	Syn Lead	Digital
756		Thair-Uh-Min	Syn Lead	Digital
757		My Ballad	Syn Lead	Analog
758		Wave Mod	Syn Lead	Digital
759		Sycronomicon	Syn Lead	Digital
760		Death to DACs! AT	Syn Lead	Digital
761		Party Chips	Syn Lead	Electronic
762		8bit Dude	Syn Lead	Electronic
763		First Strike	Syn Lead	Digital
764		Jets	Syn Lead	Digital
765		Wave Shapers	Syn Lead	Digital
766		Texture Lead	Syn Lead	Digital
767		Crusty Voltage	Syn Lead	Analog
768		Twee Lead	Syn Lead	Analog
769		Too Square for me	Syn Lead	Analog
770		Modern Funk	Syn Lead	R&B/Hip Hop

No.		Perfomance Name	Main Category	Sub Category
771		Dark Vintage Pad	Pad/Choir	Analog
772		Calm Ocean	Pad/Choir	Analog
773		FM Film Pad	Pad/Choir	Warm
774		SinePad<>Strs<>Nz	Pad/Choir	Analog
775		Saturated Pad FM	Pad/Choir	Analog
776		FM Cloud Sine Pad	Pad/Choir	Warm
777		AN-X Sine Pad PAT	Pad/Choir	Analog
778		Soul Pad	Pad/Choir	Warm
779		Vari Pad 1	Pad/Choir	Warm
780		Vari Pad 2	Pad/Choir	Warm
781		Firey Pad	Pad/Choir	Analog
782		That's a Pad	Pad/Choir	Analog
783		Jumping Power Pad	Pad/Choir	Analog
784		Softer Pad	Pad/Choir	Warm
785		Undersea Pad	Pad/Choir	Warm
786		Ethereal	Pad/Choir	Warm
787		Sync'd Carpet PAT	Pad/Choir	Analog
788		Peaceful Gardens	Pad/Choir	Analog
789		SH Pad	Pad/Choir	Analog
790		Smooth Pad	Pad/Choir	Warm
791		Soft Pad	Pad/Choir	Analog
792		Evolution	Pad/Choir	Bright
793		Fizzy FM Mod Pad	Pad/Choir	Bright
794		Scenery Pad MW	Pad/Choir	Analog
795		Angelic Pad PAT	Pad/Choir	Analog
796		Warming Pads	Pad/Choir	Analog
797		Apollo	Pad/Choir	Warm
798		Cloud and Clear	Pad/Choir	Warm
799		Cycles	Pad/Choir	Analog
800		CS Pad	Pad/Choir	Warm
801		Dual Slow Pad PAT	Pad/Choir	Analog
802		AN-X Over Pad	Pad/Choir	Analog
803		The Polysynth MW	Pad/Choir	Analog
804		FM Analogy Pad	Pad/Choir	Analog
805		AN-X Soft Pad PAT	Pad/Choir	Analog
806		Wave Shaper Pad PAT	Pad/Choir	Analog
807		Saturator Pad PAT	Pad/Choir	Warm
808		AN-X PEG Pad PAT	Pad/Choir	Analog
809		CS80 Greek Master	Pad/Choir	Warm
810		AN-X 80s Noir	Pad/Choir	Analog
811		Seagull Pad	Pad/Choir	Analog
812		Soft Brass Pad	Pad/Choir	Warm
813		Colder Pad	Pad/Choir	Analog
814		CS Dreams	Pad/Choir	Analog
815		Variable Pad	Pad/Choir	Warm
816		Lizard	Pad/Choir	Analog
817		November Brass Pad	Pad/Choir	Warm
818		Tensor	Pad/Choir	Bright
819		Lodestar	Pad/Choir	Electronic
820		Yes, ummm... FM !	Pad/Choir	Warm
821		SY Wavepad	Pad/Choir	Electronic
822		Extended Heaven	Pad/Choir	Warm
823		Padderday	Pad/Choir	Bright
824		FM PWM Pad	Pad/Choir	Bright
825		FM Sweet Pad	Pad/Choir	Analog
826		Wide 3Osc Pad	Pad/Choir	Analog
827		Saws-2-Squares	Pad/Choir	Warm
828		Galloping Pad	Pad/Choir	Analog
829		CS80 Dystopian	Pad/Choir	Analog
830		Fade Bender Pad	Pad/Choir	Analog
831		FM Double Filtered	Pad/Choir	Bright
832		CelestialOrchestrial	Pad/Choir	Warm
833		S8	Pad/Choir	Analog
834		PWM Dial Up	Pad/Choir	Bright
835		80s Utility Saw	Pad/Choir	Analog
836		Roll Credits	Pad/Choir	Analog
837		Square don't care	Pad/Choir	Analog
838		Dark Pad	Pad/Choir	Bright
839		Poly Pad MW DA	Pad/Choir	Bright
840		Smart Morph PadScene	Pad/Choir	Bright

No.	Perfomance Name	Main Category	Sub Category
841	Hybrid Dance Pad	Pad/Choir	Bright
842	HyperTrance Stereo	Pad/Choir	Bright
843	Motion DUB	Pad/Choir	Electronic
844	Introduce Me	Pad/Choir	Bright
845	R's Logo	Pad/Choir	Analog
846	Vintage Sweep	Pad/Choir	Analog
847	AN-X Sawtooth Scenes	Pad/Choir	Analog
848	Whale Runner	Pad/Choir	Warm
849	Superfeed	Pad/Choir	Analog
850	AN-X Reso SynPad PAT	Pad/Choir	Analog
851	AN-X Dreaming	Pad/Choir	Analog
852	Slow Big Pad PAT	Pad/Choir	Analog
853	Glorious Pad	Pad/Choir	Warm
854	Oscillation Pad	Pad/Choir	Warm
855	3 Osc Swell Pad	Pad/Choir	Analog
856	FM Sweep AnalogPad	Pad/Choir	Analog
857	AN-X Sync Pad	Pad/Choir	Analog
858	AN-X Vibration Pad	Pad/Choir	Analog
859	FM Sweeping Poly	Pad/Choir	Analog
860	Slow Synth Pad PAT	Pad/Choir	Analog
861	FM Heavenly Pad	Pad/Choir	Warm
862	FM Warm Shivers	Pad/Choir	Warm
863	FM Saw Pad	Pad/Choir	Warm
864	Tranquility AF1&2	Pad/Choir	Warm
865	Pink Oracle	Pad/Choir	Analog
866	Notch Etherium	Pad/Choir	Warm
867	Free Running	Pad/Choir	Warm
868	Subspace Oceans	Pad/Choir	Electronic
869	Dramatic Turns	Pad/Choir	Electronic
870	Trilogy	Pad/Choir	Analog
871	Ocean Pad	Pad/Choir	Warm
872	Ozone Cleaner	Pad/Choir	Bright
873	Creation	Pad/Choir	Warm
874	Whip Motion	Pad/Choir	Warm
875	SciFi Pad	Pad/Choir	Analog
876	FM-X Repetizer PAT	Pad/Choir	Bright
877	Alone In The Rain	Pad/Choir	Analog
878	Arrival	Pad/Choir	Analog
879	SY Dreaming	Pad/Choir	Analog
880	Danger Zone	Pad/Choir	Analog
881	One Of Those PAT	Pad/Choir	Analog
882	190 Pulse PAT	Pad/Choir	Analog
883	Harmonix Helix	Pad/Choir	Warm
884	Groovin Spheres	Pad/Choir	Warm
885	Fading Darkness	Pad/Choir	Analog
886	Ascension	Pad/Choir	Warm
887	B*A*PWM MultiPad	Pad/Choir	Analog
888	Updraft	Pad/Choir	Warm
889	Ambient Synth Pad 2	Pad/Choir	Analog
890	UnderWater Worlds	Pad/Choir	Analog
891	Liquid Metals	Pad/Choir	Warm
892	Chillomatik	Pad/Choir	Bright
893	Funk Motion Pad	Pad/Choir	Analog
894	Trigger Horizon	Pad/Choir	Bright
895	The Great Red Spot	Pad/Choir	Warm
896	Smoothed Mosaic PAT	Pad/Choir	Analog
897	AN-X Binary	Pad/Choir	Analog
898	Deep Filter Kino	Pad/Choir	Bright
899	Deep Pitch Kino	Pad/Choir	Bright
900	Nu Age Designer FM	Pad/Choir	Warm
901	FM Crystal Pad	Pad/Choir	Bright
902	FM Bow RingMod Pad	Pad/Choir	Bright
903	Self-Res & Ice	Pad/Choir	Warm
904	Momentary FM	Pad/Choir	Warm
905	FM Astral Pad	Pad/Choir	Bright
906	FM Slow Square Pad	Pad/Choir	Warm
907	FM Forest Pad	Pad/Choir	Bright
908	Piercing Light	Pad/Choir	Bright
909	Morphalux	Pad/Choir	Electronic
910	Snow Flurries	Pad/Choir	Warm

No.	Perfomance Name	Main Category	Sub Category
911	FM Tides	Pad/Choir	Warm
912	FM 5th Pad	Pad/Choir	Bright
913	FM Bell SquarePad	Pad/Choir	Bright
914	FM Strings & Bells	Pad/Choir	Bright
915	DX Classix	Pad/Choir	Bright
916	FM Ice Heaven Pad	Pad/Choir	Bright
917	FM Ambient Keys	Pad/Choir	Warm
918	FM Linear Synth	Pad/Choir	Bright
919	Angel Pad 2	Pad/Choir	Bright
920	Dreamy FM Keys	Pad/Choir	Bright
921	Stardust FM	Pad/Choir	Warm
922	Art Strealla	Pad/Choir	Analog
923	Schlager Weapon 4	Pad/Choir	Bright
924	Rotary Bell Voices	Pad/Choir	Warm
925	Gong Pad	Pad/Choir	Bright
926	Cloud Pad	Pad/Choir	Warm
927	Satellite	Pad/Choir	Bright
928	Snow Run	Pad/Choir	Warm
929	Scorpius	Pad/Choir	Bright
930	Sunset Colors	Pad/Choir	Analog
931	Galactic Nucleus	Pad/Choir	Analog
932	Tapes	Pad/Choir	Warm
933	Beauty Vox & WWinds	Pad/Choir	Choir
934	Choir/Str/Pipe Org	Pad/Choir	Choir
935	Choir Service	Pad/Choir	Choir
936	BoysChoir MW Xfade	Pad/Choir	Choir
937	Film Choir	Pad/Choir	Choir
938	Oh/Aah Choir	Pad/Choir	Choir
939	AN-X Syn Choir PAT	Pad/Choir	Choir
940	Apollo 2022 X PAT	Pad/Choir	Choir
941	FM Choir	Pad/Choir	Choir
942	Latin Vocal	Pad/Choir	Choir
943	Jazz Singers	Pad/Choir	Choir
944	Gospel Hmm	Pad/Choir	Choir
945	Gospel Wow	Pad/Choir	Choir
946	Gospel Hey	Pad/Choir	Choir
947	Void	Pad/Choir	Choir
948	Hardware Vox	Pad/Choir	Choir
949	Swirly Q	Pad/Choir	Analog
950	Glistening Grove	Pad/Choir	Analog
951	Argentina 2080	Pad/Choir	Choir
952	Spaced Voices	Pad/Choir	Choir
953	Choir SEQ	Pad/Choir	Choir
954	Orient Envelope	Pad/Choir	Bright
955	Hi Pass Pad Machine	Pad/Choir	Bright
956	Morph Waveforms	Pad/Choir	Bright
957	Wubble Pad	Pad/Choir	Analog
958	Envelope Seq Scenes	Pad/Choir	Choir
959	Pad Planet	Pad/Choir	Analog
960	Fluctuations	Pad/Choir	Bright
961	Wax And Wane	Pad/Choir	Bright
962	Polyphonic LFOs	Pad/Choir	Analog
963	Color Wheel	Pad/Choir	Bright
964	Isle of Skye	Pad/Choir	Warm
965	Deep Dreams	Pad/Choir	Analog
966	Cloud Electric	Pad/Choir	Analog
967	Drift & Pulse	Pad/Choir	Bright
968	AN-X Harmonic Series	Pad/Choir	Analog
969	Paraphonica	Pad/Choir	Warm
970	Particles in Space	Pad/Choir	Analog
971	Octo Supreme	Pad/Choir	Analog
972	Praise Mr. 80	Pad/Choir	Analog
973	Planet 10	Pad/Choir	Bright
974	Compu Sigh	Pad/Choir	Electronic
975	Journey Within	Pad/Choir	Analog
976	Particle Pad	Pad/Choir	Electronic
977	Meteor Shower	Pad/Choir	Electronic
978	Motion PAD & ARP	Pad/Choir	Analog
979	Analog Arpeggios	Pad/Choir	Analog
980	Flexi Filters AF1&2	Pad/Choir	Bright

No.	Perfomance Name	Main Category	Sub Category
981	Filter & Funky	Pad/Choir	Bright
982	Stereo Pumping	Pad/Choir	Analog
983	New Groove Pad	Pad/Choir	Analog
984	Vintage Arp LFO	Pad/Choir	Analog
985	PiTCh Up Vowel Pad	Pad/Choir	Bright
986	C-Tonix	Pad/Choir	Electronic
987	Wave Shark	Pad/Choir	Bright
988	Power of Emotion	Pad/Choir	Analog
989	Chasing Clouds	Pad/Choir	Warm
990	Crispy Jam Pad	Pad/Choir	Bright
991	Chilled Vocoder	Pad/Choir	Bright
992	Increasing Tension	Pad/Choir	Electronic
993	The Golden Key	Pad/Choir	Analog
994	CS80+Spectra	Pad/Choir	Electronic
995	Honeyfaces	Pad/Choir	Warm
996	Chart Topper	Pad/Choir	Analog
997	AN1x Wave Arp Pad	Pad/Choir	Electronic
998	EDM Fun 1	Pad/Choir	Bright
999	EDM Fun 2	Pad/Choir	Bright
1000	One Chord EDM	Pad/Choir	Analog
1001	Schlager Herz	Pad/Choir	Analog
1002	Mr. Side Chain	Pad/Choir	Analog
1003	Travel Frontiers	Pad/Choir	Analog
1004	Ethno ARP Beat	Pad/Choir	Analog
1005	Vocoder & Follower	Pad/Choir	Choir
1006	Vocoder Dance	Pad/Choir	Choir
1007	DX1 Double Harps	Syn Comp	Decay
1008	DX1 African Mallets	Syn Comp	Decay
1009	FM Harpune AF1&2	Syn Comp	Decay
1010	Breathless Safri	Syn Comp	Analog
1011	FM Two Kalimbas	Syn Comp	Digital
1012	Space Age Blip	Syn Comp	Analog
1013	FM Atmos Decay	Syn Comp	Decay
1014	FM Baroque Decay	Syn Comp	Decay
1015	FM Koto & Shamisen	Syn Comp	Decay
1016	FM India Ethnic	Syn Comp	Digital
1017	Durable Style	Syn Comp	Decay
1018	Pulse Comp	Syn Comp	Analog
1019	Hybrid Comp	Syn Comp	Digital
1020	FM Hard Comp	Syn Comp	Digital
1021	FM Wave Dreams	Syn Comp	Digital
1022	FM Comper	Syn Comp	Digital
1023	FM Brite Comp	Syn Comp	Digital
1024	Kool Dis Comp	Syn Comp	Digital
1025	90s Harp	Syn Comp	Digital
1026	Epiphany	Syn Comp	Digital
1027	Universal Comp	Syn Comp	Analog
1028	Multi-Keys	Syn Comp	Analog
1029	Metalcimer	Syn Comp	Decay
1030	Grotteratti	Syn Comp	Digital
1031	FM Morpher	Syn Comp	Digital
1032	Rising Comp	Syn Comp	Decay
1033	Super Pluck Decay	Syn Comp	Decay
1034	AN-X Big Comp PAT	Syn Comp	Analog
1035	AN-X BIG SAW Decay	Syn Comp	Decay
1036	Percussive Dance	Syn Comp	Hook
1037	AM Pluck	Syn Comp	Decay
1038	Saturn 107	Syn Comp	Decay
1039	Saw Pluck	Syn Comp	Decay
1040	Synth Pluck 2	Syn Comp	Decay
1041	Pluck Away	Syn Comp	Analog
1042	La Click Pluck	Syn Comp	Decay
1043	One&Only massive	Syn Comp	Analog
1044	Plucked Melody	Syn Comp	Decay
1045	AN-X Decay COMP PAT	Syn Comp	Decay
1046	Percussive Dance 2	Syn Comp	Decay
1047	Delay Hit	Syn Comp	Decay
1048	Fusion Keys	Syn Comp	Digital
1049	Chords	Syn Comp	Decay
1050	1 Note Chord Sw	Syn Comp	Digital

No.	Perfomance Name	Main Category	Sub Category
1051	Classic House Chords	Syn Comp	Analog
1052	Saws Vs Bells	Syn Comp	Digital
1053	Comp Delay	Syn Comp	Digital
1054	Glassy FM	Syn Comp	Analog
1055	Schlager Weapon 2	Syn Comp	Digital
1056	EDM Chord Playa	Syn Comp	Digital
1057	Angel Hood	Syn Comp	Digital
1058	Swirly Pops	Syn Comp	Digital
1059	Energy Contract	Syn Comp	Decay
1060	Mutations	Syn Comp	Decay
1061	Square Drops	Syn Comp	Decay
1062	Popcorn	Syn Comp	Decay
1063	FM Funky Companion	Syn Comp	Digital
1064	Dual Super PWM PAT	Syn Comp	Analog
1065	80s Stab Machine	Syn Comp	Analog
1066	The Opener	Syn Comp	Analog
1067	FM Clabrass	Syn Comp	Digital
1068	AN-X GX1 Comp PAT	Syn Comp	Analog
1069	FM Polyesterday	Syn Comp	Digital
1070	AN-X Filter Comp	Syn Comp	Analog
1071	Vintage Poly	Syn Comp	Analog
1072	Turn It On	Syn Comp	Digital
1073	AN-X Super Sine PAT	Syn Comp	Analog
1074	Skywave	Syn Comp	Analog
1075	Synth Pluck 1	Syn Comp	Digital
1076	Synthimer	Syn Comp	Analog
1077	Signal Loss	Syn Comp	Analog
1078	Super Triangle PAT	Syn Comp	Analog
1079	Plucky Square	Syn Comp	Digital
1080	Super Square PAT	Syn Comp	Analog
1081	Sync Wah Comp PAT	Syn Comp	Analog
1082	Smooth Backgrounds	Syn Comp	Analog
1083	Freedom	Syn Comp	Analog
1084	Poly Dreamz	Syn Comp	Analog
1085	Chart Comp	Syn Comp	Analog
1086	Schlager Weapon 3	Syn Comp	Digital
1087	Autumn	Syn Comp	Hook
1088	Beauty Full	Syn Comp	Hook
1089	Party Chords	Syn Comp	Hook
1090	Double Poly	Syn Comp	Analog
1091	Dance Supersaw	Syn Comp	Hook
1092	Power Hook	Syn Comp	Hook
1093	Dance Surviver	Syn Comp	Hook
1094	Mega Stack	Syn Comp	Hook
1095	Multi Saw MW DA	Syn Comp	Hook
1096	Dance Synth MW DA	Syn Comp	Hook
1097	Trembling Game	Syn Comp	Digital
1098	AN-X Super SAW PAT	Syn Comp	Analog
1099	SuperWavePolySynth	Syn Comp	Analog
1100	AN-X Stereo Detuner	Syn Comp	Hook
1101	Dual Super SAW PAT	Syn Comp	Analog
1102	Unison Polysynth	Syn Comp	Analog
1103	Unison Twin Comp	Syn Comp	Analog
1104	Red Ones	Syn Comp	Digital
1105	E Strings	Syn Comp	Analog
1106	Space is Fine	Syn Comp	Digital
1107	LaidBack House	Syn Comp	Digital
1108	Freedom Runner	Syn Comp	Decay
1109	Dynamic Pad	Syn Comp	Digital
1110	Special Delivery	Syn Comp	Analog
1111	Melancholic Cats	Syn Comp	Analog
1112	Corroded Circuit	Syn Comp	Analog
1113	Sticky Steps	Syn Comp	Digital
1114	Wheel House	Syn Comp	Analog
1115	DX1 Side to Side	Syn Comp	Decay
1116	M Gates	Syn Comp	Analog
1117	Con Artists	Syn Comp	Electronic
1118	FM Variations	Syn Comp	Digital
1119	Modular Tronic	Syn Comp	Electronic
1120	FM&AN Classic Arps	Syn Comp	Digital

No.	Perfomance Name	Main Category	Sub Category
1121	Arpy Dreams	Syn Comp	Analog
1122	Toys and Arps	Syn Comp	Analog
1123	Short 'n Fast	Syn Comp	Decay
1124	Wooden Sparks	Syn Comp	Analog
1125	Creamy Chords	Syn Comp	Electronic
1126	Hard Pluck	Syn Comp	Electronic
1127	ArpFilteredSynth	Syn Comp	Digital
1128	Flexy	Syn Comp	Electronic
1129	Faaat Unison Arp	Syn Comp	Electronic
1130	Magic Pumping Chords	Syn Comp	Electronic
1131	Hands Up!	Syn Comp	Hook
1132	FUTURE-X	Syn Comp	Digital
1133	Spark Saw	Syn Comp	Hook
1134	my saw	Syn Comp	Hook
1135	FM So Simple	Syn Comp	Electronic
1136	Chill Melody Arp	Syn Comp	Electronic
1137	Lo Cycles FM	Syn Comp	Digital
1138	Space Knight	Syn Comp	Analog
1139	Blue Chilly	Syn Comp	Decay
1140	Classic Pluck	Syn Comp	Electronic
1141	Zappatak	Syn Comp	Electronic
1142	Fruit Suits	Syn Comp	Analog
1143	Bubble Arps	Syn Comp	Digital
1144	Bungalow Pluck	Syn Comp	Analog
1145	Airy Chill SPLIT	Syn Comp	Electronic
1146	Relaxing Journey	Syn Comp	Electronic
1147	Stranger Dreams	Syn Comp	Electronic
1148	Solaris	Syn Comp	Decay
1149	Vapor Technology	Syn Comp	Electronic
1150	DNA Lounge	Syn Comp	Decay
1151	Telestro	Syn Comp	Electronic
1152	Burbaladder	Syn Comp	Electronic
1153	Arpeggion X	Syn Comp	Digital
1154	Caramel Ice	Syn Comp	Analog
1155	Horizon	Syn Comp	Digital
1156	Moon Shape	Syn Comp	Electronic
1157	Chicago 2005	Syn Comp	Electronic
1158	Galaxy Rez	Syn Comp	Electronic
1159	Moving Floor	Syn Comp	Digital
1160	Crumbler	Syn Comp	Digital
1161	DJ Montage	Syn Comp	Decay
1162	Trance Master	Syn Comp	Hook
1163	Elektro Shape	Syn Comp	Decay
1164	Electro Pop SPLIT	Syn Comp	Electronic
1165	Straight Dance	Syn Comp	Electronic
1166	X-Dance	Syn Comp	Electronic
1167	On Duty	Syn Comp	Electronic
1168	Norman	Syn Comp	Electronic
1169	80s Kit MPP	Syn Comp	Rock/Pop
1170	Expanded DX Bells	Chromatic Perc	Bell
1171	Far Away FM	Chromatic Perc	Bell
1172	FM Music Box	Chromatic Perc	Bell
1173	FM Carillon	Chromatic Perc	Bell
1174	Vibraphone MotorOn	Chromatic Perc	Mallet
1175	Orch Xylophone	Chromatic Perc	Mallet
1176	Orch Marimba	Chromatic Perc	Mallet
1177	Orch Glockenspiel	Chromatic Perc	Mallet
1178	AN-X Xylo	Chromatic Perc	Mallet
1179	FM Woody Keys	Chromatic Perc	Mallet
1180	FM Vibe 1	Chromatic Perc	Mallet
1181	FM Vibe 2	Chromatic Perc	Mallet
1182	FM Marimba	Chromatic Perc	Mallet
1183	FM Xylophone	Chromatic Perc	Mallet
1184	FM Marimba Guitar	Chromatic Perc	Mallet
1185	FM Celesta	Chromatic Perc	Mallet
1186	FM Glocken	Chromatic Perc	Mallet
1187	FM Metal Glocken	Chromatic Perc	Mallet
1188	FM Lullaby AF1&2	Chromatic Perc	Mallet
1189	Beaten Gong	Chromatic Perc	Mallet
1190	Shape of Marimbas	Chromatic Perc	Mallet

No.	Perfomance Name	Main Category	Sub Category
1191	Chunky Mallets	Chromatic Perc	Mallet
1192	FM Vibraphone	Chromatic Perc	Electronic
1193	Dusty Vibes	Chromatic Perc	Electronic
1194	Buonanotte	Chromatic Perc	Electronic
1195	Subtle XMods	Chromatic Perc	Electronic
1196	Haccato Steaven	Chromatic Perc	Synth Bell
1197	Fantasy	Chromatic Perc	Synth Bell
1198	FM Fantasy	Chromatic Perc	Synth Bell
1199	FM Vari Bell	Chromatic Perc	Synth Bell
1200	FM Tubular Bells	Chromatic Perc	Synth Bell
1201	FM Hand Bell	Chromatic Perc	Synth Bell
1202	Super Bell	Chromatic Perc	Synth Bell
1203	FM Smart Bells	Chromatic Perc	Synth Bell
1204	AN-X Virtual DX	Chromatic Perc	Synth Bell
1205	Delicate Sine Bells	Chromatic Perc	Synth Bell
1206	Movie Bells	Chromatic Perc	Synth Bell
1207	FM Dulcimer	Chromatic Perc	Pitched Drum
1208	FM Steel Drum	Chromatic Perc	Pitched Drum
1209	FM Japanese Taiko	Chromatic Perc	Pitched Drum
1210	FM Electric Drums	Chromatic Perc	Pitched Drum
1211	Celestial Ornaments	Chromatic Perc	Bell
1212	Rewind Time	Chromatic Perc	Synth Bell
1213	Dreamy Tin	Chromatic Perc	Synth Bell
1214	Bellscape	Chromatic Perc	Bell
1215	Bell Majestic	Chromatic Perc	Bell
1216	Ethno Festivo	Chromatic Perc	Mallet
1217	Glassbell Pindrops	Chromatic Perc	Bell
1218	Real Drums Kit	Drum / Perc	Drums
1219	Real Drums Kit 2	Drum / Perc	Drums
1220	New Oak Custom Kit	Drum / Perc	Drums
1221	NewMapleCustom Kit	Drum / Perc	Drums
1222	BeechwoodSnare Kit	Drum / Perc	Drums
1223	BeechwoodSnareKit2	Drum / Perc	Drums
1224	Modern Rock Kit 2	Drum / Perc	Drums
1225	Real Brushes Kit	Drum / Perc	Drums
1226	Jazz Brushes Kit	Drum / Perc	Drums
1227	Jazz Sticks Kit	Drum / Perc	Drums
1228	Iranian Mix Kit	Drum / Perc	Drums
1229	D'elo Kit	Drum / Perc	Drums
1230	T's EDM Kit	Drum / Perc	Drums
1231	T's EDM Kit 2	Drum / Perc	Drums
1232	T's Hip Hop Kit	Drum / Perc	Drums
1233	T's Hip Hop Kit 2	Drum / Perc	Drums
1234	Trap Kit	Drum / Perc	Drums
1235	Trap Kit 2	Drum / Perc	Drums
1236	Downtempo HipHop Kit	Drum / Perc	Drums
1237	LoFi Kit	Drum / Perc	Drums
1238	Airy Chill Kit	Drum / Perc	Drums
1239	EDM Kit	Drum / Perc	Drums
1240	House-Techno Kit	Drum / Perc	Drums
1241	House-Techno Kit 2	Drum / Perc	Drums
1242	The Flashbulb Kit	Drum / Perc	Drums
1243	Electro Kit	Drum / Perc	Drums
1244	Electro Kit 2	Drum / Perc	Drums
1245	DUB Kit	Drum / Perc	Drums
1246	DUB Kit 2	Drum / Perc	Drums
1247	Tricky Hip Hop Kit	Drum / Perc	Electronic
1248	European EDM Kit 1	Drum / Perc	Drums
1249	European EDM Kit 2	Drum / Perc	Drums
1250	Straight Dance Kit	Drum / Perc	Drums
1251	Dancefloor Kit	Drum / Perc	Drums
1252	Dancefloor Kit 2	Drum / Perc	Drums
1253	Psychedelic Dub Kit	Drum / Perc	Drums
1254	Brachial Kit	Drum / Perc	Drums
1255	Epic Kit	Drum / Perc	Drums
1256	Arabic Mixed Kit 2	Drum / Perc	Drums
1257	Brazil Kit 1	Drum / Perc	Percussion
1258	Brazil Kit 2	Drum / Perc	Percussion
1259	Turkish St Kit	Drum / Perc	Percussion
1260	New Arabic Kit 1	Drum / Perc	Percussion

No.	Perfomance Name	Main Category	Sub Category
1261	New Arabic Kit 2	Drum / Perc	Percussion
1262	New Maghrebi Kit	Drum / Perc	Percussion
1263	New Khaligi Kit 1	Drum / Perc	Percussion
1264	New Khaligi Kit 2	Drum / Perc	Percussion
1265	New Iranian Kit 1	Drum / Perc	Percussion
1266	New Iranian Kit 2	Drum / Perc	Percussion
1267	Darbuka Sagat Riq	Drum / Perc	Percussion
1268	Bodhran&Cajon Kit	Drum / Perc	Percussion
1269	Bones&Spoons Kit	Drum / Perc	Percussion
1270	Highland Snares	Drum / Perc	Percussion
1271	AN-X Syn Multi-Drum	Drum / Perc	Synth
1272	Rototom Stylins	Drum / Perc	Percussion
1273	Hi/Mid/Lo Rototoms	Drum / Perc	Percussion
1274	Thunderous Rotos	Drum / Perc	Percussion
1275	Round Robin Timps	Drum / Perc	Percussion
1276	Gran Cassas & Drums	Drum / Perc	Percussion
1277	Trailer Toms Split	Drum / Perc	Percussion
1278	4 Trailer Toms	Drum / Perc	Percussion
1279	TamTam Adventures	Drum / Perc	Percussion
1280	Bell Tree & Chimes	Drum / Perc	Percussion
1281	13 Orch. Cymbals	Drum / Perc	Percussion
1282	Crash Cart & Rides	Drum / Perc	Percussion
1283	Orchestral Snares +	Drum / Perc	Percussion
1284	Rytmobox	Drum / Perc	Synth
1285	Neo Disco Kit	Drum / Perc	Drums
1286	80s Drum Machine Kit	Drum / Perc	Drums
1287	Goliath Trap Kit	Drum / Perc	Drums
1288	Shook	Drum / Perc	R&B/Hip Hop
1289	Trap City Kit	Drum / Perc	Drums
1290	Pick It Up	Drum / Perc	R&B/Hip Hop
1291	Memory Restaurant	Drum / Perc	Electronic
1292	SQR Harmony	Drum / Perc	Electronic
1293	Atebits Kit Showcase	Drum / Perc	Electronic
1294	Tracker Showcase	Drum / Perc	Electronic
1295	Analogue Drum Machin	Drum / Perc	Electronic
1296	Output	Drum / Perc	Drums
1297	Experimental Work	Drum / Perc	Electronic
1298	Flix Flux FM	Drum / Perc	Electronic
1299	FM Techre	Drum / Perc	Electronic
1300	FM Scraper	Drum / Perc	Electronic
1301	DubStepping	Drum / Perc	Drums
1302	Minimal Techno	Drum / Perc	Drums
1303	Surprise Package	Drum / Perc	Drums
1304	ATL Flexin	Drum / Perc	Drums
1305	Infamous	Drum / Perc	Drums
1306	Plastic Beat	Drum / Perc	Drums
1307	Bodhran Scrape	Drum / Perc	Percussion
1308	Handcussion	Drum / Perc	Percussion
1309	Scatter Dance	Drum / Perc	Percussion
1310	Morphcussion	Drum / Perc	Percussion
1311	FM Landscapes	Sound FX	Electronic
1312	FM Flight	Sound FX	Moving
1313	FM The Wave	Sound FX	Nature
1314	Warp Speed Atmos	Sound FX	Moving
1315	Telharmonics	Sound FX	Moving
1316	MOON BASE	Sound FX	Moving
1317	Spiral Feedbacker	Sound FX	Moving
1318	Spirals	Sound FX	Moving
1319	4Bar1NoteRisers	Sound FX	Moving
1320	Galactic Static	Sound FX	Sci-Fi
1321	Robot Junkyard	Sound FX	Sci-Fi
1322	Entropy	Sound FX	Sci-Fi
1323	Blaster Beam	Sound FX	Sci-Fi
1324	InsideTheWormhole	Sound FX	Moving
1325	Dernt to Bwow	Sound FX	Ambient
1326	Interstella FM	Sound FX	Sci-Fi
1327	Cetaceans	Sound FX	Ambient
1328	Surreal Beach	Sound FX	Sci-Fi
1329	Feral Interstellar	Sound FX	Sci-Fi
1330	DX1 Planet of Ice	Sound FX	Moving

No.	Perfomance Name	Main Category	Sub Category
1331	Positronic	Sound FX	Electronic
1332	FM Ringmod Fall	Sound FX	Electronic
1333	SciFi Pad 2	Sound FX	Sci-Fi
1334	Cinema Action Riser	Sound FX	Sci-Fi
1335	AN-X Opening SFX PAT	Sound FX	Sci-Fi
1336	More Trailer Toys	Sound FX	Sci-Fi
1337	Clock Divider	Sound FX	Electronic
1338	Complextro	Sound FX	Moving
1339	Riser X	Sound FX	Electronic
1340	Creeping Voltage	Sound FX	Electronic
1341	Retro SEQ exLFO	Sound FX	Sci-Fi
1342	Start The Machine	Sound FX	Electronic
1343	North Station	Musical FX	Ambient
1344	Secret Garden	Musical FX	Moving
1345	Waterphonix	Musical FX	Ambient
1346	My Loving Ghost	Musical FX	Ambient
1347	Breaking Point	Musical FX	Sweep
1348	Canterbury Tales	Musical FX	Moving
1349	FM Meditator	Musical FX	Moving
1350	FM For Airports	Musical FX	Ambient
1351	Marimbophone	Musical FX	Moving
1352	Tin Space	Musical FX	Moving
1353	Cricket Night	Musical FX	Sweep
1354	Copy	Musical FX	Moving
1355	Pacific	Musical FX	Moving
1356	Additive Movement	Musical FX	Moving
1357	CirrocumulusClouds	Musical FX	Jazz/World
1358	Emerald Forest	Musical FX	Moving
1359	Pond Ripples	Musical FX	Moving
1360	FM Spectral Spheres	Musical FX	Moving
1361	Cosmoklavier	Musical FX	Ambient
1362	Piano Asylum	Musical FX	Moving
1363	Aleatoric Awakening	Musical FX	Ambient
1364	Nefarious SW1 & 2	Musical FX	Moving
1365	Orch String FX	Musical FX	Moving
1366	Rising Subs	Musical FX	Sweep
1367	Marine Life	Musical FX	Moving
1368	Dystopiotic	Musical FX	Sweep
1369	The Doom Is Near	Musical FX	Sweep
1370	Tyrannosaur	Musical FX	Moving
1371	Trailer Toys	Musical FX	Moving
1372	Trailer Dives Split	Musical FX	Moving
1373	FM Wallop	Musical FX	Moving
1374	The Reaper	Musical FX	Hit
1375	Country Dreams	Musical FX	Moving
1376	FM Chillout	Musical FX	Moving
1377	Sea Cycles	Musical FX	Moving
1378	White Wings	Musical FX	Ambient
1379	Space Worms	Musical FX	Moving
1380	Growing Spirals	Musical FX	Ambient
1381	24 OP Organism	Musical FX	Ambient
1382	Distant Memories	Musical FX	Ambient
1383	Star Storm	Musical FX	Sweep
1384	Big Loud Sky	Musical FX	Ambient
1385	Melted Cassette	Musical FX	Ambient
1386	Distortion EVOLUTION	Musical FX	Electronic
1387	Synthetic Heart	Musical FX	Electronic
1388	String Theory	Musical FX	Ambient
1389	M-Seq Choir Pad	Musical FX	Moving
1390	Space Dust	Musical FX	Moving
1391	Maze	Musical FX	Moving
1392	Melt Motion PAT	Musical FX	Moving
1393	MegaRezzoid	Musical FX	Sweep
1394	Breathe In	Musical FX	Moving
1395	Electronik Symphonik	Musical FX	Moving
1396	Ice Walkers	Musical FX	Ambient
1397	Mysterious Invention	Musical FX	Moving
1398	Zyzzit	Musical FX	Sweep
1399	Scirocco	Musical FX	Moving
1400	Bit Performer	Musical FX	Moving

No.	Perfomance Name	Main Category	Sub Category
1401	Hydra Drone	Musical FX	Ambient
1402	Iceworld	Musical FX	Moving
1403	The Undecided	Musical FX	Moving
1404	Space Construction	Musical FX	Moving
1405	Granular Motion	Musical FX	Moving
1406	Orpheus	Musical FX	Moving
1407	Time Travel	Musical FX	Moving
1408	FM Spiral Dist	Musical FX	Ambient
1409	Vocal&Marim Ld	Musical FX	Moving
1410	Vocal&Marim Ld 2	Musical FX	Moving
1411	VoxTrix	Musical FX	Moving
1412	Video Game Octaves	Musical FX	Moving
1413	Coils	Musical FX	Moving
1414	Blinking Lights	Musical FX	Moving
1415	Dreamy 80s Octaves	Musical FX	Moving
1416	Whisper Moon	Musical FX	Ambient
1417	Switcher	Musical FX	Moving
1418	Icecream	Musical FX	Ambient
1419	Hypnosis	Musical FX	Moving
1420	Wave Surfer	Musical FX	Moving
1421	Drone Generator	Musical FX	Moving
1422	Cold Motion	Musical FX	Moving
1423	Turnstyle	Musical FX	Moving
1424	Pad Pulsations	Musical FX	Moving
1425	Motion Filters AF	Musical FX	Moving
1426	AN-X Circular Minds	Musical FX	Moving
1427	Motion Sweep	Musical FX	Moving
1428	Cliff	Musical FX	Moving
1429	Waveseq FM	Musical FX	Moving
1430	Motion Pad	Musical FX	Sweep
1431	EDM SideChainer	Musical FX	Sweep
1432	Pump EDM Pad	Musical FX	Moving
1433	Prime N Things	Musical FX	Electronic
1434	Different Time/Place	Musical FX	Moving
1435	Super Slicer	Musical FX	Moving
1436	AN-X Loose ARP	Musical FX	Moving
1437	Super Devil	Musical FX	Ambient
1438	Octave Bumper MS	Musical FX	Moving
1439	Rubber Tension PAT	Musical FX	Moving
1440	Shapeshifter	Musical FX	Moving
1441	Autonomous Machine	Musical FX	Electronic
1442	Sentimental Boy	Musical FX	Ambient
1443	Slow Fast	Musical FX	Electronic
1444	Pearly Gates	Musical FX	Moving
1445	The Green Flash	Musical FX	Ambient
1446	Electric Jungle	Musical FX	Electronic
1447	Elysion	Musical FX	Electronic
1448	Three Cables	Musical FX	Electronic
1449	FM Tribal Council	Musical FX	Jazz/World
1450	Envelope Beatz	Musical FX	Electronic
1451	Full of Shape	Musical FX	Electronic
1452	Shaking Trees	Musical FX	Moving
1453	Hot Corner	Musical FX	Moving
1454	Shades of Yesterday	Musical FX	Moving
1455	Tribaltronic	Musical FX	Electronic
1456	Freaky FM AF1&2	Musical FX	Electronic
1457	Fax Science	Musical FX	Moving
1458	Run It	Musical FX	R&B/Hip Hop
1459	Under Dirt	Musical FX	R&B/Hip Hop
1460	Thursday Evening	Musical FX	Moving
1461	Wave Xplosion	Musical FX	Electronic
1462	Lucky Bag	Musical FX	Electronic
1463	Electro Boo	Musical FX	Electronic
1464	Kreuzberg Funk	Musical FX	Electronic
1465	Smartbar Funk	Musical FX	Electronic
1466	Fusion Science	Musical FX	Electronic
1467	Electron	Musical FX	Electronic
1468	More & More	Musical FX	Electronic
1469	Turn It Up! AF1&2	Musical FX	Moving
1470	Rubber Bullitz	Musical FX	Electronic

No.	Perfomance Name	Main Category	Sub Category
1471	Magnetism	Musical FX	Electronic
1472	Electrone	Musical FX	Electronic
1473	Wired	Musical FX	Electronic
1474	Rock Ready	Musical FX	Rock/Pop
1475	Flowerpot Hats	Musical FX	Rock/Pop
1476	Santur-A-Delic	Ethnic	Struck
1477	S'Tar Garden	Ethnic	Plucked
1478	ReplicatorShakuhachi	Ethnic	Blown
1479	Trees In Juarez	Ethnic	Plucked
1480	African Garage Beat	Ethnic	Jazz/World
1481	Full Concert Grand	Piano	Acoustic
1482	Rock Grand Piano	Piano	Modern
1483	Mellow Grand Piano	Piano	Acoustic
1484	Glasgow	Piano	Acoustic
1485	Romantic Piano	Piano	Acoustic
1486	Aggressive Grand	Piano	Modern
1487	Tacky	Piano	Modern
1488	House Piano	Piano	Modern
1489	Old and Squashed	Piano	Vintage
1490	Ballad Key	Piano	Layer
1491	80s Layer	Piano	Layer
1492	Ballad Stack	Piano	Layer
1493	Piano Back	Piano	Layer
1494	Piano & Strings	Piano	Layer
1495	Piano & Ooh Choir	Piano	Layer
1496	Monaural Grand MW	Piano	Acoustic
1497	Old Blues	Piano	Vintage
1498	1968	Piano	Vintage
1499	CP 1979	Piano	Vintage
1500	CP70 Chorus	Piano	Vintage
1501	Journey	Piano	Vintage
1502	Vintage'74	Keyboard	Electric Piano
1503	R&B Soft	Keyboard	Electric Piano
1504	Early 70's	Keyboard	Electric Piano
1505	Soft Case	Keyboard	Electric Piano
1506	Crunchy Comp	Keyboard	Electric Piano
1507	Vintage Case	Keyboard	Electric Piano
1508	Hard Vintage	Keyboard	Electric Piano
1509	Sweetness MW	Keyboard	Electric Piano
1510	Phaser Vintage	Keyboard	Electric Piano
1511	Vintage Phase	Keyboard	Electric Piano
1512	Early Fusion	Keyboard	Electric Piano
1513	Neo Soul MW	Keyboard	Electric Piano
1514	1983 MW	Keyboard	Electric Piano
1515	Contempo	Keyboard	Electric Piano
1516	Clicky Dyno MW	Keyboard	Electric Piano
1517	DynoStraightMW	Keyboard	Electric Piano
1518	Dyno Chorus MW	Keyboard	Electric Piano
1519	80s Boosted	Keyboard	Electric Piano
1520	Chorus Hard	Keyboard	Electric Piano
1521	Max Tine	Keyboard	Electric Piano
1522	Bell Chorus	Keyboard	FM Piano
1523	Drive EP	Keyboard	Electric Piano
1524	Vinyl EP	Keyboard	Electric Piano
1525	Natural Wr	Keyboard	Electric Piano
1526	Wr EP 1 Bright	Keyboard	Electric Piano
1527	Wr Distortion	Keyboard	Electric Piano
1528	Phaze Wr	Keyboard	Electric Piano
1529	DX Legend	Keyboard	FM Piano
1530	Bell DX	Keyboard	FM Piano
1531	DX Woody	Keyboard	FM Piano
1532	Full Tine 1	Keyboard	FM Piano
1533	DX Mellow	Keyboard	FM Piano
1534	DX Crisp	Keyboard	FM Piano
1535	DX Celesta EP	Keyboard	FM Piano
1536	DX Pluck EP	Keyboard	FM Piano
1537	DX-7 II	Keyboard	FM Piano
1538	GS Tines AF1&2	Keyboard	FM Piano
1539	Galaxy DX	Keyboard	FM Piano
1540	TX816 Bell Piano	Keyboard	FM Piano

No.	Perfomance Name	Main Category	Sub Category
1541	Marimba DX	Keyboard	FM Piano
1542	DX5-Zero	Keyboard	FM Piano
1543	Hybrid EP	Keyboard	Electric Piano
1544	Mixed Up	Keyboard	Electric Piano
1545	Dyno Wr	Keyboard	Electric Piano
1546	Analog Piano	Keyboard	Synth
1547	AhrAml	Keyboard	Synth
1548	Electro Piano	Keyboard	Electric Piano
1549	Transistor Piano	Keyboard	Synth
1550	EP Pad	Keyboard	Electric Piano
1551	DX Pad	Keyboard	Electric Piano
1552	Dyno Choir	Keyboard	Electric Piano
1553	Vintage Clavi	Keyboard	Clavi
1554	Super Clavi 1	Keyboard	Clavi
1555	Stereo Clavi	Keyboard	Clavi
1556	Hollow Clavi	Keyboard	Clavi
1557	Nu Phasing	Keyboard	Clavi
1558	Touch Clavi	Keyboard	Clavi
1559	PedalWah Clavi FC2	Keyboard	Clavi
1560	Pulse Clavi	Keyboard	Clavi
1561	Guitarpsichord	Keyboard	Clavi
1562	Hipsichord	Keyboard	Clavi
1563	16 + 8 + 5&1/3	Organ	Tone Wheel
1564	Jazz 2nd Perc + C3	Organ	Tone Wheel
1565	First 3 w/Perc	Organ	Tone Wheel
1566	Slow Jam	Organ	Tone Wheel
1567	Cool Cat	Organ	Tone Wheel
1568	Jazzy 1	Organ	Tone Wheel
1569	Jazzy 2	Organ	Tone Wheel
1570	Jazzy Chorus	Organ	Tone Wheel
1571	On Road	Organ	Tone Wheel
1572	Progressy	Organ	Tone Wheel
1573	Rocky	Organ	Tone Wheel
1574	Crunchy	Organ	Tone Wheel
1575	1972	Organ	Combo
1576	Glassy AF1	Organ	Tone Wheel
1577	Clean	Organ	Tone Wheel
1578	All Bars Perc AF	Organ	Tone Wheel
1579	Rotor Vibrato	Organ	Tone Wheel
1580	Vib Chorus AF1	Organ	Tone Wheel
1581	Soulemn	Organ	Tone Wheel
1582	Mellow	Organ	Tone Wheel
1583	Fully	Organ	Tone Wheel
1584	FullDraw/CVibrato	Organ	Tone Wheel
1585	Even Out	Organ	Tone Wheel
1586	Harmonic Hole	Organ	Tone Wheel
1587	A Few Wheels	Organ	Tone Wheel
1588	Left Manual	Organ	Tone Wheel
1589	Draw Control	Organ	Tone Wheel
1590	Stop Rotar	Organ	Tone Wheel
1591	Clean Noise	Organ	Tone Wheel
1592	Walking Bass	Organ	Tone Wheel
1593	Greasy	Organ	Tone Wheel
1594	Swishie	Organ	Tone Wheel
1595	Solo Percussion AF	Organ	Tone Wheel
1596	Percussion Vibrato	Organ	Tone Wheel
1597	Tiny Combo Bars 1	Organ	Combo
1598	Tiny Combo Bars 2	Organ	Combo
1599	Panther	Organ	Combo
1600	1967 Keys	Organ	Combo
1601	YD-45C	Organ	Combo
1602	Diamond Head	Organ	Synth
1603	Early Bird	Organ	Tone Wheel
1604	Moet	Organ	Synth
1605	Bollinger	Organ	Synth
1606	Vinyl Organ	Organ	Synth
1607	Alternator	Organ	Tone Wheel
1608	Flying Rhythm Bars	Organ	Synth
1609	Roundabout	Organ	Electronic
1610	Tradi	Organ	Tone Wheel

No.	Perfomance Name	Main Category	Sub Category
1611	Petit	Organ	Tone Wheel
1612	Fluty	Organ	Tone Wheel
1613	Fluty Pipe	Organ	Pipe
1614	St. Peter	Organ	Pipe
1615	St. Paul AF1&2	Organ	Pipe
1616	Impromptu	Organ	Pipe
1617	Mixture	Organ	Pipe
1618	Reed Split	Organ	Pipe
1619	Medieval MW	Organ	Pipe
1620	Breath Pipe	Organ	Pipe
1621	Reedy Pipe	Organ	Pipe
1622	Sunday	Organ	Pipe
1623	Accordions AF1&2	Organ	Pipe
1624	Soft Marimba	Chromatic Perc	Mallet
1625	Vibes Bow MW	Chromatic Perc	Mallet
1626	Twinkle	Chromatic Perc	Bell
1627	Stick Bell	Chromatic Perc	Bell
1628	Ice Bells	Chromatic Perc	Bell
1629	Bell Ice	Chromatic Perc	Bell
1630	Stack Bell	Chromatic Perc	Synth Bell
1631	J-Pop	Chromatic Perc	Bell
1632	Chorus Bell	Chromatic Perc	Bell
1633	Handbell	Chromatic Perc	Bell
1634	Bell Chiff	Chromatic Perc	Synth Bell
1635	Sako Bell	Chromatic Perc	Synth Bell
1636	Nice Bell	Chromatic Perc	Synth Bell
1637	Noisy Bell	Chromatic Perc	Synth Bell
1638	Pop Bells & Pad MW	Chromatic Perc	Bell
1639	Going To Heaven	Chromatic Perc	Rock/Pop
1640	Digibox	Chromatic Perc	Synth Bell
1641	Nibelungen	Chromatic Perc	Bell
1642	Wood Bell	Chromatic Perc	Bell
1643	Marimbell	Chromatic Perc	Synth Bell
1644	Synth Steel Drum	Chromatic Perc	Pitched Drum
1645	Gamelan	Chromatic Perc	Bell
1646	Ethnic Dream	Chromatic Perc	Mallet
1647	Mystic Bowl	Chromatic Perc	Bell
1648	Mbira	Ethnic	Plucked
1649	Glass Mbira	Chromatic Perc	Pitched Drum
1650	Island Bell	Chromatic Perc	Synth Bell
1651	Tibetan	Chromatic Perc	Bell
1652	Rimba Bells	Chromatic Perc	Synth Bell
1653	Lost in Asia	Chromatic Perc	Bell
1654	Coconuts Random	Chromatic Perc	Jazz/World
1655	Kodo	Chromatic Perc	Pitched Drum
1656	Timp/Bell/Glocken	Chromatic Perc	Bell
1657	Orc Percussion	Chromatic Perc	Bell
1658	Classical AF1&2	Guitar	Acoustic
1659	High Tension AF1&2	Guitar	Acoustic
1660	Sao Paulo	Guitar	Acoustic
1661	Barcelona	Guitar	Acoustic
1662	Nylon Slide Vel	Guitar	Acoustic
1663	NylonHarmonics Vel	Guitar	Acoustic
1664	Classical12Strings	Guitar	Acoustic
1665	Hip-HopNylonGuitar	Guitar	Acoustic
1666	Steel String AF1&2	Guitar	Acoustic
1667	Old Strings AF1&2	Guitar	Acoustic
1668	Steel Slide Vel	Guitar	Acoustic
1669	Mute & Slide Vel	Guitar	Acoustic
1670	SteelHarmonics Vel	Guitar	Acoustic
1671	Hip-HopSteelGuitar	Guitar	Acoustic
1672	Hi Strings	Guitar	Acoustic
1673	Two Acoustics 1	Guitar	Acoustic
1674	2 Steel Strings	Guitar	Acoustic
1675	Big 12 Strings	Guitar	Acoustic
1676	Airy 12 AF1&2	Guitar	Acoustic
1677	Wide 12 strings AF	Guitar	Acoustic
1678	12Strings Mono	Guitar	Acoustic
1679	Clean El & Ac 1	Guitar	Electric Clean
1680	Clean El & Ac 2	Guitar	Electric Clean

No.	Perfomance Name	Main Category	Sub Category
1681	Clean El & Ac 3	Guitar	Electric Clean
1682	Strange 12	Guitar	Electric Clean
1683	Jazzy Pick	Guitar	Electric Clean
1684	Melodic Jazz	Guitar	Electric Clean
1685	Fat Oil Jazz AF1&2	Guitar	Electric Clean
1686	Touch Wah AF1	Guitar	Electric Clean
1687	Baby AF1	Guitar	Electric Clean
1688	Good Night	Guitar	Electric Clean
1689	Dynamic Clean AF	Guitar	Electric Clean
1690	Single Coil Chorus	Guitar	Electric Clean
1691	Distant	Guitar	Electric Clean
1692	Some Hair	Guitar	Distortion
1693	Clean Slide Vel	Guitar	Electric Clean
1694	Hit It Hard	Guitar	Electric Clean
1695	Paddy Clean	Guitar	Electric Clean
1696	BluesyClean Legato	Guitar	Electric Clean
1697	Dual Coil '65	Guitar	Distortion
1698	Dual Coil Amp	Guitar	Electric Clean
1699	Roto Guitar MW	Guitar	Electric Clean
1700	Dual Coil SlideVel	Guitar	Electric Clean
1701	Dual Coil Slap Vel	Guitar	Electric Clean
1702	Dual Coil 80sClean	Guitar	Electric Clean
1703	Dual Coil Rotary	Guitar	Electric Clean
1704	Electric 12Strings	Guitar	Electric Clean
1705	Rotator AF1&2	Guitar	Distortion
1706	Middy Tremolo	Guitar	Distortion
1707	Retro Flanger	Guitar	Electric Clean
1708	Vintage Strum	Guitar	Electric Clean
1709	Spanky	Guitar	Distortion
1710	Rockabilly	Guitar	Distortion
1711	2 Electrics AF1&2	Guitar	Electric Clean
1712	Light Blues AF1&2	Guitar	Distortion
1713	DualCoil SemiClean	Guitar	Electric Clean
1714	Chorus Dist AF1&2	Guitar	Distortion
1715	Tex Boogie	Guitar	Distortion
1716	59 Combo AF1&2	Guitar	Distortion
1717	Alternative Rocker	Guitar	Distortion
1718	Overdrive Mt&Harmo	Guitar	Distortion
1719	Crunched Up 376	Guitar	Distortion
1720	Dynamic Amp	Guitar	Distortion
1721	Chuggin' Guitar	Guitar	Distortion
1722	Chugga	Guitar	Distortion
1723	Small Amp	Guitar	Distortion
1724	Metal Mute	Guitar	Distortion
1725	DistortionMt&Harmo	Guitar	Distortion
1726	Cool Drive	Guitar	Distortion
1727	Hard Drive	Guitar	Distortion
1728	Hard Ramp	Guitar	Distortion
1729	Heavy Drive	Guitar	Distortion
1730	No.1 GTR	Guitar	Distortion
1731	Snake Finger	Guitar	Distortion
1732	Dual Coil BlueLead	Guitar	Distortion
1733	Over The Top	Guitar	Distortion
1734	Voodooman	Guitar	Distortion
1735	Killer Whammy	Guitar	Distortion
1736	Latin Lover	Guitar	Distortion
1737	Oct Fuzz PdWah FC2	Guitar	Distortion
1738	DualCoilLeadWahFC2	Guitar	Distortion
1739	DualCoil Harmo Vel	Guitar	Distortion
1740	Crunchy Guitar	Guitar	Distortion
1741	Beater	Guitar	Distortion
1742	HIP Mute	Guitar	Electric Clean
1743	Pedal Steel	Guitar	Electric Clean
1744	DualCoil80sCleanMt	Guitar	Electric Clean
1745	Mid Drive(2handGt)	Guitar	Distortion
1746	HrdRocker(2handGt)	Guitar	Distortion
1747	ToughTube(2handGt)	Guitar	Distortion
1748	DriveWah (2handGt)	Guitar	Distortion
1749	Resonator Guitar	Guitar	Acoustic
1750	Velo Growl	Bass	Acoustic

No.	Perfomance Name	Main Category	Sub Category
1751	Groove Acoustic AF	Bass	Acoustic
1752	Upright	Bass	Acoustic
1753	Prec Flat Wound	Bass	Electric
1754	Round Wound	Bass	Electric
1755	Active P	Bass	Electric
1756	Mid Range Finger	Bass	Electric
1757	Active TRB	Bass	Electric
1758	Passive BB AF1&2	Bass	Electric
1759	Vintage JB AF1&2	Bass	Electric
1760	Straight Finger AF	Bass	Electric
1761	JB Flat Wound AF	Bass	Electric
1762	Finger PickBass AF	Bass	Electric
1763	Prec Amped AF1	Bass	Electric
1764	Finger Bass Amp AF	Bass	Electric
1765	Fret Buzzy	Bass	Electric
1766	Small Cabinet	Bass	Electric
1767	Simple Pick	Bass	Electric
1768	Pick Open	Bass	Electric
1769	Pick Mute	Bass	Electric
1770	Pick Pull	Bass	Electric
1771	Straight Pick AF	Bass	Electric
1772	Velo Bass	Bass	Electric
1773	Slap Switch	Bass	Electric
1774	Fretless Dry	Bass	Electric
1775	Fretless Solo	Bass	Electric
1776	PBassFingerDist AF	Bass	Electric
1777	Fuzz Bass AF1	Bass	Electric
1778	Gnarly Bass	Bass	Electric
1779	BaCement	Bass	Electric
1780	Dist Tama Bass	Bass	Electric
1781	5th Fuzz Bass	Bass	Electric
1782	Chili Bass	Bass	Electric
1783	Big Cabinet	Bass	Electric
1784	Hybrid Bass 1	Bass	Electric
1785	Hybrid Bass 2	Bass	Electric
1786	3 VCOs	Bass	Synth
1787	Brain Bass AF1&2	Bass	Synth
1788	Lo Boy AF1&2	Bass	Synth
1789	Dark Bass	Bass	Synth
1790	Rn Bass RB	Bass	Synth
1791	Fundamental	Bass	Synth
1792	Fat Sine Resonance	Bass	Synth
1793	Moon Bass	Bass	Synth
1794	More Fatty	Bass	Synth
1795	Chill Out Bass AF1	Bass	Synth
1796	Growler	Bass	Synth
1797	Smacked	Bass	Synth
1798	booooooooom	Bass	Synth
1799	Biting	Bass	Synth
1800	Boogie A Legato RB	Bass	Synth
1801	Uni Punch	Bass	Synth
1802	Noise Bass	Bass	Synth
1803	Single Oscillator	Bass	Synth
1804	Unison	Bass	Synth
1805	Long Spit AF2	Bass	Synth
1806	Big Bass	Bass	Synth
1807	Bass & Comp!	Bass	Synth
1808	Rave Blade	Bass	Synth
1809	Plastic Bass	Bass	Synth
1810	Funky Resonance RB	Bass	Synth
1811	Phat Three	Bass	Synth
1812	Needle Bass	Bass	Synth
1813	Acidd	Bass	Synth
1814	Boom Bass AF1	Bass	Synth
1815	West Coast	Bass	Synth
1816	Wazzo	Bass	Synth
1817	Fast PWM Bass	Bass	Synth
1818	Bass Pedal	Bass	Synth
1819	Oxide	Bass	Synth
1820	Bowngo	Bass	Synth

No.		Perfomance Name	Main Category	Sub Category
1821		Wide Synth Bass	Bass	Synth
1822		Dry Synth Bass	Bass	Synth
1823		Kick Bass Legato	Bass	Synth
1824		Keep Dancin'	Bass	Synth
1825		Velo Master	Bass	Synth
1826		Wah Bass	Bass	Synth
1827		Pulse Step AF1	Bass	Synth
1828		Phat Step	Bass	Synth
1829		Octave Analog	Bass	Synth
1830		Sync Bass	Bass	Synth
1831		Sync Big	Bass	Synth
1832		Puncher	Bass	Synth
1833		Dark Comp AF1&2	Bass	Synth
1834		Simple Bass	Bass	Synth
1835		Fat Sine	Bass	Synth
1836		Kompressor	Bass	Synth
1837		Dark Uni	Bass	Synth
1838		Fight Bass	Bass	Synth
1839		Byon Bass	Bass	Synth
1840		One Voice	Bass	Synth
1841		Pro-Attack AF1	Bass	Synth
1842		Bobby Bass	Bass	Synth
1843		Trance Bass	Bass	Synth
1844		Short SequenceBass	Bass	Synth
1845		Lately	Bass	Synth
1846		Faaat Pulse	Bass	Synth
1847		Short PWM Bass	Bass	Synth
1848		Hyper Velocity AF1	Bass	Synth
1849		Deep Point	Bass	Synth
1850		Pulse Stop	Bass	Synth
1851		Oh Bee Bass	Bass	Synth
1852		Booming Bass	Bass	Synth
1853		Army Bass	Bass	Synth
1854		Punchy Drone RB	Bass	Synth
1855		Dee Tune	Bass	Synth
1856		Chorus Pulse	Bass	Synth
1857		Sweeper	Bass	Synth
1858		Old House Organ	Bass	Synth
1859		Data Run	Bass	Synth
1860		Sharp 3o3	Bass	Synth
1861		Short 3o3 Saw	Bass	Synth
1862		Acid Fun	Bass	Synth
1863		Compu Bass	Bass	Synth
1864		Squeaker Bass	Bass	Synth
1865		Violin Solo 1	Strings	Solo
1866		Violin Solo 2 AF1	Strings	Solo
1867		Viola Solo 1	Strings	Solo
1868		Viola Solo 2 AF1	Strings	Solo
1869		Cello Solo	Strings	Solo
1870		Cello Duo AF1	Strings	Solo
1871		ContrabassSolo1	Strings	Solo
1872		ContrabassSolo2 AF	Strings	Solo
1873		Quartet	Strings	Ensemble
1874		Small Section	Strings	Ensemble
1875		Small Ensemble	Strings	Ensemble
1876		Almighty	Strings	Ensemble
1877		Medium Section	Strings	Ensemble
1878		Medium Hall	Strings	Ensemble
1879		MediumLargeSection	Strings	Ensemble
1880		Quick Bows	Strings	Ensemble
1881		Aggressive AF1	Strings	Ensemble
1882		Large Section	Strings	Ensemble
1883		Octave Ensemble	Strings	Ensemble
1884		Full Chamber	Strings	Ensemble
1885		Stryngs	Strings	Ensemble
1886		Dynamik Bow	Strings	Ensemble
1887		SymphonicPizzicato	Strings	Pizzicato
1888		Plucky Pizzicato	Strings	Pizzicato
1889		Octave Pizzes	Strings	Pizzicato
1890		Tremolo Strings 1	Strings	Ensemble

No.		Perfomance Name	Main Category	Sub Category
1891		Tremolo Strs Small	Strings	Ensemble
1892		Spicato Large	Strings	Pizzicato
1893		Disco AF1	Strings	Pizzicato
1894		Ens Mix	Strings	Ensemble
1895		Lush	Strings	Ensemble
1896		Back Ground	Strings	Ensemble
1897		Romantic	Strings	Ensemble
1898		Warm Back	Strings	Ensemble
1899		Stringy	Strings	Ensemble
1900		Big Strings	Strings	Ensemble
1901		PWM Strings	Strings	Synth
1902		Mourn Strings	Strings	Synth
1903		VP Soft	Strings	Synth
1904		PWM Simple	Strings	Synth
1905		Glassy Rezonant	Strings	Synth
1906		Superstrings	Strings	Synth
1907		Light Pad	Strings	Synth
1908		Noble Pad	Strings	Synth
1909		Warm Big	Strings	Ensemble
1910		Sentimental	Strings	Synth
1911		Analog Sweep	Strings	Synth
1912		Phase Strings	Strings	Synth
1913		Octave Strings	Strings	Synth
1914		JP Strings	Strings	Synth
1915		3 Oscillators Vin	Strings	Synth
1916		Silver Strings	Strings	Synth
1917		String Machine	Strings	Synth
1918		3 Octave Strings	Strings	Synth
1919		TranceIntroduction	Strings	Synth
1920		Mystic Trance	Strings	Synth
1921		F.Horn + Strings	Strings	Ensemble
1922		Wood Winds+Strings	Strings	Synth
1923		Electric Violin AF	Strings	Solo
1924		Tron Violin	Strings	Synth
1925		Tron Strings	Strings	Synth
1926		Tape Strings	Strings	Synth
1927		Orchestronic	Strings	Synth
1928		Vinyltron	Strings	Synth
1929		Analog Strings	Strings	Synth
1930		Analog Ensemble	Strings	Ensemble
1931		Pizz-o-matic	Strings	Pizzicato
1932		Ambient Pizza	Strings	Pizzicato
1933		Beauty Harp	Strings	Pizzicato
1934		Stereo Harp	Strings	Pizzicato
1935		Trumpet 1 AF1	Brass	Solo
1936		Tp Romantic Legato	Brass	Solo
1937		Classical Trumpet	Brass	Solo
1938		Baby Trumpet AF1	Brass	Solo
1939		Bright Trumpet AF1	Brass	Solo
1940		Tp SoftJazz Legato	Brass	Solo
1941		Legend Mute AF1	Brass	Solo
1942		Jazzy Flugel AF1	Brass	Solo
1943		Trumpet Section	Brass	Ensemble
1944		Trombone 1 AF1	Brass	Solo
1945		Blown Bone Legato	Brass	Solo
1946		Bright Trombone AF	Brass	Solo
1947		NewOrleansTrombone	Brass	Solo
1948		French Horn 1 AF1	Brass	Solo
1949		French Horn Solo	Brass	Solo
1950		BassTuba(Bb)	Brass	Solo
1951		Euphonium 1	Brass	Orchestra
1952		Bony Section	Brass	Ensemble
1953		FrenchHornSection1	Brass	Orchestra
1954		F.Horn + Trombone	Brass	Orchestra
1955		F.Hrn+Trombone+Trp	Brass	Orchestra
1956		Orchestra Brass	Brass	Orchestra
1957		Movie Horns	Brass	Orchestra
1958		Symphonic	Brass	Orchestra
1959		Smooth Brass	Brass	Orchestra
1960		Soft Brass mp-mf	Brass	Orchestra

No.	Perfomance Name	Main Category	Sub Category
1961	Dynamic Brass AF	Brass	Orchestra
1962	Accent mf-fall AF	Brass	Ensemble
1963	Small BrassSection	Brass	Ensemble
1964	MediumBrassSection	Brass	Ensemble
1965	Lots O' Brass	Brass	Ensemble
1966	Bright Section	Brass	Ensemble
1967	Power Section	Brass	Ensemble
1968	Shiny Brass	Brass	Ensemble
1969	Big Brass AF1&2	Brass	Ensemble
1970	Sforzando AF1&2	Brass	Ensemble
1971	Soft Brass & Sax	Brass	Ensemble
1972	Big Band	Brass	Ensemble
1973	Sax Big Band	Brass	Ensemble
1974	Velo Falls	Brass	Ensemble
1975	Hybrid Section	Brass	Synth
1976	Hybrid Bright	Brass	Synth
1977	Hybrid Brass Swell	Brass	Synth
1978	T Brass	Brass	Synth
1979	Lo-fi	Brass	Ensemble
1980	Quiet Brass	Brass	Synth
1981	Big Syn	Brass	Synth
1982	Thinth	Brass	Synth
1983	XP Brass Stereo	Brass	Synth
1984	Simple Saw Brass	Brass	Synth
1985	Brassy	Brass	Synth
1986	Kustom	Brass	Synth
1987	After 1984	Brass	Synth
1988	Finale	Brass	Synth
1989	Huge CS80	Brass	Synth
1990	CS-90	Brass	Synth
1991	Ob Soft	Brass	Synth
1992	Ob Horns	Brass	Synth
1993	Slow PWM Brass	Brass	Synth
1994	Soft 5th Brass	Brass	Synth
1995	Soprano Legato	Woodwind	Saxophone
1996	Soprano Soft AF1	Woodwind	Saxophone
1997	Alto Vib Legato	Woodwind	Saxophone
1998	Alto Legato	Woodwind	Saxophone
1999	Alto	Woodwind	Saxophone
2000	Tenor Dynamic AF1	Woodwind	Saxophone
2001	Tenor Soft Legato	Woodwind	Saxophone
2002	Velo Growl Legato	Woodwind	Saxophone
2003	Tenor Growl AF1	Woodwind	Saxophone
2004	Baritone	Woodwind	Saxophone
2005	Hip Bari	Woodwind	Saxophone
2006	Tenor Section	Woodwind	Saxophone
2007	Sax Octave Section	Woodwind	Saxophone
2008	Mixed Sax Section	Woodwind	Saxophone
2009	Flute Legato	Woodwind	Flute
2010	Sweet Flute AF1	Woodwind	Flute
2011	Wood Flute	Woodwind	Flute
2012	Oboe 1 AF1	Woodwind	Woodwind
2013	Sweet Oboe Legato	Woodwind	Woodwind
2014	Oboe Soft Legato	Woodwind	Woodwind
2015	Clarinet 1 AF1	Woodwind	Woodwind
2016	Jazzy Cla Legato	Woodwind	Woodwind
2017	Bassoon 1 AF1	Woodwind	Woodwind
2018	Irish Pipe Legato	Woodwind	Reed / Pipe
2019	2 Flutes	Woodwind	Flute
2020	Flute & Clari	Woodwind	Flute
2021	2 Oboes & Bassoon	Woodwind	Woodwind
2022	WoodWind Quartet	Woodwind	Woodwind
2023	Gentle Harp	Woodwind	Reed / Pipe
2024	Woody Harp	Woodwind	Reed / Pipe
2025	Bluz Distort	Woodwind	Reed / Pipe
2026	Campfire	Woodwind	Reed / Pipe
2027	Tron Flute	Woodwind	Flute
2028	Flootz	Woodwind	Flute
2029	Huge Lead	Syn Lead	Analog
2030	Bleep Lead AF2	Syn Lead	Analog

No.	Perfomance Name	Main Category	Sub Category
2031	Detuned Vintage	Syn Lead	Analog
2032	Space Lead	Syn Lead	Analog
2033	Dual Square Lead	Syn Lead	Analog
2034	Vintage Sync	Syn Lead	Analog
2035	Dirty Hook	Syn Lead	Analog
2036	Nu Mini	Syn Lead	Analog
2037	ProgressiveRk Lead	Syn Lead	Analog
2038	Lucky	Syn Lead	Analog
2039	Opening	Syn Lead	Analog
2040	Rap Lead 1	Syn Lead	Analog
2041	Mini Soft	Syn Lead	Analog
2042	Feeling	Syn Lead	Analog
2043	Early Lead	Syn Lead	Analog
2044	Funky Pulse	Syn Lead	Digital
2045	Mr. Finger	Syn Lead	Analog
2046	Singleline 1	Syn Lead	Analog
2047	Soft RnB	Syn Lead	Analog
2048	Wind Synth	Syn Lead	Analog
2049	Broken Sine RB	Syn Lead	Analog
2050	Duck Lead	Syn Lead	Analog
2051	In da Night	Syn Lead	Analog
2052	Mayday MW	Syn Lead	Analog
2053	On D Line	Syn Lead	Analog
2054	Early Soloist	Syn Lead	Analog
2055	Heterodyne	Syn Lead	Analog
2056	Classic 5th	Syn Lead	Analog
2057	Vintage Saw	Syn Lead	Analog
2058	Mini Three	Syn Lead	Digital
2059	Phat Dino	Syn Lead	Digital
2060	Dynamic Mini	Syn Lead	Digital
2061	PWM Lead	Syn Lead	Digital
2062	Pulse Wound	Syn Lead	Digital
2063	Think Sync	Syn Lead	Digital
2064	Punch Lead	Syn Lead	Digital
2065	Bright Saw	Syn Lead	Digital
2066	Trojan	Syn Lead	Digital
2067	Wood Panel	Syn Lead	Digital
2068	Push Ahead	Syn Lead	Digital
2069	Eight	Syn Lead	Digital
2070	Sync Power	Syn Lead	Digital
2071	Glisten Lead	Syn Lead	Digital
2072	Big Drone	Syn Lead	Digital
2073	Screameemy	Syn Lead	Digital
2074	Flange Filter	Syn Lead	Digital
2075	Sutra	Syn Lead	Digital
2076	Free LFO	Syn Lead	Digital
2077	Rap Lead 2	Syn Lead	Digital
2078	Space Power Lead	Syn Lead	Digital
2079	Nyquist	Syn Lead	Digital
2080	Digimetal	Syn Lead	Digital
2081	Saw destroy	Syn Lead	Digital
2082	Vinalog saw	Syn Lead	Digital
2083	Mady SQU	Syn Lead	Digital
2084	Low Undulation	Syn Lead	Digital
2085	Impact	Syn Lead	Hip Hop
2086	Talk Mod	Syn Lead	Hip Hop
2087	Digital Gangsta	Syn Lead	Hip Hop
2088	Plastic Squeeze	Syn Lead	Hip Hop
2089	Pinz Lead	Syn Lead	Hip Hop
2090	Dancy Saw Lead	Syn Lead	Dance
2091	Buzz Around	Syn Lead	Dance
2092	Xtreme Wheel	Syn Lead	Dance
2093	Supertrance	Syn Lead	Dance
2094	Poly Hook	Syn Lead	Dance
2095	HPF Dance	Syn Lead	Dance
2096	Tekk Glide	Syn Lead	Dance
2097	Growl Tekk	Syn Lead	Dance
2098	Plucked Chordz	Syn Lead	Dance
2099	Chordz	Syn Lead	Dance
2100	Cool Body	Syn Lead	Dance

No.	Perfomance Name	Main Category	Sub Category
2101	Twist Sync	Syn Lead	Dance
2102	TEKIE	Syn Lead	Dance
2103	Sonix	Syn Lead	Dance
2104	Big SkidHookLead 1	Syn Lead	Dance
2105	Big SkidHookLead 2	Syn Lead	Dance
2106	Porta Queen	Syn Lead	Electronic
2107	Vicious Dogs	Syn Lead	Digital
2108	Saw Pad	Pad/Choir	Analog
2109	Dark ModulationPad	Pad/Choir	Analog
2110	Dark Light	Pad/Choir	Warm
2111	Ambient Synth Pad	Pad/Choir	Analog
2112	5th Lite	Pad/Choir	Analog
2113	Smooth BPF Sweep	Pad/Choir	Analog
2114	High Wire	Pad/Choir	Analog
2115	Trance MW	Pad/Choir	Analog
2116	Xtreme Sweep	Pad/Choir	Analog
2117	Nu Warm Pad	Pad/Choir	Warm
2118	5th Atmosphere	Pad/Choir	Warm
2119	Dim	Pad/Choir	Warm
2120	Simple Air	Pad/Choir	Warm
2121	Nature Sine	Pad/Choir	Warm
2122	Analog	Pad/Choir	Warm
2123	Perc Pad	Pad/Choir	Warm
2124	Dark Atmo Pad	Pad/Choir	Warm
2125	Dark Organ Pad	Pad/Choir	Warm
2126	Soft Brassy	Pad/Choir	Warm
2127	Road to Nowhere	Pad/Choir	Warm
2128	Sweep Strings	Pad/Choir	Warm
2129	Brass Motion Pad	Pad/Choir	Warm
2130	Luminous	Pad/Choir	Warm
2131	Mother Ship	Pad/Choir	Choir
2132	Warm Backing Pad	Pad/Choir	Warm
2133	Feather	Pad/Choir	Warm
2134	Pan Sphere	Pad/Choir	Warm
2135	Square	Pad/Choir	Analog
2136	Shaper	Pad/Choir	Bright
2137	Early Digital	Pad/Choir	Warm
2138	Dramana	Pad/Choir	Bright
2139	Dream Shift	Pad/Choir	Bright
2140	Remote Space	Pad/Choir	Warm
2141	Fathoms	Pad/Choir	Warm
2142	SY22 2007	Pad/Choir	Warm
2143	Mother Earth	Pad/Choir	Warm
2144	Landing Pad	Pad/Choir	Warm
2145	The Breath	Pad/Choir	Bright
2146	Humanity	Pad/Choir	Warm
2147	Vowel Pad	Pad/Choir	Choir
2148	Feather Pad	Pad/Choir	Bright
2149	Slow Attack Pad	Pad/Choir	Bright
2150	Hi Brite	Pad/Choir	Bright
2151	Pad & Syn	Pad/Choir	Bright
2152	Cosmic Swell Pad	Pad/Choir	Bright
2153	Sweet Flange	Pad/Choir	Bright
2154	Waterfall	Pad/Choir	Bright
2155	Phase Pad	Pad/Choir	Bright
2156	Pure Synth	Pad/Choir	Bright
2157	Pearls	Pad/Choir	Bright
2158	Flange Wall	Pad/Choir	Bright
2159	Tornado	Pad/Choir	Bright
2160	Ice Rink	Pad/Choir	Bright
2161	Turbulence	Pad/Choir	Bright
2162	Bell Pad	Pad/Choir	Bright
2163	Paradise	Pad/Choir	Bright
2164	Yellow River	Pad/Choir	Bright
2165	Love Me	Pad/Choir	Bright
2166	Frozen Pad	Pad/Choir	Bright
2167	Pensive	Pad/Choir	Warm
2168	Space Vocals	Pad/Choir	Choir
2169	Haah Pad	Pad/Choir	Choir
2170	Oooh Pad	Pad/Choir	Choir

No.	Perfomance Name	Main Category	Sub Category
2171	Back in Itopian	Pad/Choir	Choir
2172	Strings & Choir	Pad/Choir	Choir
2173	Angel Eyes	Pad/Choir	Choir
2174	Glass Choir	Pad/Choir	Choir
2175	Nativity	Pad/Choir	Choir
2176	Seraphim	Pad/Choir	Choir
2177	Analog Shine	Pad/Choir	Analog
2178	Cosmic Gate	Pad/Choir	Bright
2179	CatchingWildHorses	Pad/Choir	Bright
2180	High Pass Gate	Pad/Choir	Bright
2181	RhythmicFilterPad1	Pad/Choir	Warm
2182	RhythmicFilterPad2	Pad/Choir	Bright
2183	P5 Resonance Comp	Syn Comp	Analog
2184	P5 Analog Punch	Syn Comp	Analog
2185	Cool Trance	Syn Comp	Analog
2186	>Attack<	Syn Comp	Analog
2187	Club Finger	Syn Comp	Analog
2188	Wobbly RB	Syn Comp	Analog
2189	Ana Dayz	Syn Comp	Analog
2190	Airy Nylon	Syn Comp	Analog
2191	Progressive Attack	Syn Comp	Analog
2192	Oracle	Syn Comp	Analog
2193	Big Comp	Syn Comp	Digital
2194	Rezz Punch	Syn Comp	Digital
2195	Resonant Clavi	Syn Comp	Digital
2196	Straight RB	Syn Comp	Digital
2197	Psych Noise	Syn Comp	Digital
2198	SquiffyMisbehaving	Syn Comp	Digital
2199	Lektro Codes	Syn Comp	Digital
2200	Hard FM Keys	Syn Comp	Digital
2201	W Phaser	Syn Comp	Digital
2202	DPCM Attack	Syn Comp	Digital
2203	Talk	Syn Comp	Digital
2204	Digy_SEQ	Syn Comp	Digital
2205	Nerve Nasty	Syn Comp	Analog
2206	Ring_Zplus	Syn Comp	Digital
2207	Trance Attack	Syn Comp	Digital
2208	Tekno Attack AF1&2	Syn Comp	Digital
2209	PWM Percussion	Syn Comp	Digital
2210	Stabby	Syn Comp	Digital
2211	Detroit Stab	Syn Comp	Digital
2212	Corrado	Syn Comp	Digital
2213	Synthetique	Syn Comp	Digital
2214	Noiz Rezz	Syn Comp	Digital
2215	Tuxedo	Syn Comp	Digital
2216	Queens	Syn Comp	Digital
2217	Hip Voice	Syn Comp	Digital
2218	GX1	Syn Comp	Decay
2219	Night Watch	Syn Comp	Decay
2220	Pluck Bells	Syn Comp	Decay
2221	Power Dance Chords	Syn Comp	Hook
2222	Hyper Trance	Syn Comp	Digital
2223	Cosmic Psyche	Syn Comp	Digital
2224	Chillin' Chords	Syn Comp	Hook
2225	Dirty Chordz	Syn Comp	Hook
2226	Wild Horses	Syn Comp	Electronic
2227	Sixpack AF1&2	Syn Comp	Electronic
2228	Percussive Chords	Syn Comp	Electronic
2229	Chordmaster	Syn Comp	Electronic
2230	In the Mirror	Syn Comp	Electronic
2231	Come together!	Syn Comp	Electronic
2232	Happy Hour	Syn Comp	Electronic
2233	Recycling	Syn Comp	Electronic
2234	Digital Dreaming	Syn Comp	Electronic
2235	Carpenter's Wife	Syn Comp	Electronic
2236	Electronic Games	Syn Comp	Electronic
2237	Dancing Waves	Syn Comp	Electronic
2238	Hit Factory	Syn Comp	Electronic
2239	Freaky Loop	Syn Comp	Electronic
2240	Mr. Wah!	Syn Comp	Electronic

No.	Perfomance Name	Main Category	Sub Category
2241	Chill Comp 1	Syn Comp	Jazz/World
2242	Chill Comp 2	Syn Comp	Jazz/World
2243	Kalimboidal	Syn Comp	Jazz/World
2244	Bippus	Syn Comp	Electronic
2245	Virtuoso Sequencia	Syn Comp	Electronic
2246	Fat Saw Arpeggio	Syn Comp	Electronic
2247	Trancious Line	Syn Comp	Electronic
2248	Metal Plate	Syn Comp	Electronic
2249	Fifth Dancer	Syn Comp	Electronic
2250	PercussiveSequence	Syn Comp	Electronic
2251	Simply Faaat	Syn Comp	Electronic
2252	Bright Dance	Syn Comp	Electronic
2253	Quadro Tune	Syn Comp	Electronic
2254	Champ	Syn Comp	Electronic
2255	Men In Yellow	Sound FX	Moving
2256	Metamorphosis	Sound FX	Moving
2257	Perplex	Sound FX	Moving
2258	Outer Planet	Sound FX	Moving
2259	Industrial	Sound FX	Moving
2260	Space Walking	Sound FX	Moving
2261	Scraper	Sound FX	Moving
2262	SE_02 <Zero Two>	Sound FX	Moving
2263	Talking Machines	Sound FX	Moving
2264	Tobi Mage	Sound FX	Moving
2265	Bitzz MW	Sound FX	Moving
2266	Thexism	Sound FX	Moving
2267	In My Head	Sound FX	Moving
2268	Toda	Sound FX	Ambient
2269	Water Tank	Sound FX	Ambient
2270	Auto Trapeze	Sound FX	Ambient
2271	Harpist'sNightmare	Sound FX	Ambient
2272	Find Newgt!	Sound FX	Ambient
2273	Nile River	Sound FX	Nature
2274	New Age Atmo	Sound FX	Nature
2275	Wind Blows	Sound FX	Nature
2276	Fire!	Sound FX	Nature
2277	Scratching Machine	Sound FX	Sci-Fi
2278	Goa Psyche	Sound FX	Sci-Fi
2279	WaitForBadWeather	Sound FX	Sci-Fi
2280	Reverse The Audio	Sound FX	Sci-Fi
2281	Radio Static	Sound FX	Sci-Fi
2282	Modifier X	Sound FX	Sci-Fi
2283	Surveillance	Sound FX	Sci-Fi
2284	Noise FX	Sound FX	Sci-Fi
2285	Sample&HoldVintage	Sound FX	Sci-Fi
2286	Lazerzz	Sound FX	Sci-Fi
2287	uhohhrr	Sound FX	Sci-Fi
2288	On The Fritz	Sound FX	Sci-Fi
2289	Scratch Thing MW	Sound FX	Moving
2290	Trash Can Lid Band	Sound FX	Moving
2291	Piston Engine	Sound FX	Moving
2292	Waka Waka Noize	Sound FX	Moving
2293	Argentina	Sound FX	Moving
2294	Gate of Eden	Musical FX	Moving
2295	Wave Journey	Musical FX	Moving
2296	Whispering Ghosts	Musical FX	Moving
2297	NighttrainToMunich	Musical FX	Moving
2298	Morning Dew	Musical FX	Moving
2299	Calling Mr. Reso	Musical FX	Moving
2300	2 SwitchesToHeaven	Musical FX	Moving
2301	Cell Division	Musical FX	Moving
2302	Jumping Needle	Musical FX	Moving
2303	SEKAI-ISAN	Musical FX	Moving
2304	Setsunai AF2	Musical FX	Moving
2305	Week End	Musical FX	Moving
2306	Dragonfly	Sound FX	Sci-Fi
2307	TiRiPAD	Musical FX	Moving
2308	Cluster	Musical FX	Moving
2309	Xtreme Rezz	Musical FX	Moving
2310	Bit Space	Musical FX	Moving

No.	Perfomance Name	Main Category	Sub Category
2311	My Reality	Musical FX	Moving
2312	Waterproof	Musical FX	Moving
2313	Magnetics	Musical FX	Moving
2314	Sand	Musical FX	Moving
2315	Felicity	Musical FX	Moving
2316	Vibrancy	Musical FX	Moving
2317	Metalflake	Musical FX	Moving
2318	Radio Venus	Musical FX	Moving
2319	Elec Blue	Musical FX	Moving
2320	Chyo Ethno	Musical FX	Moving
2321	Metal Shaper	Musical FX	Moving
2322	Calculator	Musical FX	Moving
2323	konjoh BEAM	Musical FX	Moving
2324	Blizzard	Musical FX	Ambient
2325	SINGING BOWL	Musical FX	Ambient
2326	Vektris	Musical FX	Ambient
2327	Metalvox Pad	Musical FX	Ambient
2328	Refraction	Musical FX	Ambient
2329	Philanger	Musical FX	Ambient
2330	Slippery Ambience	Musical FX	Moving
2331	Ellipsotron	Musical FX	Moving
2332	Envelope	Musical FX	Moving
2333	Whatsis	Musical FX	Ambient
2334	Pearl Collection	Musical FX	Ambient
2335	Four Dimensions	Musical FX	Ambient
2336	Hallucination	Musical FX	Ambient
2337	Arctic Sequence	Musical FX	Ambient
2338	Drifting	Musical FX	Ambient
2339	Electraid	Musical FX	Ambient
2340	Bed Time Story	Musical FX	Ambient
2341	Clearing	Musical FX	Sweep
2342	Long HiPa	Musical FX	Sweep
2343	Quad Swell	Musical FX	Sweep
2344	New Stab	Musical FX	Hit
2345	Vinyl Hit	Musical FX	Hit
2346	Hit Me	Musical FX	Hit
2347	Ambient Bite	Musical FX	Hit
2348	Green Valley	Musical FX	Ambient
2349	Everlasting Glory	Musical FX	Ambient
2350	Thinking of You	Musical FX	Ambient
2351	FestivalOfHarmony	Musical FX	Ambient
2352	Paris at Night	Musical FX	Ambient
2353	On my Way to UK	Musical FX	Ambient
2354	Chillin' Ibiza	Musical FX	Ambient
2355	Heavens Door	Musical FX	Ambient
2356	Cocktail	Musical FX	Ambient
2357	Vanilla	Musical FX	Ambient
2358	Ibiza Groove	Musical FX	Ambient
2359	Nylon Chill	Musical FX	Ambient
2360	Xtreme Harp	Musical FX	Ambient
2361	TrancingInTheRain	Musical FX	Ambient
2362	Gated Detune	Musical FX	Moving
2363	Gated Choir	Musical FX	Moving
2364	Exotic	Musical FX	Moving
2365	Syncscraper	Musical FX	Moving
2366	Ethnotic	Musical FX	Moving
2367	Com Sat	Musical FX	Moving
2368	Investikator	Musical FX	Moving
2369	Monkey Bars	Musical FX	Moving
2370	Chilltrancer	Musical FX	Moving
2371	Random Beatz	Musical FX	Moving
2372	Electro Hood	Musical FX	Moving
2373	My Subwoofers	Musical FX	Moving
2374	Mister Sinister	Musical FX	Moving
2375	Polyrhythm	Musical FX	Moving
2376	Blood Flow	Musical FX	Moving
2377	On The Verge	Musical FX	Moving
2378	Droid	Musical FX	Moving
2379	Worker Ant	Musical FX	Moving
2380	Chopp Lingo	Musical FX	Moving

No.	Perfomance Name	Main Category	Sub Category
2381	Vinyl Beatnik	Musical FX	Moving
2382	Drop Zone ARP	Musical FX	Moving
2383	Particle	Musical FX	Moving
2384	Simple Arp	Musical FX	Moving
2385	Cyber Cycle	Musical FX	Moving
2386	Bollog Puls	Musical FX	Moving
2387	Octopus	Musical FX	Moving
2388	Electronic Beatz	Musical FX	Moving
2389	Dreamin' of You	Musical FX	Moving
2390	Brothers & Sisters	Musical FX	Moving
2391	Pizza No.1	Musical FX	Moving
2392	Electronix	Musical FX	Moving
2393	Tekk Now	Musical FX	Moving
2394	Hollow Sequence	Musical FX	Ambient
2395	Icicle	Musical FX	Ambient
2396	Jegog	Musical FX	Moving
2397	Octo Strobe 1	Musical FX	Moving
2398	Octo Strobe 2	Musical FX	Moving
2399	Random Waves	Musical FX	Moving
2400	Semar	Musical FX	Moving
2401	TrailingHeadlights	Musical FX	Moving
2402	Dream Winds	Musical FX	Moving
2403	Kemence	Ethnic	Bowed
2404	Kemen Wet	Ethnic	Bowed
2405	Yayli	Ethnic	Bowed
2406	Kawala	Ethnic	Bowed
2407	Santur	Ethnic	Struck
2408	Baglama	Ethnic	Plucked
2409	Kotoun	Ethnic	Plucked
2410	Kanun	Ethnic	Plucked
2411	Bouzuki	Ethnic	Plucked
2412	Oud Tremolo Vel	Ethnic	Plucked
2413	Saz Feeze	Ethnic	Plucked
2414	Where Am I?	Ethnic	Plucked
2415	Sakura	Ethnic	Plucked
2416	Nomad	Ethnic	Plucked
2417	Pluk-o-dy	Ethnic	Plucked
2418	Tambura	Ethnic	Plucked
2419	Sitar MW	Ethnic	Plucked
2420	Tabla Zone	Ethnic	Struck
2421	Udu	Ethnic	Struck
2422	Djembe	Ethnic	Struck
2423	Dhol	Ethnic	Struck
2424	Khol	Ethnic	Struck
2425	Ney	Ethnic	Blown
2426	Zurna	Ethnic	Blown
2427	Pungi	Ethnic	Blown
2428	Shehnai 1	Ethnic	Blown
2429	Didgeridoo	Ethnic	Blown
2430	Snake Charmer	Ethnic	Blown
2431	Mythic Flute	Ethnic	Blown
2432	Ethnology	Ethnic	Jazz/World
2433	Oztralian	Ethnic	Jazz/World
2434	8Z Destruct	Drum / Perc	Drums
2435	8Z Jarrin	Drum / Perc	Drums
2436	8Z Romps	Drum / Perc	Drums
2437	8Z Glitch	Drum / Perc	Drums
2438	8Z Oxidized	Drum / Perc	Drums
2439	8Z D&B Machine	Drum / Perc	Drums
2440	8Z Down Tempo	Drum / Perc	Drums
2441	8Z Early Lo-Fi	Drum / Perc	Drums
2442	8Z Noize Xpress	Drum / Perc	Drums
2443	8Z Trance Basics 1	Drum / Perc	Drums
2444	8Z Reverse Beatz	Drum / Perc	Drums
2445	8Z Crush Dance	Drum / Perc	Drums
2446	8Z Heavy Hearts	Drum / Perc	Drums
2447	8Z Chilly Breakz	Drum / Perc	Drums
2448	8Z Gated Beatz	Drum / Perc	Drums
2449	8Z Hip Hop Shakers	Drum / Perc	Drums
2450	8Z Blip Hop	Drum / Perc	Drums

No.	Perfomance Name	Main Category	Sub Category
2451	8Z Nasty Glitch	Drum / Perc	Drums
2452	8Z Scratch	Drum / Perc	Drums
2453	8Z Tod	Drum / Perc	Drums
2454	8Z Psychedelic 1	Drum / Perc	Drums
2455	8Z Psychedelic 2	Drum / Perc	Drums
2456	8Z Dub Element	Drum / Perc	Drums
2457	Mega Nylon	Guitar	Acoustic
2458	Mega Steel	Guitar	Acoustic
2459	Mega 12 Steel	Guitar	Acoustic
2460	Mega 60s Clean	Guitar	Electric Clean
2461	Mega60sChorusCombo	Guitar	Electric Clean
2462	Mega 60s Tremolo	Guitar	Electric Clean
2463	Mega 60s BluesTone	Guitar	Electric Clean
2464	Mega 60s Phaser	Guitar	Electric Clean
2465	Mega 60s Tube Tone	Guitar	Distortion
2466	Mega 60sDistStack	Guitar	Distortion
2467	Mega 60sRoadHouse	Guitar	Distortion
2468	Mega 60sSmallBlues	Guitar	Electric Clean
2469	Mega 60s Pedal Wah	Guitar	Distortion
2470	Mega 60s VCM T.Wah	Guitar	Distortion
2471	Mega 60sT.Wah&Dist	Guitar	Distortion
2472	Mega 60sJetFlanger	Guitar	Distortion
2473	Mega 1coil Clean	Guitar	Electric Clean
2474	Mega 1coil Chorus	Guitar	Electric Clean
2475	Mega 1coil Tremolo	Guitar	Electric Clean
2476	Mega1coilBluesTone	Guitar	Electric Clean
2477	Mega 1coil Phaser	Guitar	Electric Clean
2478	Mega 1coilTubeTone	Guitar	Electric Clean
2479	Mega 1coilTubeAmp1	Guitar	Distortion
2480	Mega 1coilTubeAmp2	Guitar	Distortion
2481	Mega1coilRoadhouse	Guitar	Distortion
2482	Mega1coilVCM T.Wah	Guitar	Electric Clean
2483	Mega 60sCleanDelay	Guitar	Electric Clean
2484	Mega 60s SlapClean	Guitar	Electric Clean
2485	Mega 60s Slap Dist	Guitar	Electric Clean
2486	Mega1coilSlapClean	Guitar	Electric Clean
2487	Mega 1coilSlapDist	Guitar	Distortion
2488	Mega 1coilSlpPdWah	Guitar	Electric Clean
2489	MegaOvdrDistortion	Guitar	Distortion
2490	Mega Ovdr Fuzz	Guitar	Distortion
2491	Mega Acoustic Bass	Bass	Acoustic
2492	Mega Finger+Harmo	Bass	Electric
2493	Mega Fretless Bass	Bass	Electric
2494	Mega PickOpenAmped	Bass	Electric
2495	Mega PickMuteAmped	Bass	Electric
2496	Mega Slap Bass	Bass	Electric
2497	Mega Finger+Slap	Bass	Electric
2498	MegaFinger+PullAmp	Bass	Electric
2499	Mega Pick OpenMute	Bass	Electric
2500	Mega Pick OpMtDark	Bass	Electric
2501	Vocoder with Delay	Pad/Choir	Choir
2502	Funky Vocoder	Pad/Choir	Choir
2503	Vocoder Pad 1	Pad/Choir	Choir
2504	Vocoder Pad 2	Pad/Choir	Choir
2505	Concert GrandPiano	Piano	Acoustic
2506	Rock Brite Piano	Piano	Modern
2507	CP 2007	Piano	Vintage
2508	Honkytonk	Piano	Vintage
2509	E.Piano 1	Keyboard	Electric Piano
2510	E.Piano 2	Keyboard	FM Piano
2511	Harpsichord	Keyboard	Clavi
2512	Brite Clavi	Keyboard	Clavi
2513	Celesta	Chromatic Perc	Mallet
2514	Glocken	Chromatic Perc	Mallet
2515	Music Box	Chromatic Perc	Bell
2516	Vibes	Chromatic Perc	Mallet
2517	Marimba	Chromatic Perc	Mallet
2518	Xylophone	Chromatic Perc	Mallet
2519	Tubular Bell 1	Chromatic Perc	Bell
2520	Dulcimer	Chromatic Perc	Pitched Drum

No.	Perfomance Name	Main Category	Sub Category
2521	Draw Organ	Organ	Tone Wheel
2522	Percussive Organ	Organ	Tone Wheel
2523	Rock Organ 1	Organ	Tone Wheel
2524	Church Organ	Organ	Pipe
2525	Reed Organ	Organ	Pipe
2526	Accordion	Organ	Pipe
2527	Harmonica	Woodwind	Reed / Pipe
2528	Tango Accordion 1	Organ	Pipe
2529	Nylon Guitar	Guitar	Acoustic
2530	Steel Guitar	Guitar	Acoustic
2531	Jazz Guitar	Guitar	Electric Clean
2532	Clean Guitar	Guitar	Electric Clean
2533	Mute Guitar	Guitar	Electric Clean
2534	Overdrive Guitar	Guitar	Distortion
2535	Distortion Guitar	Guitar	Distortion
2536	Guitar Harmonics	Guitar	Distortion
2537	Acoustic Bass	Bass	Acoustic
2538	Finger Bass	Bass	Electric
2539	Pick Bass	Bass	Electric
2540	Fretless Bass	Bass	Electric
2541	Slap Bass 1	Bass	Electric
2542	Slap Bass 2 Vel	Bass	Electric
2543	Synth Bass 1	Bass	Synth
2544	Synth Bass 2	Bass	Synth
2545	Violin	Strings	Solo
2546	Viola	Strings	Solo
2547	Cello	Strings	Solo
2548	Contrabass	Strings	Solo
2549	Tremolo Strings 2	Strings	Ensemble
2550	Pizzicato	Strings	Pizzicato
2551	Harp	Strings	Pizzicato
2552	Timpani + Cymbal	Chromatic Perc	Pitched Drum
2553	Strings Section 1	Strings	Ensemble
2554	Strings Section 2	Strings	Ensemble
2555	Synth Strings 1	Strings	Synth
2556	Synth Strings 2	Strings	Synth
2557	Aah Choir	Pad/Choir	Choir
2558	Ooh Choir	Pad/Choir	Choir
2559	Syn Voice	Pad/Choir	Choir
2560	Orchestra Hit	Musical FX	Hit
2561	Trumpet 2	Brass	Solo
2562	Trombone 2	Brass	Solo
2563	Tuba	Brass	Solo
2564	Mute Trumpet	Brass	Solo
2565	French Horns	Brass	Orchestra
2566	Brass Section	Brass	Ensemble
2567	Synth Brass 1	Brass	Synth
2568	Synth Brass 2	Brass	Synth
2569	Soprano Sax	Woodwind	Saxophone
2570	Alto Sax	Woodwind	Saxophone
2571	Tenor Sax	Woodwind	Saxophone
2572	Baritone Sax	Woodwind	Saxophone
2573	Oboe 2	Woodwind	Woodwind
2574	English Horn	Woodwind	Woodwind
2575	Bassoon 2	Woodwind	Woodwind
2576	Clarinet 2	Woodwind	Woodwind
2577	Piccolo 1	Woodwind	Flute
2578	Flute	Woodwind	Flute
2579	Recorder	Woodwind	Woodwind
2580	Panflute	Woodwind	Flute
2581	Bottle	Woodwind	Flute
2582	Shakuhachi	Woodwind	Flute
2583	Whistle	Woodwind	Woodwind
2584	Ocarina	Woodwind	Woodwind
2585	Square Lead	Syn Lead	Analog
2586	Saw Lead	Syn Lead	Analog
2587	Calliope Lead	Syn Lead	Analog
2588	Chiff Lead	Syn Lead	Analog
2589	Charan Lead	Syn Lead	Digital
2590	Voice Lead	Syn Lead	Analog

No.	Perfomance Name	Main Category	Sub Category
2591	Fifth Lead	Syn Lead	Analog
2592	Bass & Lead	Syn Lead	Analog
2593	New Age Pad	Pad/Choir	Bright
2594	Warm Pad	Pad/Choir	Warm
2595	Poly Synth Pad	Pad/Choir	Analog
2596	Choir Pad	Pad/Choir	Choir
2597	Bowed Pad	Pad/Choir	Warm
2598	Metal Pad	Pad/Choir	Bright
2599	Halo Pad	Pad/Choir	Bright
2600	Sweep Pad	Pad/Choir	Bright
2601	Rain Pad	Musical FX	Moving
2602	Sound Track	Pad/Choir	Bright
2603	Crystal	Chromatic Perc	Bell
2604	Atmosphere	Pad/Choir	Warm
2605	Brightness	Syn Comp	Digital
2606	Goblin	Musical FX	Sweep
2607	Echoes	Musical FX	Moving
2608	Sci-Fi	Pad/Choir	Bright
2609	Sitar 1	Ethnic	Plucked
2610	Banjo 1	Ethnic	Plucked
2611	Shamisen	Ethnic	Plucked
2612	Koto	Ethnic	Plucked
2613	Kalimba	Chromatic Perc	Mallet
2614	Bagpipe	Woodwind	Reed / Pipe
2615	Fiddle	Ethnic	Bowed
2616	Shehnai 2	Woodwind	Woodwind
2617	Tinkle Bell	Chromatic Perc	Bell
2618	Agogo	Drum / Perc	Percussion
2619	Steel Drum	Chromatic Perc	Pitched Drum
2620	Woodblock	Drum / Perc	Percussion
2621	Taiko Drum	Drum / Perc	Percussion
2622	Melodic Tom	Drum / Perc	Drums
2623	Synth Drum	Drum / Perc	Drums
2624	Reverse Cymbal	Sound FX	Moving
2625	Fret Noise	Sound FX	Nature
2626	Breath Noiz	Sound FX	Nature
2627	Seashore	Sound FX	Nature
2628	Tweet	Sound FX	Nature
2629	Telephone	Sound FX	Nature
2630	Helicopter	Sound FX	Nature
2631	Applause	Sound FX	Nature
2632	Gunshot	Sound FX	Nature
2633	Natural Grand S6	Piano	Acoustic
2634	Piano Rock S6	Piano	Modern
2635	Woody Piano S6	Piano	Vintage
2636	Intimate S6	Piano	Vintage
2637	Clavi Bril Treble	Keyboard	Clavi
2638	Clavi Amped	Keyboard	Clavi
2639	Clavi Phaser	Keyboard	Clavi
2640	Clavi Touch Wah	Keyboard	Clavi
2641	Clavi PdWah FC2&MW	Keyboard	Clavi
2642	NaturalHarpsichord	Keyboard	Clavi
2643	Octave Harpsichord	Keyboard	Clavi
2644	Vx Full Bars	Organ	Combo
2645	Vx Dark Bars	Organ	Combo
2646	Fr All Tabs	Organ	Combo
2647	Fr Bright Boost	Organ	Combo
2648	Fr String Tabs	Organ	Combo
2649	Vx Full Bars Amped	Organ	Combo
2650	Vx Surf Organ	Organ	Combo
2651	Fr Raspy Tabs	Organ	Combo
2652	Master Accordion	Organ	Pipe
2653	French Musette	Organ	Pipe
2654	Cassotto	Organ	Pipe
2655	Tango Accordion 2	Organ	Pipe
2656	Vibraphone	Chromatic Perc	Mallet
2657	Vibraphone Soft	Chromatic Perc	Mallet
2658	Tubular Bell 2	Chromatic Perc	Bell
2659	RealTimpani AF Mfl	Chromatic Perc	Mallet
2660	1coil Clean AF1&2	Guitar	Electric Clean

No.	Perfomance Name	Main Category	Sub Category
2661	1coil Amped Vel	Guitar	Electric Clean
2662	Vintage1coilChorus	Guitar	Electric Clean
2663	Surfin' 60s 1coil	Guitar	Electric Clean
2664	Breakback Mountain	Guitar	Distortion
2665	Grunged Up	Guitar	Distortion
2666	Jazz Clean AF1&2	Guitar	Electric Clean
2667	Arched Top	Guitar	Electric Clean
2668	Jazz Blues	Guitar	Electric Clean
2669	Round Wound Finger	Bass	Electric
2670	Tube Finger Bass	Bass	Electric
2671	Slightly Grunged	Bass	Electric
2672	Prec Pick	Bass	Electric
2673	Pick Amp	Bass	Electric
2674	Universal AF1&2	Bass	Synth
2675	Analog Bullet Bass	Bass	Synth
2676	Analog Perc Bass	Bass	Synth
2677	Analog Step Bass	Bass	Synth
2678	Short Buzz AF1&2	Bass	Rock/Pop
2679	Bass Machine AF1	Bass	Electronic
2680	Deep Ramp AF1&2	Bass	Electronic
2681	Section Strings 1	Strings	Ensemble
2682	Section Strings 2	Strings	Ensemble
2683	Section Strings 3	Strings	Ensemble
2684	Section Strings 4	Strings	Ensemble
2685	Tremolo Section	Strings	Ensemble
2686	Pizzicato Vel	Strings	Pizzicato
2687	Orchestra Harp	Strings	Pizzicato
2688	Harp Ambient	Strings	Pizzicato
2689	Gleaming Pad AF1&2	Strings	Synth
2690	Fat PWM Synth Vel	Strings	Synth
2691	VintagePolyStrings	Strings	Synth
2692	SoftTrumpetLegato	Brass	Solo
2693	Trumpet Vibrato	Brass	Solo
2694	Trumpet Shake Vel	Brass	Solo
2695	FrenchHornSection2	Brass	Orchestra
2696	Flugelhorn	Brass	Solo
2697	Jazz Brass Section	Brass	Ensemble
2698	Ob Syncomp	Brass	Synth
2699	Tacky Brass AF1&2	Brass	Synth
2700	Mellow Soprano	Woodwind	Saxophone
2701	Alto Accent Legato	Woodwind	Saxophone
2702	Tenor Max	Woodwind	Saxophone
2703	SoftTenorSaxLegato	Woodwind	Saxophone
2704	Piccolo Legato	Woodwind	Flute
2705	Bizz AF2	Syn Lead	Electronic
2706	Reflector AT AF1&2	Syn Lead	Electronic
2707	Mellow Swell AF1&2	Pad/Choir	Warm
2708	Frozen Glasspad	Pad/Choir	Warm
2709	Lunar Eclipse AF	Pad/Choir	Bright
2710	Melting Steel AF	Pad/Choir	Choir
2711	Prayer Call	Pad/Choir	Choir
2712	Bass n' Gate	Pad/Choir	Rock/Pop
2713	PWM Stabs	Syn Comp	Analog
2714	Queen of Pop AF1&2	Syn Comp	Analog
2715	Multi Bell	Syn Comp	Electronic
2716	Acid 'n Space AF	Syn Comp	Electronic
2717	Middle Ear AF1&2	Syn Comp	Electronic
2718	Badger AF1&2	Syn Comp	Electronic
2719	Voodoo Wah	Syn Comp	Electronic
2720	Jumping Wheel AF	Syn Comp	Electronic
2721	Devils Wah AF1&2	Syn Comp	Electronic
2722	Horizons AF1&2	Syn Comp	Electronic
2723	Hypnotic AF1&2	Syn Comp	Electronic
2724	Airy Buzz AF1&2	Syn Comp	Electronic
2725	Trancious Stepz	Syn Comp	Electronic
2726	Trilogy AF1&2	Syn Comp	Electronic
2727	PWM Picks AF1&2	Syn Comp	Electronic
2728	VariChord AT AF1&2	Syn Comp	Electronic
2729	Voxdance AT AF1&2	Syn Comp	Electronic
2730	Spacewave Dancer	Sound FX	Moving

No.	Perfomance Name	Main Category	Sub Category
2731	Berimbau Ookawaton	Musical FX	Moving
2732	Club Telemetrix	Musical FX	Moving
2733	Venusian Rhumba	Musical FX	Moving
2734	Dripping Quarks	Musical FX	Ambient
2735	Undulator	Musical FX	Ambient
2736	Expanse	Musical FX	Ambient
2737	Deep Motion AF1&2	Musical FX	Ambient
2738	Metallic Airstabs	Musical FX	Ambient
2739	Descendant	Musical FX	Ambient
2740	Angel in Love	Musical FX	Moving
2741	Berlin Dreamz	Musical FX	Moving
2742	Complexions AF1&2	Musical FX	Moving
2743	Crazy Groove AF1&2	Musical FX	Moving
2744	Da Thumperz	Musical FX	Moving
2745	Meister Chilla	Musical FX	Moving
2746	X-Generator AF1&2	Musical FX	Moving
2747	Glaring Message AF	Musical FX	Moving
2748	Sitar 2	Ethnic	Plucked
2749	India Harmonium	Ethnic	Jazz/World
2750	Berimbau	Ethnic	Struck
2751	Banjo 2	Ethnic	Plucked
2752	Nu Orc Percussion	Drum / Perc	Percussion
2753	8Z Cajon	Drum / Perc	Drums
2754	8Z Djembe	Drum / Perc	Drums
2755	8Z Static	Drum / Perc	Drums
2756	8Z RX11	Drum / Perc	Drums
2757	8Z Trance Basics 2	Drum / Perc	Drums
2758	8Z Tom Heartz	Drum / Perc	Drums
2759	Mega 1coil Old R&R	Guitar	Electric Clean
2760	Mega Jazz Guitar	Guitar	Electric Clean
2761	PowerStandardKit 1	Drum / Perc	Drums
2762	PowerStandardKit 2	Drum / Perc	Drums
2763	Hyper Standard Kit	Drum / Perc	Drums
2764	Dry Standard Kit	Drum / Perc	Drums
2765	Modern Rock Kit	Drum / Perc	Drums
2766	Rock Stereo Kit 1	Drum / Perc	Drums
2767	Rock Stereo Kit 2	Drum / Perc	Drums
2768	Nu Hip Hop Kit 1	Drum / Perc	Drums
2769	Nu Hip Hop Kit 2	Drum / Perc	Drums
2770	Hip Hop Kit 1	Drum / Perc	Drums
2771	Hip Hop Kit 2	Drum / Perc	Drums
2772	Hip Hop Kit 3	Drum / Perc	Drums
2773	Hip Hop Kit 4	Drum / Perc	Drums
2774	Hip Stick Kit 1	Drum / Perc	Drums
2775	Hip Stick Kit 2	Drum / Perc	Drums
2776	R&B Kit 1	Drum / Perc	Drums
2777	R&B Kit 2	Drum / Perc	Drums
2778	R&B Kit 3	Drum / Perc	Drums
2779	Trance Kit	Drum / Perc	Drums
2780	Psychedelic Kit	Drum / Perc	Drums
2781	Chill Out Kit	Drum / Perc	Drums
2782	Brush Kit	Drum / Perc	Drums
2783	Jazz Kit	Drum / Perc	Drums
2784	Pop Latin Kit	Drum / Perc	Percussion
2785	Analog T9 Kit	Drum / Perc	Drums
2786	Analog T8 Kit	Drum / Perc	Drums
2787	Tekno Kit	Drum / Perc	Drums
2788	House Kit 1	Drum / Perc	Drums
2789	House Kit 2	Drum / Perc	Drums
2790	HouseCompressedKit	Drum / Perc	Drums
2791	Big Kit	Drum / Perc	Drums
2792	Break Kit	Drum / Perc	Drums
2793	Drum'n'Bass Kit	Drum / Perc	Drums
2794	Acid Kit	Drum / Perc	Drums
2795	Jungle Kit	Drum / Perc	Drums
2796	Electric Kit	Drum / Perc	Drums
2797	Human Kit	Drum / Perc	Drums
2798	Hard Kit	Drum / Perc	Drums
2799	Distorted Kit	Drum / Perc	Drums
2800	Ambient Kit	Drum / Perc	Drums

No.		Perfomance Name	Main Category	Sub Category
2801		Garage Kit	Drum / Perc	Drums
2802		Synth Pop Kit	Drum / Perc	Drums
2803		Orchestra Kit	Drum / Perc	Drums
2804		Drum Machines Kit	Drum / Perc	Drums
2805		Rock Multiple Kits	Drum / Perc	Drums
2806		HipHopMultipleKits	Drum / Perc	Drums
2807		Percussion Kit	Drum / Perc	Percussion
2808		LatinPercussionKit	Drum / Perc	Percussion
2809		Guitar/Bass FX Kit	Drum / Perc	Percussion
2810		Wacko Kit	Drum / Perc	Percussion
2811		Wood Bits Kit	Drum / Perc	Percussion
2812		Metal Bits Kit	Drum / Perc	Percussion
2813		Hands Kit	Drum / Perc	Percussion
2814		Scratches	Drum / Perc	Percussion
2815		Acoustic Snares	Drum / Perc	Drums
2816		Grouped St Snares	Drum / Perc	Drums
2817		All Kicks	Drum / Perc	Drums
2818		Dance Kicks	Drum / Perc	Drums
2819		Arabic Mixed Kit 1	Drum / Perc	Drums
2820		Belly Dance Kit	Drum / Perc	Drums
2821		Dance Snares	Drum / Perc	Drums
2822		Special SFXs	Drum / Perc	Percussion
2823		Synthetic Kit	Drum / Perc	Drums
2824		SFX Kit	Drum / Perc	Percussion
2825		Stereo GM Kit	Drum / Perc	Drums
2826		Maple Custom Kit	Drum / Perc	Drums
2827		Oak Custom Kit	Drum / Perc	Drums
2828		Nu Jazzy Kit	Drum / Perc	Drums
2829		Illest Hip Hop Kit	Drum / Perc	Drums
2830		Perc Master Kit	Drum / Perc	Percussion
2831		Nu Orchestra Kit	Drum / Perc	Drums
2832		Japan Kit	Drum / Perc	Percussion
2833		Turkish Kit	Drum / Perc	Percussion
2834		Piano Electro	Piano	Electronic
2835		Neon Girlz	Syn Comp	Electronic
2836		Altered States	Guitar	Rock/Pop
2837		Lurch	Syn Comp	R&B/Hip Hop
2838		Indian Xperience	Syn Comp	Electronic
2839		Clavi 70's 1	Keyboard	Jazz/World
2840		Purple Stone	Pad/Choir	Electronic
2841		Fountain	Musical FX	Ambient
2842		Lighthouse	Syn Comp	Electronic
2843		Commander	Chromatic Perc	Pitched Drum
2844		Open The Door	Organ	Rock/Pop
2845		Jazz Lounge	Piano	Jazz/World
2846		Inner Wind	Syn Comp	Electronic
2847		Acid Shuffle	Syn Comp	R&B/Hip Hop
2848		Pass the Naan	Ethnic	Jazz/World
2849		Secret Film	Syn Comp	Electronic
2850		Night Train	Pad/Choir	Electronic
2851		Trance Vision	Syn Comp	Electronic
2852		Rule The Earth	Syn Comp	Rock/Pop
2853		Jammin	Keyboard	R&B/Hip Hop
2854		Waht's This	Syn Comp	Electronic
2855		Auto Funk 1	Woodwind	Jazz/World
2856		Electric Mystery	Syn Comp	Electronic
2857		Complex Beauty	Pad/Choir	Warm
2858		Cool Madness	Syn Lead	Electronic
2859		Yamaha Concerto	Strings	Ensemble
2860		Big Watches	Pad/Choir	Rock/Pop
2861		Swingin' Organ Club	Organ	Jazz/World
2862		Cool Breakz	Syn Comp	Electronic
2863		Rolla Freqs	Organ	R&B/Hip Hop
2864		Piccolo Party	Woodwind	Jazz/World
2865		Hand Mates	Musical FX	Electronic
2866		Silent Lake	Piano	Electronic
2867		Sweet Peaches	Syn Comp	Electronic
2868		New Grunge	Guitar	Rock/Pop
2869		4rims & a Microphone	Ethnic	R&B/Hip Hop
2870		Dub Bursts	Musical FX	Electronic

No.		Perfomance Name	Main Category	Sub Category
2871		Auto Funk 2	Brass	Jazz/World
2872		Bacteria	Syn Comp	Electronic
2873		Falling Monks	Pad/Choir	Choir
2874		Dancing Sonar	Bass	R&B/Hip Hop
2875		Baroque Ensemble	Strings	Ensemble
2876		Sunny Beaches	Organ	Rock/Pop
2877		Bebop Trio	Guitar	Jazz/World
2878		Elektrik Arcade	Musical FX	Electronic
2879		Fairy Tale	Strings	Pizzicato
2880		Brazil Pop	Piano	Jazz/World
2881		Chaos Layer	Musical FX	Electronic
2882		Gentle Chillgroove	Pad/Choir	Electronic
2883		Distorted Dreamz	Syn Comp	Electronic
2884		Into The Sunset	Guitar	Rock/Pop
2885		Club Beat	Syn Comp	R&B/Hip Hop
2886		Super Ninja Shot!	Syn Comp	Electronic
2887		Clavi 70's 2	Keyboard	Jazz/World
2888		Peanut Butter Slices	Syn Comp	Electronic
2889		Warm Plasma	Musical FX	Ambient
2890		Drummers of Tokyo	Syn Comp	Rock/Pop
2891		Epic Orchestra	Brass	Orchestra
2892		Piano Boogie	Piano	Rock/Pop
2893		Sunset Horn	Brass	Jazz/World
2894		Lush Auto Comp	Syn Comp	Electronic
2895		Don't Look!	Pad/Choir	R&B/Hip Hop
2896		Japan Festival	Ethnic	Jazz/World
2897		Cloudy Bay	Pad/Choir	Choir
2898		Sneaking Diamonds	Pad/Choir	Electronic
2899		Plutonium Freezer	Syn Comp	Electronic
2900		Alternative Pop	Guitar	Rock/Pop
2901		GarageHopTrumpetBoi	Brass	R&B/Hip Hop
2902		Whole Lotta 8ths	Guitar	Rock/Pop
2903		Timbale Jam	Brass	R&B/Hip Hop
2904		Laser Scratch	Musical FX	Electronic
2905		Sands of Time	Musical FX	Ambient
2906		Confyooshus	Musical FX	Electronic
2907		Fugue in D Minor	Brass	Orchestra
2908		Love Her Crazily	Organ	Rock/Pop
2909		Jazz Vibe	Chromatic Perc	Jazz/World
2910		Magnetic Fields	Syn Comp	Electronic
2911		Hip Hop Orchestra	Strings	R&B/Hip Hop
2912		Mallet Groove	Chromatic Perc	Jazz/World
2913		Eighties Dreams	Pad/Choir	Electronic
2914		Just Relax	Pad/Choir	Electronic
2915		Headspinz	Musical FX	Electronic
2916		Rockin' the Country	Guitar	Rock/Pop
2917		Southern Rap Cat	Musical FX	R&B/Hip Hop
2918		Rusted Beat	Syn Lead	Electronic
2919		Tenor to the Max	Woodwind	Jazz/World
2920		Chain Saw	Musical FX	Electronic
2921		ARP Duo	Syn Comp	Electronic
2922		Organs In Space	Musical FX	Electronic
2923		The Birth Of Life	Strings	Ensemble
2924		60s Border Town	Syn Lead	Rock/Pop
2925		Late Show	Chromatic Perc	Jazz/World
2926		Synthlines	Bass	Electronic
2927		Schmusin'	Keyboard	R&B/Hip Hop
2928		Andalucia Wind	Guitar	Rock/Pop
2929		Raging Waves	Musical FX	Moving
2930		Night Walk	Pad/Choir	Electronic
2931		Glowing Socks	Syn Comp	Electronic
2932		Auto Ballad	Woodwind	Rock/Pop
2933		Trip Groove	Musical FX	R&B/Hip Hop
2934		Atomic Bouncer	Syn Comp	Electronic
2935		Soulful EP Player	Keyboard	R&B/Hip Hop
2936		Buttoned Down	Syn Comp	Electronic
2937		Frosted World	Musical FX	Moving
2938		Electrix	Syn Comp	Electronic
2939		Worship Center	Strings	Ensemble
2940		Cheep King	Organ	Rock/Pop

No.	Perfomance Name	Main Category	Sub Category
2941	Waltzing Quartet	Piano	Jazz/World
2942	Chill Performer	Keyboard	Electronic
2943	Harp/Piccolo	Strings	Pizzicato
2944	Homeward Bound	Ethnic	Electronic
2945	Lava Rhythm	Musical FX	Moving
2946	Coded Message	Pad/Choir	Electronic
2947	Mirror Wave	Syn Comp	Electronic
2948	80's Drummer	Drum / Perc	Rock/Pop
2949	The Clapper	Sound FX	R&B/Hip Hop
2950	Fata Morgana	Syn Comp	Electronic
2951	Hot E.P. Noodles	Keyboard	R&B/Hip Hop
2952	Between the Lines	Musical FX	Electronic
2953	Ice Pizz	Syn Comp	Electronic
2954	Welder	Syn Comp	Electronic
2955	Strings/FrenchHorns	Strings	Ensemble
2956	Minor Mood	Organ	Rock/Pop
2957	Nitehawks	Brass	Jazz/World
2958	Talk Show Band	Brass	R&B/Hip Hop
2959	Pastoral	Strings	Pizzicato
2960	Smooth Guitar	Guitar	Jazz/World
2961	Intimacy	Chromatic Perc	Bell
2962	Chilltronika	Pad/Choir	Electronic
2963	East Sider	Syn Lead	R&B/Hip Hop
2964	Dreamscape	Strings	Ensemble
2965	Sub-sonic	Syn Lead	Electronic
2966	Chilln Keys	Piano	Electronic
2967	Urban Shuffle	Woodwind	Rock/Pop
2968	Green Oasis	Pad/Choir	Warm
2969	Andy Lucia	Guitar	Jazz/World
2970	Heart Breakz	Syn Comp	Electronic
2971	Bop till you Drop	Piano	Jazz/World
2972	White Sand Dub	Sound FX	Electronic
2973	Double Dip the Funk	Guitar	R&B/Hip Hop
2974	Echo in the Night	Syn Comp	Rock/Pop
2975	Electro Club	Syn Comp	Electronic
2976	Slow and Low	Keyboard	R&B/Hip Hop
2977	Abyss of the Sea	Pad/Choir	Bright
2978	Second Breakfast	Pad/Choir	Electronic
2979	Coastal	Woodwind	R&B/Hip Hop
2980	Semi Finale	Brass	Orchestra
2981	DRY-Wash	Musical FX	Electronic
2982	Warm Feeling	Pad/Choir	Electronic
2983	Strummin'&Hummin'	Guitar	Rock/Pop
2984	Ukigumo	Musical FX	Ambient
2985	Bellydancer	Ethnic	Jazz/World
2986	Chart Breaker	Syn Comp	Electronic
2987	Smooth It Over	Woodwind	Jazz/World
2988	Sample & Hold	Sound FX	Electronic
2989	Funky Finger	Keyboard	R&B/Hip Hop
2990	Yearn to see You	Musical FX	Ambient
2991	Big Beater	Syn Comp	Electronic
2992	Organ Cruise	Organ	R&B/Hip Hop
2993	Oyashio	Sound FX	Moving
2994	Synth Power	Brass	Rock/Pop
2995	Yah-Yo-Jah	Guitar	R&B/Hip Hop
2996	Trumpet Concert	Brass	Orchestra
2997	Dancing Bars	Syn Comp	Rock/Pop
2998	Nightshadows	Guitar	Electronic
2999	Hold On a Minute	Keyboard	R&B/Hip Hop
3000	Kogarashi	Musical FX	Moving
3001	Hot Sauce	Brass	Jazz/World
3002	Cosmic Trance	Syn Comp	Electronic
3003	Blues Organ Trio	Organ	Jazz/World
3004	Jembrana	Musical FX	Electronic
3005	Clavi Jam	Keyboard	R&B/Hip Hop
3006	Free Fall	Guitar	Rock/Pop
3007	Tollhouse	Syn Comp	Electronic
3008	String Accompaniment	Strings	Ensemble
3009	Arianes Nightwalk	Syn Comp	Digital
3010	Semar Dub	Syn Comp	Electronic

No.	Perfomance Name	Main Category	Sub Category
3011	Casbian Nights	Ethnic	R&B/Hip Hop
3012	Requiem	Strings	Ensemble
3013	Broiling	Syn Lead	Electronic
3014	Wobbly Keys	Keyboard	Electronic
3015	Rock of the 80's	Guitar	Rock/Pop
3016	Crying Scene	Pad/Choir	Analog
3017	Two Hands of Latin	Guitar	Jazz/World
3018	Funfair	Syn Comp	Electronic
3019	Night Cruiser	Keyboard	Jazz/World
3020	Meeting Point	Musical FX	Ambient
3021	Analog Power	Syn Comp	R&B/Hip Hop
3022	Sarah's Dream	Pad/Choir	Bright
3023	Pursuer	Syn Comp	Electronic
3024	Worship	Organ	R&B/Hip Hop
3025	Euro Animation	Musical FX	Moving
3026	Poppyhanger	Pad/Choir	Electronic
3027	City Groove	Syn Lead	R&B/Hip Hop
3028	Winds & Strings	Strings	Ensemble
3029	Deep House 1	Syn Comp	Electronic
3030	Wet Reflected Lights	Syn Comp	Electronic
3031	Classic Shuffle Rock	Organ	Rock/Pop
3032	Silent Spheres	Pad/Choir	Choir
3033	World Beat	Ethnic	Jazz/World
3034	Cool Box	Syn Comp	Electronic
3035	Let's Comp!	Piano	Jazz/World
3036	Kuroshio	Musical FX	Ambient
3037	Acid Club	Keyboard	Jazz/World
3038	Haze o' Phase	Syn Comp	Electronic
3039	Gran Beat	Syn Lead	Electronic
3040	Lake Side	Piano	Acoustic
3041	Sprinkler	Pad/Choir	Choir
3042	Dub City	Pad/Choir	Electronic
3043	West Coast Interact	Piano	R&B/Hip Hop
3044	Oboe Soloist	Woodwind	Reed / Pipe
3045	Electric Monkeys	Musical FX	Electronic
3046	Chilly Dreams	Pad/Choir	Electronic
3047	Echo Park Rock	Guitar	Rock/Pop
3048	Angel Pad	Pad/Choir	Choir
3049	Latin 4 Beginners	Woodwind	Jazz/World
3050	What is he doing?	Musical FX	Electronic
3051	Duck Groove	Syn Lead	Jazz/World
3052	Java Winds	Chromatic Perc	Bell
3053	Funky Jump	Guitar	R&B/Hip Hop
3054	Club Jazz 1	Keyboard	Jazz/World
3055	Machine-Run	Syn Lead	Electronic
3056	Full Monty	Organ	Tone Wheel
3057	Kyuketsuki	Pad/Choir	Warm
3058	Auto Running	Pad/Choir	Electronic
3059	Bubblicious	Pad/Choir	R&B/Hip Hop
3060	The Woodwind Section	Woodwind	Flute
3061	Maison Blanc	Syn Comp	Electronic
3062	Bristol	Piano	Electronic
3063	Friday Night	Guitar	Rock/Pop
3064	Lake Pad	Strings	Synth
3065	Canto de rua	Woodwind	Jazz/World
3066	Pound-a-thon	Musical FX	Electronic
3067	Film Noir	Woodwind	Jazz/World
3068	Teatime	Musical FX	Moving
3069	Funk Jam	Keyboard	R&B/Hip Hop
3070	Rattle and Roll	Musical FX	R&B/Hip Hop
3071	Club 80's	Syn Comp	Electronic
3072	2 Manuals	Organ	Tone Wheel
3073	Needle Penalty	Musical FX	Ambient
3074	Magic Spell	Pad/Choir	Electronic
3075	The Duece	Ethnic	R&B/Hip Hop
3076	Movie Strings	Strings	Ensemble
3077	Nasty Dirty Funky	Musical FX	Electronic
3078	Traumzeit	Piano	Electronic
3079	Austin City Blues	Guitar	Rock/Pop
3080	Creepn Worm	Musical FX	Sweep

No.	Perfomance Name	Main Category	Sub Category
3081	2 Guitars for Mrs R	Guitar	Acoustic
3082	Subway Traxx Trigger	Syn Comp	Electronic
3083	Dream Shuffle	Pad/Choir	Rock/Pop
3084	Snow na Oto	Musical FX	Moving
3085	Thrust	Keyboard	Jazz/World
3086	Elfin Dreams	Musical FX	Electronic
3087	Crowded Place	Musical FX	Electronic
3088	American Beauty	Piano	Acoustic
3089	Space Gallery	Musical FX	Moving
3090	Crushy Jegog	Pad/Choir	Electronic
3091	Hip Hop Girl	Strings	R&B/Hip Hop
3092	Welcome to Sirius	Sound FX	Moving
3093	Brit Piano Pop	Piano	Rock/Pop
3094	BleePAD	Keyboard	FM Piano
3095	Orchestra Del Mar	Pad/Choir	Rock/Pop
3096	Let the Music Play	Guitar	Rock/Pop
3097	Bubbly Dub	Organ	Jazz/World
3098	Toys	Musical FX	Moving
3099	Blues Spell	Piano	Rock/Pop
3100	Random Breakz	Pad/Choir	Electronic
3101	Piano+Analog Kit	Piano	Rock/Pop
3102	Dubrin!	Sound FX	Sci-Fi
3103	Big Beat Trigger	Syn Comp	Electronic
3104	Deborah in love	Pad/Choir	Bright
3105	Psychic Trance	Syn Comp	Electronic
3106	Power Worxx	Syn Comp	Electronic
3107	Vanilla Wrapper	Keyboard	R&B/Hip Hop
3108	Blue Horizon	Pad/Choir	Warm
3109	21st Century Bruce	Pad/Choir	Rock/Pop
3110	Ethereal	Pad/Choir	Choir
3111	Istanbul	Pad/Choir	Warm
3112	Prog Rocker	Guitar	Rock/Pop
3113	Samba Electric	Syn Lead	Jazz/World
3114	Rivers of Stars	Pad/Choir	Electronic
3115	Funk Night	Brass	R&B/Hip Hop
3116	Sneaky Neutrons	Musical FX	Electronic
3117	Love Songs	Keyboard	R&B/Hip Hop
3118	Bell Doesn't Ring	Musical FX	Moving
3119	Body Pumping	Guitar	Rock/Pop
3120	Arctic Landscape	Musical FX	Ambient
3121	Ambient Trigger	Keyboard	Electronic
3122	Rain Dance	Pad/Choir	Electronic
3123	Dirty South	Syn Comp	R&B/Hip Hop
3124	Labyrinth	Musical FX	Ambient
3125	Acoustic Piano Man	Piano	Rock/Pop
3126	Scattered Beatz	Musical FX	Electronic
3127	Soft Analog	Syn Comp	R&B/Hip Hop
3128	12 O'Clock High	Guitar	Rock/Pop
3129	Guitar Duo	Guitar	Jazz/World
3130	U make me crazy!	Syn Lead	Electronic
3131	Organ Jam	Organ	Jazz/World
3132	Wild Heart	Guitar	Rock/Pop
3133	Sweet Club	Strings	R&B/Hip Hop
3134	What'so funny?	Bass	Synth
3135	Alternative1 Trigger	Guitar	Rock/Pop
3136	4zone	Bass	Synth
3137	Trance Trigger	Syn Comp	Electronic
3138	Club 2007	Syn Comp	Electronic
3139	Money on My Mind	Guitar	R&B/Hip Hop
3140	Gate Orch	Pad/Choir	Analog
3141	Lay Me Down to Sleep	Piano	Rock/Pop
3142	Komorebi	Musical FX	Moving
3143	All Guitars	Guitar	Acoustic
3144	Retrock	Organ	Rock/Pop
3145	Decadent World	Ethnic	Jazz/World
3146	Talking Wizzards	Musical FX	Electronic
3147	W Coast '80	Keyboard	Jazz/World
3148	Continental	Organ	Rock/Pop
3149	Cloudy Morning	Keyboard	R&B/Hip Hop
3150	KURA-KURA	Musical FX	Moving

No.	Perfomance Name	Main Category	Sub Category
3151	Dest Electra	Guitar	Electronic
3152	Nuclear Fusion	Musical FX	Ambient
3153	Rolling City	Sound FX	Electronic
3154	Jazzy Garage	Syn Comp	Electronic
3155	City Beats	Strings	R&B/Hip Hop
3156	Evolving Spheres	Pad/Choir	Warm
3157	Jack Does it Again	Keyboard	Rock/Pop
3158	Psychobot Beat	Musical FX	Electronic
3159	Endless Summer	Guitar	Rock/Pop
3160	Surfin' Kahuna	Organ	Rock/Pop
3161	Tropic Groove	Organ	Jazz/World
3162	Cosmic Bullets	Musical FX	Electronic
3163	Hopit	Keyboard	Jazz/World
3164	Portable	Organ	Rock/Pop
3165	Wr Ballad	Keyboard	Rock/Pop
3166	Intelligent Static	Sound FX	Electronic
3167	Progressive Trance	Musical FX	Electronic
3168	Circle of environmen	Musical FX	Moving
3169	Straight Line	Syn Comp	Electronic
3170	Rising Beat	Pad/Choir	Electronic
3171	Bring the Bling	Keyboard	R&B/Hip Hop
3172	Magic Carpet	Musical FX	Moving
3173	Classic Rock	Organ	Rock/Pop
3174	Tamfen-Loop	Sound FX	Electronic
3175	Campfire Split	Guitar	Acoustic
3176	Jukebox	Woodwind	Rock/Pop
3177	Martini Orbit	Syn Lead	Jazz/World
3178	Wah Dub	Musical FX	Electronic
3179	Smooth Lead Jam	Syn Lead	Jazz/World
3180	Metabolize	Syn Comp	Electronic
3181	Dream Grand	Piano	Acoustic
3182	Petit Dark	Musical FX	Ambient
3183	Breakbeat 1	Musical FX	Electronic
3184	Insane Circuits	Sound FX	Sci-Fi
3185	In a Trance	Syn Comp	Electronic
3186	Deep House 2	Syn Comp	Electronic
3187	Southern Rap 1	Syn Comp	R&B/Hip Hop
3188	Aztec Temple	Musical FX	Moving
3189	Unplugged	Piano	Rock/Pop
3190	Hin Daeng	Musical FX	Moving
3191	Micro Disco	Syn Comp	Electronic
3192	Country Gee-tars	Guitar	Rock/Pop
3193	Bossa On the Beach	Woodwind	Jazz/World
3194	IDM JAM	Sound FX	Electronic
3195	Bluesy Moody	Keyboard	Jazz/World
3196	Metalheads	Guitar	Rock/Pop
3197	Fretless Ballad	Pad/Choir	Rock/Pop
3198	Random Orchestra	Pad/Choir	Warm
3199	Alternative2 Trigger	Guitar	Rock/Pop
3200	Sea electron Bottom	Pad/Choir	Electronic
3201	Ambient Fluid	Syn Comp	Electronic
3202	Love Box	Pad/Choir	Electronic
3203	Boom Snap	Guitar	R&B/Hip Hop
3204	Robby	Syn Comp	Electronic
3205	80's young gun	Syn Comp	Rock/Pop
3206	Natural Woman	Pad/Choir	Electronic
3207	Very Clavistitious	Keyboard	R&B/Hip Hop
3208	Psychedelic Dream	Keyboard	Rock/Pop
3209	Asahi ni niou	Musical FX	Sweep
3210	Dust of Mars	Pad/Choir	Electronic
3211	Late Walk	Keyboard	Jazz/World
3212	Cityscape	Woodwind	Electronic
3213	EP Ballad	Keyboard	Rock/Pop
3214	Information	Sound FX	Moving
3215	Squelchy Tub Thunk	Musical FX	Electronic
3216	Nouveau Gangsta	Sound FX	Electronic
3217	SciFi Foley - Atonal	Sound FX	Ambient
3218	Proggo Rocko	Syn Lead	Rock/Pop
3219	New R&B Motif Triggr	Strings	R&B/Hip Hop
3220	Tumbling Galaxies	Musical FX	Ambient

No.	Perfomance Name	Main Category	Sub Category
3221	Old School Acid	Syn Comp	Electronic
3222	Vintage Rider	Keyboard	R&B/Hip Hop
3223	Ethnic Dance (4ARP)	Ethnic	Jazz/World
3224	When The Piggies Fly	Guitar	Rock/Pop
3225	Big Apple	Brass	Jazz/World
3226	The March of Progres	Brass	Ensemble
3227	Club Jazz 2	Syn Comp	Jazz/World
3228	Dream Ballad	Piano	Acoustic
3229	Meringue	Guitar	Jazz/World
3230	Mad IDM	Pad/Choir	Electronic
3231	Rare Groove	Organ	Jazz/World
3232	8beat Basic	Keyboard	Rock/Pop
3233	Far Away from Home	Musical FX	Ambient
3234	16beat Rock	Guitar	Rock/Pop
3235	The Walls (4ARP)	Syn Comp	R&B/Hip Hop
3236	Triathlon	Pad/Choir	Warm
3237	Latin House	Syn Comp	Electronic
3238	Sneak Thru the Nite	Keyboard	R&B/Hip Hop
3239	Africana	Ethnic	Jazz/World
3240	Worship Fast (4ARP)	Guitar	Rock/Pop
3241	Jazz Breeze	Woodwind	Jazz/World
3242	More Chester	Brass	Orchestra
3243	Clavi Funk	Keyboard	Jazz/World
3244	Gentle Support	Pad/Choir	Warm
3245	Single Coil	Guitar	Acoustic
3246	Bubble Techno	Sound FX	Electronic
3247	'70th	Keyboard	R&B/Hip Hop
3248	Newbury Street 1980	Syn Lead	Rock/Pop
3249	Nashville Ballad	Piano	Rock/Pop
3250	Contemporary Rock	Guitar	Rock/Pop
3251	Hip Hop (4ARP)	Syn Comp	R&B/Hip Hop
3252	Underground	Drum / Perc	Drums
3253	Back To The Jungle	Syn Lead	Electronic
3254	Slow & Easy	Keyboard	Rock/Pop
3255	Maya Ruins (4ARP)	Woodwind	Jazz/World
3256	Blues	Organ	Rock/Pop
3257	Rag Time Strut(4ARP)	Piano	Jazz/World
3258	Philharmonic	Chromatic Perc	Pitched Drum
3259	Pop Shuffle	Piano	Jazz/World
3260	Love Affair	Keyboard	Electric Piano
3261	Spanish Romance	Guitar	Jazz/World
3262	Trance-a-lator	Syn Comp	Electronic
3263	Follow The Funk	Keyboard	R&B/Hip Hop
3264	3 Chords & The Truth	Piano	Rock/Pop
3265	Won't be a minute	Syn Lead	Rock/Pop
3266	Power Rock (4ARP)	Guitar	Rock/Pop
3267	Brother	Strings	R&B/Hip Hop
3268	RANDAVE	Musical FX	Moving
3269	Breakbeat 2 Trigger	Sound FX	Electronic
3270	Funky Breath	Woodwind	R&B/Hip Hop
3271	Nation Capture	Pad/Choir	Jazz/World
3272	Closing Time	Organ	Rock/Pop
3273	Jazz Quartet	Woodwind	Jazz/World
3274	Son of Mars	Chromatic Perc	Pitched Drum
3275	16beat Pop	Keyboard	Jazz/World
3276	Ballad Piano&Bass	Piano	Layer
3277	Southern Gtr Ballad	Guitar	Acoustic
3278	Neo Half	Musical FX	Electronic
3279	Dark EP Jam	Keyboard	Jazz/World
3280	Motor City Rules	Piano	R&B/Hip Hop
3281	Watch Out	Pad/Choir	R&B/Hip Hop
3282	Death Metal (4ARP)	Guitar	Rock/Pop
3283	Southern Rap 2	Ethnic	R&B/Hip Hop
3284	Chemical	Sound FX	Electronic
3285	Power Grid	Syn Lead	Electronic
3286	ZAZA Pop	Keyboard	R&B/Hip Hop
3287	Exodus	Woodwind	Jazz/World
3288	Piano Boogie Woogie	Piano	Rock/Pop
3289	Modern Jazz (4ARP)	Guitar	Jazz/World
3290	Violin Concerto	Strings	Ensemble

No.	Perfomance Name	Main Category	Sub Category
3291	Soul Swing	Keyboard	R&B/Hip Hop
3292	Sailboarding	Pad/Choir	Warm
3293	Guitar+PianoBallad	Guitar	Acoustic
3294	Aqua Techno	Musical FX	Electronic
3295	UK Soul	Guitar	R&B/Hip Hop
3296	Heavy 8s	Pad/Choir	Rock/Pop
3297	Softy	Keyboard	Jazz/World
3298	Progre	Organ	Rock/Pop
3299	Regeton (4ARP)	Syn Lead	R&B/Hip Hop
3300	ZAVE	Musical FX	Ambient
3301	Bringin Phaser(4ARP)	Syn Comp	Electronic
3302	Keys 2 da Undrgrnd	Organ	R&B/Hip Hop
3303	The Living Deputy	Keyboard	Jazz/World
3304	8beat Rock	Guitar	Rock/Pop
3305	Bombastico to E3	Piano	Jazz/World
3306	Bach o' Roll	Strings	Pizzicato
3307	Gospel Brothers	Keyboard	R&B/Hip Hop
3308	Jazz Duo	Piano	Acoustic
3309	Strummers (4ARP)	Guitar	Acoustic
3310	Synthethnic	Syn Lead	Electronic
3311	Hey Sixteen	Organ	Jazz/World
3312	Desert Drive (4ARP)	Guitar	Rock/Pop
3313	It May Sustain . . .	Pad/Choir	Electronic
3314	Rockacha	Organ	Rock/Pop
3315	J-Hip Rock (4ARP)	Syn Lead	R&B/Hip Hop
3316	Endless	Syn Comp	Electronic
3317	Long Dark Tunnel	Musical FX	Electronic
3318	Soft Groover	Keyboard	R&B/Hip Hop
3319	Summer Festival	Brass	Jazz/World
3320	Country EP	Keyboard	Rock/Pop
3321	Slow Down & Ease Up	Guitar	Jazz/World
3322	ARP Piano Concerto	Piano	Layer
3323	African Funk (4ARP)	Chromatic Perc	Jazz/World
3324	Standing on Air	Musical FX	Ambient
3325	Spanish Fiesta	Guitar	Acoustic
3326	TEKNICON	Syn Comp	Electronic
3327	Philly Aboard	Piano	R&B/Hip Hop
3328	Northern Pop	Keyboard	Rock/Pop
3329	Ibiza Growl Sax	Woodwind	Electronic
3330	Shuffle Blues	Piano	Rock/Pop
3331	Down Wid It Trigger	Syn Comp	R&B/Hip Hop
3332	Star Gate	Pad/Choir	Warm
3333	Dark Mod Drummer	Pad/Choir	R&B/Hip Hop
3334	Dirty Mini	Guitar	R&B/Hip Hop
3335	HillsDanceEthno 4ARP	Ethnic	Electronic
3336	Slow Blues	Piano	Rock/Pop
3337	Rodovia	Brass	Jazz/World
3338	Big Strings	Strings	Ensemble
3339	Sumo-Funk	Keyboard	R&B/Hip Hop
3340	XtraTerrestrialFrogs	Pad/Choir	Bright
3341	Tear It Up	Piano	R&B/Hip Hop
3342	Psynchro	Musical FX	Electronic
3343	Just the Facts	Keyboard	Jazz/World
3344	80's American (4ARP)	Syn Comp	Rock/Pop
3345	Business Lunch	Pad/Choir	Electronic
3346	All 9 Bars! +	Organ	Tone Wheel
3347	The Basics +	Organ	Tone Wheel
3348	8.8.8.8.6.2.2.0.0 +	Organ	Tone Wheel
3349	Hot Smoky +	Organ	Tone Wheel
3350	J's Jazz +	Organ	Tone Wheel
3351	J's Jazz 2 +	Organ	Tone Wheel
3352	Dave's Nu +	Organ	Tone Wheel
3353	X Draw Organ +	Organ	Tone Wheel
3354	More Shade +	Organ	Tone Wheel
3355	Jazz To All Out +	Organ	Tone Wheel
3356	Gospel to Reggae +	Organ	Tone Wheel
3357	The Preacher +	Organ	Tone Wheel
3358	Evens and Odds +	Organ	Tone Wheel
3359	Two Blue Hands +	Organ	Tone Wheel
3360	The Grinder +	Organ	Tone Wheel

No.		Perfomance Name	Main Category	Sub Category
3361		Rock Organ 2 +	Organ	Tone Wheel
3362		Overdriven Organ +	Organ	Tone Wheel
3363		FM Draw Organ 1 +	Organ	Synth
3364		FM Jazz Organ +	Organ	Synth
3365		FM Draw Organ 2 +	Organ	Synth
3366		FM Rock Organ 4 +	Organ	Synth
3367		Go-Come Organ +	Organ	Tone Wheel
3368		FM Perc Organ 1 +	Organ	Synth
3369		Digital Tonewheels +	Organ	Synth
3370		CFX2	Piano	Acoustic
3371		CFX2 Bright	Piano	Acoustic
3372		CFX2 Dark	Piano	Acoustic
3373		Shimmer Grand	Piano	Layer
3374		CFX2 Shimmer Ghosts	Piano	Acoustic
3375		CFX2 Dreamscapes	Piano	Acoustic
3376		Savile Row 1969	Piano	Acoustic
3377		Piano Plus 2310	Piano	Acoustic
3378		CFX2 & FMX Dancers	Piano	Layer
3379		Scenery from Train	Piano	Acoustic
3380		The PIANO in Desert	Piano	Modern
3381		Warm CP80 SySpLA	Piano	Acoustic
3382		Smashed CP80 SySpLA	Piano	Vintage
3383		CP80 for Arenas	Piano	Acoustic
3384		4 Keyboard Faves!	Keyboard	Electric Piano
3385		AN PipeOrgan DA	Organ	Pipe
3386		Theme 1982	Guitar	Acoustic
3387		AN EPf>EGt>GtSolo DA	Guitar	Distortion
3388		Folder Massive Kick	Bass	Synth
3389		AN-X Bass Gallery	Bass	Synth
3390		St Ensemble K2	Strings	Ensemble
3391		Lord Majestic	Strings	Ensemble
3392		2310 Hybrid Orch	Strings	Ensemble
3393		AN SynBrass DA	Brass	Synth
3394		AN Whistle DA	Syn Lead	Analog
3395		Big Moth	Syn Lead	Analog
3396		Wave Folder Sync	Syn Lead	Analog
3397		SK Sync Ripper	Syn Lead	Analog
3398		Flaming Dragon	Syn Lead	Analog
3399		CS80 meet Shimmer Rv	Pad/Choir	Analog
3400		Shimmer SINE Pad PAT	Pad/Choir	Analog
3401		Northern Lights	Pad/Choir	Analog
3402		Cygnus	Pad/Choir	Analog
3403		Woodwinds and Ice	Pad/Choir	Warm
3404		Feathers	Pad/Choir	Analog
3405		Color Shimmer	Pad/Choir	Analog
3406		Speedy Folder	Pad/Choir	Analog
3407		T-Str & PWM Pad	Pad/Choir	Analog
3408		Wave Folder Symphony	Pad/Choir	Analog
3409		Wave Folder-scape	Pad/Choir	Analog
3410		AN SweepSyn DA	Pad/Choir	Analog
3411		Is this a Pad?	Pad/Choir	Analog
3412		Cosmic Pad to Pluck	Pad/Choir	Analog
3413		AN Morpher	Pad/Choir	Analog
3414		Warmy AN SmtMophPAD	Pad/Choir	Analog
3415		AN-X SmartMorph ARP	Pad/Choir	Analog
3416		Space Blips	Syn Comp	Analog
3417		Kingdom Come	Syn Comp	Electronic
3418		Northern Atmosphere	Syn Comp	Analog
3419		AN Arp DA	Syn Comp	Analog
3420		Uni Flex Arp	Syn Comp	Analog
3421		Eight Wave	Syn Comp	Analog
3422		Worship	Chromatic Perc	Synth Bell
3423		Pure Analog AN-X KIT	Drum / Perc	Synth
3424		Morph AN-X Drums	Drum / Perc	Synth
3425		Explosion Noize Fold	Sound FX	Sci-Fi
3426		Liberty Shine	Musical FX	Moving
3427		Chaotic	Musical FX	Ambient
3428	*1	CFX Wide Spreaded	Piano	Acoustic
3429	*1	Mono<>Stereo Comp	Piano	Acoustic
3430	*1	AcP C3+Wide SynPad	Piano	Acoustic

No.		Perfomance Name	Main Category	Sub Category
3431	*1	RingMod Pianoscape	Piano	Layer
3432	*1	GS1 AcousticPiano	Piano	Acoustic
3433	*1	GS1 MM-Piano	Keyboard	FM Piano
3434	*1	GS1 ElectricPiano M	Keyboard	Electric Piano
3435	*1	GS1 ElectricPiano W	Keyboard	Electric Piano
3436	*1	Neo GS1 E.Piano	Keyboard	FM Piano
3437	*1	GS E.P. Gallery	Keyboard	FM Piano
3438	*1	The GS Dancer	Keyboard	FM Piano
3439	*1	The Vintage Couple	Keyboard	FM Piano
3440	*1	Ring Tines	Keyboard	Electric Piano
3441	*1	Cinema EP	Keyboard	Electric Piano
3442	*1	Clavi CA Direct	Keyboard	Clavi
3443	*1	Clavi CA Amp	Keyboard	Clavi
3444	*1	Clavi DA Direct	Keyboard	Clavi
3445	*1	Clavi DA Amp	Keyboard	Clavi
3446	*1	Rotary Clavs	Keyboard	Clavi
3447	*1	Wahmy Clavi	Keyboard	Clavi
3448	*1	GS1 Harpsichord	Keyboard	Electric Piano
3449	*1	GS1 PipeOrgan	Organ	Pipe
3450	*1	The M/S Band	Organ	Tone Wheel
3451	*1	Vintage GS Guitar	Guitar	Electric Clean
3452	*1	Ultra WIDE MS Bass	Bass	Synth
3453	*1	Looong Bass Drop	Bass	Synth
3454	*1	Big Mouth Bass	Bass	Synth
3455	*1	GS1 StrEnsemble	Strings	Synth
3456	*1	Wide Side SynStrings	Strings	Synth
3457	*1	RichAnStr A.Touch DA	Strings	Synth
3458	*1	GS1 Brass	Brass	Synth
3459	*1	GS1 MM-Brass	Brass	Synth
3460	*1	GS Brass Gallery XL	Brass	Synth
3461	*1	VintageSynBrass DA	Brass	Synth
3462	*1	CS80 Ring Mod Pad	Pad/Choir	Analog
3463	*1	Anna Rotations	Pad/Choir	Analog
3464	*1	Descent CS Rings	Pad/Choir	Analog
3465	*1	RingMod Scapes	Pad/Choir	Analog
3466	*1	Soft Mover	Pad/Choir	Warm
3467	*1	Hydro Oxygen	Pad/Choir	Warm
3468	*1	Follow The Light	Pad/Choir	Bright
3469	*1	Cosmic Farewell	Pad/Choir	Analog
3470	*1	Ocean Of Ambience	Pad/Choir	Bright
3471	*1	ChoirPad GS1 Ens/Trm	Pad/Choir	Choir
3472	*1	CsRingMod Choir DA	Pad/Choir	Choir
3473	*1	Punchy Rush	Syn Comp	Analog
3474	*1	Desert View	Syn Comp	Analog
3475	*1	Laddow ARP Soft	Syn Comp	Decay
3476	*1	Dystopian CS80 Drone	Syn Comp	Analog
3477	*1	Voyage 1982	Syn Comp	Analog
3478	*1	Synths for Ludwig	Syn Comp	Analog
3479	*1	GS1 Celeste	Chromatic Perc	Mallet
3480	*1	GS1 Vibraphones	Chromatic Perc	Mallet
3481	*1	GS1 MM-Vib	Chromatic Perc	Mallet
3482	*1	Vintage Tape Drums	Drum / Perc	Drums
3483	*1	Tremoriser	Musical FX	Moving
3484	*1	FloatingToneWheel DA	Musical FX	Ambient
3485	*1	AutoChillMachine DA	Musical FX	Ambient
3486	*1	CsRingMod MFX Lib DA	Musical FX	Hit
3487	*1	Dystopia	Musical FX	Ambient

Performance Category List

Main Category	Sub Category								
Piano	Acoustic	Layer	Modern	Vintage	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Keyboard	Electric Piano	FM Piano	Clavi	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Organ	Tone Wheel	Combo	Pipe	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Guitar	Acoustic	Electric Clean	Distortion	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Bass	Acoustic	Electric	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign	
Strings	Solo	Ensemble	Pizzicato	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Brass	Solo	Ensemble	Orchestra	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Woodwind	Saxophone	Flute	Woodwind	Reed / Pipe	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Syn Lead	Analog	Digital	Hip Hop	Dance	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Pad/Choir	Analog	Warm	Bright	Choir	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Syn Comp	Analog	Digital	Decay	Hook	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Chromatic Perc	Mallet	Bell	Synth Bell	Pitched Drum	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Drum / Perc	Drums	Percussion	Synth	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign	
Sound FX	Moving	Ambient	Nature	Sci-Fi	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Musical FX	Moving	Ambient	Sweep	Hit	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign
Ethnic	Bowed	Plucked	Struck	Blown	Rock/Pop	R&B/Hip Hop	Electronic	Jazz/World	No Assign

Drum Kit Assign List

Real Drums Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5565	Bright Snare Roll
F#0	3202	Castanet1
G0	5561	LW Snare Sw
G#0	3197	Stick1
A0	4893	AT Kick Sw
A#0	5562	DG Snare1 Sw
B0	4894	GT Kick1 Sw
C1	4895	GT Kick2 Sw
C#1	5546	Sd Closed Rim5
D1	5563	DG Snare2 Sw
D#1	3237	Hand Clap3 Sw
E1	5564	TM Snare Sw
F1	6411	CP Tom Floor Sw
F#1	6099	PT HiHat Closed
G1	6411	CP Tom Floor Sw
G#1	6101	PT HiHat Pedal
A1	6410	CP Tom Low Sw
A#1	6100	PT HiHat Open
B1	6409	CP Tom Mid Sw
C2	6408	CP Tom High Sw
C#2	6543	ZJ Crash1 Sw
D2	6408	CP Tom High Sw
D#2	6600	ZJ Ride1 Tip Sw
E2	6544	ZJ Crash2 Sw
F2	6601	ZJ Ride1 Cup Sw
F#2	3185	Tambourine1 Sw
G2	6643	ZJ Splash1
G#2	3571	Cowbell5
A2	6545	ZJ Crash3 Sw
A#2	3221	Vibraslap1
B2	6602	ZJ Ride2 Tip Sw
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

Real Drums Kit 2

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5565	Bright Snare Roll
F#0	3202	Castanet1
G0	5561	LW Snare Sw
G#0	3197	Stick1
A0	4893	AT Kick Sw
A#0	5562	DG Snare1 Sw
B0	4894	GT Kick1 Sw
C1	4895	GT Kick2 Sw
C#1	5546	Sd Closed Rim5
D1	5563	DG Snare2 Sw
D#1	3237	Hand Clap3 Sw
E1	5564	TM Snare Sw
F1	6411	CP Tom Floor Sw
F#1	6099	PT HiHat Closed
G1	6411	CP Tom Floor Sw
G#1	6101	PT HiHat Pedal
A1	6410	CP Tom Low Sw
A#1	6100	PT HiHat Open
B1	6409	CP Tom Mid Sw
C2	6408	CP Tom High Sw
C#2	6543	ZJ Crash1 Sw
D2	6408	CP Tom High Sw
D#2	6600	ZJ Ride1 Tip Sw
E2	6544	ZJ Crash2 Sw
F2	6601	ZJ Ride1 Cup Sw
F#2	3185	Tambourine1 Sw
G2	6643	ZJ Splash1
G#2	3571	Cowbell5
A2	6545	ZJ Crash3 Sw
A#2	3221	Vibraslap1
B2	6602	ZJ Ride2 Tip Sw
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

New Oak Custom Kit

Note	Wave Number	Wave Name
C0	5877	HH Pedal 1-3St
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5403	Sd Oak 2 St
G#0	3198	Stick2
A0	4832	Bd Oak Open 1-2 St
A#0	5472	Sd Metal OpRm 1-2 St
B0	4841	Bd Oak Close 1-2 St
C1	4832	Bd Oak Open 1-2 St
C#1	5421	Sd Oak ClRm St
D1	5394	Sd Oak 1-4 St
D#1	5484	Sd Metal SnRoll St
E1	5412	Sd Oak OpRm 1-2 St
F1	6353	Tom Oak Floor 1-2 St
F#1	5857	HH Closed 1-4St
G1	6353	Tom Oak Floor 1-2 St
G#1	5909	HH Half Open2 St
A1	6341	Tom Oak Mid 1-2 St
A#1	5895	HH Open 2St
B1	6341	Tom Oak Mid 1-2 St
C2	6329	Tom Oak Hi 1-2 St
C#2	6523	Crash Brite St
D2	6329	Tom Oak Hi 1-2 St
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3231	Hand Clap1 St
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

NewMapleCustom Kit

Note	Wave Number	Wave Name
C0	6024	HH Dark Pedal 1-2 St
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5403	Sd Oak 2 St
G#0	3198	Stick2
A0	4821	Bd Maple Close 2 L
A#0	5478	Sd Metal OpRm 2 St
B0	4823	Bd Maple Open 1-2 St
C1	4823	Bd Maple Open 1-2 St
C#1	5481	Sd Metal ClRm St
D1	5454	Sd Metal 1-4 St
D#1	5484	Sd Metal SnRoll St
E1	5457	Sd Metal 1-OpRm St
F1	6320	Tom Maple Flr 1-2 RL
F#1	6004	HH Dark Closed 1-4St
G1	6325	Tom Maple Flr 2 St
G#1	5893	HH Open 1-2St
A1	6313	Tom Maple Mid 2 St
A#1	6036	HH Dark Open 1-2 St
B1	6305	Tom Maple Mid 1-2 St
C2	6301	Tom Maple Hi 2 St
C#2	6523	Crash Brite St
D2	6293	Tom Maple Hi 1-2 St
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3231	Hand Clap1 St
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

BeechwoodSnare Kit

Note	Wave Number	Wave Name
C0	5996	HH Power ClPedal St
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5430	Sd Beech 1 St
G#0	3198	Stick2
A0	4799	Bd PowerA 1St
A#0	5448	Sd Beech OpRm 2 St
B0	4743	Bd Normal 2L
C1	4789	Bd Jazz2St
C#1	5421	Sd Oak ClRm St
D1	5424	Sd Beech 1-4 St
D#1	5484	Sd Metal SnRoll St
E1	5427	Sd Beech 1-OpRm St
F1	6281	Tom Power04 1-2St
F#1	5956	HH Power ClTip 1-4St
G1	6269	Tom Power03 1-2St
G#1	5976	HH Power ClEgde1-4St
A1	6257	Tom Power02 1-2St
A#1	6000	HH Power Open EdgeSt
B1	6245	Tom Power01 1-2St
C2	6255	Tom Power01 2R
C#2	6523	Crash Brite St
D2	6255	Tom Power01 2R
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3231	Hand Clap1 St
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

BeechwoodSnareKit2

Note	Wave Number	Wave Name
C0	5996	HH Power ClPedal St
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5430	Sd Beech 1 St
G#0	3198	Stick2
A0	4799	Bd PowerA 1St
A#0	5448	Sd Beech OpRm 2 St
B0	4743	Bd Normal 2L
C1	4789	Bd Jazz2St
C#1	5421	Sd Oak ClRm St
D1	5424	Sd Beech 1-4 St
D#1	5484	Sd Metal SnRoll St
E1	5427	Sd Beech 1-OpRm St
F1	6281	Tom Power04 1-2St
F#1	5956	HH Power ClTip 1-4St
G1	6269	Tom Power03 1-2St
G#1	5976	HH Power ClEgde1-4St
A1	6257	Tom Power02 1-2St
A#1	6000	HH Power Open EdgeSt
B1	6245	Tom Power01 1-2St
C2	6255	Tom Power01 2R
C#2	6523	Crash Brite St
D2	6255	Tom Power01 2R
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3231	Hand Clap1 St
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Modern Rock Kit 2

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5282	Sd Rock Open1 R
G#0	3197	Stick1
A0	4780	Bd Room1
A#0	5137	Sd Rng St4
B0	4789	Bd Jazz2St
C1	4782	Bd Room3
C#1	5527	Sd Rock Stick2 St
D1	5108	Sd Strong St1-4
D#1	4558	HipHop Clap6
E1	5307	Sd PowerA 1-5St
F1	6229	Tom Floor St
F#1	5917	HH Closed Rock Sw St
G1	6225	Tom Low St
G#1	5945	HH Half Open Rock St
A1	6225	Tom Low St
A#1	5943	HH Open Rock St
B1	6221	Tom Mid St
C2	6221	Tom Mid St
C#2	6516	Crash1 RL
D2	6217	Tom Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6618	Ride Cup2 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6513	Crash1 St
A#2	3221	Vibraslap1
B2	6598	Ride Cup1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5224	Sd Blues St13
D5	5251	Sd Tight St1-4
D#5	5244	Sd BluesHeart R1-3
E5	5262	Sd Tight R1-4
F5	4757	Bd Low St
F#5	5367	Sd PowerC 4St
G5	4944	Bd R&B1
G#5	5328	Sd PowerB 1-5St
A5	4780	Bd Room1
A#5	5307	Sd PowerA 1-5St
B5	4766	Bd Funk Son St
C6	4781	Bd Room2

Real Brushes Kit

Note	Wave Number	Wave Name
C0	5591	Sd LW Brush Swir2 Sw
C#0	5587	Sd LW Brush Combi Sw
D0	5592	Sd LW Brush Swir3
D#0	5586	Sd LW Brush Slap Sw
E0	5593	Sd LW Brush Swir4
F0	5594	Sd LW Brush Swir5
F#0	5595	Sd LW Brush Swir6
G0	5584	Sd LW Brush Tap1 Sw
G#0	3197	Stick1
A0	4896	PL Kick1 Sw
A#0	5588	Sd LW Brush Rim1 Sw
B0	4897	PL Kick2 Sw
C1	4795	Bd PL Jazz HiSna Sw
C#1	5547	Sd Closed Rim6
D1	5585	Sd LW Brush Tap2 Sw
D#1	3237	Hand Clap3 Sw
E1	5589	Sd LW Brush Rim2 Sw
F1	6432	Tom Jazz FLR Sw
F#1	6105	HH IB Brush Cls
G1	6431	Tom Jazz LL Sw
G#1	6107	HH IB Brush Pdl
A1	6431	Tom Jazz LL Sw
A#1	6106	HH IB Brush Opn
B1	6430	Tom Jazz LH Sw
C2	6429	Tom Jazz M Sw
C#2	6546	Jazz Crash1 Sw
D2	6428	Tom Jazz H Sw
D#2	6615	Ride Brush3 Tip Sw
E2	6560	ZJ Crash Brush Sw
F2	6616	Ride Brush3 Cup Sw
F#2	3185	Tambourine1 Sw
G2	6644	ZJ Splash2 Sw
G#2	3571	Cowbell5
A2	6547	Jazz Crash2 Sw
A#2	3221	Vibraslap1
B2	6617	Ride Brush4 Cup Sw
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

Jazz Brushes Kit

Note	Wave Number	Wave Name
C0	6025	HH Dark Pedal 1-2 L
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5557	Sd Roll Mn
F#0	3202	Castanet1
G0	5493	Sd NJz 1 St
G#0	3198	Stick2
A0	4786	Bd Jazz1St
A#0	5472	Sd Metal OpRm 1-2 St
B0	4792	Bd FK Jazz St
C1	4792	Bd FK Jazz St
C#1	5514	Sd NJz ClRm St
D1	5572	Sd Brush vari St
D#1	5566	Sd Brush Soft St
E1	5569	Sd Brush Med St
F1	6424	Tom Brush Floor St
F#1	6102	HH Brush Closed
G1	6420	Tom Brush Low St
G#1	6104	HH Brush Pedal
A1	6416	Tom Brush Mid St
A#1	6080	HH NJz Open 1-2 St
B1	6416	Tom Brush Mid St
C2	6412	Tom Brush Hi St
C#2	6556	Crash Brush2 St
D2	6412	Tom Brush Hi St
D#2	6611	Ride Brush2 St
E2	6548	Crash Brush1 St
F2	6552	Crash Brush Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6556	Crash Brush2 St
A#2	3222	Vibraslap2
B2	6609	Ride Brush1 R
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3247	Finger Snap3
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Jazz Sticks Kit

Note	Wave Number	Wave Name
C0	6024	HH Dark Pedal 1-2 St
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5557	Sd Roll Mn
F#0	3202	Castanet1
G0	5493	Sd NJz 1 St
G#0	3198	Stick2
A0	4856	Bd NJz Closed 2 St
A#0	5448	Sd Beech OpRm 2 St
B0	4859	Bd NJz Open 1-2 St
C1	4850	Bd NJz Closed 1-2 St
C#1	5514	Sd NJz ClRm St
D1	5487	Sd NJz 1-4 St
D#1	5551	Sd RockRollD St
E1	5490	Sd NJz 1-OpRm St
F1	6389	Tom NJz Floor 1-2 St
F#1	6004	HH Dark Closed 1-4St
G1	6377	Tom NJz Low 1-2 St
G#1	6024	HH Dark Pedal 1-2 St
A1	6373	Tom NJz Mid 2 St
A#1	6036	HH Dark Open 1-2 St
B1	6369	Tom NJz Mid 1 St
C2	6369	Tom NJz Mid 1 St
C#2	6535	Crash NJzB St
D2	6365	Tom NJz Mid 1-2 St
D#2	6587	Ride NJz St
E2	6630	China3 St
F2	6591	Ride NJz Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6531	Crash NJzA St
A#2	3222	Vibraslap2
B2	6571	Ride2 St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3247	Finger Snap3
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Iranian Mix Kit

Note	Wave Number	Wave Name
C#0	3347	Bongo3 Hi Open
D0	3348	Bongo3 Lo Open
D#0	3295	Conga3 Hi Open
E0	3297	Conga3 Lo Open
F0	6407	Std Tom Floor L
F#0	6092	HH Std Closed
G0	6405	Std Tom Floor H
G#0	6094	HH Std Pedal
A0	6405	Std Tom Floor H
A#0	6093	HH Std Open
B0	6603	Std Ride
C1	4892	Bd Std Kick
C#1	5545	Sd Closed Rim4
D1	5558	Std Snare
D#1	6540	Std Crash2
E1	5559	Std Snare Tight
F1	3669	Tablah Big Dom
F#1	3671	Tablah Big Sak
G1	3670	Tablah Big Tak
G#1	4381	Daholla2 Sak
A1	4378	Daholla2 Dom
A#1	4380	Daholla2 Tak 2
B1	4379	Daholla2 Tak 1
C2	4133	Daf Tom bb
C#2	4141	Daf Chain Up2
D2	4138	Daf Back2
D#2	4142	Daf Chain Down2
E2	4136	Daf Chap
F2	4147	Daf Full Roll
F#2	4148	Daf Chain Roll
G2	4149	Daf Whipping Roll
G#2	3244	Iran Hand Clap
A2	3246	Finger Snap2
A#2	3805	Neghareh Roll
B2	3800	Neghareh Tom
C3	3803	Neghareh Snap
C#3	3801	Neghareh Chap
D3	3804	Neghareh Eshareh
D#3	3802	Neghareh Back
E3	3701	Kurdish Dohol2 Lo
F3	3702	Kurdish Dohol2 Hi
F#3	3703	Kurdish Dohol2LoBuzz
G3	3704	Lurish Dohol Lo
G#3	3705	Lurish Dohol Lo Buzz
A3	3706	Lurish Dohol Hi
A#3	4216	Tombak Full Roll
B3	4217	Tombak Timapni Roll
C4	4211	Tombak Tom2
C#4	4215	Tombak Eshareh Right
D4	4212	Tombak Back
D#4	4214	Tombak Eshareh Left
E4	4213	Tombak Snap
F4	4358	Zarb2 Tom
F#4	4362	Zarb2 Whipping
G4	4361	Zarb2 Back
G#4	4359	Zarb2 Eshareh
A4	4360	Zarb2 Chap
A#4	4364	Zarb2 Full Roll
B4	4363	Zarb2 Snap
C5	4365	Zarb2 Whipping Roll
C#5	4160	Dayereh1 Roll
D5	4161	Dayereh2 Tom
D#5	4162	Dayereh2 Eshareh
E5	4163	Dayereh2 Back
F5	4164	Dayereh2 Snap
F#5	4167	Dayereh2 Edge Roll
G5	3910	Twaisat4
G#5	3908	Twaisat2
A5	3911	Twaisat5
A#5	3907	Twaisat1
B5	3390	Timbale4 Lo
C6	3390	Timbale4 Lo

D'elo Kit

Note	Wave Number	Wave Name
C0	3247	Finger Snap3
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	3779	Zangooreh Roll
F#0	3246	Finger Snap2
G0	5655	Caixa1 RimShot
G#0	3197	Stick1
A0	4964	Light BD
A#0	5089	Sd Soul St1-3
B0	4859	Bd NJz Open 1-2 St
C1	4850	Bd NJz Closed 1-2 St
C#1	5848	Sd HipHop Rim2
D1	5851	Sd HipHop Rim5
D#1	3239	Arabic Hand Clap
E1	5451	Sd Beech ClRm St
F1	6411	CP Tom Floor Sw
F#1	5956	HH Power ClTip 1-4St
G1	6411	CP Tom Floor Sw
G#1	6068	HH NJz Pedal 1-2 St
A1	6410	CP Tom Low Sw
A#1	6100	PT HiHat Open
B1	6409	CP Tom Mid Sw
C2	6408	CP Tom High Sw
C#2	6543	ZJ Crash1 Sw
D2	6408	CP Tom High Sw
D#2	6600	ZJ Ride1 Tip Sw
E2	6544	ZJ Crash2 Sw
F2	6601	ZJ Ride1 Cup Sw
F#2	3185	Tambourine1 Sw
G2	6643	ZJ Splash1
G#2	3571	Cowbell5
A2	6545	ZJ Crash3 Sw
A#2	3221	Vibraslap1
B2	6602	ZJ Ride2 Tip Sw
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3389	Timbale3 Hi Rim
F#3	3388	Timbale3 Lo Rim
G3	3450	Agogo2 Bell1
G#3	3451	Agogo2 Bell2
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	4339	Darbuka3 RllTakToDom
C4	4319	Darbuka3 Tak BothHnd
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3561	Claves3
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3781	Shekere Shake Sw
B4	4106	Riq1 ShakeB 1-2
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5251	Sd Tight St1-4
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5535	Sd Hip Stick6 St
G5	5533	Sd Hip Stick4
G#5	4558	HipHop Clap6
A5	4559	HipHop Clap7
A#5	4871	Bd GranCasaA Mute St
B5	4868	Bd GranCasaA Open St
C6	4731	Bd Ambience R1-2

T's EDM Kit

Note	Wave Number	Wave Name
C0	4962	Fresh BD St
C#0	4964	Light BD
D0	4963	Smith BD St
D#0	5677	Fresh Snare 2
E0	5671	Digital Snare St
F0	5670	Crisp Snare St
F#0	5675	Biting Snare 2
G0	5673	Echo Snare St
G#0	5678	Shrill Snare St
A0	4959	Artifact BD St
A#0	5679	Strong Snare Wire
B0	4960	Kindle BD St
C1	4961	Biting BD
C#1	5672	Elec Small Snare St
D1	5674	Biting Snare 1
D#1	4533	Clap Long Ambi St
E1	5676	Fresh Snare 1
F1	6502	Digital Tom Low St
F#1	6209	Tight HH Closed
G1	6502	Digital Tom Low St
G#1	6210	Fresh HH Closed
A1	6501	Digital Tom High St
A#1	6216	Crackle HH Open
B1	6508	Elec SE Tom St
C2	6508	Elec SE Tom St
C#2	6665	Novelty Crash
D2	6508	Elec SE Tom St
D#2	6681	Live Ride St
E2	6670	Phase Crash St
F2	6682	Fresh Ride St
F#2	2795	Glitch 4
G2	6664	EDM Crash St
G#2	2800	Glitch 9
A2	6666	Flange Crash St
A#2	2796	Glitch 5
B2	6683	Fine Ride St
C3	3298	Conga Fine 1 St
C#3	3299	Conga Fine 2 St
D3	3300	Conga FX
D#3	3604	Ethnic Perc 1
E3	3605	Ethnic Perc 2
F3	3606	Ethnic Perc 3
F#3	4613	WB Fresh Elec St
G3	4535	Clap Elec 1
G#3	4536	Clap Elec 2
A3	3172	Shaker Fresh 1
A#3	3173	Shaker Fresh 2
B3	3174	Shaker Fresh 3
C4	2792	Glitch 1
C#4	2793	Glitch 2
D4	2797	Glitch 6
D#4	2801	Glitch 10
E4	2798	Glitch 7
F4	2797	Glitch 6
F#4	2797	Glitch 6
G4	2797	Glitch 6
G#4	2797	Glitch 6
A4	2797	Glitch 6
A#4	2797	Glitch 6
B4	2797	Glitch 6
C5	2797	Glitch 6

T's EDM Kit 2

Note	Wave Number	Wave Name
C0	4962	Fresh BD St
C#0	4964	Light BD
D0	4963	Smith BD St
D#0	5677	Fresh Snare 2
E0	5671	Digital Snare St
F0	5670	Crisp Snare St
F#0	5675	Biting Snare 2
G0	5673	Echo Snare St
G#0	5678	Shrill Snare St
A0	4959	Artifact BD St
A#0	5679	Strong Snare Wire
B0	4960	Kindle BD St
C1	4961	Biting BD
C#1	5672	Elec Small Snare St
D1	5674	Biting Snare 1
D#1	4533	Clap Long Ambi St
E1	5676	Fresh Snare 1
F1	6502	Digital Tom Low St
F#1	6209	Tight HH Closed
G1	6502	Digital Tom Low St
G#1	6210	Fresh HH Closed
A1	6501	Digital Tom High St
A#1	6216	Crackle HH Open
B1	6508	Elec SE Tom St
C2	6508	Elec SE Tom St
C#2	6665	Novelty Crash
D2	6508	Elec SE Tom St
D#2	6681	Live Ride St
E2	6670	Phase Crash St
F2	6682	Fresh Ride St
F#2	2795	Glitch 4
G2	6664	EDM Crash St
G#2	2800	Glitch 9
A2	6666	Flange Crash St
A#2	2796	Glitch 5
B2	6683	Fine Ride St
C3	3298	Conga Fine 1 St
C#3	3299	Conga Fine 2 St
D3	3300	Conga FX
D#3	3604	Ethnic Perc 1
E3	3605	Ethnic Perc 2
F3	3606	Ethnic Perc 3
F#3	4613	WB Fresh Elec St
G3	4535	Clap Elec 1
G#3	4536	Clap Elec 2
A3	3172	Shaker Fresh 1
A#3	3173	Shaker Fresh 2
B3	3174	Shaker Fresh 3
C4	2792	Glitch 1
C#4	2793	Glitch 2
D4	2797	Glitch 6
D#4	2801	Glitch 10
E4	2798	Glitch 7
F4	2797	Glitch 6
F#4	2797	Glitch 6
G4	2797	Glitch 6
G#4	2797	Glitch 6
A4	2797	Glitch 6
A#4	2797	Glitch 6
B4	2797	Glitch 6
C5	2797	Glitch 6

T's Hip Hop Kit

Note	Wave Number	Wave Name
C0	2803	T8 Bass SE St
C#0	5680	Elec Jazz Snare St
D0	5688	Crackle Snare St
D#0	2802	T8 Bend
E0	5687	Elec Light Snare St
F0	5685	Snare Roll OneShot
F#0	5683	Clang Snare St
G0	5684	Ambi Snare
G#0	5681	Elec Tight Snare St
A0	4966	Electric BD St
A#0	5686	Fine Snare St
B0	4967	Clink BD St
C1	4965	Crackle BD St
C#1	5682	Electric Snare
D1	5690	Sd Long Snare Wire
D#1	4534	Clap Short Ambi St
E1	5689	Sd HandClap
F1	6506	Powerful Tom Mid St
F#1	6211	Elec HH 1 Closed
G1	6507	Powerful Tom Low St
G#1	6213	Elec HH 2 Closed
A1	6505	Powerful Tom High St
A#1	6212	Elec HH 1 Open
B1	6509	Fine Light Tom St
C2	6504	Light Tom Low St
C#2	6669	FX Crash St
D2	6503	Light Tom High St
D#2	6684	Clang Ride St
E2	6667	Crackle Crash St
F2	6685	Smith Ride St
F#2	3192	Tambourine FX 1
G2	6668	Electric Crash St
G#2	3193	Tambourine FX 2
A2	6670	Phase Crash St
A#2	4568	Snap & Clap St
B2	6687	Ride Hip Hop St
C3	3349	Bongo Extent 1 St
C#3	3351	Bongo Extent 3 St
D3	3350	Bongo Extent 2 St
D#3	3349	Bongo Extent 1 St
E3	3603	Stomp St
F3	2787	Vocal Snare St
F#3	2788	Vocal Ambi SE St
G3	2789	Vocal Shout Yeah St
G#3	2790	Vocal Shout Go St
A3	3175	Shaker Muffled 1 St
A#3	3176	Shaker Muffled 2 St
B3	2799	Glitch 8
C4	2799	Glitch 8
C#4	6214	Powerful HH Closed
D4	6215	Powerful HH Open
D#4	3609	Ethnic Perc 6
E4	3610	Ethnic Perc 7
F4	3611	Ethnic Perc 8
F#4	2791	Rainmaker St
G4	3608	Ethnic Perc 5
G#4	3607	Ethnic Perc 4
A4	4567	Snap Digital St
A#4	4569	Snap Long Ambi St
B4	4570	Snap Smith Snap St
C5	3255	Wind Chime 2 St

T's Hip Hop Kit 2

Note	Wave Number	Wave Name
C0	2803	T8 Bass SE St
C#0	5680	Elec Jazz Snare St
D0	5688	Crackle Snare St
D#0	2802	T8 Bend
E0	5687	Elec Light Snare St
F0	5685	Snare Roll OneShot
F#0	5683	Clang Snare St
G0	5684	Ambi Snare
G#0	5681	Elec Tight Snare St
A0	4966	Electric BD St
A#0	5686	Fine Snare St
B0	4967	Clink BD St
C1	4965	Crackle BD St
C#1	5682	Electric Snare
D1	5690	Sd Long Snare Wire
D#1	4534	Clap Short Ambi St
E1	5689	Sd HandClap
F1	6506	Powerful Tom Mid St
F#1	6211	Elec HH 1 Closed
G1	6507	Powerful Tom Low St
G#1	6213	Elec HH 2 Closed
A1	6505	Powerful Tom High St
A#1	6212	Elec HH 1 Open
B1	6509	Fine Light Tom St
C2	6504	Light Tom Low St
C#2	6669	FX Crash St
D2	6503	Light Tom High St
D#2	6684	Clang Ride St
E2	6667	Crackle Crash St
F2	6685	Smith Ride St
F#2	3192	Tambourine FX 1
G2	6668	Electric Crash St
G#2	3193	Tambourine FX 2
A2	6670	Phase Crash St
A#2	4568	Snap & Clap St
B2	6687	Ride Hip Hop St
C3	3349	Bongo Extent 1 St
C#3	3351	Bongo Extent 3 St
D3	3350	Bongo Extent 2 St
D#3	3349	Bongo Extent 1 St
E3	3603	Stomp St
F3	2787	Vocal Snare St
F#3	2788	Vocal Ambi SE St
G3	2789	Vocal Shout Yeah St
G#3	2790	Vocal Shout Go St
A3	3175	Shaker Muffled 1 St
A#3	3176	Shaker Muffled 2 St
B3	2799	Glitch 8
C4	2799	Glitch 8
C#4	6214	Powerful HH Closed
D4	6215	Powerful HH Open
D#4	3609	Ethnic Perc 6
E4	3610	Ethnic Perc 7
F4	3611	Ethnic Perc 8
F#4	2791	Rainmaker St
G4	3608	Ethnic Perc 5
G#4	3607	Ethnic Perc 4
A4	4567	Snap Digital St
A#4	4569	Snap Long Ambi St
B4	4570	Snap Smith Snap St
C5	3255	Wind Chime 2 St

Trap Kit

Note	Wave Number	Wave Name
B0	5035	Trap BD 1 Mn
C1	5036	Trap BD 2 Mn
C#1	4631	Trap Perc 1 St
D1	5811	Trap SD 6 Mn
D#1	5807	Trap SD 2 Mn
E1	4538	Trap Clap 1 St
F1	5810	Trap SD 5 St
F#1	6171	Trap HH 2 St
G1	4704	T8 Sub-1 M
G#1	6170	Trap HH 1 St
A1	4705	T8 Sub-2 M
A#1	6179	Trap OHH 1 St
B1	4706	T8 Sub-3 M
C2	4707	T8 Sub-4 M
C#2	6181	Trap OHH 3 St
D2	4708	T8 Sub-5 M
D#2	4663	Trap Misc 7 Mn
E2	6180	Trap OHH 2 St
F2	4665	Trap Misc 9 St
F#2	6656	Trap Crash 2 St
G2	4541	Trap Clap 4 Mn
G#2	4542	Trap Clap 5 Mn
A2	6173	Trap HH 4 St
A#2	6175	Trap HH 6 St
B2	6177	Trap HH 8 St
C3	6178	Trap HH 9 St
C#3	4662	Trap Misc 6 St
D3	4660	Trap Misc 4 St
D#3	4659	Trap Misc 3 St
E3	4539	Trap Clap 2 Mn
F3	4540	Trap Clap 3 St
F#3	4664	Trap Misc 8 St
G3	4658	Trap Misc 2 St
G#3	4657	Trap Misc 1 St
A3	4661	Trap Misc 5 St
A#3	6172	Trap HH 3 St
B3	6176	Trap HH 7 St
C4	2770	Trap Fx1 St
C#4	2773	Trap Fx4 St
D4	2771	Trap Fx2 St
D#4	5809	Trap SD 4 Mn
E4	5808	Trap SD 3 Mn
F4	5806	Trap SD 1 St
F#4	4632	Trap Perc 2 St
G4	2774	Trap Fx5 St
G#4	2772	Trap Fx3 St
A4	2775	Trap Fx6 St

Trap Kit 2

Note	Wave Number	Wave Name
B0	5035	Trap BD 1 Mn
C1	5036	Trap BD 2 Mn
C#1	4631	Trap Perc 1 St
D1	5811	Trap SD 6 Mn
D#1	5807	Trap SD 2 Mn
E1	4538	Trap Clap 1 St
F1	5810	Trap SD 5 St
F#1	6171	Trap HH 2 St
G1	4704	T8 Sub-1 M
G#1	6170	Trap HH 1 St
A1	4705	T8 Sub-2 M
A#1	6179	Trap OHH 1 St
B1	4706	T8 Sub-3 M
C2	4707	T8 Sub-4 M
C#2	6181	Trap OHH 3 St
D2	4708	T8 Sub-5 M
D#2	4663	Trap Misc 7 Mn
E2	6180	Trap OHH 2 St
F2	4665	Trap Misc 9 St
F#2	6656	Trap Crash 2 St
G2	4541	Trap Clap 4 Mn
G#2	4542	Trap Clap 5 Mn
A2	6173	Trap HH 4 St
A#2	6175	Trap HH 6 St
B2	6177	Trap HH 8 St
C3	6178	Trap HH 9 St
C#3	4662	Trap Misc 6 St
D3	4660	Trap Misc 4 St
D#3	4659	Trap Misc 3 St
E3	4539	Trap Clap 2 Mn
F3	4540	Trap Clap 3 St
F#3	4664	Trap Misc 8 St
G3	4658	Trap Misc 2 St
G#3	4657	Trap Misc 1 St
A3	4661	Trap Misc 5 St
A#3	6172	Trap HH 3 St
B3	6176	Trap HH 7 St
C4	2770	Trap Fx1 St
C#4	2773	Trap Fx4 St
D4	2771	Trap Fx2 St
D#4	5809	Trap SD 4 Mn
E4	5808	Trap SD 3 Mn
F4	5806	Trap SD 1 St
F#4	4632	Trap Perc 2 St
G4	2774	Trap Fx5 St
G#4	2772	Trap Fx3 St
A4	2775	Trap Fx6 St

Downtempo HipHop Kit

Note	Wave Number	Wave Name
A#0	5063	HipHop BD 1 St
B0	5064	HipHop BD 2 Mn
C1	5066	HipHop BD 4 Mn
C#1	3199	HipHop Stick1 Mn
D1	5854	HipHop SD 2 Mn
D#1	4544	HipHop Clap 1 St
E1	5853	HipHop SD 1 St
F1	6494	House Tom Lo L Mn
F#1	6184	HipHop HH 2 Mn
G1	6493	House Tom Lo H Mn
G#1	6183	HipHop HH 1 Mn
A1	6492	House Tom Mid L Mn
A#1	6207	Opeh HH 14inch
B1	6491	House Tom Mid M Mn
C2	6490	House Tom Mid H Mn
C#2	6658	HipHop Crash 2 St
D2	6489	House Tom Hi L Mn
D#2	6686	HipHop Ride St
E2	6657	HipHop Crash 1 St
F2	6686	HipHop Ride St
F#2	3195	HipHop Tamb2 Mn
G2	2778	HipHop Fx3 St
G#2	3572	HipHop Cowbell 1 Mn
A2	6659	HipHop Crash 3 St
A#2	5856	HipHop Rim St
B2	6679	House Ride St
C3	3352	HipHop Bongo1 Mn
C#3	3353	HipHop Bongo2 Mn
D3	5067	HipHop BD 5 Mn
D#3	5065	HipHop BD 3 Mn
E3	5033	Dub BD 5 St
F3	4545	HipHop Clap 2 St
F#3	4552	Electro Clap 2 St
G3	5822	House SD 5 St
G#3	5819	House SD 2 Mn
A3	3177	HipHop Shaker1 Mn
A#3	3178	HipHop Shaker2 Mn
B3	4629	HipHop Flex1
C4	4630	HipHop Flex2
C#4	3459	House Guiro Mn
D4	3458	HipHop Guiro Mn
D#4	4640	HipHop Clunk St
E4	3215	HipHop WB1 Mn
F4	3216	HipHop WB2 Mn
F#4	2846	HipHop Scratch1 St
G4	2847	HipHop Scratch2 St
G#4	4623	House Triangle Mn
A4	4622	HipHop Triangle Mn

LoFi Kit

Note	Wave Number	Wave Name
C0	3247	Finger Snap3
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	3787	TalkingDrum Mute
F#0	3235	Hand Clap2 Close
G0	3245	Finger Snap1
G#0	3006	Electric Bass FX 20
A0	4959	Artifact BD St
A#0	5848	Sd HipHop Rim2
B0	6705	Bd Trendy 16 Mn
C1	6751	Bd Trendy 62 Mn
C#1	6845	Sd Trendy 13 St
D1	6981	Sd Trendy 149 St
D#1	7223	Clap Trendy 43 St
E1	6836	Sd Trendy 4 St
F1	7066	Tom Trendy 6 Mn
F#1	7025	HH Trendy 36 St
G1	7066	Tom Trendy 6 Mn
G#1	7026	HH Trendy 37 St
A1	7067	Tom Trendy 7 Mn
A#1	7027	HH Trendy 38 St
B1	7440	PC Trendy 192 St
C2	6989	Sd Trendy 157 St
C#2	7160	Cym Trendy 48 St
D2	7077	Tom Trendy 12 St
D#2	7167	Cym Trendy 55 St
E2	7169	Cym Trendy 57 Mn
F2	7171	Cym Trendy 59 St
F#2	3196	HipHop Tamb3 Sw
G2	7124	Cym Trendy 12 St
G#2	3569	Cowbell3 Open
A2	7125	Cym Trendy 13 St
A#2	3241	Khaligi Hand Clap2
B2	7130	Cym Trendy 18 St
C3	3331	Bongo1 Lo 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3290	Conga2 Hi Mute
D#3	3287	Conga2 Hi Open 1-2
E3	3291	Conga2 Lo Open 1-2
F3	3375	Timbale1 Rim
F#3	3388	Timbale3 Lo Rim
G3	3452	Agogo3 Click
G#3	3449	Agogo1 Lo1 Tap
A3	3418	Caxixi 3
A#3	3402	Maracas1 Staccato
B3	1984	HighWhistle KeyNoise
C4	1977	LowWhistle KeyNoise
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3219	House WB2 Mn
F4	3215	HipHop WB1 Mn
F#4	3319	Cuica2 Med
G4	3316	Cuica1 Lo
G#4	3230	Triangle3 Mute
A4	3229	Triangle3 Open
A#4	7333	PC Trendy 85 St
B4	4118	Riq3 Snouj Close2
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5251	Sd Tight St1-4
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	2582	Loop145
G5	2848	AcousticGtr FX01 St
G#5	678	Steel1 FX St
A5	777	Jazz FX
A#5	4871	Bd GranCasaA Mute St
B5	4868	Bd GranCasaA Open St
C6	4731	Bd Ambience R1-2

Airy Chill Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	2809	Swarm
D0	2810	TurnTable
D#0	2501	Willow St
E0	2822	RainLoop
F0	2498	Birch St
F#0	2501	Willow St
G0	7232	Snap Trendy 5 St
G#0	6856	Sd Trendy 24 St
A0	6805	Bd Trendy 116 St
A#0	6974	Sd Trendy 142 St
B0	6696	Bd Trendy 7 Mn
C1	6808	Bd Trendy 119 St
C#1	5730	T8 RimShot
D1	6983	Sd Trendy 151 St
D#1	7189	Clap Trendy 9 Mn
E1	6914	Sd Trendy 82 St
F1	7083	Tom Trendy 14 Lo Mn
F#1	6994	HH Trendy 5 St
G1	7083	Tom Trendy 14 Lo Mn
G#1	7004	HH Trendy 15 St
A1	7082	Tom Trendy 14 Mid Mn
A#1	6999	HH Trendy 10 Mn
B1	7081	Tom Trendy 14 Hi Mn
C2	7081	Tom Trendy 14 Hi Mn
C#2	7160	Cym Trendy 48 St
D2	7081	Tom Trendy 14 Hi Mn
D#2	7166	Cym Trendy 54 St
E2	7144	Cym Trendy 32 Mn
F2	7151	Cym Trendy 39 Mn
F#2	7284	PC Trendy 36 St
G2	7143	Cym Trendy 31 Mn
G#2	7287	PC Trendy 39 St
A2	7158	Cym Trendy 46 St
A#2	7316	PC Trendy 68 St
B2	7170	Cym Trendy 58 Mn
C3	7344	PC Trendy 96 St
C#3	7300	PC Trendy 52 St
D3	7278	PC Trendy 30 St
D#3	7298	PC Trendy 50 St
E3	7301	PC Trendy 53 St
F3	7338	PC Trendy 90 St
F#3	7340	PC Trendy 92 St
G3	7282	PC Trendy 34 St
G#3	7285	PC Trendy 37 St
A3	4626	House Cabasa1 Mn
A#3	3182	House Shaker2 Mn
B3	7287	PC Trendy 39 St
C4	7288	PC Trendy 40 St
C#4	7468	FX Trendy 21 Mn
D4	7472	FX Trendy 25 St
D#4	7461	FX Trendy 14 St
E4	7304	PC Trendy 56 St
F4	7305	PC Trendy 57 St
F#4	7330	PC Trendy 82 St
G4	7331	PC Trendy 83 Mn
G#4	7343	PC Trendy 95 St
A4	7349	PC Trendy 101 St
A#4	2722	Granular Loop6
B4	2747	Noize Rize2
C5	2780	EDM Fx2 St
C#5	6773	Bd Trendy 84 St
D5	6777	Bd Trendy 88 Mn
D#5	6787	Bd Trendy 98 St
E5	6804	Bd Trendy 115 St
F5	6713	Bd Trendy 24 St
F#5	6719	Bd Trendy 30 St
G5	6720	Bd Trendy 31 St
G#5	6729	Bd Trendy 40 St
A5	6826	Bd Trendy 137 Mn
A#5	6755	Bd Trendy 66 Mn
B5	6753	Bd Trendy 64 Mn
C6	6732	Bd Trendy 43 St

EDM Kit

Note	Wave Number	Wave Name
B0	5041	EDM BD 5 Mn
C1	5039	EDM BD 3 Mn
C#1	4633	EDM Perc St
D1	5814	EDM SD 3 St
D#1	4546	EDM Clap St
E1	5812	EDM SD 1 St
F1	6484	EDM Tom Low Mn
F#1	6187	EDM HH 3 Mn
G1	6483	EDM Tom Mid Mn
G#1	6186	EDM HH 2 Mn
A1	6482	EDM Tom High Mn
A#1	6190	EDM OHH 1 Mn
B1	6485	Zap Tom H Mn
C2	6486	Zap Tom M Mn
C#2	6192	EDM OHH 3 St
D2	6487	Zap Tom L Mn
D#2	6678	EDM Ride St
E2	4676	EDM Misc 09 St
F2	4677	EDM Misc 10 St
F#2	6191	EDM OHH 2 St
G2	4679	EDM Misc 12 Mn
G#2	2781	EDM Fx3 St
A2	5813	EDM SD 2 St
A#2	2780	EDM Fx2 St
B2	4668	EDM Misc 01 St
C3	4673	EDM Misc 06 St
C#3	4674	EDM Misc 07 St
D3	4669	EDM Misc 02 St
D#3	4678	EDM Misc 11 St
E3	2779	EDM Fx1 St
F3	5037	EDM BD 1 Mn
F#3	5038	EDM BD 2 St
G3	5040	EDM BD 4 Mn
G#3	4624	Elec Cabasa1 Mn
A3	4625	Elec Cabasa2 Mn
A#3	5817	EDM SD 6 Mn
B3	5816	EDM SD 5 St
C4	4672	EDM Misc 05 St
C#4	4672	EDM Misc 05 St
D4	4675	EDM Misc 08 St
D#4	5815	EDM SD 4 St
E4	4671	EDM Misc 04 St
F4	4670	EDM Misc 03 St
F#4	6188	EDM HH 4 St
G4	6189	EDM HH 5 St
G#4	6185	EDM HH 1 St
A4	6193	EDM OHH 4 St

House-Techno Kit

Note	Wave Number	Wave Name
B0	5042	House BD 1 St
C1	5043	House BD 2 St
C#1	4680	House Misc 1 St
D1	5820	House SD 3 St
D#1	4549	House Clap 3 St
E1	5819	House SD 2 Mn
F1	6494	House Tom Lo L Mn
F#1	6194	House HH 1 St
G1	6493	House Tom Lo H Mn
G#1	6195	House HH 2 Mn
A1	6492	House Tom Mid L Mn
A#1	6198	House OHH 2 St
B1	6491	House Tom Mid M Mn
C2	6490	House Tom Mid H Mn
C#2	6661	House Crash St
D2	6489	House Tom Hi L Mn
D#2	6679	House Ride St
E2	6488	House Tom Hi H Mn
F2	6196	House HH 3 Mn
F#2	2782	House Fx1 Mn
G2	6197	House OHH 1 St
G#2	3572	HipHop Cowbell 1 Mn
A2	4550	House Clap 4 St
A#2	4547	House Clap 1 St
B2	2784	House Fx3 St
C3	4683	House Misc 4 St
C#3	4681	House Misc 2 St
D3	5822	House SD 5 St
D#3	5821	House SD 4 St
E3	4548	House Clap 2 St
F3	5818	House SD 1 St
F#3	5044	House BD 3 St
G3	5045	House BD 4 Mn
G#3	4626	House Cabasa1 Mn
A3	4627	House Cabasa2 Mn
A#3	3182	House Shaker2 Mn
B3	3181	House Shaker1 Mn
C4	3184	House Shaker Long Mn
C#4	4685	House Misc 6 Mn
D4	3459	House Guiro Mn
D#4	3220	House WB3 Mn
E4	3219	House WB2 Mn
F4	3218	House WB1 Mn
F#4	4682	House Misc 3 St
G4	4634	House Perc St
G#4	4684	House Misc 5 St
A4	4623	House Triangle Mn

House-Techno Kit 2

Note	Wave Number	Wave Name
B0	5042	House BD 1 St
C1	5043	House BD 2 St
C#1	4680	House Misc 1 St
D1	5820	House SD 3 St
D#1	4549	House Clap 3 St
E1	5819	House SD 2 Mn
F1	6494	House Tom Lo L Mn
F#1	6194	House HH 1 St
G1	6493	House Tom Lo H Mn
G#1	6195	House HH 2 Mn
A1	6492	House Tom Mid L Mn
A#1	6198	House OHH 2 St
B1	6491	House Tom Mid M Mn
C2	6490	House Tom Mid H Mn
C#2	6661	House Crash St
D2	6489	House Tom Hi L Mn
D#2	6679	House Ride St
E2	6488	House Tom Hi H Mn
F2	6196	House HH 3 Mn
F#2	2782	House Fx1 Mn
G2	6197	House OHH 1 St
G#2	3572	HipHop Cowbell 1 Mn
A2	4550	House Clap 4 St
A#2	4547	House Clap 1 St
B2	2784	House Fx3 St
C3	4683	House Misc 4 St
C#3	4681	House Misc 2 St
D3	5822	House SD 5 St
D#3	5821	House SD 4 St
E3	4548	House Clap 2 St
F3	5818	House SD 1 St
F#3	5044	House BD 3 St
G3	5045	House BD 4 Mn
G#3	4626	House Cabasa1 Mn
A3	4627	House Cabasa2 Mn
A#3	3182	House Shaker2 Mn
B3	3181	House Shaker1 Mn
C4	3184	House Shaker Long Mn
C#4	4685	House Misc 6 Mn
D4	3459	House Guiro Mn
D#4	3220	House WB3 Mn
E4	3219	House WB2 Mn
F4	3218	House WB1 Mn
F#4	4682	House Misc 3 St
G4	4634	House Perc St
G#4	4684	House Misc 5 St
A4	4623	House Triangle Mn

The Flashbulb Kit

Note	Wave Number	Wave Name
C0	3002	Electric Bass FX 16
C#0	5472	Sd Metal OpRm 1-2 St
D0	5826	Electro SD 4 Mn
D#0	7184	Clap Trendy 4 St
E0	7347	PC Trendy 99 St
F0	6842	Sd Trendy 10 St
F#0	4946	Bd Hip Deep
G0	6736	Bd Trendy 47 St
G#0	6734	Bd Trendy 45 Mn
A0	6740	Bd Trendy 51 St
A#0	6737	Bd Trendy 48 St
B0	6823	Bd Trendy 134 Mn
C1	6748	Bd Trendy 59 St
C#1	7248	Snap Trendy 21 St
D1	6985	Sd Trendy 153 St
D#1	7206	Clap Trendy 26 Mn
E1	6870	Sd Trendy 38 St
F1	7446	PC Trendy 198 St
F#1	7047	HH Trendy 58 Mn
G1	7444	PC Trendy 196 St
G#1	7055	HH Trendy 66 St
A1	7445	PC Trendy 197 St
A#1	7046	HH Trendy 57 Mn
B1	7447	PC Trendy 199 Mn
C2	7075	Tom Trendy 11 St
C#2	7158	Cym Trendy 46 St
D2	7441	PC Trendy 193 St
D#2	7175	Cym Trendy 63 St
E2	7166	Cym Trendy 54 St
F2	7130	Cym Trendy 18 St
F#2	7260	PC Trendy 12 St
G2	7139	Cym Trendy 27 St
G#2	7317	PC Trendy 69 St
A2	7160	Cym Trendy 48 St
A#2	7403	PC Trendy 155 St
B2	7312	PC Trendy 64 St
C3	3357	Khalg Bongo Hi Snap1
C#3	3354	Khalg Bongo Lo Dom
D3	3301	Khalg Conga1 Hi Sak1
D#3	3305	Khalg Conga1 Lo Sak1
E3	3360	Iran Bongo Lo Tom
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	4627	House Cabasa2 Mn
A#3	3400	Maracas1 Sw
B3	1992	Human Whistle
C4	2573	Stab Hard
C#4	3455	Guiro1 Short
D4	3458	HipHop Guiro Mn
D#4	4620	Elec T8 Claves
E4	383	Wr1 Hard+
F4	813	Power Chord FX St
F#4	2584	Resonance X-Fade
G4	2584	Resonance X-Fade
G#4	3226	Triangle1 Mute
A4	4622	HipHop Triangle Mn
A#4	3158	ShakerA 13
B4	3251	Sleigh Bell2
C5	6734	Bd Trendy 45 Mn
C#5	2332	Tri Wave
D5	2332	Tri Wave
D#5	2332	Tri Wave
E5	2332	Tri Wave
F5	2332	Tri Wave
F#5	2332	Tri Wave
G5	2332	Tri Wave
G#5	2332	Tri Wave
A5	2332	Tri Wave
A#5	2332	Tri Wave
B5	2332	Tri Wave
C6	2332	Tri Wave

Electro Kit

Note	Wave Number	Wave Name
B0	5047	Electro BD 2 Mn
C1	5049	Electro BD 4 St
C#1	4686	Electro Misc 01 M
D1	5823	Electro SD 1 Mn
D#1	4552	Electro Clap 2 St
E1	5825	Electro SD 3 Mn
F1	6500	Electro Tom Lo L Mn
F#1	6201	Electro HH 3 St
G1	6499	Electro Tom Lo H Mn
G#1	6202	Electro HH 4 St
A1	6498	Electro Tom Mid L Mn
A#1	6205	Electro OHH 3 Mn
B1	6497	Electro Tom Mid H Mn
C2	6496	Electro Tom Hi L Mn
C#2	6662	Electro Crash 1 St
D2	6495	Electro Tom Hi H Mn
D#2	6680	Electro Ride Mn
E2	6204	Electro OHH 2 St
F2	6200	Electro HH 2 St
F#2	6203	Electro OHH 1 St
G2	6199	Electro HH 1 St
G#2	6663	Electro Crash 2 St
A2	4687	Electro Misc 02 St
A#2	4687	Electro Misc 02 St
B2	4688	Electro Misc 03 St
C3	4689	Electro Misc 04 St
C#3	4690	Electro Misc 05 St
D3	4691	Electro Misc 06 St
D#3	4692	Electro Misc 07 St
E3	4639	Brip 2 St
F3	4638	Brip 1 St
F#3	4635	Electro Perc 1 St
G3	4637	Electro Perc 3 St
G#3	4551	Electro Clap 1 St
A3	4693	Electro Misc 08 St
A#3	5046	Electro BD 1 Mn
B3	5048	Electro BD 3 Mn
C4	5824	Electro SD 2 Mn
C#4	5825	Electro SD 3 Mn
D4	2786	Electro FX St
D#4	5826	Electro SD 4 Mn
E4	4698	Electro Misc 13 St
F4	4697	Electro Misc 12 St
F#4	5827	Electro SD 5 Mn
G4	4696	Electro Misc 11 St
G#4	4694	Electro Misc 09 St
A4	4695	Electro Misc 10 St

Electro Kit 2

Note	Wave Number	Wave Name
B0	5047	Electro BD 2 Mn
C1	5049	Electro BD 4 St
C#1	4686	Electro Misc 01 M
D1	5823	Electro SD 1 Mn
D#1	4552	Electro Clap 2 St
E1	5825	Electro SD 3 Mn
F1	6500	Electro Tom Lo L Mn
F#1	6201	Electro HH 3 St
G1	6499	Electro Tom Lo H Mn
G#1	6202	Electro HH 4 St
A1	6498	Electro Tom Mid L Mn
A#1	6205	Electro OHH 3 Mn
B1	6497	Electro Tom Mid H Mn
C2	6496	Electro Tom Hi L Mn
C#2	6662	Electro Crash 1 St
D2	6495	Electro Tom Hi H Mn
D#2	6680	Electro Ride Mn
E2	6204	Electro OHH 2 St
F2	6200	Electro HH 2 St
F#2	6203	Electro OHH 1 St
G2	6199	Electro HH 1 St
G#2	6663	Electro Crash 2 St
A2	4687	Electro Misc 02 St
A#2	4687	Electro Misc 02 St
B2	4688	Electro Misc 03 St
C3	4689	Electro Misc 04 St
C#3	4690	Electro Misc 05 St
D3	4691	Electro Misc 06 St
D#3	4692	Electro Misc 07 St
E3	4639	Brip 2 St
F3	4638	Brip 1 St
F#3	4635	Electro Perc 1 St
G3	4637	Electro Perc 3 St
G#3	4551	Electro Clap 1 St
A3	4693	Electro Misc 08 St
A#3	5046	Electro BD 1 Mn
B3	5048	Electro BD 3 Mn
C4	5824	Electro SD 2 Mn
C#4	5825	Electro SD 3 Mn
D4	2786	Electro FX St
D#4	5826	Electro SD 4 Mn
E4	4698	Electro Misc 13 St
F4	4697	Electro Misc 12 St
F#4	5827	Electro SD 5 Mn
G4	4696	Electro Misc 11 St
G#4	4694	Electro Misc 09 St
A4	4695	Electro Misc 10 St

DUB Kit

Note	Wave Number	Wave Name
B0	5030	Dub BD 2 St
C1	5032	Dub BD 4 Mn
C#1	4606	Elec Stick1 Mn
D1	5801	Dub SD 1 St
D#1	4537	Dub Clap St
E1	5802	Dub SD 2 St
F1	6481	Dub Tom Mn
F#1	6167	Dub HH 2 Mn
G1	5828	Flam Mn
G#1	6166	Dub HH 1 Mn
A1	5031	Dub BD 3 Mn
A#1	6168	Dub OHH 1 St
B1	5029	Dub BD 1 Mn
C2	5033	Dub BD 5 St
C#2	6654	Dub Crash Mn
D2	4647	Dub Misc 01 St
D#2	6676	Dub Ride St
E2	2768	Dub Fx1 Mn
F2	2769	Dub Fx2 St
F#2	4604	Electric Tambourine3
G2	4605	Electric Tambourine4
G#2	4648	Dub Misc 02 St
A2	4650	Dub Misc 04 St
A#2	4649	Dub Misc 03 St
B2	6169	Dub OHH 2 Mn
C3	4651	Dub Misc 05 St
C#3	4652	Dub Misc 06 St
D3	4653	Dub Misc 07 St
D#3	4654	Dub Misc 08 St
E3	4655	Dub Misc 09 St
F3	4656	Dub Misc 10 St
F#3	5034	Dub BD 6 St
G3	4702	Tick 01 St
G#3	4703	Tick 02 St
A3	4595	Elec Shaker1 St
A#3	4596	Elec Shaker2 St
B3	4597	Elec Shaker3 St
C4	4598	Elec Shaker4 St
C#4	4599	Elec Shaker5 St
D4	4699	Rattle Mn
D#4	5803	Dub SD 3 Mn
E4	4609	Elec Wood Block1 St
F4	4611	Elec Wood Block3 St
F#4	4610	Elec Wood Block2 St
G4	4612	Elec Wood Block4 St
G#4	5804	Dub SD 4 Mn
A4	5805	Dub SD 5 St

DUB Kit 2

Note	Wave Number	Wave Name
B0	5030	Dub BD 2 St
C1	5032	Dub BD 4 Mn
C#1	4606	Elec Stick1 Mn
D1	5801	Dub SD 1 St
D#1	4537	Dub Clap St
E1	5802	Dub SD 2 St
F1	6481	Dub Tom Mn
F#1	6167	Dub HH 2 Mn
G1	5828	Flam Mn
G#1	6166	Dub HH 1 Mn
A1	5031	Dub BD 3 Mn
A#1	6168	Dub OHH 1 St
B1	5029	Dub BD 1 Mn
C2	5033	Dub BD 5 St
C#2	6654	Dub Crash Mn
D2	4647	Dub Misc 01 St
D#2	6676	Dub Ride St
E2	2768	Dub Fx1 Mn
F2	2769	Dub Fx2 St
F#2	4604	Electric Tambourine3
G2	4605	Electric Tambourine4
G#2	4648	Dub Misc 02 St
A2	4650	Dub Misc 04 St
A#2	4649	Dub Misc 03 St
B2	6169	Dub OHH 2 Mn
C3	4651	Dub Misc 05 St
C#3	4652	Dub Misc 06 St
D3	4653	Dub Misc 07 St
D#3	4654	Dub Misc 08 St
E3	4655	Dub Misc 09 St
F3	4656	Dub Misc 10 St
F#3	5034	Dub BD 6 St
G3	4702	Tick 01 St
G#3	4703	Tick 02 St
A3	4595	Elec Shaker1 St
A#3	4596	Elec Shaker2 St
B3	4597	Elec Shaker3 St
C4	4598	Elec Shaker4 St
C#4	4599	Elec Shaker5 St
D4	4699	Rattle Mn
D#4	5803	Dub SD 3 Mn
E4	4609	Elec Wood Block1 St
F4	4611	Elec Wood Block3 St
F#4	4610	Elec Wood Block2 St
G4	4612	Elec Wood Block4 St
G#4	5804	Dub SD 4 Mn
A4	5805	Dub SD 5 St

Tricky Hip Hop Kit

Note	Wave Number	Wave Name
C0	4989	Bd ElecClick
C#0	5584	Sd LW Brush Tap1 Sw
D0	5590	Sd LW Brush Swir1
D#0	5586	Sd LW Brush Slap Sw
E0	5593	Sd LW Brush Swir4
F0	7014	HH Trendy 25 St
F#0	7348	PC Trendy 100 St
G0	7183	Clap Trendy 3 St
G#0	6838	Sd Trendy 6 St
A0	6750	Bd Trendy 61 St
A#0	6839	Sd Trendy 7 St
B0	6756	Bd Trendy 67 St
C1	6757	Bd Trendy 68 St
C#1	6878	Sd Trendy 46 Mn
D1	6875	Sd Trendy 43 St
D#1	7222	Clap Trendy 42 Mn
E1	6881	Sd Trendy 49 St
F1	7109	Tom Trendy 29 St
F#1	7032	HH Trendy 43 Mn
G1	7108	Tom Trendy 28 Mn
G#1	7016	HH Trendy 27 St
A1	7443	PC Trendy 195 St
A#1	7027	HH Trendy 38 St
B1	7110	Tom Trendy 30 St
C2	7112	Tom Trendy 32 St
C#2	7124	Cym Trendy 12 St
D2	7075	Tom Trendy 11 St
D#2	7174	Cym Trendy 62 St
E2	7163	Cym Trendy 51 St
F2	7126	Cym Trendy 14 St
F#2	7261	PC Trendy 13 St
G2	7054	HH Trendy 65 St
G#2	7362	PC Trendy 114 St
A2	7123	Cym Trendy 11 St
A#2	7422	PC Trendy 174 St
B2	7177	Cym Trendy 65 St
C3	7397	PC Trendy 149 St
C#3	7400	PC Trendy 152 St
D3	7401	PC Trendy 153 St
D#3	7404	PC Trendy 156 St
E3	7402	PC Trendy 154 St
F3	7339	PC Trendy 91 St
F#3	7340	PC Trendy 92 St
G3	7369	PC Trendy 121 St
G#3	7370	PC Trendy 122 St
A3	7306	PC Trendy 58 St
A#3	7377	PC Trendy 129 St
B3	7613	FX Trendy 166 St
C4	7614	FX Trendy 167 St
C#4	7403	PC Trendy 155 St
D4	7433	PC Trendy 185 St
D#4	7367	PC Trendy 119 St
E4	7242	Snap Trendy 15 St
F4	7243	Snap Trendy 16 St
F#4	7407	PC Trendy 159 Mn
G4	7421	PC Trendy 173 St
G#4	7329	PC Trendy 81 St
A4	7310	PC Trendy 62 St
A#4	7376	PC Trendy 128 St
B4	7368	PC Trendy 120 St
C5	7371	PC Trendy 123 St
C#5	7507	FX Trendy 60 St
D5	7508	FX Trendy 61 St
D#5	7509	FX Trendy 62 St
E5	7510	FX Trendy 63 St
F5	7511	FX Trendy 64 St
F#5	7512	FX Trendy 65 St
G5	7326	PC Trendy 78 St
G#5	7325	PC Trendy 77 St
A5	7323	PC Trendy 75 St
A#5	7324	PC Trendy 76 St
B5	7320	PC Trendy 72 St
C6	7319	PC Trendy 71 St

European EDM Kit 1

Note	Wave Number	Wave Name
C0	5799	Sd TB Comp1
C#0	5798	Sd TB Q
D0	2725	Abstract Fx1
D#0	2728	Abstract Fx4
E0	2731	Damage Fx1
F0	2730	Bazer Fx
F#0	2733	Damage Fx3
G0	2726	Abstract Fx2
G#0	2757	Electric FX Perc8
A0	5027	Bd Body2
A#0	5793	Sd ShortDry2
B0	5024	Bd LongBass
C1	5015	Bd EDM03
C#1	5794	Sd ShortGate1
D1	5789	Sd Clap3
D#1	4532	RX11 Clap
E1	5787	Sd Clap1
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	Pl Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	Pl Crash 16
G#2	2707	Hi Q2
A2	6542	Pl Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4900	Bd DanceGate1
C#5	5023	Bd EDM Gate
D5	4901	Bd DanceGate2
D#5	2741	Damage Fx11
E5	5004	Bd Stack3
F5	5022	Bd EDM10
F#5	5520	Sd BreakRim
G5	2764	Electric FX Perc15
G#5	2745	Noize Fx2
A5	2738	Damage Fx8
A#5	2755	Electric FX Perc6
B5	2753	Electric FX Perc4
C6	2758	Electric FX Perc9

European EDM Kit 2

Note	Wave Number	Wave Name
C0	5025	Bd Body1 Hard
C#0	5026	Bd Body1 Soft
D0	2726	Abstract Fx2
D#0	2730	Bazer Fx
E0	2732	Damage Fx2
F0	2736	Damage Fx6
F#0	2737	Damage Fx7
G0	2728	Abstract Fx4
G#0	2758	Electric FX Perc9
A0	5021	Bd EDM09
A#0	5795	Sd ShortGate2
B0	5023	Bd EDM Gate
C1	5016	Bd EDM04
C#1	5797	Sd TB Gate
D1	5799	Sd TB Comp1
D#1	4532	RX11 Clap
E1	5794	Sd ShortGate1
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	Pl Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	Pl Crash 16
G#2	2707	Hi Q2
A2	6542	Pl Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4995	Bd HrdSpecial
C#5	4996	Bd Hybrid1
D5	4997	Bd Hybrid2
D#5	4998	Bd NewPop1
E5	4999	Bd NewPop2
F5	5000	Bd NewPop3
F#5	5792	Sd ShortDry1
G5	2761	Electric FX Perc12
G#5	2728	Abstract Fx4
A5	2725	Abstract Fx1
A#5	2751	Electric FX Perc2
B5	2757	Electric FX Perc8
C6	2764	Electric FX Perc15

Straight Dance Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	6860	Sd Trendy 28 St
D0	6849	Sd Trendy 17 St
D#0	6851	Sd Trendy 19 St
E0	6854	Sd Trendy 22 St
F0	6853	Sd Trendy 21 St
F#0	6859	Sd Trendy 27 St
G0	6857	Sd Trendy 25 St
G#0	6855	Sd Trendy 23 St
A0	6714	Bd Trendy 25 St
A#0	6852	Sd Trendy 20 St
B0	6716	Bd Trendy 27 St
C1	6728	Bd Trendy 39 St
C#1	6919	Sd Trendy 87 St
D1	6915	Sd Trendy 83 St
D#1	7203	Clap Trendy 23 St
E1	6947	Sd Trendy 115 St
F1	7083	Tom Trendy 14 Lo Mn
F#1	6996	HH Trendy 7 St
G1	7083	Tom Trendy 14 Lo Mn
G#1	7002	HH Trendy 13 St
A1	7082	Tom Trendy 14 Mid Mn
A#1	7003	HH Trendy 14 St
B1	7081	Tom Trendy 14 Hi Mn
C2	7081	Tom Trendy 14 Hi Mn
C#2	7160	Cym Trendy 48 St
D2	7081	Tom Trendy 14 Hi Mn
D#2	7166	Cym Trendy 54 St
E2	7144	Cym Trendy 32 Mn
F2	7151	Cym Trendy 39 Mn
F#2	7284	PC Trendy 36 St
G2	7143	Cym Trendy 31 Mn
G#2	7287	PC Trendy 39 St
A2	7158	Cym Trendy 46 St
A#2	7568	FX Trendy 121 St
B2	7170	Cym Trendy 58 Mn
C3	7344	PC Trendy 96 St
C#3	7345	PC Trendy 97 St
D3	7278	PC Trendy 30 St
D#3	7281	PC Trendy 33 St
E3	7299	PC Trendy 51 St
F3	7279	PC Trendy 31 St
F#3	7280	PC Trendy 32 St
G3	7282	PC Trendy 34 St
G#3	7285	PC Trendy 37 St
A3	4626	House Cabasa1 Mn
A#3	3182	House Shaker2 Mn
B3	7287	PC Trendy 39 St
C4	7288	PC Trendy 40 St
C#4	7293	PC Trendy 45 St
D4	7294	PC Trendy 46 St
D#4	3220	House WB3 Mn
E4	7295	PC Trendy 47 St
F4	7559	FX Trendy 112 St
F#4	7560	FX Trendy 113 St
G4	7561	FX Trendy 114 St
G#4	7562	FX Trendy 115 St
A4	7564	FX Trendy 117 St
A#4	7563	FX Trendy 116 St
B4	7565	FX Trendy 118 St
C5	7566	FX Trendy 119 Mn
C#5	6717	Bd Trendy 28 St
D5	6718	Bd Trendy 29 Mn
D#5	6722	Bd Trendy 33 St
E5	6723	Bd Trendy 34 St
F5	6724	Bd Trendy 35 St
F#5	6725	Bd Trendy 36 St
G5	6726	Bd Trendy 37 St
G#5	6727	Bd Trendy 38 St
A5	6730	Bd Trendy 41 St
A#5	6731	Bd Trendy 42 St
B5	6733	Bd Trendy 44 St
C6	6711	Bd Trendy 22 St

Dancefloor Kit

Note	Wave Number	Wave Name
C0	5799	Sd TB Comp1
C#0	5798	Sd TB Q
D0	2725	Abstract Fx1
D#0	2728	Abstract Fx4
E0	2731	Damage Fx1
F0	2730	Bazer Fx
F#0	2733	Damage Fx3
G0	2726	Abstract Fx2
G#0	2757	Electric FX Perc8
A0	5018	Bd EDM06
A#0	5792	Sd ShortDry1
B0	5004	Bd Stack3
C1	5010	Bd TB Comp
C#1	5794	Sd ShortGate1
D1	5788	Sd Clap2
D#1	4532	RX11 Clap
E1	5798	Sd TB Q
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	PI Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	PI Crash 16
G#2	2707	Hi Q2
A2	6542	PI Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4900	Bd DanceGate1
C#5	5023	Bd EDM Gate
D5	4901	Bd DanceGate2
D#5	2741	Damage Fx11
E5	5004	Bd Stack3
F5	5022	Bd EDM10
F#5	5520	Sd BreakRim
G5	2764	Electric FX Perc15
G#5	2745	Noize Fx2
A5	2738	Damage Fx8
A#5	2755	Electric FX Perc6
B5	2753	Electric FX Perc4
C6	2758	Electric FX Perc9

Dancefloor Kit 2

Note	Wave Number	Wave Name
C0	5799	Sd TB Comp1
C#0	5798	Sd TB Q
D0	2725	Abstract Fx1
D#0	2728	Abstract Fx4
E0	2731	Damage Fx1
F0	2730	Bazer Fx
F#0	2733	Damage Fx3
G0	2726	Abstract Fx2
G#0	2757	Electric FX Perc8
A0	5018	Bd EDM06
A#0	5792	Sd ShortDry1
B0	5004	Bd Stack3
C1	5010	Bd TB Comp
C#1	5794	Sd ShortGate1
D1	5788	Sd Clap2
D#1	4532	RX11 Clap
E1	5798	Sd TB Q
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	PI Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	PI Crash 16
G#2	2707	Hi Q2
A2	6542	PI Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4900	Bd DanceGate1
C#5	5023	Bd EDM Gate
D5	4901	Bd DanceGate2
D#5	2741	Damage Fx11
E5	5004	Bd Stack3
F5	5022	Bd EDM10
F#5	5520	Sd BreakRim
G5	2764	Electric FX Perc15
G#5	2745	Noize Fx2
A5	2738	Damage Fx8
A#5	2755	Electric FX Perc6
B5	2753	Electric FX Perc4
C6	2758	Electric FX Perc9

Psychedelic Dub Kit

Note	Wave Number	Wave Name
C0	5025	Bd Body1 Hard
C#0	5026	Bd Body1 Soft
D0	2726	Abstract Fx2
D#0	2730	Bazer Fx
E0	2732	Damage Fx2
F0	2736	Damage Fx6
F#0	2737	Damage Fx7
G0	2728	Abstract Fx4
G#0	2758	Electric FX Perc9
A0	5021	Bd EDM09
A#0	5800	Sd TB Comp2
B0	4901	Bd DanceGate2
C1	5004	Bd Stack3
C#1	5797	Sd TB Gate
D1	5791	Sd NineComp
D#1	4532	RX11 Clap
E1	5788	Sd Clap2
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	PI Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	PI Crash 16
G#2	2707	Hi Q2
A2	6542	PI Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4995	Bd HrdSpecial
C#5	4996	Bd Hybrid1
D5	4997	Bd Hybrid2
D#5	4998	Bd NewPop1
E5	4999	Bd NewPop2
F5	5000	Bd NewPop3
F#5	5792	Sd ShortDry1
G5	2761	Electric FX Perc12
G#5	2728	Abstract Fx4
A5	2725	Abstract Fx1
A#5	2751	Electric FX Perc2
B5	2757	Electric FX Perc8
C6	2764	Electric FX Perc15

Brachial Kit

Note	Wave Number	Wave Name
C0	2748	Shimmer Fx
C#0	2746	Noize Rize1
D0	2743	HiQ Rize
D#0	2742	Dist Synth Fx
E0	2729	Abstract Fx5
F0	2728	Abstract Fx4
F#0	2727	Abstract Fx3
G0	2726	Abstract Fx2
G#0	2744	Noize Fx1
A0	4900	Bd DanceGate1
A#0	2733	Damage Fx3
B0	2741	Damage Fx11
C1	5004	Bd Stack3
C#1	2739	Damage Fx9
D1	2735	Damage Fx5
D#1	2725	Abstract Fx1
E1	2733	Damage Fx3
F1	2734	Damage Fx4
F#1	6159	HH ClosedNine
G1	2735	Damage Fx5
G#1	6160	HH PedalNine
A1	2731	Damage Fx1
A#1	6161	HH OpenNine
B1	2732	Damage Fx2
C2	2740	Damage Fx10
C#2	6541	PI Crash 15
D2	2739	Damage Fx9
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	2750	Electric FX Perc1
G2	6542	PI Crash 16
G#2	2487	Voc Enjoying This
A2	6542	PI Crash 16
A#2	2752	Electric FX Perc3
B2	6605	Fine Ride Edge
C3	2753	Electric FX Perc4
C#3	2754	Electric FX Perc5
D3	2755	Electric FX Perc6
D#3	2756	Electric FX Perc7
E3	2757	Electric FX Perc8
F3	2758	Electric FX Perc9
F#3	4593	PC Shaker1
G3	2760	Electric FX Perc11
G#3	2761	Electric FX Perc12
A3	2762	Electric FX Perc13
A#3	2765	Electric FX Perc16
B3	2763	Electric FX Perc14
C4	2478	Voc Beat The Band
C#4	2479	Voc Born Happy
D4	2480	Voc Close Eyes
D#4	2481	Voc Complication
E4	2482	Voc Day Life
F4	2483	Voc DeepWater
F#4	2484	Voc Desperation
G4	2485	Voc Destiny
G#4	2489	Voc Forbidden Dreams
A4	2487	Voc Enjoying This
A#4	2488	Voc Feel Good
B4	2489	Voc Forbidden Dreams
C5	2490	Voc Freezing Cold
C#5	2491	Voc Infinity
D5	2492	Voc Love Is Blind
D#5	2493	Voc Mystery
E5	2494	Voc Reality
F5	2497	Voc Yesterday
F#5	2495	Voc Revolution
G5	2496	Voc Sweeping
G#5	2717	Granular Loop1
A5	2718	Granular Loop2
A#5	2720	Granular Loop4
B5	2721	Granular Loop5
C6	2632	Epic FX Loop4

Epic Kit

Note	Wave Number	Wave Name
C0	2748	Shimmer Fx
C#0	2746	Noize Rize1
D0	2743	HiQ Rize
D#0	2742	Dist Synth Fx
E0	2729	Abstract Fx5
F0	2728	Abstract Fx4
F#0	2727	Abstract Fx3
G0	2726	Abstract Fx2
G#0	2744	Noize Fx1
A0	4900	Bd DanceGate1
A#0	2733	Damage Fx3
B0	2741	Damage Fx11
C1	4901	Bd DanceGate2
C#1	2741	Damage Fx11
D1	2737	Damage Fx7
D#1	2726	Abstract Fx2
E1	2738	Damage Fx8
F1	2733	Damage Fx3
F#1	6164	HH TecClosed2
G1	2732	Damage Fx2
G#1	6163	HH TecOpen1
A1	2731	Damage Fx1
A#1	6165	HH TecOpen2
B1	2732	Damage Fx2
C2	2740	Damage Fx10
C#2	6541	PI Crash 15
D2	2739	Damage Fx9
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	2750	Electric FX Perc1
G2	6542	PI Crash 16
G#2	2751	Electric FX Perc2
A2	6542	PI Crash 16
A#2	2752	Electric FX Perc3
B2	6605	Fine Ride Edge
C3	2753	Electric FX Perc4
C#3	2754	Electric FX Perc5
D3	2755	Electric FX Perc6
D#3	2756	Electric FX Perc7
E3	2757	Electric FX Perc8
F3	2758	Electric FX Perc9
F#3	4593	PC Shaker1
G3	2760	Electric FX Perc11
G#3	2761	Electric FX Perc12
A3	2762	Electric FX Perc13
A#3	2765	Electric FX Perc16
B3	2763	Electric FX Perc14
C4	2478	Voc Beat The Band
C#4	2479	Voc Born Happy
D4	2480	Voc Close Eyes
D#4	2481	Voc Complication
E4	2482	Voc Day Life
F4	2483	Voc DeepWater
F#4	2484	Voc Desperation
G4	2485	Voc Destiny
G#4	2486	Voc Dreamin Offset U
A4	2487	Voc Enjoying This
A#4	2488	Voc Feel Good
B4	2489	Voc Forbidden Dreams
C5	2490	Voc Freezing Cold
C#5	2491	Voc Infinity
D5	2492	Voc Love Is Blind
D#5	2493	Voc Mystery
E5	2494	Voc Reality
F5	2497	Voc Yesterday
F#5	2495	Voc Revolution
G5	2496	Voc Sweeping
G#5	2717	Granular Loop1
A5	2718	Granular Loop2
A#5	2720	Granular Loop4
B5	2721	Granular Loop5
C6	2632	Epic FX Loop4

Arabic Mixed Kit 2

Note	Wave Number	Wave Name
C#0	4583	Analog Conga
D0	4583	Analog Conga
D#0	4583	Analog Conga
E0	3223	Vibraslap3
F0	4992	Bd Techno L
F#0	5782	Side Stick Analog
G0	5783	Snare Techno
G#0	3457	Guiro2 Long
A0	4993	Bd Techno Q
A#0	5560	Std Open Rimshot
B0	5785	NeoSnare2
C1	4994	Bd NeoKick
C#1	5784	NeoSnare1
D1	5786	NeoSnare3
D#1	3238	Hand Clap4
E1	5558	Std Snare
F1	6406	Std Tom Floor M
F#1	6095	Neo HiHat Closed
G1	6404	Std Tom Low L
G#1	6096	Neo HiHat HalfOpen
A1	6403	Std Tom Low H
A#1	6097	Neo HiHat Open
B1	6402	Std Tom Mid
C2	6402	Std Tom Mid
C#2	6539	Std Crash1
D2	6401	Std Tom High
D#2	6098	Dance HiHat Open
E2	6689	Reverse Cymbal2
F2	3390	Timbale4 Lo
F#2	3295	Conga3 Hi Open
G2	3390	Timbale4 Lo
G#2	3296	Conga3 Hi Mute
A2	3191	Tambourine3
A#2	3297	Conga3 Lo Open
B2	3570	Cowbell4
C3	3561	Claves3
C#3	3347	Bongo3 Hi Open
D3	3214	Wood Block
D#3	3348	Bongo3 Lo Open
E3	3214	Wood Block
F3	3699	Kurdish Dohol1 Lo
F#3	3414	Cabasa4
G3	3700	Kurdish Dohol1 Hi
G#3	3171	Std Shaker
A3	3246	Finger Snap2
A#3	3403	Maracas2
B3	3247	Finger Snap3
C4	3909	Twaisat3
C#4	3907	Twaisat1
D4	3908	Twaisat2
D#4	3909	Twaisat3
E4	3910	Twaisat4
F4	3658	Tablah Small Dom
F#4	3902	Tar Barashim Dom
G4	3659	Tablah Small Snap
G#4	3903	Tar Barashim Sak
A4	3660	Tablah Small Sak
A#4	3904	Tar Barashim Tak
B4	3661	Tablah Small Tik
C5	3669	Tablah Big Dom
C#5	3905	Segal Dom
D5	3737	Merwas Sak
D#5	3906	Segal Tak
E5	3671	Tablah Big Sak
F5	3662	Tablah Dom
F#5	3663	Tablah Tak1
G5	3672	Tablah Tremolo
G#5	3664	Tablah Tak2
A5	3665	Tablah Tik1
A#5	3668	Tablah Sak
B5	3667	Tablah Tik3
C6	3666	Tablah Tik2

Brazil Kit 1

Note	Wave Number	Wave Name
C0	3588	Repique2 St Centr
C#0	3591	Repique2 St RmSht
D0	3589	Repique2 St Hd Slap
D#0	3590	Repique2 St Rim
E0	3592	Repique3 St Centr
F0	3593	Repique3 St RmSht
F#0	3490	Zabmba Mute RH
G0	3489	Zabmba Open RH
G#0	3488	Zabmba STick LH
A0	3478	Surdo5-1 Mute
A#0	3477	Surdo5-1 Open
B0	3476	Surdo5-1 Stop
C1	3479	Surdo5-2 Sdstck
C#1	5655	Caixa1 RimShot
D1	5654	Caixa1 Center
D#1	3427	Tumbo5 Rim Close
E1	3426	Tumbo5 Center Open
F1	3425	Tumbo5 Finger Back
F#1	3424	Tumbo4 Down
G1	3423	Tumbo4 Up
G#1	3475	Surdo4 Mute
A1	3474	Surdo4 Open
A#1	3473	Surdo4 Stop
B1	3472	Surdo3 Mute
C2	3471	Surdo3 Open
C#2	3470	Surdo3 Stop
D2	3487	Tntan2 Close RH
D#2	3486	Tntan2 Open RH
E2	3485	Tntan2 Slap RH
F2	3484	Tntan2 Body LH
F#2	3436	Pandeiro2 LThmb Cls
G2	3435	Pandeiro2 LThmb Opn
G#2	3433	Pandeiro2 LToe Rim
A2	3432	Pandeiro2 LHeel
A#2	3434	Pandeiro2 LSlap
B2	3437	Pandeiro2 LRoll
C3	3464	Reco1
C#3	3253	Chocal Forward
D3	3418	Caixixi 3
D#3	3389	Timbale3 Hi Rim
E3	3388	Timbale3 Lo Rim
F3	3387	Timbale3 Hi
F#3	3386	Timbale3 Lo
G3	3450	Agogo2 Bell1
G#3	3451	Agogo2 Bell2
A3	3452	Agogo3 Click
A#3	3453	Agogo4 Click
B3	3412	Cabasa2
C4	3398	Ganza2 Forward1
C#4	3597	Repique4 Anel Rim LH
D4	3596	Repique4 Anel Rim RH
D#4	3595	Repique4 Anel Mute
E4	3594	Repique4 Anel Open
F4	3320	Cuica2 Hi
F#4	3319	Cuica2 Med
G4	3318	Cuica2 Low
G#4	3228	Triangle2 Mute
A4	3227	Triangle2 Open
A#4	3600	Repique5 Mao Slap
B4	3599	Repique5 Mao Rim
C5	3598	Repique5 Mao Open
C#5	3564	Apito Hi Short
D5	3563	Apito Lo Short

Brazil Kit 2

Note	Wave Number	Wave Name
C0	3588	Repique2 St Centr
C#0	3591	Repique2 St RmSht
D0	3589	Repique2 St Hd Slap
D#0	3590	Repique2 St Rim
E0	3592	Repique3 St Centr
F0	3593	Repique3 St RmSht
F#0	3490	Zabmba Mute RH
G0	3489	Zabmba Open RH
G#0	3488	Zabmba STick LH
A0	3478	Surdo5-1 Mute
A#0	3477	Surdo5-1 Open
B0	3476	Surdo5-1 Stop
C1	3479	Surdo5-2 Sdstck
C#1	5657	Caixa2 RimShot
D1	5656	Caixa2 Center
D#1	3427	Tumbo5 Rim Close
E1	3426	Tumbo5 Center Open
F1	3425	Tumbo5 Finger Back
F#1	3424	Tumbo4 Down
G1	3423	Tumbo4 Up
G#1	3475	Surdo4 Mute
A1	3474	Surdo4 Open
A#1	3473	Surdo4 Stop
B1	3472	Surdo3 Mute
C2	3471	Surdo3 Open
C#2	3470	Surdo3 Stop
D2	3483	Tntan1 Open RH
D#2	3482	Tntan1 Thmb Open RH
E2	3481	Tntan1 Slap RH
F2	3480	Tntan1 Body
F#2	3442	Pandeiro2 CThmb Cls
G2	3441	Pandeiro2 CThmb Opn
G#2	3439	Pandeiro2 CToLo Opn
A2	3438	Pandeiro2 CHeel
A#2	3440	Pandeiro2 CSlap
B2	3443	Pandeiro2 CRoll Lng
C3	3465	Reco2
C#3	3253	Chocal Forward
D3	3418	Caxixi 3
D#3	3389	Timbale3 Hi Rim
E3	3388	Timbale3 Lo Rim
F3	3387	Timbale3 Hi
F#3	3386	Timbale3 Lo
G3	3166	ShakerC 2 Sw
G#3	3165	ShakerC 1 Sw
A3	3419	Afoxe Open
A#3	3413	Cabasa3
B3	3412	Cabasa2
C4	3399	Ganza2 Forward2
C#4	3597	Repique4 Anel Rim LH
D4	3596	Repique4 Anel Rim RH
D#4	3595	Repique4 Anel Mute
E4	3594	Repique4 Anel Open
F4	3320	Cuica2 Hi
F#4	3319	Cuica2 Med
G4	3318	Cuica2 Low
G#4	3230	Triangle3 Mute
A4	3229	Triangle3 Open
A#4	3600	Repique5 Mao Slap
B4	3599	Repique5 Mao Rim
C5	3598	Repique5 Mao Open
C#5	3564	Apito Hi Short
D5	3563	Apito Lo Short

Turkish St Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	3915	AsmaDavul L Side 1-2
D0	3919	AsmaDavul R Side 1-2
D#0	3912	AsmaDavulSideBdy 1-2
E0	3918	AsmaDavul Both Sides
F0	3933	KoltukDavulOpenFlam
F#0	3925	KoltukDavulTekeOp1-3
G0	3929	KoltukDavulTekOp 1-3
G#0	3922	Koltuk Davul Dum 1-2
A0	3968	Bendir Teke OpenFlam
A#0	3975	Bendir1 Teke Dead1-2
B0	3972	Bendir1 Tek Dead1-2
C1	3964	Bendir Teke 1-3
C#1	3960	Bendir Tek 1-3
D1	3969	Bendir Slap 1-2
D#1	3957	Bendir Dum 1-2
E1	4055	Sagat1 R Close 1-2
F1	4054	Sagat1 R Open
F#1	4059	Sagat1 L Close 1-2
G1	4058	Sagat1 L Open
G#1	4085	Riq1 Teke Flam
A1	4079	Riq1 Tek Mute 1-2
A#1	4082	Riq1 Teke Damped 1-2
B1	4086	Riq1 TekMtMed 1-2
C2	4072	Riq1 Dum Mute
C#2	4096	Riq1 Cymbal 1-2
D2	4099	Riq1 Cymbal Mute 1-2
D#2	4109	Riq1 Tremolo
E2	4103	Riq1 ShakeA 1-2
F2	4106	Riq1 ShakeB 1-2
F#2	4095	Riq1 Tek Flam
G2	4102	Riq1 Full Open
G#2	4092	Riq1 TekeOpnShrt 1-2
A2	4089	Riq1 TekOpnShrt 1-2
A#2	4076	Riq1 Tek Open 1-2
B2	4073	Riq1 Dum Open 1-2
C3	4179	Hollo FingerDead 1-2
C#3	4176	Hollo Slap 1-2
D3	4173	Hollo Dum 1-2
D#3	4456	Kasik 1-2
E3	4460	Kasik Flam
F3	4200	Tombek Tek Dead Sw
F#3	4202	Tombek Tek Flam
G3	4206	Tombek Teke 1-3
G#3	4196	TombekTekeOthFng 1-3
A3	4192	TombekTekeIndFng 1-3
A#3	4188	Tombek Tek 1-3
B3	4185	Tombek Slap 1-2
C4	4203	Tombek Slap Med 1-2
C#4	4182	Tombek Dum 1-2
D4	4292	Darbuka1 Roll Close
D#4	4290	Darbuka1 RollOpen
E4	4291	Darbuka1 TekeDmpFlam
F4	4293	Darbuka1 TekDead 1-3
F#4	4297	Darbuka1 TekDampd1-3
G4	4289	Darbuka1 TekeOpnFlam
G#4	4301	Darbuka1 TekeOpen1-3
A4	4275	Darb1TekeOthFngA 1-3
A#4	4267	Darb1TekeIndFngA 1-3
B4	4259	Darbuka1 Teka1 1-3
C5	4279	Darb1TekeOthFngB 1-3
C#5	4271	Darb1TekeIndFngB 1-3
D5	4263	Darbuka1 TekB 1-3
D#5	4286	Darbuka1 SlapMed 1-2
E5	4283	Darbuka1 Slap 1-2
F5	4256	Darbuka1 Dum 1-2
F#5	4469	Bonges Tek Roll
G5	4470	Bonges Flam
G#5	4468	Bonges Tek Flam
A5	4464	Bonges Tek 1-2
A#5	4467	Bonges Slap
B5	4471	Bonges Flam Hi
C6	4461	Bonges Dum 1-2

New Arabic Kit 1

Note	Wave Number	Wave Name
C#0	4062	Sagat2 Close
D0	4064	Sagat3 Close
D#0	4063	Sagat3 Open
E0	4066	Sagat4 Close
F0	4065	Sagat4 Open
F#0	4168	Mazhar Dom Open
G0	4169	Mazhar Dom Close
G#0	4171	Mazhar Tak Close
A0	4170	Mazhar Tak Open
A#0	4172	Mazhar Sak Close
B0	4394	Katem1 Dom1
C1	4396	Katem1 Tak Open1
C#1	4395	Katem1 Dom2
D1	4397	Katem1 Tak Open2
D#1	4398	Katem1 Sak1
E1	3679	Tabel Saaidi Dom
F1	3626	Djembe4 Tak1
F#1	3680	Tabel Saaidi Tak
G1	3627	Djembe4 Tak2
G#1	3682	Tabel Dom
A1	3683	Tabel Tak
A#1	3684	Tabel Tak Wood
B1	4112	Riq3 Dom Close
C2	4111	Riq3 Dom Open
C#2	4114	Riq3 Tak Close1
D2	4113	Riq3 Tak Open
D#2	4115	Riq3 Tak Close2
E2	4116	Riq3 Tak Snouj
F2	4110	Riq2 Sak
F#2	4117	Riq3 Snouj Close1
G2	4118	Riq3 Snouj Close2
G#2	4120	Riq3 Flam
A2	4119	Riq3 Sak
A#2	4121	Riq3 Snouj Roll
B2	4305	Darbuka2 Dom LH
C3	4306	Darbuka2 Dom RH
C#3	4308	Darbuka2 TakLIndxFng
D3	4309	Darbuka2 TakRIndxFng
D#3	4307	Darbuka2 Sak1
E3	4310	Darbuka2 TakLRingFng
F3	4312	Darbuka2 Tap1
F#3	4313	Darbuka2 Tap2
G3	4314	Darbuka2 Flam1
G#3	4316	Darbuka2 Tak Roll
A3	4519	Arabic Zalgouta Opn
A#3	4520	Arabic Zalgouta Cls
B3	4366	Daholla1 Dom LH
C4	4367	Daholla1 Dom RH
C#4	4368	Daholla1 Tak1
D4	4369	Daholla1 Tak2
D#4	4370	Daholla1 Tak3
E4	4371	Daholla1 Tak4
F4	4372	Daholla1 Sak
F#4	4373	Daholla1 Rak1
G4	3239	Arabic Hand Clap
G#4	4375	Daholla1 Flam1
A4	4376	Daholla1 Flam2
A#4	4377	Daholla1 Tak Roll
B4	3634	Tabla2 Dom & Tak
C5	3635	Tabla2 Dom
C#5	3636	Tabla2 Tak1
D5	3637	Tabla2 Tak2
D#5	3638	Tabla2 Tak3
E5	3639	Tabla2 Tak4
F5	3640	Tabla2 Sak
F#5	3641	Tabla2 Rak1
G5	3642	Tabla2 Rak2
G#5	3643	Tabla2 Flam1
A5	3644	Tabla2 Flam2
A#5	3645	Tabla2 Tak Roll
B5	3624	Djembe4 Dom1
C6	3625	Djembe4 Dom2

New Arabic Kit 2

Note	Wave Number	Wave Name
C1	3978	Bendir2 Lrg Dom Opn1
C#1	3979	Bendir2 Lrg Dom Opn2
D1	3980	Bendir2 Lrg Dom Cls
D#1	3981	Bendir2 Lrg Sak1
E1	3982	Bendir2 Lrg Sak2
F1	3983	Bendir2 Lrg Tak Opn1
F#1	3984	Bendir2 Lrg Tak Opn2
G1	3988	Bendir2 Lrg Flam
G#1	3985	Bendir2 Lrg 1
A1	3986	Bendir2 Lrg 2
A#1	3987	Bendir2 Lrg 3
B1	3989	Bendir2 Lrg Flam&Tak
C2	3707	Nakrazan Dom
C#2	3708	Nakrazan Flam
D2	3709	Nakrazan Tak 1
D#2	3710	Nakrazan Tak 2
E2	3711	Nakrazan Tak 3
F2	3712	Nakrazan GlisDn pppp
F#2	3713	Nakrazan GlisDn ppp
G2	3714	Nakrazan GlisDn pp
G#2	3715	Nakrazan GlisDn p
A2	3716	Nakrazan Noise FX
A#2	3717	Nakrazan Roll1
B2	3718	Nakrazan Roll2
C3	4400	Katem2 Dom1
C#3	4401	Katem2 Dom2
D3	4402	Katem2 Tak Open1
D#3	4403	Katem2 Tak Open2
E3	4406	Katem2 Sak
F3	4407	Katem2 Sak Close1
F#3	4408	Katem2 Sak Close2
G3	4409	Katem2 Flam1
G#3	4410	Katem2 Flam2
A3	4404	Katem2 Tak Close1
A#3	4405	Katem2 Tak Close2
B3	4411	Katem2 Trem Dom
C4	4412	Katem2 Med Dom Opn1
C#4	4413	Katem2 Med Dom Opn2
D4	4414	Katem2 Med Dom Opn3
D#4	4415	Katem2 Med Dom Close
E4	4416	Katem2 Med Tak1
F4	4417	Katem2 Med Tak2
F#4	4418	Katem2 Med Sak1
G4	4419	Katem2 Med Sak2
G#4	4422	Katem2 Med Flam
A4	4420	Katem2 Med1
A#4	4421	Katem2 Med2
B4	4423	Katem2 Med Flam&Tak
C5	4424	Katem2 Sml Dom Opn
C#5	4425	Katem2 Sml Dom Cls1
D5	4426	Katem2 Sml Dom Cls2
D#5	4427	Katem2 Sml Tak1
E5	4428	Katem2 Sml Tak2
F5	4429	Katem2 Sml Sak
F#5	4433	Katem2 Sml Flam
G5	4430	Katem2 Sml1
G#5	4431	Katem2 Sml2
A5	4432	Katem2 Sml3
A#5	4434	Katem2 Sml Flam&Tak
B5	4435	Katem2 Sml Fing Tak

New Maghrebi Kit

Note	Wave Number	Wave Name
C0	4031	AlgrnBendir TakDroit
C#0	4032	AlgrnBendir TakGuche
D0	4033	AlgrnBendir Kaf
D#0	4472	AlgrnGalal Daza
E0	4473	AlgrnGalal Daza Gch
F0	4474	AlgrnGalal Taka Drt
F#0	4475	AlgrnGalal Taka Gch
G0	3685	Tunisian Tabel Dom1
G#0	3686	Tunisian Tabel Dom2
A0	3687	Tunisian Tabel Dom3
A#0	3656	Tunisian Tabla Sak
B0	3657	Tunisian Tabla TakMt
C1	3990	Tnsn Bendir1 Dom1
C#1	3991	Tnsn Bendir1 Dom2
D1	3995	Tnsn Bendir1 TakCls1
D#1	3992	Tnsn Bendir1 TakOpn1
E1	3993	Tnsn Bendir1 TakOpn2
F1	3999	Tnsn Bendir1 TakMute
F#1	3996	Tnsn Bendir1 TakCls2
G1	3997	Tnsn Bendir1 TakCls3
G#1	3998	Tnsn Bendir1 TakCls4
A1	3994	Tnsn Bendir1 TakOpn3
A#1	4000	Tnsn Bendir1 Roll
B1	4012	Tnsn Bendir2 DomRoll
C2	4001	Tnsn Bendir2 Dom Opn
C#2	4002	Tnsn Bendir2 Dom Cls
D2	4003	Tnsn Bendir2 TakSml
D#2	4004	Tnsn Bendir2 TakOpn1
E2	4005	Tnsn Bendir2 TakOpn2
F2	4011	Tnsn Bendir2 TakMute
F#2	4008	Tnsn Bendir2 TakCls1
G2	4009	Tnsn Bendir2 TakCls2
G#2	4010	Tnsn Bendir2 TakCls3
A2	4006	Tnsn Bendir2 TakOpn3
A#2	4007	Tnsn Bendir2 TakOpn4
B2	4351	Darbouka Finger Roll
C3	4340	Darbouka Dom
C#3	4341	Darbouka Tak Close1
D3	4342	Darbouka Tak Close2
D#3	4345	Darbouka Tak Open1
E3	4346	Darbouka Tak Open2
F3	4347	Darbouka Tak Open3
F#3	4348	Darbouka Tak Open4
G3	4343	Darbouka Tak Close3
G#3	4344	Darbouka Tak Close4
A3	4349	Darbouka Tak Open5
A#3	4350	Darbouka Tak Open6
B3	4352	Darbouka Hand Roll
C4	4013	Mrcn Bendir1 Dom Opn
C#4	4014	Mrcn Bendir1 Dom Cls
D4	4015	Mrcn Bendir1 Tik Opn
D#4	4016	Mrcn Bendir1 TikCls1
E4	4017	Mrcn Bendir1 TikCls2
F4	4018	Mrcn Bendir1 Zim
F#4	4019	Mrcn Bendir2 Dom Opn
G4	4020	Mrcn Bendir2 Dom Cls
G#4	4022	Mrcn Bendir2 TikCls1
A4	4023	Mrcn Bendir2 TikCls2
A#4	4021	Mrcn Bendir2 Tik Opn
B4	4024	Mrcn Bendir2 Zim
C5	4025	Mrcn Bendir3 Dom Opn
C#5	4026	Mrcn Bendir3 Edg Opn
D5	4028	Mrcn Bendir3 Tik Cls
D#5	4027	Mrcn Bendir3 Tik Opn
E5	4029	Mrcn Bendir3 Tik Stp
F5	3691	Moroccan Tamtam Lo
F#5	3692	Moroccan Tamtam Hi
G5	4436	MoroccanTaarija1 Dom
G#5	4437	MoroccanTaarija1 Tik
A5	4438	MoroccanTaarija2 Dom
A#5	4439	MoroccanTaarija2 Tik
B5	4440	MoroccanTaarija3 Dom
C6	4030	AlgrnBendir Deza

New Khaligi Kit 1

Note	Wave Number	Wave Name
C#0	3354	Khalg Bongo Lo Dom
D0	3356	Khalg Bongo Lo Tak
D#0	3355	Khalg Bongo Lo Sak
E0	3357	Khalg Bongo Hi Snap1
F0	3359	Khalg Bongo Hi Sak
F#0	3358	Khalg Bongo Hi Snap2
G0	3719	Merjaf Group1 Dom
G#0	3720	Merjaf Group1 Sak
A0	3721	Merjaf Group2 Dom
A#0	3722	Merjaf Group2 Tak
B0	3723	Merjaf Group2 Sak
C1	4382	Doholla1 Dom
C#1	4383	Doholla1 Tak
D1	4384	Doholla1 Sak
D#1	3646	Tabla3 Dom
E1	3647	Tabla3 Tak
F1	3648	Tabla3 Sak
F#1	3303	Khalg Conga1 Lo Dom1
G1	3649	Tabla4 Dom
G#1	3650	Tabla4 Tak
A1	3651	Tabla4 Tik
A#1	3652	Tabla4 Sak
B1	3240	Khaligi Hand Clap1
C2	4441	Marad Group1 Dom
C#2	4442	Marad Group1 Tak
D2	4443	Marad Group1 Sak
D#2	4444	Marad Group2 Dom
E2	4445	Marad Group2 Tak
F2	4446	Marad Group2 Sak
F#2	4447	Marad1 Dom
G2	4448	Marad1 Tak
G#2	4449	Marad1 Sak
A2	4450	Marad2 Dom
A#2	4451	Marad2 Tak
B2	4452	Marad2 Sak
C3	4067	Sajat1 Open
C#3	4068	Sajat1 Close
D3	4069	Sajat2 Open
D#3	4070	Sajat2 Close
E3	4453	Sigal Marad Dom
F3	4454	Sigal Marad Tak
F#3	4455	Sigal Marad Sak
G3	4123	Req Dom1
G#3	4127	Req Sajat
A3	4125	Req Open
A#3	4130	Req Roll
B3	3306	Khalg Conga2 Hi Dom
C4	3307	Khalg Conga2 Hi Sak
C#4	3894	Taar Barashim3 Dom
D4	3895	Taar Barashim3 Sak
D#4	3896	Taar Barashim4 Dom
E4	3897	Taar Barashim4 Sak
F4	3899	Sgl TaarBarashim Dom
F#4	3901	Sgl TaarBarashim Tak
G4	3900	Sgl TaarBarashim Sak
G#4	3898	Taar Barashim Shake
A4	4518	Manjoor Normal
A#4	3724	Zeer1 Dom
B4	3725	Zeer1 Flam
C5	3726	Zeer2 Dom1
C#5	3728	Zeer2 Flam
D5	3727	Zeer2 Dom2
D#5	3731	Zeer3 Tak1
E5	3729	Zeer3 Dom1
F5	3730	Zeer3 Dom2
F#5	3732	Zeer3 Tak2
G5	3673	Tabol Low Dom
G#5	3674	Tabol Low Tak
A5	3675	Tabol Low Sak
A#5	3676	Tabol High Dom
B5	3677	Tabol High Tak
C6	3678	Tabol High Sak

New Khaligi Kit 2

Note	Wave Number	Wave Name
C#0	4067	Sajat1 Open
D0	4068	Sajat1 Close
D#0	4069	Sajat2 Open
E0	4070	Sajat2 Close
F0	4453	Sigal Marad Dom
F#0	4125	Req Open
G0	4127	Req Sajat
G#0	4123	Req Dom1
A0	4122	Req Sak
A#0	4130	Req Roll
B0	4518	Manjoor Normal
C1	4385	Doholla2 Dom
C#1	4386	Doholla2 Tak
D1	4387	Doholla2 Sak
D#1	3733	Merwas Group Dom
E1	3734	Merwas Group Sak
F1	3735	Merwas Group Tak
F#1	3736	Merwas Dom
G1	3737	Merwas Sak
G#1	3738	Merwas Tak
A1	3241	Khaligi Hand Clap2
A#1	3242	Khaligi Hand Clap3
B1	3243	Khaligi Hand Clap4
C2	4441	Marad Group1 Dom
C#2	4442	Marad Group1 Tak
D2	4443	Marad Group1 Sak
D#2	4444	Marad Group2 Dom
E2	4445	Marad Group2 Tak
F2	4446	Marad Group2 Sak
F#2	3739	Kaser Flam
G2	3740	Kaser Dom1
G#2	3742	Kaser Sak1
A2	3741	Kaser Dom2
A#2	3743	Kaser Sak2
B2	3898	Taar Barashim Shake
C3	3744	Rana Low1 Dom
C#3	3745	Rana Low2 Dom
D3	3746	Rana Low1 Tak
D#3	3747	Rana Low2 Tak
E3	3748	Rana Low1 Sak
F3	3749	Rana Low2 Sak
F#3	3750	Rana High1 Dom
G3	3751	Rana High2 Dom
G#3	3752	Rana High1 Tak
A3	3753	Rana High2 Tak
A#3	3754	Rana High1 Sak
B3	3755	Rana High2 Sak
C4	3756	Medando1 Dom
C#4	3758	Medando2 Dom
D4	3757	Medando1 Sak
D#4	3759	Medando2 Sak
E4	3760	Medando Flam
F4	3761	Mesando Dom
F#4	3762	Mesando Sak1
G4	3881	Jahla Group Dom
G#4	3882	Jahla Group Sak
A4	3883	Jahla Dom
A#4	3884	Jahla Sak
B4	3391	Tanak Dom1
C5	3392	Tanak Dom2
C#5	3306	Khalg Conga2 Hi Dom
D5	3301	Khalg Conga1 Hi Sak1
D#5	3302	Khalg Conga1 Hi Sak2
E5	3304	Khalg Conga1 Lo Dom2
F5	3305	Khalg Conga1 Lo Sak1
F#5	3767	Ras Low Dom
G5	3769	Ras High Dom
G#5	3768	Ras Low Sak
A5	4453	Sigal Marad Dom
A#5	4454	Sigal Marad Tak
B5	4455	Sigal Marad Sak
C6	3793	Kasoor Dom

New Iranian Kit 1

Note	Wave Number	Wave Name
C0	3870	Udho Tom Hole
C#0	3872	Udho Back1
D0	3874	Udho Chap Body
D#0	3875	Udho Chap Skin
E0	3876	Udho Chap Top Hole
F0	4036	Iran Bendir1 Chap1
F#0	4038	Iran Bendir1 Rim
G0	4035	Iran Bendir1 Slap
G#0	4040	Iran Bendir1 Back
A0	4039	Iran Bendir1 Bck&Chp
A#0	4037	Iran Bendir1 Chap2
B0	4041	Iran Bendir1 Roll
C1	4210	Tombak Tom1
C#1	4219	Tombak Chap1
D1	4220	Tombak Chap2
D#1	4221	Tombak Back1
E1	4224	Tombak Nail Swish
F1	4223	Tombak Pelang
F#1	4228	Tombak Roll 8fingers
G1	4225	Tombak Flam1
G#1	4226	Tombak Flam2
A1	4227	Tombak Flam & Back
A#1	4222	Tombak Back2
B1	4218	Tombak Slap
C2	4132	Daf Tom
C#2	4139	Daf Chain Up1
D2	4137	Daf Back1
D#2	4140	Daf Chain Down1
E2	4143	Daf Chap No Chain
F2	4144	Daf Roll
F#2	4145	Daf Roll Chain
G2	4146	Daf Roll Rim
G#2	4134	Daf Slap Open
A2	4135	Daf Slap Mute
A#2	4389	Naghareh Roll
B2	4388	Naghareh Tom
C3	4391	Naghareh Snap
C#3	4390	Naghareh Chap
D3	4393	Naghareh Flam 3Fing
D#3	4392	Naghareh Back
E3	3695	Dohol Gorz
F3	3696	Dohol Gorz & Tarkeh
F#3	3697	Dohol Tarkeh1
G3	3698	Dohol Tarkeh2
G#3	4128	Req Tom & Zang
A3	4129	Req Chap Zang Open
A#3	4126	Req Slap
B3	4236	Tombak Tempo Roll
C4	4229	Tombak Tempo Tom
C#4	4235	Tombak Tempo ChapFlm
D4	4233	Tombak Tempo Back
D#4	4234	Tombak Tempo Back Mt
E4	4231	Tombak Tempo Chap
F4	4232	Tombak Tempo Chap Mt
F#4	4230	Tombak Tempo Slap
G4	4355	Zarb1 Back
G#4	4356	Zarb1 Flam Open
A4	4354	Zarb1 Chap
A#4	4353	Zarb1 Slap
B4	4357	Zarb1 Roll
C5	4150	Dayereh1 Tom
C#5	4151	Dayereh1 Tom Mute
D5	4152	Dayereh1 Back
D#5	4153	Dayereh1 Back Mute1
E5	4154	Dayereh1 Back Mute2
F5	4155	Dayereh1 Snap
F#5	4156	Dayereh1 Chap
G5	4157	Dayereh1 Soft Roll
G#5	4158	Dayereh1 Tom Roll
A5	4159	Dayereh1 Rim Roll
A#5	4165	Dayereh2 Flam Tom
B5	4166	Dayereh2 Flam Back
C6	4034	Iran Bendir1 Tom

New Iranian Kit 2

Note	Wave Number	Wave Name
C1	3362	Iran Bongo Lo Roll
C#1	3367	Iran Bongo Hi Roll
D1	3779	Zangooreh Roll
D#1	3780	Zangooreh Shot
E1	3206	Castanet3 Flam1
F1	3207	Castanet3 Flam2
F#1	3208	Castanet3 LH Normal
G1	3209	Castanet3 LH Mute
G#1	3210	Castanet3 LH&RH Normal
A1	3211	Castanet3 LH&RH Mute
A#1	3212	Castanet3 RH Normal
B1	3213	Castanet3 RH Mute
C2	3806	Gosha Naghareh Lo
C#2	3807	Gosha Naghareh LoRim
D2	3808	Gosha Naghareh LoFlm
D#2	3809	Gosha Naghareh Hi1
E2	3810	Gosha Naghareh Hi2
F2	3811	Gosha Naghareh HiRim
F#2	3812	Gosha Naghareh HiFlm
G2	3774	Finger Cymbal Opn LH
G#2	3775	Finger Cymbal Mt LH
A2	3776	Finger Cymbal Opn RH
A#2	3777	Finger Cymbal Mt RH
B2	3778	Finger Cymbal Mt L&R
C3	4042	Iran Bendir2 Tom
C#3	4044	Iran Bendir2 Chap1
D3	4045	Iran Bendir2 Chap2
D#3	4047	Iran Bendir2 Back
E3	4043	Iran Bendir2 Slap
F3	4048	Iran Bendir2 Bak Rim
F#3	4046	Iran Bendir2 Chap Mt
G3	4051	Iran Bendir2 FlamBck
G#3	4049	Iran Bendir2 Flam
A3	4050	Iran Bendir2 FlamTom
A#3	4053	Iran Bendir2 RimRoll
B3	4052	Iran Bendir2 Roll
C4	4240	Tempo Chap Tom
C#4	4241	Tempo Chap1
D4	4238	Tempo Tom Mute
D#4	4239	Tempo Tom Slap
E4	4242	Tempo Chap2
F4	4237	Tempo Tom
F#4	4245	Tempo Back1
G4	4246	Tempo Back2
G#4	4247	Tempo Back Rim
A4	4251	Tempo Flam Bak
A#4	4249	Tempo Flam
B4	4252	Tempo Roll
C5	4250	Tempo Flam Tom
C#5	4243	Tempo Chap Rim
D5	4244	Tempo Chap Rim Mute
D#5	4248	Tempo Snap Nail
E5	4255	Tempo Gliss Down
F5	4254	Tempo Gliss Up
F#5	4253	Tempo Rim Roll
G5	3360	Iran Bongo Lo Tom
G#5	3363	Iran Bongo Hi Bk LH
A5	3364	Iran Bongo Hi Bk RH
A#5	3365	Iran Bongo Hi Mt RH
B5	3361	Iran Bongo Lo Flm Tm
C6	3366	Iran Bongo Hi Flm Bk

Darbuka Sagat Riq

Note	Wave Number	Wave Name
G1	4062	Sagat2 Close
G#1	4064	Sagat3 Close
A1	4063	Sagat3 Open
A#1	4066	Sagat4 Close
B1	4065	Sagat4 Open
C2	4330	Darbuka3 Noise FX1
C#2	4331	Darbuka3 Noise FX2
D2	4332	Darbuka3 Noise FX3
D#2	4333	Darbuka3 Noise FX4
E2	4334	Darbuka3 Noise FX5
F2	4335	Darbuka3 Noise FX6
F#2	4336	Darbuka3 Noise FX7
G2	4325	Darbuka3 Rak1
G#2	4326	Darbuka3 Rak2
A2	4329	Darbuka3 Feel Heel
A#2	4317	Darbuka3 Dom & Tak
B2	4327	Darbuka3 Gliss Down
C3	4328	Darbuka3 Gliss Up
C#3	4308	Darbuka2 TakLIndxFng
D3	4309	Darbuka2 TakRIndxFng
D#3	4307	Darbuka2 Sak1
E3	4310	Darbuka2 TakLRingFng
F3	4311	Darbuka2 TakRRingFng
F#3	4312	Darbuka2 Tap1
G3	4313	Darbuka2 Tap2
G#3	4314	Darbuka2 Flam1
A3	4315	Darbuka2 Flam2
A#3	4316	Darbuka2 Tak Roll
B3	4327	Darbuka3 Gliss Down
C4	4328	Darbuka3 Gliss Up
C#4	4322	Darbuka3 Sak1
D4	4323	Darbuka3 Sak2
D#4	4324	Darbuka3 Sak3
E4	4318	Darbuka3 Tak Finger
F4	4319	Darbuka3 Tak BothHnd
F#4	4320	Darbuka3 Tak Close
G4	4321	Darbuka3 Tak Mute
G#4	4337	Darbuka3 Dom Roll
A4	4338	Darbuka3 Sak Roll
A#4	4339	Darbuka3 RllTakToDom
B4	4112	Riq3 Dom Close
C5	4111	Riq3 Dom Open
C#5	4114	Riq3 Tak Close1
D5	4113	Riq3 Tak Open
D#5	4115	Riq3 Tak Close2
E5	4116	Riq3 Tak Snouj
F5	4110	Riq2 Sak
F#5	4117	Riq3 Snouj Close1
G5	4118	Riq3 Snouj Close2
G#5	4120	Riq3 Flam
A5	4119	Riq3 Sak
A#5	4121	Riq3 Snouj Roll

Bodhran&Cajon Kit

Note	Wave Number	Wave Name
C0	4573	Conga T8
C#0	3934	Bodhran Opn Center
D0	3935	Bodhran Opn Mid
D#0	3936	Bodhran Opn Edge
E0	3937	Bodhran Stck Mt Cent
F0	3938	Bodhran Stck Mt Mid
F#0	3939	Bodhran Stck Mt Edge
G0	3940	Bodhran Finger Mt
G#0	3941	Bodhran Palm Mt
A0	3942	Bodhran Op Rim Clk
A#0	3943	Bodhran Mt Rim Clk
B0	3944	Bodhran Mt Rm Clk Rs
C1	3945	Bodhran OpRimClk Rs
C#1	3946	Bodhran Grace Note
D1	3947	Bodhran Harmonics
D#1	3948	Bodhran Drags
E1	3949	Bodhran Mute Bend
F1	3950	Bodhran Palm Slide1
F#1	3951	Bodhran Palm Slide2
G1	3952	Bodhran Palm Slide3
G#1	3953	Bodhran Palm Slide4
A1	3954	Bodhran Stck SldStrt
A#1	3955	Bodhran Stck Sld Mid
B1	3956	Bodhran Stck Sld End
C2	3503	Cajon3 Vari 1
C#2	3504	Cajon3 Vari 2
D2	3505	Cajon3 Vari 3
D#2	3506	Cajon3 Vari 4
E2	3507	Cajon3 Vari 5
F2	3508	Cajon3 Vari 6
F#2	3509	Cajon3 Vari 7
G2	3510	Cajon3 Vari 8
G#2	3511	Cajon3 Vari 9
A2	3512	Cajon3 Vari 10
A#2	3513	Cajon3 Vari 11
B2	3514	Cajon3 Vari 12
C3	3515	Cajon3 Vari 13
C#3	3516	Cajon3 Vari 14
D3	3517	Cajon3 Vari 15
D#3	3518	Cajon3 Vari 16
E3	3519	Cajon3 Vari 17
F3	3520	Cajon3 Vari 18
F#3	3521	Cajon3 Vari 19
G3	3522	Cajon3 Vari 20
G#3	3523	Cajon3 Vari 21
A3	3524	Cajon3 Vari 22
A#3	3525	Cajon3 Vari 23
B3	3526	Cajon3 Vari 24
C4	3527	Cajon3 Vari 25
C#4	3528	Cajon3 Vari 26
D4	3529	Cajon3 Vari 27
D#4	3530	Cajon3 Vari 28
E4	3531	Cajon3 Vari 29
F4	3532	Cajon3 Vari 30
F#4	3533	Cajon3 Vari 31
G4	3534	Cajon3 Vari 32
G#4	3535	Cajon3 Vari 33
A4	3536	Cajon3 Vari 34
A#4	3537	Cajon3 Vari 35
B4	3538	Cajon3 Vari 36
C5	3539	Cajon3 Vari 37
C#5	3540	Cajon3 Vari 38
D5	3541	Cajon3 Vari 39
D#5	3542	Cajon3 Vari 40
E5	3543	Cajon3 Vari 41
F5	3544	Cajon3 Vari 42
F#5	3545	Cajon3 Vari 43
G5	3546	Cajon3 Vari 44
G#5	3547	Cajon3 Vari 45
A5	3548	Cajon3 Vari 46
A#5	3549	Cajon3 Vari 47
B5	3550	Cajon3 Vari 48
C6	3551	Cajon3 Vari 49

Bones&Spoons Kit

Note	Wave Number	Wave Name
C1	4476	Bones 1
C#1	4477	Bones 2
D1	4478	Bones 3
D#1	4479	Bones 4
E1	4480	Bones 5
F1	4481	Bones 6
F#1	4482	Bones 7
G1	4483	Bones 8
G#1	4484	Bones 9
A1	4485	Bones 10
A#1	4486	Bones 11
B1	4487	Bones 12
C2	4488	Bones Triplet
C3	4489	Spoons 1
C#3	4490	Spoons 2
D3	4491	Spoons 3
D#3	4492	Spoons 4
E3	4493	Spoons 5
F3	4494	Spoons 6
F#3	4495	Spoons 7
G3	4496	Spoons 8
G#3	4497	Spoons 9
A3	4498	Spoons 10
A#3	4499	Spoons 11
B3	4500	Spoons 12
C4	4501	Spoons 13
C#4	4502	Spoons 14
D4	4503	Spoons 15
D#4	4504	Spoons 16
E4	4505	Spoons 17
F4	4506	Spoons 18
F#4	4507	Spoons 19
G4	4508	Spoons 20
G#4	4509	Spoons 21
A4	4510	Spoons 22
A#4	4511	Spoons 23
B4	4512	Spoons 24
C5	4513	Spoons 25
C#5	4514	Spoons Roll 1
D5	4515	Spoons Roll 2
D#5	4516	Spoons Roll 3
E5	4517	Spoons Roll 4

Highland Snares

Note	Wave Number	Wave Name
C2	4868	Bd GranCasaA Open St
C#2	6564	Hand Cymbal Mute St
D2	6513	Crash1 St
C3	5647	Hiland Snare
C#3	5648	Hiland Snare Rim
D3	5649	Hiland Snare Open
D#3	5650	Hiland Snare Flam
E3	5651	Hiland Snare ShtRll
F3	5653	Hiland Snare Roll
F#3	5652	Hiland Snare Sfz
G3	5653	Hiland Snare Roll

Rototom Stylins

Note	Wave Number	Wave Name
C0	4994	Bd NeoKick
C#0	4994	Bd NeoKick
D0	4994	Bd NeoKick
D#0	4994	Bd NeoKick
E0	4994	Bd NeoKick
F0	4994	Bd NeoKick
F#0	4994	Bd NeoKick
G0	4994	Bd NeoKick
G#0	4994	Bd NeoKick
A0	4994	Bd NeoKick
A#0	4994	Bd NeoKick
B0	4994	Bd NeoKick
C1	4994	Bd NeoKick
C#1	4994	Bd NeoKick
D1	4994	Bd NeoKick
D#1	4994	Bd NeoKick
E1	4994	Bd NeoKick
F1	4994	Bd NeoKick
F#1	4994	Bd NeoKick
G1	4994	Bd NeoKick
G#1	4994	Bd NeoKick
A1	4994	Bd NeoKick
A#1	4994	Bd NeoKick
B1	4994	Bd NeoKick
C2	4994	Bd NeoKick
C#2	4994	Bd NeoKick
D2	4994	Bd NeoKick
D#2	4994	Bd NeoKick
E2	4994	Bd NeoKick
F2	4994	Bd NeoKick
F#2	4994	Bd NeoKick
G2	4994	Bd NeoKick
G#2	4994	Bd NeoKick
A2	4994	Bd NeoKick
A#2	4994	Bd NeoKick
B2	4994	Bd NeoKick
C3	4994	Bd NeoKick
C#3	4994	Bd NeoKick
D3	4994	Bd NeoKick
D#3	4994	Bd NeoKick
E3	4994	Bd NeoKick
F3	4994	Bd NeoKick
F#3	4994	Bd NeoKick
G3	4994	Bd NeoKick
G#3	4994	Bd NeoKick
A3	4994	Bd NeoKick
A#3	4994	Bd NeoKick
B3	4994	Bd NeoKick
C4	4994	Bd NeoKick
C#4	4994	Bd NeoKick
D4	4994	Bd NeoKick
D#4	4994	Bd NeoKick
E4	4994	Bd NeoKick
F4	4994	Bd NeoKick
F#4	4994	Bd NeoKick
G4	4994	Bd NeoKick
G#4	4994	Bd NeoKick
A4	4994	Bd NeoKick
A#4	4994	Bd NeoKick
B4	4994	Bd NeoKick
C5	4994	Bd NeoKick
C#5	4994	Bd NeoKick
D5	4994	Bd NeoKick
D#5	4994	Bd NeoKick
E5	4994	Bd NeoKick
F5	4994	Bd NeoKick
F#5	4994	Bd NeoKick
G5	4994	Bd NeoKick
G#5	4994	Bd NeoKick
A5	4994	Bd NeoKick
A#5	4994	Bd NeoKick
B5	4994	Bd NeoKick
C6	4994	Bd NeoKick

Thunderous Rotos

Note	Wave Number	Wave Name
C0	4974	Bd Analog Tight
C#0	5723	Sd T8 Rim
D0	5741	Sd Jungle3
D#0	3231	Hand Clap1 St
E0	5718	Sd T8-1
F0	6473	Tom Syn1
F#0	5243	Sd BluesHeart L1-3
G0	5250	Sd BluesHeart 3R
G#0	5202	Sd SonA St1-3
A0	4745	Bd Funk St1-2
A#0	5186	Sd Basic St1-3
B0	4937	Bd Brip
C1	4905	Bd T9-4
C#1	5697	Sd T9Rim
D1	5773	Sd FM
D#1	4521	Clap T9-1
E1	5735	Sd AnCR
F1	6449	Tom T9 Lo
F#1	6147	HH Closed Tek
G1	6449	Tom T9 Lo
G#1	6147	HH Closed Tek
A1	6449	Tom T9 Lo
A#1	6148	HH Open Tek
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6619	Ride Cup2 L
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6638	Splash1 RL
A#2	4584	Cowbell T8
B2	6622	Ride Mn
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1
F#3	3369	Timbale1 Hi 1
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5695	Sd T9-5
D5	5695	Sd T9-5
D#5	5695	Sd T9-5
E5	5695	Sd T9-5
F5	4935	Bd Human1
F#5	5743	Sd D&B1
G5	2980	Acoustic Bass FX03
G#5	2376	DigiOsc4
A5	2375	DigiOsc3
A#5	5759	Sd Break1
B5	4939	Bd Jungle1
C6	4950	Bd Break Heavy

Round Robin Timps

Note	Wave Number	Wave Name
C#0	27	CF3 Stretch Sw St
D0	27	CF3 Stretch Sw St
D#0	27	CF3 Stretch Sw St
E0	27	CF3 Stretch Sw St
F0	27	CF3 Stretch Sw St
F#0	27	CF3 Stretch Sw St
G0	27	CF3 Stretch Sw St
G#0	27	CF3 Stretch Sw St
A0	27	CF3 Stretch Sw St
A#0	27	CF3 Stretch Sw St
B0	27	CF3 Stretch Sw St
C1	27	CF3 Stretch Sw St
C#1	27	CF3 Stretch Sw St
D1	27	CF3 Stretch Sw St
D#1	27	CF3 Stretch Sw St
E1	27	CF3 Stretch Sw St
F1	27	CF3 Stretch Sw St
F#1	27	CF3 Stretch Sw St
G1	27	CF3 Stretch Sw St
G#1	27	CF3 Stretch Sw St
A1	27	CF3 Stretch Sw St
A#1	27	CF3 Stretch Sw St
B1	27	CF3 Stretch Sw St
C2	27	CF3 Stretch Sw St
C#2	27	CF3 Stretch Sw St
D2	27	CF3 Stretch Sw St
D#2	27	CF3 Stretch Sw St
E2	27	CF3 Stretch Sw St
F2	27	CF3 Stretch Sw St
F#2	27	CF3 Stretch Sw St
G2	27	CF3 Stretch Sw St
G#2	27	CF3 Stretch Sw St
A2	27	CF3 Stretch Sw St
A#2	27	CF3 Stretch Sw St
B2	27	CF3 Stretch Sw St
C3	27	CF3 Stretch Sw St
C#3	27	CF3 Stretch Sw St
D3	27	CF3 Stretch Sw St
D#3	27	CF3 Stretch Sw St
E3	27	CF3 Stretch Sw St
F3	27	CF3 Stretch Sw St
F#3	27	CF3 Stretch Sw St
G3	27	CF3 Stretch Sw St
G#3	27	CF3 Stretch Sw St
A3	27	CF3 Stretch Sw St
A#3	27	CF3 Stretch Sw St
B3	27	CF3 Stretch Sw St
C4	27	CF3 Stretch Sw St
C#4	27	CF3 Stretch Sw St
D4	27	CF3 Stretch Sw St
D#4	27	CF3 Stretch Sw St
E4	27	CF3 Stretch Sw St
F4	27	CF3 Stretch Sw St
F#4	27	CF3 Stretch Sw St
G4	27	CF3 Stretch Sw St
G#4	27	CF3 Stretch Sw St
A4	27	CF3 Stretch Sw St
A#4	27	CF3 Stretch Sw St
B4	27	CF3 Stretch Sw St
C5	3017	OP Crash18 Top 3Sw St
C#5	3023	OP SusC20 Top Low 3Sw St
D5	5157	Sd Normal 4St
D#5	5554	Sd LiveRoll St
E5	5156	Sd Normal 3St
F5	5558	Std Snare
F#5	5629	Sd Orch Roll St
G5	5607	Sd OrchB 2 St
G#5	2563	Orchestra Hit2 St
A5	6239	Tom Rock Mid R
A#5	4600	Tambourine RX5
B5	3214	Wood Block
C6	3257	Resin Block Large

TamTam Adventures

Note	Wave Number	Wave Name
C0	2748	Shimmer Fx
C#0	2746	Noize Rize1
D0	2743	HiQ Rize
D#0	2742	Dist Synth Fx
E0	2729	Abstract Fx5
F0	2728	Abstract Fx4
F#0	2727	Abstract Fx3
G0	2726	Abstract Fx2
G#0	5673	Echo Snare St
A0	4900	Bd DanceGate1
A#0	3055	OP Rotot Top 3 3Sw St
B0	2741	Damage Fx11
C1	3043	OP GrCa30 OpSoft 5Sw St
C#1	2741	Damage Fx11
D1	2736	Damage Fx6
D#1	2726	Abstract Fx2
E1	2738	Damage Fx8
F1	3038	OP Taiko Top Med 3Sw St
F#1	3146	OP Shake1 Top Alt 1 St
G1	2722	Granular Loop6
G#1	6163	HH TecOpen1
A1	2731	Damage Fx1
A#1	6165	HH TecOpen2
B1	2732	Damage Fx2
C2	2740	Damage Fx10
C#2	6541	Pl Crash 15
D2	2739	Damage Fx9
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	2750	Electric FX Perc1
G2	6542	Pl Crash 16
G#2	2751	Electric FX Perc2
A2	6542	Pl Crash 16
A#2	2752	Electric FX Perc3
B2	6605	Fine Ride Edge
C3	2753	Electric FX Perc4
C#3	2754	Electric FX Perc5
D3	2755	Electric FX Perc6
D#3	2756	Electric FX Perc7
E3	2757	Electric FX Perc8
F3	2758	Electric FX Perc9
F#3	4593	PC Shaker1
G3	6269	Tom Power03 1-2St
G#3	2761	Electric FX Perc12
A3	2762	Electric FX Perc13
A#3	2765	Electric FX Perc16
B3	2763	Electric FX Perc14
C4	2478	Voc Beat The Band
C#4	2479	Voc Born Happy
D4	2480	Voc Close Eyes
D#4	2481	Voc Complication
E4	2482	Voc Day Life
F4	2483	Voc DeepWater
F#4	2484	Voc Desperation
G4	2485	Voc Destiny
G#4	2486	Voc Dreamin Offset U
A4	2487	Voc Enjoying This
A#4	2488	Voc Feel Good
B4	2489	Voc Forbidden Dreams
C5	2490	Voc Freezing Cold
C#5	2491	Voc Infinity
D5	2492	Voc Love Is Blind
D#5	2493	Voc Mystery
E5	2494	Voc Reality
F5	2497	Voc Yesterday
F#5	2495	Voc Revolution
G5	2496	Voc Sweeping
G#5	2717	Granular Loop1
A5	2718	Granular Loop2
A#5	3094	OP BOBA Bb rim 3Sw Alt2 St
B5	2721	Granular Loop5
C6	2632	Epic FX Loop4

Neo Disco Kit

Note	Wave Number	Wave Name
C0	6772	Bd Trendy 83 St
C#0	6776	Bd Trendy 87 St
D0	6789	Bd Trendy 100 St
D#0	6790	Bd Trendy 101 St
E0	6788	Bd Trendy 99 St
F0	6785	Bd Trendy 96 St
F#0	6783	Bd Trendy 94 St
G0	6785	Bd Trendy 96 St
G#0	6784	Bd Trendy 95 St
A0	6818	Bd Trendy 129 St
A#0	6906	Sd Trendy 74 St
B0	6763	Bd Trendy 74 St
C1	6793	Bd Trendy 104 St
C#1	7208	Clap Trendy 28 St
D1	6963	Sd Trendy 131 St
D#1	7213	Clap Trendy 33 St
E1	6928	Sd Trendy 96 St
F1	7062	Tom Trendy 2 Mn
F#1	7043	HH Trendy 54 St
G1	7062	Tom Trendy 2 Mn
G#1	7048	HH Trendy 59 St
A1	7063	Tom Trendy 3 Mn
A#1	7049	HH Trendy 60 St
B1	7063	Tom Trendy 3 Mn
C2	7064	Tom Trendy 4 St
C#2	7158	Cym Trendy 46 St
D2	7064	Tom Trendy 4 St
D#2	7128	Cym Trendy 16 St
E2	7347	PC Trendy 99 St
F2	7165	Cym Trendy 53 St
F#2	7315	PC Trendy 67 St
G2	7158	Cym Trendy 46 St
G#2	7413	PC Trendy 165 St
A2	7159	Cym Trendy 47 St
A#2	7418	PC Trendy 170 St
B2	7175	Cym Trendy 63 St
C3	7434	PC Trendy 186 St
C#3	7438	PC Trendy 190 St
D3	6936	Sd Trendy 104 St
D#3	7410	PC Trendy 162 St
E3	7045	HH Trendy 56 St
F3	7255	PC Trendy 7 St
F#3	7257	PC Trendy 9 Mn
G3	7263	PC Trendy 15 St
G#3	7265	PC Trendy 17 St
A3	7276	PC Trendy 28 St
A#3	7277	PC Trendy 29 St
B3	7296	PC Trendy 48 St
C4	7213	Clap Trendy 33 St
C#4	6907	Sd Trendy 75 St
D4	6907	Sd Trendy 75 St
D#4	6908	Sd Trendy 76 St
E4	6909	Sd Trendy 77 St
F4	7214	Clap Trendy 34 St
F#4	7215	Clap Trendy 35 St
G4	6910	Sd Trendy 78 St
G#4	7557	FX Trendy 110 St
A4	6911	Sd Trendy 79 St
A#4	6912	Sd Trendy 80 St
B4	7218	Clap Trendy 38 St
C5	6913	Sd Trendy 81 St
C#5	7221	Clap Trendy 41 St
D5	6920	Sd Trendy 88 St
D#5	6922	Sd Trendy 90 St
E5	6925	Sd Trendy 93 St
F5	6927	Sd Trendy 95 St
F#5	6928	Sd Trendy 96 St
G5	6937	Sd Trendy 105 St
G#5	6931	Sd Trendy 99 St
A5	6933	Sd Trendy 101 St
A#5	6934	Sd Trendy 102 St
B5	6935	Sd Trendy 103 St
C6	6936	Sd Trendy 104 St

80s Drum Machine Kit

Note	Wave Number	Wave Name
C0	6961	Sd Trendy 129 St
C#0	7577	FX Trendy 130 St
D0	6788	Bd Trendy 99 St
D#0	7588	FX Trendy 141 Mn
E0	6786	Bd Trendy 97 St
F0	6778	Bd Trendy 89 St
F#0	7590	FX Trendy 143 St
G0	6747	Bd Trendy 58 St
G#0	7161	Cym Trendy 49 St
A0	6817	Bd Trendy 128 St
A#0	7162	Cym Trendy 50 St
B0	6810	Bd Trendy 121 St
C1	6813	Bd Trendy 124 St
C#1	6966	Sd Trendy 134 Mn
D1	6954	Sd Trendy 122 St
D#1	7195	Clap Trendy 15 Mn
E1	6948	Sd Trendy 116 St
F1	7105	Tom Trendy 25 St
F#1	7052	HH Trendy 63 St
G1	7105	Tom Trendy 25 St
G#1	7051	HH Trendy 62 St
A1	7105	Tom Trendy 25 St
A#1	7050	HH Trendy 61 St
B1	7104	Tom Trendy 24 St
C2	7104	Tom Trendy 24 St
C#2	7158	Cym Trendy 46 St
D2	7104	Tom Trendy 24 St
D#2	7165	Cym Trendy 53 St
E2	7576	FX Trendy 129 St
F2	7168	Cym Trendy 56 St
F#2	7577	FX Trendy 130 St
G2	7578	FX Trendy 131 St
G#2	7107	Tom Trendy 27 Mn
A2	7127	Cym Trendy 15 St
A#2	7589	FX Trendy 142 St
B2	7571	FX Trendy 124 St
C3	7162	Cym Trendy 50 St
C#3	7172	Cym Trendy 60 St
D3	7173	Cym Trendy 61 Mn
D#3	7207	Clap Trendy 27 St
E3	7208	Clap Trendy 28 St
F3	7209	Clap Trendy 29 Mn
F#3	7210	Clap Trendy 30 St
G3	7211	Clap Trendy 31 St
G#3	7212	Clap Trendy 32 St
A3	7216	Clap Trendy 36 St
A#3	7217	Clap Trendy 37 St
B3	7219	Clap Trendy 39 St
C4	7220	Clap Trendy 40 St
C#4	7508	FX Trendy 61 St
D4	7507	FX Trendy 60 St
D#4	7509	FX Trendy 62 St
E4	7510	FX Trendy 63 St
F4	6949	Sd Trendy 117 Mn
F#4	6950	Sd Trendy 118 St
G4	6951	Sd Trendy 119 St
G#4	6952	Sd Trendy 120 St
A4	6953	Sd Trendy 121 St
A#4	6955	Sd Trendy 123 St
B4	6956	Sd Trendy 124 St
C5	6957	Sd Trendy 125 St
C#5	6960	Sd Trendy 128 Mn
D5	6959	Sd Trendy 127 St
D#5	6960	Sd Trendy 128 Mn
E5	6962	Sd Trendy 130 St
F5	6961	Sd Trendy 129 St
F#5	6962	Sd Trendy 130 St
G5	7106	Tom Trendy 26 St
G#5	7106	Tom Trendy 26 St
A5	7106	Tom Trendy 26 St
A#5	7106	Tom Trendy 26 St
B5	7106	Tom Trendy 26 St
C6	7106	Tom Trendy 26 St

Goliath Trap Kit

Note	Wave Number	Wave Name
C0	7481	FX Trendy 34 St
C#0	7497	FX Trendy 50 St
D0	7136	Cym Trendy 24 St
D#0	6684	Clang Ride St
E0	7017	HH Trendy 28 St
F0	6711	Bd Trendy 22 St
F#0	6711	Bd Trendy 22 St
G0	6779	Bd Trendy 90 St
G#0	6781	Bd Trendy 92 St
A0	6743	Bd Trendy 54 St
A#0	6738	Bd Trendy 49 St
B0	6735	Bd Trendy 46 St
C1	6710	Bd Trendy 21 St
C#1	6841	Sd Trendy 9 St
D1	6964	Sd Trendy 132 Mn
D#1	7200	Clap Trendy 20 St
E1	6844	Sd Trendy 12 St
F1	7067	Tom Trendy 7 Mn
F#1	7019	HH Trendy 30 St
G1	7067	Tom Trendy 7 Mn
G#1	6993	HH Trendy 4 St
A1	7067	Tom Trendy 7 Mn
A#1	6997	HH Trendy 8 St
B1	7069	Tom Trendy 9 St
C2	7069	Tom Trendy 9 St
C#2	7155	Cym Trendy 43 Mn
D2	7068	Tom Trendy 8 St
D#2	7128	Cym Trendy 16 St
E2	7481	FX Trendy 34 St
F2	7269	PC Trendy 21 St
F#2	6708	Bd Trendy 19 St
G2	6840	Sd Trendy 8 St
G#2	7304	PC Trendy 56 St
A2	7154	Cym Trendy 42 Mn
A#2	7141	Cym Trendy 29 St
B2	7133	Cym Trendy 21 St
C3	7240	Snap Trendy 13 St
C#3	7239	Snap Trendy 12 St
D3	7237	Snap Trendy 10 St
D#3	7236	Snap Trendy 9 St
E3	7234	Snap Trendy 7 St
F3	6964	Sd Trendy 132 Mn
F#3	6958	Sd Trendy 126 Mn
G3	7208	Clap Trendy 28 St
G#3	7207	Clap Trendy 27 St
A3	7205	Clap Trendy 25 St
A#3	7204	Clap Trendy 24 St
B3	7203	Clap Trendy 23 St
C4	7202	Clap Trendy 22 Mn
C#4	7200	Clap Trendy 20 St
D4	7199	Clap Trendy 19 St
D#4	7197	Clap Trendy 17 St
E4	7231	Snap Trendy 4 St
F4	6738	Bd Trendy 49 St
F#4	6743	Bd Trendy 54 St
G4	6781	Bd Trendy 92 St
G#4	6779	Bd Trendy 90 St
A4	7479	FX Trendy 32 St
A#4	7467	FX Trendy 20 Mn
B4	7466	FX Trendy 19 Mn
C5	7464	FX Trendy 17 Mn
C#5	7463	FX Trendy 16 Mn
D5	7462	FX Trendy 15 Mn
D#5	7460	FX Trendy 13 Mn
E5	7471	FX Trendy 24 Mn
F5	7470	FX Trendy 23 Mn
F#5	7469	FX Trendy 22 Mn
G5	7465	FX Trendy 18 Mn
G#5	2662	Grain1
A5	2663	Grain2 St
A#5	2666	Grain3 St
B5	2669	Moving Harp St
C6	2672	Metal Mod

Shook

Note	Wave Number	Wave Name
C0	7039	HH Trendy 50 St
C#0	7038	HH Trendy 49 St
D0	7527	FX Trendy 80 St
D#0	7314	PC Trendy 66 St
E0	7517	FX Trendy 70 St
F0	7314	PC Trendy 66 St
F#0	7523	FX Trendy 76 St
G0	6885	Sd Trendy 53 St
G#0	7303	PC Trendy 55 St
A0	6762	Bd Trendy 73 St
A#0	7394	PC Trendy 146 St
B0	6761	Bd Trendy 72 St
C1	6760	Bd Trendy 71 St
C#1	7379	PC Trendy 131 St
D1	6882	Sd Trendy 50 St
D#1	7390	PC Trendy 142 St
E1	6884	Sd Trendy 52 St
F1	7064	Tom Trendy 4 St
F#1	7040	HH Trendy 51 St
G1	7067	Tom Trendy 7 Mn
G#1	7039	HH Trendy 50 St
A1	7066	Tom Trendy 6 Mn
A#1	7038	HH Trendy 49 St
B1	7064	Tom Trendy 4 St
C2	7069	Tom Trendy 9 St
C#2	7149	Cym Trendy 37 St
D2	7068	Tom Trendy 8 St
D#2	7150	Cym Trendy 38 St
E2	7148	Cym Trendy 36 St
F2	7037	HH Trendy 48 St
F#2	7391	PC Trendy 143 St
G2	7148	Cym Trendy 36 St
G#2	7382	PC Trendy 134 St
A2	7522	FX Trendy 75 St
A#2	7527	FX Trendy 80 St
B2	7517	FX Trendy 70 St
C3	7524	FX Trendy 77 St
C#3	7519	FX Trendy 72 St
D3	7516	FX Trendy 69 St
D#3	7389	PC Trendy 141 St
E3	7386	PC Trendy 138 St
F3	7388	PC Trendy 140 St
F#3	7385	PC Trendy 137 St
G3	7381	PC Trendy 133 St
G#3	7380	PC Trendy 132 St
A3	7387	PC Trendy 139 St
A#3	7515	FX Trendy 68 St
B3	7520	FX Trendy 73 St
C4	7393	PC Trendy 145 St
C#4	7521	FX Trendy 74 St
D4	7518	FX Trendy 71 St
D#4	7526	FX Trendy 79 St
E4	7383	PC Trendy 135 St
F4	7384	PC Trendy 136 St
F#4	7527	FX Trendy 80 St
G4	7513	FX Trendy 66 St
G#4	7523	FX Trendy 76 St
A4	7287	PC Trendy 39 St
A#4	7514	FX Trendy 67 St
B4	7392	PC Trendy 144 St
C5	7525	FX Trendy 78 St
C#5	6758	Bd Trendy 69 St
D5	6743	Bd Trendy 54 St
D#5	6742	Bd Trendy 53 Mn
E5	6883	Sd Trendy 51 St
F5	6861	Sd Trendy 29 St
F#5	6759	Bd Trendy 70 St
G5	6739	Bd Trendy 50 St
G#5	6847	Sd Trendy 15 St
A5	6848	Sd Trendy 16 St
A#5	7302	PC Trendy 54 Mn
B5	6718	Bd Trendy 29 Mn
C6	6744	Bd Trendy 55 Mn

Trap City Kit

Note	Wave Number	Wave Name
C0	5534	Sd Hip Stick5
C#0	5585	Sd LW Brush Tap2 Sw
D0	5581	Sd Brush SwirAtt St
D#0	5586	Sd LW Brush Slap Sw
E0	2837	Scratch Spin
F0	2785	House FX Sw
F#0	3211	Castanet3 LH&RH Mute
G0	2689	Zap1
G#0	3479	Surdo5-2 Sdstck
A0	2841	Scratch R&B
A#0	5056	Bd HipHop7
B0	6746	Bd Trendy 57 Mn
C1	6745	Bd Trendy 56 Mn
C#1	7274	PC Trendy 26 St
D1	6868	Sd Trendy 36 St
D#1	7190	Clap Trendy 10 St
E1	6843	Sd Trendy 11 St
F1	7620	FX Trendy 173 St
F#1	7012	HH Trendy 23 St
G1	7074	Tom Trendy 10 Lo L St
G#1	7013	HH Trendy 24 St
A1	7073	Tom Trendy 10 Lo H St
A#1	7021	HH Trendy 32 St
B1	7072	Tom Trendy 10 Mid St
C2	7071	Tom Trendy 10 Hi L St
C#2	7128	Cym Trendy 16 St
D2	7070	Tom Trendy 10 Hi H St
D#2	7137	Cym Trendy 25 St
E2	7141	Cym Trendy 29 St
F2	7130	Cym Trendy 18 St
F#2	7336	PC Trendy 88 St
G2	7136	Cym Trendy 24 St
G#2	7309	PC Trendy 61 St
A2	7132	Cym Trendy 20 St
A#2	7306	PC Trendy 58 St
B2	7138	Cym Trendy 26 St
C3	6178	Trap HH 9 St
C#3	4662	Trap Misc 6 St
D3	4660	Trap Misc 4 St
D#3	4659	Trap Misc 3 St
E3	4539	Trap Clap 2 Mn
F3	4540	Trap Clap 3 St
F#3	4664	Trap Misc 8 St
G3	4658	Trap Misc 2 St
G#3	4657	Trap Misc 1 St
A3	4661	Trap Misc 5 St
A#3	6172	Trap HH 3 St
B3	6176	Trap HH 7 St
C4	2770	Trap Fx1 St
C#4	2773	Trap Fx4 St
D4	2771	Trap Fx2 St
D#4	5809	Trap SD 4 Mn
E4	5808	Trap SD 3 Mn
F4	5806	Trap SD 1 St
F#4	4632	Trap Perc 2 St
G4	2774	Trap Fx5 St
G#4	2772	Trap Fx3 St
A4	5048	Electro BD 3 Mn
A#4	2683	Ripper
B4	6669	FX Crash St
C5	2781	EDM Fx3 St
C#5	2780	EDM Fx2 St
D5	2762	Electric FX Perc13
D#5	2804	Bomb
E5	2732	Damage Fx2
F5	2743	HiQ Rize
F#5	2749	XMod Loop
G5	3395	Ganza1 Accent
G#5	4588	Elec T8 Cowbell
A5	2663	Grain2 St
A#5	2766	White Noise
B5	2800	Glitch 9
C6	2847	HipHop Scratch2 St

Pick It Up

Note	Wave Number	Wave Name
C0	2803	T8 Bass SE St
C#0	5680	Elec Jazz Snare St
D0	5688	Crackle Snare St
D#0	2802	T8 Bend
E0	5687	Elec Light Snare St
F0	5685	Snare Roll OneShot
F#0	5683	Clang Snare St
G0	5684	Ambi Snare
G#0	5681	Elec Tight Snare St
A0	4966	Electric BD St
A#0	5686	Fine Snare St
B0	6822	Bd Trendy 133 St
C1	6749	Bd Trendy 60 Mn
C#1	6865	Sd Trendy 33 St
D1	6864	Sd Trendy 32 St
D#1	7191	Clap Trendy 11 St
E1	6863	Sd Trendy 31 St
F1	7087	Tom Trendy 16 Mn
F#1	6990	HH Trendy 1 St
G1	7101	Tom Trendy 21 Lo St
G#1	7034	HH Trendy 45 St
A1	7100	Tom Trendy 21 Mid St
A#1	7036	HH Trendy 47 St
B1	7099	Tom Trendy 21 Hi St
C2	7089	Tom Trendy 17 Lo Mn
C#2	7155	Cym Trendy 43 Mn
D2	7088	Tom Trendy 17 Hi Mn
D#2	7166	Cym Trendy 54 St
E2	7193	Clap Trendy 13 Mn
F2	7146	Cym Trendy 34 Mn
F#2	3192	Tambourine FX 1
G2	7145	Cym Trendy 33 Mn
G#2	3193	Tambourine FX 2
A2	7334	PC Trendy 86 St
A#2	4568	Snap & Clap St
B2	7510	FX Trendy 63 St
C3	3349	Bongo Extent 1 St
C#3	3351	Bongo Extent 3 St
D3	3350	Bongo Extent 2 St
D#3	3349	Bongo Extent 1 St
E3	3603	Stomp St
F3	2787	Vocal Snare St
F#3	2788	Vocal Ambi SE St
G3	2789	Vocal Shout Yeah St
G#3	2790	Vocal Shout Go St
A3	3175	Shaker Muffled 1 St
A#3	3176	Shaker Muffled 2 St
B3	2799	Glitch 8
C4	2799	Glitch 8
C#4	6214	Powerful HH Closed
D4	6215	Powerful HH Open
D#4	3609	Ethnic Perc 6
E4	3610	Ethnic Perc 7
F4	3611	Ethnic Perc 8
F#4	2791	Rainmaker St
G4	3608	Ethnic Perc 5
G#4	3607	Ethnic Perc 4
A4	4567	Snap Digital St
A#4	4569	Snap Long Ambi St
B4	4570	Snap Smith Snap St
C5	3255	Wind Chime 2 St
C#5	7477	FX Trendy 30 St
D5	7483	FX Trendy 36 St
D#5	7275	PC Trendy 27 St
E5	7276	PC Trendy 28 St
F5	6670	Phase Crash St
F#5	7500	FX Trendy 53 Mn
G5	7361	PC Trendy 113 St
G#5	7541	FX Trendy 94 Mn
A5	7551	FX Trendy 104 St
A#5	7555	FX Trendy 108 St
B5	7233	Snap Trendy 6 St
C6	7616	FX Trendy 169 St

SQR Harmony

Note	Wave Number	Wave Name
C0	7039	HH Trendy 50 St
C#0	7038	HH Trendy 49 St
D0	7527	FX Trendy 80 St
D#0	7314	PC Trendy 66 St
E0	7517	FX Trendy 70 St
F0	7314	PC Trendy 66 St
F#0	7523	FX Trendy 76 St
G0	6885	Sd Trendy 53 St
G#0	7303	PC Trendy 55 St
A0	6762	Bd Trendy 73 St
A#0	7394	PC Trendy 146 St
B0	6761	Bd Trendy 72 St
C1	6760	Bd Trendy 71 St
C#1	7379	PC Trendy 131 St
D1	6882	Sd Trendy 50 St
D#1	7390	PC Trendy 142 St
E1	6884	Sd Trendy 52 St
F1	7064	Tom Trendy 4 St
F#1	7040	HH Trendy 51 St
G1	7067	Tom Trendy 7 Mn
G#1	7039	HH Trendy 50 St
A1	7066	Tom Trendy 6 Mn
A#1	7038	HH Trendy 49 St
B1	7064	Tom Trendy 4 St
C2	7069	Tom Trendy 9 St
C#2	7149	Cym Trendy 37 St
D2	7068	Tom Trendy 8 St
D#2	7150	Cym Trendy 38 St
E2	7148	Cym Trendy 36 St
F2	7037	HH Trendy 48 St
F#2	7391	PC Trendy 143 St
G2	7148	Cym Trendy 36 St
G#2	7382	PC Trendy 134 St
A2	7522	FX Trendy 75 St
A#2	7527	FX Trendy 80 St
B2	7517	FX Trendy 70 St
C3	7524	FX Trendy 77 St
C#3	7519	FX Trendy 72 St
D3	7516	FX Trendy 69 St
D#3	7389	PC Trendy 141 St
E3	7386	PC Trendy 138 St
F3	7388	PC Trendy 140 St
F#3	7385	PC Trendy 137 St
G3	7381	PC Trendy 133 St
G#3	7380	PC Trendy 132 St
A3	7387	PC Trendy 139 St
A#3	7515	FX Trendy 68 St
B3	7520	FX Trendy 73 St
C4	7393	PC Trendy 145 St
C#4	7521	FX Trendy 74 St
D4	7518	FX Trendy 71 St
D#4	7526	FX Trendy 79 St
E4	7383	PC Trendy 135 St
F4	7384	PC Trendy 136 St
F#4	7527	FX Trendy 80 St
G4	7513	FX Trendy 66 St
G#4	7523	FX Trendy 76 St
A4	7287	PC Trendy 39 St
A#4	7514	FX Trendy 67 St
B4	7392	PC Trendy 144 St
C5	7525	FX Trendy 78 St
C#5	6758	Bd Trendy 69 St
D5	6743	Bd Trendy 54 St
D#5	6742	Bd Trendy 53 Mn
E5	6883	Sd Trendy 51 St
F5	6861	Sd Trendy 29 St
F#5	6759	Bd Trendy 70 St
G5	6739	Bd Trendy 50 St
G#5	6847	Sd Trendy 15 St
A5	6848	Sd Trendy 16 St
A#5	7302	PC Trendy 54 Mn
B5	6718	Bd Trendy 29 Mn
C6	6744	Bd Trendy 55 Mn

Atebits Kit Showcase

Note	Wave Number	Wave Name
C0	7039	HH Trendy 50 St
C#0	7038	HH Trendy 49 St
D0	7527	FX Trendy 80 St
D#0	7314	PC Trendy 66 St
E0	7517	FX Trendy 70 St
F0	7314	PC Trendy 66 St
F#0	7523	FX Trendy 76 St
G0	6885	Sd Trendy 53 St
G#0	7303	PC Trendy 55 St
A0	6762	Bd Trendy 73 St
A#0	7394	PC Trendy 146 St
B0	6761	Bd Trendy 72 St
C1	6760	Bd Trendy 71 St
C#1	7379	PC Trendy 131 St
D1	6882	Sd Trendy 50 St
D#1	7390	PC Trendy 142 St
E1	6884	Sd Trendy 52 St
F1	7064	Tom Trendy 4 St
F#1	7040	HH Trendy 51 St
G1	7067	Tom Trendy 7 Mn
G#1	7039	HH Trendy 50 St
A1	7066	Tom Trendy 6 Mn
A#1	7038	HH Trendy 49 St
B1	7064	Tom Trendy 4 St
C2	7069	Tom Trendy 9 St
C#2	7149	Cym Trendy 37 St
D2	7068	Tom Trendy 8 St
D#2	7150	Cym Trendy 38 St
E2	7148	Cym Trendy 36 St
F2	7037	HH Trendy 48 St
F#2	7391	PC Trendy 143 St
G2	7148	Cym Trendy 36 St
G#2	7382	PC Trendy 134 St
A2	7522	FX Trendy 75 St
A#2	7527	FX Trendy 80 St
B2	7517	FX Trendy 70 St
C3	7524	FX Trendy 77 St
C#3	7519	FX Trendy 72 St
D3	7516	FX Trendy 69 St
D#3	7389	PC Trendy 141 St
E3	7386	PC Trendy 138 St
F3	7388	PC Trendy 140 St
F#3	7385	PC Trendy 137 St
G3	7381	PC Trendy 133 St
G#3	7380	PC Trendy 132 St
A3	7387	PC Trendy 139 St
A#3	7515	FX Trendy 68 St
B3	7520	FX Trendy 73 St
C4	7393	PC Trendy 145 St
C#4	7521	FX Trendy 74 St
D4	7518	FX Trendy 71 St
D#4	7526	FX Trendy 79 St
E4	7383	PC Trendy 135 St
F4	7384	PC Trendy 136 St
F#4	7527	FX Trendy 80 St
G4	7513	FX Trendy 66 St
G#4	7523	FX Trendy 76 St
A4	7287	PC Trendy 39 St
A#4	7514	FX Trendy 67 St
B4	7392	PC Trendy 144 St
C5	7525	FX Trendy 78 St
C#5	6758	Bd Trendy 69 St
D5	6743	Bd Trendy 54 St
D#5	6742	Bd Trendy 53 Mn
E5	6883	Sd Trendy 51 St
F5	6861	Sd Trendy 29 St
F#5	6759	Bd Trendy 70 St
G5	6739	Bd Trendy 50 St
G#5	6847	Sd Trendy 15 St
A5	6848	Sd Trendy 16 St
A#5	7302	PC Trendy 54 Mn
B5	6718	Bd Trendy 29 Mn
C6	6744	Bd Trendy 55 Mn

Tracker Showcase

Note	Wave Number	Wave Name
C0	7417	PC Trendy 169 St
C#0	7056	HH Trendy 67 St
D0	7422	PC Trendy 174 St
D#0	7058	HH Trendy 69 St
E0	7418	PC Trendy 170 St
F0	7429	PC Trendy 181 St
F#0	7431	PC Trendy 183 Mn
G0	6987	Sd Trendy 155 Mn
G#0	7424	PC Trendy 176 St
A0	6832	Bd Trendy 143 Mn
A#0	6986	Sd Trendy 154 St
B0	6830	Bd Trendy 141 Mn
C1	6828	Bd Trendy 139 St
C#1	7427	PC Trendy 179 St
D1	6978	Sd Trendy 146 Mn
D#1	7226	Clap Trendy 46 St
E1	6880	Sd Trendy 48 St
F1	7108	Tom Trendy 28 Mn
F#1	7057	HH Trendy 68 St
G1	7111	Tom Trendy 31 Mn
G#1	7058	HH Trendy 69 St
A1	7112	Tom Trendy 32 St
A#1	7180	Cym Trendy 68 St
B1	7102	Tom Trendy 22 Mn
C2	7102	Tom Trendy 22 Mn
C#2	7180	Cym Trendy 68 St
D2	7102	Tom Trendy 22 Mn
D#2	7178	Cym Trendy 66 St
E2	6980	Sd Trendy 148 St
F2	7179	Cym Trendy 67 St
F#2	7420	PC Trendy 172 St
G2	7572	FX Trendy 125 St
G#2	7370	PC Trendy 122 St
A2	7580	FX Trendy 133 Mn
A#2	7587	FX Trendy 140 St
B2	7128	Cym Trendy 16 St
C3	7432	PC Trendy 184 St
C#3	7368	PC Trendy 120 St
D3	7425	PC Trendy 177 St
D#3	7426	PC Trendy 178 St
E3	7617	FX Trendy 170 St
F3	7611	FX Trendy 164 St
F#3	7615	FX Trendy 168 St
G3	6988	Sd Trendy 156 St
G#3	6871	Sd Trendy 39 St
A3	6872	Sd Trendy 40 St
A#3	6874	Sd Trendy 42 Mn
B3	7241	Snap Trendy 14 St
C4	7246	Snap Trendy 19 St
C#4	7244	Snap Trendy 17 St
D4	7247	Snap Trendy 20 St
D#4	7245	Snap Trendy 18 St
E4	7309	PC Trendy 61 St
F4	7305	PC Trendy 57 St
F#4	7271	PC Trendy 23 St
G4	7255	PC Trendy 7 St
G#4	7573	FX Trendy 126 St
A4	7308	PC Trendy 60 St
A#4	6980	Sd Trendy 148 St
B4	7580	FX Trendy 133 Mn
C5	7585	FX Trendy 138 Mn
C#5	6802	Bd Trendy 113 St
D5	7573	FX Trendy 126 St
D#5	6801	Bd Trendy 112 St
E5	6800	Bd Trendy 111 St
F5	6799	Bd Trendy 110 Mn
F#5	6831	Bd Trendy 142 Mn
G5	7371	PC Trendy 123 St
G#5	6938	Sd Trendy 106 St
A5	6979	Sd Trendy 147 St
A#5	6940	Sd Trendy 108 St
B5	6939	Sd Trendy 107 St
C6	6967	Sd Trendy 135 Mn

Output

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	6860	Sd Trendy 28 St
D0	6849	Sd Trendy 17 St
D#0	6851	Sd Trendy 19 St
E0	6854	Sd Trendy 22 St
F0	6853	Sd Trendy 21 St
F#0	6859	Sd Trendy 27 St
G0	6857	Sd Trendy 25 St
G#0	6855	Sd Trendy 23 St
A0	6714	Bd Trendy 25 St
A#0	6852	Sd Trendy 20 St
B0	6716	Bd Trendy 27 St
C1	6728	Bd Trendy 39 St
C#1	6919	Sd Trendy 87 St
D1	6915	Sd Trendy 83 St
D#1	7203	Clap Trendy 23 St
E1	6947	Sd Trendy 115 St
F1	7083	Tom Trendy 14 Lo Mn
F#1	6996	HH Trendy 7 St
G1	7083	Tom Trendy 14 Lo Mn
G#1	7002	HH Trendy 13 St
A1	7082	Tom Trendy 14 Mid Mn
A#1	7003	HH Trendy 14 St
B1	7081	Tom Trendy 14 Hi Mn
C2	7081	Tom Trendy 14 Hi Mn
C#2	7160	Cym Trendy 48 St
D2	7081	Tom Trendy 14 Hi Mn
D#2	7166	Cym Trendy 54 St
E2	7144	Cym Trendy 32 Mn
F2	7151	Cym Trendy 39 Mn
F#2	7284	PC Trendy 36 St
G2	7143	Cym Trendy 31 Mn
G#2	7287	PC Trendy 39 St
A2	7158	Cym Trendy 46 St
A#2	7568	FX Trendy 121 St
B2	7170	Cym Trendy 58 Mn
C3	7344	PC Trendy 96 St
C#3	7345	PC Trendy 97 St
D3	7278	PC Trendy 30 St
D#3	7281	PC Trendy 33 St
E3	7299	PC Trendy 51 St
F3	7279	PC Trendy 31 St
F#3	7280	PC Trendy 32 St
G3	7282	PC Trendy 34 St
G#3	7285	PC Trendy 37 St
A3	4626	House Cabasa1 Mn
A#3	3182	House Shaker2 Mn
B3	7287	PC Trendy 39 St
C4	7288	PC Trendy 40 St
C#4	7293	PC Trendy 45 St
D4	7294	PC Trendy 46 St
D#4	3220	House WB3 Mn
E4	7295	PC Trendy 47 St
F4	7559	FX Trendy 112 St
F#4	7560	FX Trendy 113 St
G4	7561	FX Trendy 114 St
G#4	7562	FX Trendy 115 St
A4	7564	FX Trendy 117 St
A#4	7563	FX Trendy 116 St
B4	7565	FX Trendy 118 St
C5	7566	FX Trendy 119 Mn
C#5	6717	Bd Trendy 28 St
D5	6718	Bd Trendy 29 Mn
D#5	6722	Bd Trendy 33 St
E5	6723	Bd Trendy 34 St
F5	6724	Bd Trendy 35 St
F#5	6725	Bd Trendy 36 St
G5	6726	Bd Trendy 37 St
G#5	6727	Bd Trendy 38 St
A5	6730	Bd Trendy 41 St
A#5	6731	Bd Trendy 42 St
B5	6733	Bd Trendy 44 St
C6	6711	Bd Trendy 22 St

Experimental Work

Note	Wave Number	Wave Name
C0	2471	Mini Brip2
C#0	2470	Mini Brip1
D0	2472	Mini Brip3
D#0	2473	Mini Brip4
E0	2474	Mini Brip5
F0	2475	Mini Brip6
F#0	2685	Bell FX1
G0	2686	Bell FX2
G#0	2694	Electric Perc4
A0	2696	Electric Perc6
A#0	2705	Electric Perc15
B0	2695	Electric Perc5
C1	2692	Electric Perc2
C#1	2693	Electric Perc3
D1	2697	Electric Perc7
D#1	2698	Electric Perc8
E1	2699	Electric Perc9
F1	2700	Electric Perc10
F#1	2704	Electric Perc14
G1	2703	Electric Perc13
G#1	2591	Neo Seq Em-3
A1	2400	Spectrum1
A#1	2402	Spectrum3
B1	2401	Spectrum2
C2	2597	Whisper Seq Bb
C#2	2674	Digi Voice Mod
D2	2532	Moving Chime St
D#2	2529	Engine Room St
E2	2641	Raspberry
F2	2642	Digi Heli
F#2	2586	Hop FX1
G2	2501	Willow St
G#2	2504	Anemone St
A2	2507	Magnitude St
A#2	2639	Radio Noise
B2	2585	Quiek
C3	2572	Stab Giant
C#3	2568	HH Hit
D3	2573	Stab Hard
D#3	2574	Stab Organ2
E3	2575	Stab Aah
F3	2576	Hit Uhh
F#3	2577	Hit Orchestra2
G3	2569	Hit Orchestra1
G#3	2570	Hit Brass
A3	2560	Orchestra Hit1 St
A#3	2563	Orchestra Hit2 St
B3	1452	Brass Sect Fall
C4	812	Play FX Mix
C#4	812	Play FX Mix
D4	2969	ElectricGtr FX23
D#4	2981	Acoustic Bass FX04
E4	2982	Acoustic Bass FX05
F4	2978	Acoustic Bass FX01
F#4	2823	Scratch H
G4	2824	Scratch L
G#4	2825	Scratch Down
A4	2826	Scratch Hi F
A#4	2836	Scratch Stop
B4	2805	Tape Rewind
C5	2683	Ripper
C#5	2688	Noise Burst
D5	2689	Zap1
D#5	2690	Zap2
E5	2706	Hi Q1
F5	2707	Hi Q2
F#5	2804	Bomb
G5	2806	FxGun1
G#5	2535	Motion Beam
A5	2498	Birch St
A#5	2332	Tri Wave
B5	2453	FM Bass2
C6	2339	FM Metal2

Flix Flux FM

Note	Wave Number	Wave Name
C0	4922	Bd T8-1
C#0	5723	Sd T8 Rim
D0	5719	Sd T8-2
D#0	4530	Electric Clap1
E0	5668	Sd Elec11
F0	5664	Sd Elec7
F#0	5721	Sd T8-4
G0	4980	Bd Elec2
G#0	5718	Sd T8-1
A0	5057	Bd HipHop8
A#0	5720	Sd T8-3
B0	5058	Bd HipHop9
C1	5057	Bd HipHop8
C#1	5734	Sd AnSm Rim
D1	5834	Sd HipHop4
D#1	4529	Clap AnSm
E1	5835	Sd HipHop5
F1	6465	Tom T8
F#1	6122	HH Closed T8-1
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6635	Splash1 St
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6647	Crash T8-1
G#2	4584	Cowbell T8
A2	6625	China1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	4573	Conga T8
C#3	4573	Conga T8
D3	4573	Conga T8
D#3	4573	Conga T8
E3	4573	Conga T8
F3	3271	Conga1 Hi Slap
F#3	3270	Conga1 Hi Slap Open
G3	3268	Conga1 Hi Open 2
G#3	3369	Timbale1 Hi 1
A3	3406	Cabasa1A 2
A#3	3401	Maracas1 Slur
B3	2659	Fx Female Voice St
C4	2611	Portamento Lead Seq
C#4	2699	Electric Perc9
D4	3167	Shaker Hip1
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	3168	Shaker Hip2
G4	2705	Electric Perc15
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3170	Shaker Hip4
B4	2683	Ripper
C5	4982	Bd Elec4
C#5	5750	Sd Hip1
D5	5666	Sd Elec9
D#5	5663	Sd Elec6
E5	5832	Sd HipHop2
F5	4988	Bd ElecGate
F#5	6124	HH Closed T8-2
G5	4977	Bd ThickSkin
G#5	6125	HH Open T8-2
A5	4950	Bd Break Heavy
A#5	6125	HH Open T8-2
B5	4947	Bd Break Deep
C6	4945	Bd R&B2

FM Techre

Note	Wave Number	Wave Name
C0	4980	Bd Elec2
C#0	2836	Scratch Stop
D0	5579	Sd Brush Swir L
D#0	5571	Sd Brush Med R
E0	5578	Sd Brush Swir St
F0	5557	Sd Roll Mn
F#0	2457	FM Bass6
G0	2815	Seashore
G#0	2694	Electric Perc4
A0	4985	Bd ElecComp3
A#0	5125	Sd Strong R2
B0	4980	Bd Elec2
C1	4978	Bd Slimy
C#1	3376	Timbale1 Paila H
D1	5301	Sd Piccolo
D#1	4529	Clap AnSm
E1	5667	Sd Elec10
F1	2432	Mg Bass2
F#1	2707	Hi Q2
G1	2432	Mg Bass2
G#1	2697	Electric Perc7
A1	6465	Tom T8
A#1	6125	HH Open T8-2
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6623	Ride Cup Mn
E2	6623	Ride Cup Mn
F2	6623	Ride Cup Mn
F#2	2832	Scratch Sd F
G2	6598	Ride Cup1 RL
G#2	2697	Electric Perc7
A2	6521	Crash3
A#2	2518	Hi-Lo
B2	6629	China2
C3	2335	Ring Mod
C#3	2698	Electric Perc8
D3	2335	Ring Mod
D#3	2697	Electric Perc7
E3	2701	Electric Perc11
F3	3394	Paila H
F#3	3394	Paila H
G3	2586	Hop FX1
G#3	2587	Hop FX2
A3	2823	Scratch H
A#3	2826	Scratch Hi F
B3	2690	Zap2
C4	2640	LFO Seq
C#4	2640	LFO Seq
D4	2410	Mini Bass3a
D#4	2585	Quiek
E4	2528	Digi Breath
F4	2642	Digi Heli
F#4	2697	Electric Perc7
G4	2343	FM Organ1
G#4	3773	Tibetan Bowl
A4	3773	Tibetan Bowl
A#4	3905	Segal Dom
B4	2531	Engine Room R
C5	2698	Electric Perc8
C#5	666	Steel1 Slide St
D5	2471	Mini Brip2
D#5	2401	Spectrum2
E5	2474	Mini Brip5
F5	2476	Noise
F#5	4942	Bd D&B1
G5	2401	Spectrum2
G#5	2510	SabreTone
A5	2704	Electric Perc14
A#5	2698	Electric Perc8
B5	2642	Digi Heli
C6	3254	Wind Chime 1

FM Scraper

Note	Wave Number	Wave Name
C0	4980	Bd Elec2
C#0	2836	Scratch Stop
D0	5579	Sd Brush Swir L
D#0	5571	Sd Brush Med R
E0	5578	Sd Brush Swir St
F0	5557	Sd Roll Mn
F#0	2457	FM Bass6
G0	2815	Seashore
G#0	2694	Electric Perc4
A0	4985	Bd ElecComp3
A#0	5125	Sd Strong R2
B0	4980	Bd Elec2
C1	4978	Bd Slimy
C#1	3376	Timbale1 Paila H
D1	5301	Sd Piccolo
D#1	4529	Clap AnSm
E1	5667	Sd Elec10
F1	2432	Mg Bass2
F#1	2707	Hi Q2
G1	2432	Mg Bass2
G#1	2697	Electric Perc7
A1	6465	Tom T8
A#1	6125	HH Open T8-2
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6623	Ride Cup Mn
E2	6623	Ride Cup Mn
F2	6623	Ride Cup Mn
F#2	2832	Scratch Sd F
G2	6598	Ride Cup1 RL
G#2	2697	Electric Perc7
A2	6521	Crash3
A#2	2518	Hi-Lo
B2	6629	China2
C3	2335	Ring Mod
C#3	2698	Electric Perc8
D3	2335	Ring Mod
D#3	2697	Electric Perc7
E3	2701	Electric Perc11
F3	3394	Paila H
F#3	3394	Paila H
G3	2586	Hop FX1
G#3	2587	Hop FX2
A3	2823	Scratch H
A#3	2826	Scratch Hi F
B3	2690	Zap2
C4	2640	LFO Seq
C#4	2640	LFO Seq
D4	2410	Mini Bass3a
D#4	2585	Quiek
E4	2528	Digi Breath
F4	2642	Digi Heli
F#4	2697	Electric Perc7
G4	2343	FM Organ1
G#4	3773	Tibetan Bowl
A4	3773	Tibetan Bowl
A#4	3905	Segal Dom
B4	2531	Engine Room R
C5	2698	Electric Perc8
C#5	666	Steel1 Slide St
D5	2471	Mini Brip2
D#5	2401	Spectrum2
E5	2474	Mini Brip5
F5	2476	Noise
F#5	4942	Bd D&B1
G5	2401	Spectrum2
G#5	2510	SabreTone
A5	2704	Electric Perc14
A#5	2698	Electric Perc8
B5	2642	Digi Heli
C6	3254	Wind Chime 1

DubStepping

Note	Wave Number	Wave Name
C0	5013	Bd EDM01
C#0	5019	Bd EDM07
D0	2729	Abstract Fx5
D#0	2730	Bazer Fx
E0	2739	Damage Fx9
F0	2739	Damage Fx9
F#0	2740	Damage Fx10
G0	2730	Bazer Fx
G#0	2758	Electric FX Perc9
A0	5021	Bd EDM09
A#0	5800	Sd TB Comp2
B0	4901	Bd DanceGate2
C1	5007	Bd Stack6
C#1	5799	Sd TB Comp1
D1	5793	Sd ShortDry2
D#1	4593	PC Shaker1
E1	5787	Sd Clap1
F1	6541	PI Crash 15
F#1	6164	HH TecClosed2
G1	6479	Comp EleTom High
G#1	6163	HH TecOpen1
A1	6480	Comp EleTom Low
A#1	6165	HH TecOpen2
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6542	PI Crash 16
D2	6634	China4
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	PI Crash 16
G#2	2707	Hi Q2
A2	6542	PI Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4995	Bd HrdSpecial
C#5	4996	Bd Hybrid1
D5	4997	Bd Hybrid2
D#5	4998	Bd NewPop1
E5	4999	Bd NewPop2
F5	5000	Bd NewPop3
F#5	5792	Sd ShortDry1
G5	2761	Electric FX Perc12
G#5	2728	Abstract Fx4
A5	2725	Abstract Fx1
A#5	2751	Electric FX Perc2
B5	2757	Electric FX Perc8
C6	2764	Electric FX Perc15

Minimal Techno

Note	Wave Number	Wave Name
C0	4973	Bd Hard Long
C#0	4972	Bd TekPower
D0	4956	Bd Distortion5
D#0	4954	Bd Distortion3
E0	4952	Bd Distortion1
F0	4942	Bd D&B1
F#0	4937	Bd Brip
G0	4932	Bd AnSm
G#0	4923	Bd T8-2
A0	4924	Bd T8-3
A#0	4908	Bd T9 Hd3
B0	4903	Bd T9-2
C1	4904	Bd T9-3
C#1	5697	Sd T9Rim
D1	5691	Sd T9-1
D#1	4521	Clap T9-1
E1	5694	Sd T9-4
F1	6449	Tom T9 Lo
F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6449	Tom T9 Lo
C2	6449	Tom T9 Lo
C#2	6645	Crash T9-1
D2	4573	Conga T8
D#2	6671	Ride T9-1
E2	4573	Conga T8
F2	4628	Analog Click
F#2	4618	Claves T8-1
G2	4614	MaracasT8-1
G#2	4601	Tambourine AnCR
A2	4592	Analog Shaker
A#2	4584	Cowbell T8
B2	4590	Cowbell AnCR
C3	5718	Sd T8-1
C#3	5719	Sd T8-2
D3	5720	Sd T8-3
D#3	5735	Sd AnCR
E3	5739	Sd Jungle1
F3	5743	Sd D&B1
F#3	5750	Sd Hip1
G3	5747	Sd R&B1
G#3	5749	Sd R&B2
A3	5750	Sd Hip1
A#3	5778	Sd Wood
B3	5777	Sd Timbr
C4	6122	HH Closed T8-1
C#4	6123	HH Open T8-1
D4	6124	HH Closed T8-2
D#4	6125	HH Open T8-2
E4	5888	HH Pedal 3 R
F4	5901	HH Open 2R
F#4	5901	HH Open 2R
G4	6152	HH Closed Lo-Fi
G#4	6153	HH Open Lo-Fi
A4	6154	HH Closed Syn
A#4	6155	HH Open Syn
B4	4592	Analog Shaker
C5	4600	Tambourine RX5
C#5	4600	Tambourine RX5
D5	4591	Electric Cowbell
D#5	4573	Conga T8
E5	4621	Electric Triangle
F5	4618	Claves T8-1
F#5	4592	Analog Shaker
G5	4530	Electric Clap1
G#5	4531	Electric Clap2
A5	4601	Tambourine AnCR
A#5	4584	Cowbell T8
B5	4628	Analog Click
C6	4589	Cowbell RX11

Surprise Package

Note	Wave Number	Wave Name
C0	5799	Sd TB Comp1
C#0	5798	Sd TB Q
D0	2725	Abstract Fx1
D#0	2728	Abstract Fx4
E0	2731	Damage Fx1
F0	2730	Bazer Fx
F#0	2733	Damage Fx3
G0	2726	Abstract Fx2
G#0	2757	Electric FX Perc8
A0	5027	Bd Body2
A#0	5793	Sd ShortDry2
B0	5024	Bd LongBass
C1	5015	Bd EDM03
C#1	5794	Sd ShortGate1
D1	5789	Sd Clap3
D#1	4532	RX11 Clap
E1	5787	Sd Clap1
F1	6480	Comp EleTom Low
F#1	6159	HH ClosedNine
G1	6480	Comp EleTom Low
G#1	6160	HH PedalNine
A1	6480	Comp EleTom Low
A#1	6161	HH OpenNine
B1	6479	Comp EleTom High
C2	6479	Comp EleTom High
C#2	6541	Pl Crash 15
D2	6479	Comp EleTom High
D#2	6604	Fine Ride Bow
E2	6634	China4
F2	6606	Fine Ride Cup
F#2	3430	Pandeiro1 Tip
G2	6542	Pl Crash 16
G#2	2707	Hi Q2
A2	6542	Pl Crash 16
A#2	2707	Hi Q2
B2	6605	Fine Ride Edge
C3	2984	Acoustic Bass FX07
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	4530	Electric Clap1
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2744	Noize Fx1
C#4	2746	Noize Rize1
D4	2747	Noize Rize2
D#4	2727	Abstract Fx3
E4	2729	Abstract Fx5
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4900	Bd DanceGate1
C#5	5023	Bd EDM Gate
D5	4901	Bd DanceGate2
D#5	2741	Damage Fx11
E5	5004	Bd Stack3
F5	5022	Bd EDM10
F#5	5520	Sd BreakRim
G5	2764	Electric FX Perc15
G#5	2744	Noize Fx1
A5	2738	Damage Fx8
A#5	2755	Electric FX Perc6
B5	2753	Electric FX Perc4
C6	2758	Electric FX Perc9

ATL Flexin

Note	Wave Number	Wave Name
C0	27	CF3 Stretch Sw St
C#0	5680	Elec Jazz Snare St
D0	5688	Crackle Snare St
D#0	2802	T8 Bend
E0	5687	Elec Light Snare St
F0	5685	Snare Roll OneShot
F#0	5683	Clang Snare St
G0	5684	Ambi Snare
G#0	5681	Elec Tight Snare St
A0	4966	Electric BD St
A#0	5686	Fine Snare St
B0	4967	Clink BD St
C1	4965	Crackle BD St
C#1	5682	Electric Snare
D1	5690	Sd Long Snare Wire
D#1	4534	Clap Short Ambi St
E1	5689	Sd HandClap
F1	6506	Powerful Tom Mid St
F#1	6211	Elec HH 1 Closed
G1	6507	Powerful Tom Low St
G#1	6213	Elec HH 2 Closed
A1	6505	Powerful Tom High St
A#1	6212	Elec HH 1 Open
B1	6509	Fine Light Tom St
C2	6504	Light Tom Low St
C#2	6669	FX Crash St
D2	6503	Light Tom High St
D#2	6684	Clang Ride St
E2	6667	Crackle Crash St
F2	6685	Smith Ride St
F#2	3192	Tambourine FX 1
G2	6668	Electric Crash St
G#2	3193	Tambourine FX 2
A2	6670	Phase Crash St
A#2	4568	Snap & Clap St
B2	6687	Ride Hip Hop St
C3	3349	Bongo Extent 1 St
C#3	3351	Bongo Extent 3 St
D3	3350	Bongo Extent 2 St
D#3	3349	Bongo Extent 1 St
E3	3603	Stomp St
F3	2787	Vocal Snare St
F#3	2788	Vocal Ambi SE St
G3	2789	Vocal Shout Yeah St
G#3	2790	Vocal Shout Go St
A3	3175	Shaker Muffled 1 St
A#3	3176	Shaker Muffled 2 St
B3	2799	Glitch 8
C4	2799	Glitch 8
C#4	6214	Powerful HH Closed
D4	6215	Powerful HH Open
D#4	3609	Ethnic Perc 6
E4	3610	Ethnic Perc 7
F4	3611	Ethnic Perc 8
F#4	2791	Rainmaker St
G4	3608	Ethnic Perc 5
G#4	3607	Ethnic Perc 4
A4	4567	Snap Digital St
A#4	4569	Snap Long Ambi St
B4	4570	Snap Smith Snap St
C5	3255	Wind Chime 2 St

Infamous

Note	Wave Number	Wave Name
C0	2803	T8 Bass SE St
C#0	5680	Elec Jazz Snare St
D0	5688	Crackle Snare St
D#0	2802	T8 Bend
E0	5687	Elec Light Snare St
F0	5685	Snare Roll OneShot
F#0	5683	Clang Snare St
G0	5684	Ambi Snare
G#0	5681	Elec Tight Snare St
A0	4966	Electric BD St
A#0	5686	Fine Snare St
B0	4967	Clink BD St
C1	4965	Crackle BD St
C#1	5682	Electric Snare
D1	5690	Sd Long Snare Wire
D#1	4534	Clap Short Ambi St
E1	5689	Sd HandClap
F1	6506	Powerful Tom Mid St
F#1	6211	Elec HH 1 Closed
G1	6507	Powerful Tom Low St
G#1	6213	Elec HH 2 Closed
A1	6505	Powerful Tom High St
A#1	6212	Elec HH 1 Open
B1	6509	Fine Light Tom St
C2	6504	Light Tom Low St
C#2	6669	FX Crash St
D2	6503	Light Tom High St
D#2	6684	Clang Ride St
E2	6667	Crackle Crash St
F2	6685	Smith Ride St
F#2	3192	Tambourine FX 1
G2	6668	Electric Crash St
G#2	3193	Tambourine FX 2
A2	6670	Phase Crash St
A#2	4568	Snap & Clap St
B2	6687	Ride Hip Hop St
C3	3349	Bongo Extent 1 St
C#3	3351	Bongo Extent 3 St
D3	3350	Bongo Extent 2 St
D#3	3349	Bongo Extent 1 St
E3	3603	Stomp St
F3	2787	Vocal Snare St
F#3	2788	Vocal Ambi SE St
G3	2789	Vocal Shout Yeah St
G#3	2790	Vocal Shout Go St
A3	3175	Shaker Muffled 1 St
A#3	3176	Shaker Muffled 2 St
B3	2799	Glitch 8
C4	2799	Glitch 8
C#4	6214	Powerful HH Closed
D4	6215	Powerful HH Open
D#4	3609	Ethnic Perc 6
E4	3610	Ethnic Perc 7
F4	3611	Ethnic Perc 8
F#4	2791	Rainmaker St
G4	3608	Ethnic Perc 5
G#4	3607	Ethnic Perc 4
A4	4567	Snap Digital St
A#4	4569	Snap Long Ambi St
B4	4570	Snap Smith Snap St
C5	3255	Wind Chime 2 St

Plastic Beat

Note	Wave Number	Wave Name
B0	5030	Dub BD 2 St
C1	5032	Dub BD 4 Mn
C#1	4606	Elec Stick1 Mn
D1	5801	Dub SD 1 St
D#1	4537	Dub Clap St
E1	5802	Dub SD 2 St
F1	6481	Dub Tom Mn
F#1	6167	Dub HH 2 Mn
G1	5828	Flam Mn
G#1	6166	Dub HH 1 Mn
A1	5031	Dub BD 3 Mn
A#1	6168	Dub OHH 1 St
B1	5029	Dub BD 1 Mn
C2	5033	Dub BD 5 St
C#2	6654	Dub Crash Mn
D2	4647	Dub Misc 01 St
D#2	6676	Dub Ride St
E2	2768	Dub Fx1 Mn
F2	2769	Dub Fx2 St
F#2	4604	Electric Tambourine3
G2	4605	Electric Tambourine4
G#2	4648	Dub Misc 02 St
A2	4650	Dub Misc 04 St
A#2	4649	Dub Misc 03 St
B2	6169	Dub OHH 2 Mn
C3	4651	Dub Misc 05 St
C#3	4652	Dub Misc 06 St
D3	4653	Dub Misc 07 St
D#3	4654	Dub Misc 08 St
E3	4655	Dub Misc 09 St
F3	4656	Dub Misc 10 St
F#3	5034	Dub BD 6 St
G3	4702	Tick 01 St
G#3	4703	Tick 02 St
A3	4595	Elec Shaker1 St
A#3	4596	Elec Shaker2 St
B3	4597	Elec Shaker3 St
C4	4598	Elec Shaker4 St
C#4	4599	Elec Shaker5 St
D4	4699	Rattle Mn
D#4	5803	Dub SD 3 Mn
E4	4609	Elec Wood Block1 St
F4	4611	Elec Wood Block3 St
F#4	4610	Elec Wood Block2 St
G4	4612	Elec Wood Block4 St
G#4	5804	Dub SD 4 Mn
A4	5805	Dub SD 5 St

PowerStandardKit 1

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5379	Sd PowerD 1St
G#0	3197	Stick1
A0	4805	Bd PowerB 1-2St
A#0	5391	Sd PowerD 5St
B0	4796	Bd PowerA 1-2St
C1	4783	Bd Jazz1-2St
C#1	5349	Sd PowerB SSt
D1	5352	Sd PowerC 1-5St
D#1	3231	Hand Clap1 St
E1	5373	Sd PowerD 1-5St
F1	6281	Tom Power04 1-2St
F#1	5956	HH Power ClTip 1-4St
G1	6281	Tom Power04 1-2St
G#1	5996	HH Power ClPedal St
A1	6269	Tom Power03 1-2St
A#1	6000	HH Power Open EdgeSt
B1	6257	Tom Power02 1-2St
C2	6257	Tom Power02 1-2St
C#2	6517	Crash2 St
D2	6245	Tom Power01 1-2St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6571	Ride2 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

PowerStandardKit 2

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5313	Sd PowerA 1St
G#0	3197	Stick1
A0	4805	Bd PowerB 1-2St
A#0	5325	Sd PowerA 5St
B0	4796	Bd PowerA 1-2St
C1	4783	Bd Jazz1-2St
C#1	5349	Sd PowerB SSt
D1	5328	Sd PowerB 1-5St
D#1	3231	Hand Clap1 St
E1	5307	Sd PowerA 1-5St
F1	6281	Tom Power04 1-2St
F#1	5976	HH Power ClEgde1-4St
G1	6281	Tom Power04 1-2St
G#1	5996	HH Power ClPedal St
A1	6269	Tom Power03 1-2St
A#1	6000	HH Power Open EdgeSt
B1	6257	Tom Power02 1-2St
C2	6257	Tom Power02 1-2St
C#2	6517	Crash2 St
D2	6245	Tom Power01 1-2St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6571	Ride2 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

Hyper Standard Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5154	Sd Normal 1St
G#0	3197	Stick1
A0	4766	Bd Funk Son St
A#0	5186	Sd Basic St1-3
B0	4710	Bd Snap 1
C1	4760	Bd H Son St
C#1	5540	Sd Closed Rim St
D1	5201	Sd SonA St1-4
D#1	4521	Clap T9-1
E1	5251	Sd Tight St1-4
F1	6229	Tom Floor St
F#1	5905	HH Closed Foot St
G1	6229	Tom Floor St
G#1	5909	HH Half Open2 St
A1	6225	Tom Low St
A#1	5913	HH Open2 St
B1	6225	Tom Low St
C2	6221	Tom Mid St
C#2	6520	Crash2 RL
D2	6217	Tom Hi St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6570	Ride1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5221	Sd Blues St1-3
D#5	5244	Sd BluesHeart R1-3
E5	5271	Sd Hip St1-2
F5	5148	Sd Normal St1-4
F#5	5519	Sd LdwHMn
G5	5089	Sd Soul St1-3
G#5	5522	Sd Heavy
A5	5172	Sd Funk 1St
A#5	4737	Bd Normal 1St
B5	4766	Bd Funk Son St
C6	4709	Bd Snap 1-2

Dry Standard Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5154	Sd Normal 1St
G#0	3197	Stick1
A0	4745	Bd Funk St1-2
A#0	5188	Sd Basic St2-3
B0	4754	Bd High St
C1	4736	Bd Normal St1-2
C#1	5540	Sd Closed Rim St
D1	5148	Sd Normal St1-4
D#1	4521	Clap T9-1
E1	5187	Sd Basic St1-2
F1	6229	Tom Floor St
F#1	5857	HH Closed 1-4St
G1	6229	Tom Floor St
G#1	5880	HH Pedal 3 St
A1	6225	Tom Low St
A#1	5893	HH Open 1-2St
B1	6225	Tom Low St
C2	6221	Tom Mid St
C#2	6520	Crash2 RL
D2	6217	Tom Hi St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6570	Ride1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3270	Conga1 Hi Slap Open
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5228	Sd Blues L1-3
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5090	Sd Soul St2-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5239	Sd BluesHeart St13
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

Modern Rock Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5282	Sd Rock Open1 R
G#0	3197	Stick1
A0	4780	Bd Room1
A#0	5137	Sd Rng St4
B0	4789	Bd Jazz2St
C1	4782	Bd Room3
C#1	5527	Sd Rock Stick2 St
D1	5108	Sd Strong St1-4
D#1	4558	HipHop Clap6
E1	5307	Sd PowerA 1-5St
F1	6229	Tom Floor St
F#1	5917	HH Closed Rock Sw St
G1	6225	Tom Low St
G#1	5945	HH Half Open Rock St
A1	6225	Tom Low St
A#1	5943	HH Open Rock St
B1	6221	Tom Mid St
C2	6221	Tom Mid St
C#2	6516	Crash1 RL
D2	6217	Tom Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6618	Ride Cup2 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6513	Crash1 St
A#2	3221	Vibraslap1
B2	6598	Ride Cup1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5224	Sd Blues St13
D5	5251	Sd Tight St1-4
D#5	5244	Sd BluesHeart R1-3
E5	5262	Sd Tight R1-4
F5	4757	Bd Low St
F#5	5367	Sd PowerC 4St
G5	4944	Bd R&B1
G#5	5328	Sd PowerB 1-5St
A5	4780	Bd Room1
A#5	5307	Sd PowerA 1-5St
B5	4766	Bd Funk Son St
C6	4781	Bd Room2

Rock Stereo Kit 1

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5548	Sd RockRoll St
F#0	3202	Castanet1
G0	5289	Sd Rock Open2 St
G#0	3197	Stick1
A0	4782	Bd Room3
A#0	5286	Sd Rock Rim1 St
B0	4772	Bd Rock2 St
C1	4769	Bd Rock1 St
C#1	5524	Sd Rock Stick1 St
D1	5280	Sd Rock Open1 St
D#1	4555	HipHop Clap3
E1	5283	Sd Rock Mute1 St
F1	6241	Tom Rock Low St
F#1	5917	HH Closed Rock Sw St
G1	6241	Tom Rock Low St
G#1	5929	HH Pedal Rock Sw St
A1	6237	Tom Rock Mid St
A#1	5941	HH Open Rock Sw St
B1	6237	Tom Rock Mid St
C2	6233	Tom Rock Hi St
C#2	6516	Crash1 RL
D2	6233	Tom Rock Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6618	Ride Cup2 St
F#2	4600	Tambourine RX5
G2	6635	Splash1 St
G#2	3565	Cowbell1
A2	6513	Crash1 St
A#2	3221	Vibraslap1
B2	6574	Ride2 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5298	Sd Rock Flam St
D5	5289	Sd Rock Open2 St
D#5	5295	Sd Rock Rim2 St
E5	5292	Sd Rock Mute2 St
F5	4746	Bd Funk 1St
F#5	5551	Sd RockRollD St
G5	4760	Bd H Son St
G#5	5251	Sd Tight St1-4
A5	4766	Bd Funk Son St
A#5	5209	Sd SonA 3St
B5	4749	Bd Funk R1-2
C6	4760	Bd H Son St

Rock Stereo Kit 2

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5548	Sd RockRoll St
F#0	3202	Castanet1
G0	5289	Sd Rock Open2 St
G#0	3197	Stick1
A0	4780	Bd Room1
A#0	5295	Sd Rock Rim2 St
B0	4730	Bd Ambience L1-2
C1	4772	Bd Rock2 St
C#1	5527	Sd Rock Stick2 St
D1	5289	Sd Rock Open2 St
D#1	3231	Hand Clap1 St
E1	5292	Sd Rock Mute2 St
F1	6241	Tom Rock Low St
F#1	5933	HH Closed Rock 2St
G1	6241	Tom Rock Low St
G#1	5945	HH Half Open Rock St
A1	6237	Tom Rock Mid St
A#1	5943	HH Open Rock St
B1	6237	Tom Rock Mid St
C2	6233	Tom Rock Hi St
C#2	6517	Crash2 St
D2	6233	Tom Rock Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6618	Ride Cup2 St
F#2	4600	Tambourine RX5
G2	6635	Splash1 St
G#2	3565	Cowbell1
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6574	Ride2 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5298	Sd Rock Flam St
D5	5280	Sd Rock Open1 St
D#5	5286	Sd Rock Rim1 St
E5	5283	Sd Rock Mute1 St
F5	4769	Bd Rock1 St
F#5	5551	Sd RockRollD St
G5	4747	Bd Funk 2St
G#5	5251	Sd Tight St1-4
A5	4754	Bd High St
A#5	5210	Sd SonA 4St
B5	4763	Bd L Son St
C6	4769	Bd Rock1 St

Nu Hip Hop Kit 1

Note	Wave Number	Wave Name
C0	5051	Bd HipHop2
C#0	3406	Cabasa1A 2
D0	5837	Sd HipHop7
D#0	2829	Scratch Lo R
E0	2834	Scratch Vo F
F0	5551	Sd RockRollD St
F#0	3559	Claves1
G0	5834	Sd HipHop4
G#0	5849	Sd HipHop Rim3
A0	5057	Bd HipHop8
A#0	5852	Sd HipHop Rim6
B0	5058	Bd HipHop9
C1	5054	Bd HipHop5
C#1	5848	Sd HipHop Rim2
D1	5839	Sd HipHop9
D#1	4554	HipHop Clap2
E1	5832	Sd HipHop2
F1	6230	Tom Floor L
F#1	6149	HH Closed Hip
G1	6226	Tom Low L
G#1	6150	HH Pedal Hip
A1	6223	Tom Mid R
A#1	6151	HH Open Hip
B1	6219	Tom Hi R
C2	6219	Tom Hi R
C#2	6522	Crash4
D2	6219	Tom Hi R
D#2	6572	Ride2 L
E2	6518	Crash2 L
F2	6622	Ride Mn
F#2	3187	Tambourine1 Hit
G2	6562	Hand Cymbal Open L
G#2	3578	Mambo Bell Body
A2	6627	China1 R
A#2	3248	Handbell L
B2	6624	Ride Cup Mn2
C3	3270	Conga1 Hi Slap Open
C#3	3278	Conga1 Lo Open 1
D3	3275	Conga1 Lo Tip
D#3	3281	Conga1 Lo Slap Open
E3	3279	Conga1 Lo Open 2
F3	5053	Bd HipHop4
F#3	4555	HipHop Clap3
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3160	ShakerA 2
A#3	3159	ShakerA 1
B3	5059	Bd HipHop10
C4	5055	Bd HipHop6
C#4	5850	Sd HipHop Rim4
D4	5835	Sd HipHop5
D#4	4571	HipHop Snap1
E4	5059	Bd HipHop10
F4	5836	Sd HipHop6
F#4	4553	HipHop Clap1
G4	3393	Paila L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3185	Tambourine1 Sw
B4	3160	ShakerA 2
C5	5057	Bd HipHop8
C#5	4521	Clap T9-1
D5	5718	Sd T8-1
D#5	5718	Sd T8-1
E5	5721	Sd T8-4
F5	6465	Tom T8
F#5	6124	HH Closed T8-2
G5	6465	Tom T8
G#5	6124	HH Closed T8-2
A5	6465	Tom T8
A#5	6125	HH Open T8-2
B5	6465	Tom T8
C6	6647	Crash T8-1

Nu Hip Hop Kit 2

Note	Wave Number	Wave Name
C0	5052	Bd HipHop3
C#0	2707	Hi Q2
D0	2839	Scratch Hip2
D#0	2833	Scratch Sd R
E0	2835	Scratch Vo R
F0	5763	Sd Break Roll
F#0	5697	Sd T9Rim
G0	5832	Sd HipHop2
G#0	5723	Sd T8 Rim
A0	5058	Bd HipHop9
A#0	5847	Sd HipHop Rim1
B0	5055	Bd HipHop6
C1	5054	Bd HipHop5
C#1	5848	Sd HipHop Rim2
D1	5831	Sd HipHop1
D#1	4558	HipHop Clap6
E1	5837	Sd HipHop7
F1	6449	Tom T9 Lo
F#1	6149	HH Closed Hip
G1	6449	Tom T9 Lo
G#1	6150	HH Pedal Hip
A1	6448	Tom T9 Hi
A#1	6151	HH Open Hip
B1	6448	Tom T9 Hi
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6671	Ride T9-1
F2	6552	Crash Brush Cup St
F#2	4600	Tambourine RX5
G2	6652	Crash Syn
G#2	4590	Cowbell AnCR
A2	6645	Crash T9-1
A#2	3463	MetalGuiro Long
B2	6622	Ride Mn
C3	3493	Cajon1 Tip 1-2
C#3	3338	Bongo1 Lo Tip
D3	3445	Tmbourim Finger
D#3	3421	Tumbo 2
E3	3315	Tumba Heel
F3	3394	Paila H
F#3	3393	Paila L
G3	4584	Cowbell T8
G#3	4590	Cowbell AnCR
A3	3783	Shekere Up
A#3	3416	Caxixi 1
B3	2663	Grain2 St
C4	2664	Grain2 L
C#4	3494	Cajon1 Tip 1
D4	4559	HipHop Clap7
D#4	3559	Claves1
E4	3214	Wood Block
F4	5850	Sd HipHop Rim4
F#4	4571	HipHop Snap1
G4	4572	HipHop Snap2
G#4	4621	Electric Triangle
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3463	MetalGuiro Long
C5	3254	Wind Chime 1
C#5	5850	Sd HipHop Rim4
D5	5718	Sd T8-1
D#5	5719	Sd T8-2
E5	5721	Sd T8-4
F5	6465	Tom T8
F#5	6124	HH Closed T8-2
G5	6465	Tom T8
G#5	6124	HH Closed T8-2
A5	6465	Tom T8
A#5	6125	HH Open T8-2
B5	6465	Tom T8
C6	4629	HipHop Flex1

Hip Hop Kit 1

Note	Wave Number	Wave Name
C0	5531	Sd Hip Stick2
C#0	2708	Vox Hit Rev
D0	2810	TurnTable
D#0	2570	Hit Brass
E0	2833	Scratch Sd R
F0	5556	Sd LiveRoll R
F#0	4618	Claves T8-1
G0	5279	Sd Hip 2R
G#0	5537	Sd Hip Stick6 R
A0	5058	Bd HipHop9
A#0	5772	Sd Garg L
B0	4924	Bd T8-3
C1	4902	Bd T9-1
C#1	5849	Sd HipHop Rim3
D1	5838	Sd HipHop8
D#1	4558	HipHop Clap6
E1	5831	Sd HipHop1
F1	6465	Tom T8
F#1	6122	HH Closed T8-1
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6522	Crash4
D2	6465	Tom T8
D#2	6609	Ride Brush1 R
E2	6647	Crash T8-1
F2	6671	Ride T9-1
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	3578	Mambo Bell Body
A2	6645	Crash T9-1
A#2	3221	Vibraslap1
B2	6671	Ride T9-1
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5539	Sd Hip Stick8
D5	5741	Sd Jungle3
D#5	3233	Hand Clap1 R
E5	5758	Sd Hip Rim5
F5	2823	Scratch H
F#5	2824	Scratch L
G5	2825	Scratch Down
G#5	2827	Scratch Hi R
A5	2830	Scratch Bd F
A#5	2842	Scratch Combi
B5	2835	Scratch Vo R
C6	4949	Bd Break2

Hip Hop Kit 2

Note	Wave Number	Wave Name
C0	4924	Bd T8-3
C#0	5723	Sd T8 Rim
D0	5750	Sd Hip1
D#0	4521	Clap T9-1
E0	5775	Sd Syn
F0	5556	Sd LiveRoll R
F#0	5533	Sd Hip Stick4
G0	5832	Sd HipHop2
G#0	5852	Sd HipHop Rim6
A0	4946	Bd Hip Deep
A#0	5748	Sd R&B1 Rim
B0	4950	Bd Break Heavy
C1	4946	Bd Hip Deep
C#1	5848	Sd HipHop Rim2
D1	5752	Sd Hip3
D#1	3231	Hand Clap1 St
E1	5780	Sd Lo-Fi
F1	6231	Tom Floor R
F#1	6152	HH Closed Lo-Fi
G1	6226	Tom Low L
G#1	6141	HH Closed Break
A1	6226	Tom Low L
A#1	6153	HH Open Lo-Fi
B1	6226	Tom Low L
C2	6218	Tom Hi L
C#2	6521	Crash3
D2	6218	Tom Hi L
D#2	6671	Ride T9-1
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	4600	Tambourine RX5
G2	6521	Crash3
G#2	4589	Cowbell RX11
A2	6519	Crash2 R
A#2	4584	Cowbell T8
B2	6671	Ride T9-1
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	2639	Radio Noise
F#3	2639	Radio Noise
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	4614	MaracasT8-1
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2837	Scratch Spin
D4	2836	Scratch Stop
D#4	4618	Claves T8-1
E4	2812	Door Squeak
F4	2707	Hi Q2
F#4	2830	Scratch Bd F
G4	2831	Scratch Bd R
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3187	Tambourine1 Hit
C5	3254	Wind Chime 1
C#5	5738	Sd Human2
D5	5763	Sd Break Roll
D#5	2573	Stab Hard
E5	5739	Sd Jungle1
F5	4769	Bd Rock1 St
F#5	2825	Scratch Down
G5	3825	Wa Taiko
G#5	2568	HH Hit
A5	2574	Stab Organ2
A#5	2526	Sonar1
B5	2810	TurnTable
C6	2811	Police

Hip Hop Kit 3

Note	Wave Number	Wave Name
C0	5723	Sd T8 Rim
C#0	2708	Vox Hit Rev
D0	2810	TurnTable
D#0	2573	Stab Hard
E0	2835	Scratch Vo R
F0	5557	Sd Roll Mn
F#0	4618	Claves T8-1
G0	5277	Sd Hip 1R
G#0	5533	Sd Hip Stick4
A0	4933	Bd AnCR
A#0	5756	Sd Hip Rim3
B0	4904	Bd T9-3
C1	4946	Bd Hip Deep
C#1	5534	Sd Hip Stick5
D1	5753	Sd Hip Gate
D#1	4558	HipHop Clap6
E1	5780	Sd Lo-Fi
F1	6465	Tom T8
F#1	6149	HH Closed Hip
G1	6465	Tom T8
G#1	6150	HH Pedal Hip
A1	6465	Tom T8
A#1	6151	HH Open Hip
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6522	Crash4
D2	6465	Tom T8
D#2	6573	Ride2 R
E2	6647	Crash T8-1
F2	6671	Ride T9-1
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	3578	Mambo Bell Body
A2	6645	Crash T9-1
A#2	3221	Vibraslap1
B2	6671	Ride T9-1
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3167	Shaker Hip1
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5530	Sd Hip Stick1
D5	5739	Sd Jungle1
D#5	3233	Hand Clap1 R
E5	5762	Sd Break Heavy
F5	2824	Scratch L
F#5	2825	Scratch Down
G5	2826	Scratch Hi F
G#5	2828	Scratch Lo F
A5	2829	Scratch Lo R
A#5	2830	Scratch Bd F
B5	2831	Scratch Bd R
C6	4950	Bd Break Heavy

Hip Hop Kit 4

Note	Wave Number	Wave Name
C0	5530	Sd Hip Stick1
C#0	2706	Hi Q1
D0	2810	TurnTable
D#0	2576	Hit Uhh
E0	2836	Scratch Stop
F0	5555	Sd LiveRoll L
F#0	4618	Claves T8-1
G0	5770	Sd Cut
G#0	5526	Sd Rock Stick1 R
A0	4903	Bd T9-2
A#0	5754	Sd Hip Rim1
B0	4945	Bd R&B2
C1	4947	Bd Break Deep
C#1	5544	Sd Closed Rim3
D1	5755	Sd Hip Rim2
D#1	4556	HipHop Clap4
E1	5747	Sd R&B1
F1	4573	Conga T8
F#1	6122	HH Closed T8-1
G1	4573	Conga T8
G#1	6124	HH Closed T8-2
A1	4573	Conga T8
A#1	6125	HH Open T8-2
B1	4573	Conga T8
C2	4573	Conga T8
C#2	6522	Crash4
D2	4573	Conga T8
D#2	6573	Ride2 R
E2	6647	Crash T8-1
F2	6671	Ride T9-1
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	3578	Mambo Bell Body
A2	6645	Crash T9-1
A#2	3221	Vibraslap1
B2	6671	Ride T9-1
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5542	Sd Closed Rim R
D5	5734	Sd AnSm Rim
D#5	3231	Hand Clap1 St
E5	5752	Sd Hip3
F5	2833	Scratch Sd R
F#5	2838	Scratch Hip
G5	2831	Scratch Bd R
G#5	2835	Scratch Vo R
A5	2839	Scratch Hip2
A#5	2843	Scratch Combi2
B5	2845	Scratch Combi4
C6	4946	Bd Hip Deep

Hip Stick Kit 1

Note	Wave Number	Wave Name
C0	5757	Sd Hip Rim4
C#0	2706	Hi Q1
D0	2810	TurnTable
D#0	2569	Hit Orchestra1
E0	2831	Scratch Bd R
F0	5556	Sd LiveRoll R
F#0	4628	Analog Click
G0	5756	Sd Hip Rim3
G#0	5736	Sd AnCR Rim
A0	5058	Bd HipHop9
A#0	5852	Sd HipHop Rim6
B0	4924	Bd T8-3
C1	4923	Bd T8-2
C#1	5723	Sd T8 Rim
D1	5533	Sd Hip Stick4
D#1	3233	Hand Clap1 R
E1	5532	Sd Hip Stick3
F1	6465	Tom T8
F#1	6122	HH Closed T8-1
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6522	Crash4
D2	6465	Tom T8
D#2	6573	Ride2 R
E2	6647	Crash T8-1
F2	6671	Ride T9-1
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	3578	Mambo Bell Body
A2	6645	Crash T9-1
A#2	3221	Vibraslap1
B2	6671	Ride T9-1
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5733	Sd AnSm
D5	5544	Sd Closed Rim3
D#5	4628	Analog Click
E5	5543	Sd Closed Rim2
F5	2823	Scratch H
F#5	2824	Scratch L
G5	2825	Scratch Down
G#5	2827	Scratch Hi R
A5	2830	Scratch Bd F
A#5	2842	Scratch Combi
B5	2835	Scratch Vo R
C6	4940	Bd Jungle2

Hip Stick Kit 2

Note	Wave Number	Wave Name
C0	5756	Sd Hip Rim3
C#0	2707	Hi Q2
D0	2823	Scratch H
D#0	2823	Scratch H
E0	2835	Scratch Vo R
F0	5557	Sd Roll Mn
F#0	4628	Analog Click
G0	5757	Sd Hip Rim4
G#0	5723	Sd T8 Rim
A0	5058	Bd HipHop9
A#0	5533	Sd Hip Stick4
B0	4973	Bd Hard Long
C1	4989	Bd ElecClick
C#1	5530	Sd Hip Stick1
D1	5531	Sd Hip Stick2
D#1	4560	HipHop Clap8
E1	5535	Sd Hip Stick6 St
F1	6449	Tom T9 Lo
F#1	6122	HH Closed T8-1
G1	6449	Tom T9 Lo
G#1	6123	HH Open T8-1
A1	6449	Tom T9 Lo
A#1	6123	HH Open T8-1
B1	6449	Tom T9 Lo
C2	6449	Tom T9 Lo
C#2	6645	Crash T9-1
D2	6449	Tom T9 Lo
D#2	6570	Ride1 RL
E2	6647	Crash T8-1
F2	6624	Ride Cup Mn2
F#2	4603	Electric Tambourine2
G2	6637	Splash1 R
G#2	4584	Cowbell T8
A2	6645	Crash T9-1
A#2	3221	Vibraslap1
B2	6652	Crash Syn
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5723	Sd T8 Rim
D5	5530	Sd Hip Stick1
D#5	5531	Sd Hip Stick2
E5	5543	Sd Closed Rim2
F5	2825	Scratch Down
F#5	2826	Scratch Hi F
G5	2828	Scratch Lo F
G#5	2829	Scratch Lo R
A5	2831	Scratch Bd R
A#5	2842	Scratch Combi
B5	2836	Scratch Stop
C6	5057	Bd HipHop8

R&B Kit 1

Note	Wave Number	Wave Name
C0	4908	Bd T9 Hd3
C#0	5735	Sd AnCR
D0	5734	Sd AnSm Rim
D#0	5768	Sd Clap Analog
E0	5696	Sd T9Gate
F0	5557	Sd Roll Mn
F#0	5777	Sd Timbr
G0	5774	Sd FM Rim
G#0	5742	Sd JungleFX
A0	4905	Bd T9-4
A#0	5758	Sd Hip Rim5
B0	4904	Bd T9-3
C1	4980	Bd Elec2
C#1	5723	Sd T8 Rim
D1	5780	Sd Lo-Fi
D#1	4554	HipHop Clap2
E1	5747	Sd R&B1
F1	4924	Bd T8-3
F#1	6108	HH Closed T9
G1	4924	Bd T8-3
G#1	6150	HH Pedal Hip
A1	4924	Bd T8-3
A#1	6109	HH Open T9
B1	4924	Bd T8-3
C2	4924	Bd T8-3
C#2	6516	Crash1 RL
D2	4924	Bd T8-3
D#2	6571	Ride2 St
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6513	Crash1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	2706	Hi Q1
F#3	2706	Hi Q1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	4592	Analog Shaker
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	2706	Hi Q1
D4	2707	Hi Q2
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2837	Scratch Spin
F#4	2827	Scratch Hi R
G4	2826	Scratch Hi F
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3187	Tambourine1 Hit
C5	3254	Wind Chime 1
C#5	5763	Sd Break Roll
D5	2688	Noise Burst
D#5	2511	Vox Bell
E5	5747	Sd R&B1
F5	2517	VoxAlk
F#5	3867	Udu High
G5	2515	Trance Choir
G#5	2809	Swarm
A5	4777	Bd Pop
A#5	5748	Sd R&B1 Rim
B5	4945	Bd R&B2
C6	6521	Crash3

R&B Kit 2

Note	Wave Number	Wave Name
C0	4902	Bd T9-1
C#0	5736	Sd AnCR Rim
D0	5753	Sd Hip Gate
D#0	5763	Sd Break Roll
E0	5692	Sd T9-2
F0	5554	Sd LiveRoll St
F#0	4572	HipHop Snap2
G0	5837	Sd HipHop7
G#0	5848	Sd HipHop Rim2
A0	5054	Bd HipHop5
A#0	5757	Sd Hip Rim4
B0	4902	Bd T9-1
C1	4923	Bd T8-2
C#1	5847	Sd HipHop Rim1
D1	4572	HipHop Snap2
D#1	4560	HipHop Clap8
E1	5722	Sd T8-5
F1	6465	Tom T8
F#1	6122	HH Closed T8-1
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6516	Crash1 RL
D2	6465	Tom T8
D#2	6571	Ride2 St
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6513	Crash1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	2706	Hi Q1
F#3	2706	Hi Q1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	4592	Analog Shaker
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	2706	Hi Q1
D4	2707	Hi Q2
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2837	Scratch Spin
F#4	2827	Scratch Hi R
G4	2826	Scratch Hi F
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3187	Tambourine1 Hit
C5	3254	Wind Chime 1
C#5	5763	Sd Break Roll
D5	2688	Noise Burst
D#5	2511	Vox Bell
E5	5747	Sd R&B1
F5	2517	VoxAlk
F#5	3867	Udu High
G5	2515	Trance Choir
G#5	2809	Swarm
A5	4777	Bd Pop
A#5	5748	Sd R&B1 Rim
B5	4945	Bd R&B2
C6	6521	Crash3

R&B Kit 3

Note	Wave Number	Wave Name
C0	4907	Bd T9 Hd2
C#0	5735	Sd AnCR
D0	5760	Sd Break2
D#0	5763	Sd Break Roll
E0	5696	Sd T9Gate
F0	5557	Sd Roll Mn
F#0	4572	HipHop Snap2
G0	5832	Sd HipHop2
G#0	5849	Sd HipHop Rim3
A0	4903	Bd T9-2
A#0	5756	Sd Hip Rim3
B0	4902	Bd T9-1
C1	4923	Bd T8-2
C#1	5849	Sd HipHop Rim3
D1	5747	Sd R&B1
D#1	4558	HipHop Clap6
E1	5753	Sd Hip Gate
F1	6449	Tom T9 Lo
F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6449	Tom T9 Lo
C2	6448	Tom T9 Hi
C#2	6516	Crash1 RL
D2	4924	Bd T8-3
D#2	6571	Ride2 St
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6513	Crash1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	2706	Hi Q1
F#3	2706	Hi Q1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	4592	Analog Shaker
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	2706	Hi Q1
D4	2707	Hi Q2
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2837	Scratch Spin
F#4	2827	Scratch Hi R
G4	2826	Scratch Hi F
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3187	Tambourine1 Hit
C5	3254	Wind Chime 1
C#5	5763	Sd Break Roll
D5	2688	Noise Burst
D#5	2511	Vox Bell
E5	5747	Sd R&B1
F5	2517	VoxAlk
F#5	3867	Udu High
G5	2515	Trance Choir
G#5	2809	Swarm
A5	4777	Bd Pop
A#5	5748	Sd R&B1 Rim
B5	4945	Bd R&B2
C6	6521	Crash3

Trance Kit

Note	Wave Number	Wave Name
C0	4903	Bd T9-2
C#0	5734	Sd AnSm Rim
D0	5666	Sd Elec9
D#0	4529	Clap AnSm
E0	5664	Sd Elec7
F0	5668	Sd Elec11
F#0	5664	Sd Elec7
G0	5718	Sd T8-1
G#0	5695	Sd T9-5
A0	4907	Bd T9 Hd2
A#0	5669	Sd Elec12
B0	4908	Bd T9 Hd3
C1	4973	Bd Hard Long
C#1	5697	Sd T9Rim
D1	5662	Sd Elec5
D#1	4521	Clap T9-1
E1	5692	Sd T9-2
F1	5775	Sd Syn
F#1	6108	HH Closed T9
G1	5775	Sd Syn
G#1	6109	HH Open T9
A1	5775	Sd Syn
A#1	6109	HH Open T9
B1	5775	Sd Syn
C2	5775	Sd Syn
C#2	6645	Crash T9-1
D2	5775	Sd Syn
D#2	6671	Ride T9-1
E2	6652	Crash Syn
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6647	Crash T8-1
G#2	4584	Cowbell T8
A2	6625	China1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3271	Conga1 Hi Slap
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	6473	Tom Syn1
F#3	6473	Tom Syn1
G3	4628	Analog Click
G#3	2688	Noise Burst
A3	3406	Cabasa1A 2
A#3	3401	Maracas1 Slur
B3	2591	Neo Seq Em-3
C4	2607	Neo Seq2 Em-5
C#4	2691	Electric Perc1
D4	3167	Shaker Hip1
D#4	4618	Claves T8-1
E4	4600	Tambourine RX5
F4	4589	Cowbell RX11
F#4	3168	Shaker Hip2
G4	2700	Electric Perc10
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3170	Shaker Hip4
B4	2690	Zap2
C5	5057	Bd HipHop8
C#5	4906	Bd T9 Hd1
D5	4985	Bd ElecComp3
D#5	4902	Bd T9-1
E5	4908	Bd T9 Hd3
F5	4973	Bd Hard Long
F#5	6122	HH Closed T8-1
G5	4984	Bd ElecComp2
G#5	6125	HH Open T8-2
A5	4906	Bd T9 Hd1
A#5	6123	HH Open T8-1
B5	4907	Bd T9 Hd2
C6	4985	Bd ElecComp3

Psychedelic Kit

Note	Wave Number	Wave Name
C0	2640	LFO Seq
C#0	2515	Trance Choir
D0	3773	Tibetan Bowl
D#0	2836	Scratch Stop
E0	2659	Fx Female Voice St
F0	2574	Stab Organ2
F#0	2812	Door Squeak
G0	2639	Radio Noise
G#0	2812	Door Squeak
A0	2983	Acoustic Bass FX06
A#0	2988	Electric Bass FX 02
B0	2983	Acoustic Bass FX06
C1	4938	Bd BlpHd
C#1	4937	Bd Brip
D1	5753	Sd Hip Gate
D#1	5201	Sd SonA St1-4
E1	2688	Noise Burst
F1	6477	Tom Dist Lo
F#1	6108	HH Closed T9
G1	6476	Tom Dist Hi
G#1	5859	HH Closed 2St
A1	6448	Tom T9 Hi
A#1	6109	HH Open T9
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6625	China1 St
D2	6448	Tom T9 Hi
D#2	6635	Splash1 St
E2	6645	Crash T9-1
F2	6671	Ride T9-1
F#2	3430	Pandeiro1 Tip
G2	4602	Electric Tambourine1
G#2	2707	Hi Q2
A2	4898	Bd Gate
A#2	2707	Hi Q2
B2	2980	Acoustic Bass FX03
C3	2978	Acoustic Bass FX01
C#3	2475	Mini Brip6
D3	2470	Mini Brip1
D#3	2471	Mini Brip2
E3	3309	Quinto1 Slap
F3	3630	Tabla1 Bya
F#3	3614	Djembe1 Edge
G3	3631	Tabla1 Nah
G#3	3887	Barasim Tak
A3	2698	Electric Perc8
A#3	2703	Electric Perc13
B3	2586	Hop FX1
C4	2535	Motion Beam
C#4	2690	Zap2
D4	2674	Digi Voice Mod
D#4	1992	Human Whistle
E4	2673	Digital Wind
F4	4628	Analog Click
F#4	6122	HH Closed T8-1
G4	5773	Sd FM
G#4	5912	HH Half Open2 RL
A4	4618	Claves T8-1
A#4	6123	HH Open T8-1
B4	6688	Reverse Cymbal1
C5	4974	Bd Analog Tight
C#5	4985	Bd ElecComp3
D5	4908	Bd T9 Hd3
D#5	4969	Bd ZapHard
E5	4978	Bd Slimy
F5	4951	Bd Break Hard
F#5	5520	Sd BreakRim
G5	5089	Sd Soul St1-3
G#5	5306	Sd Ambience
A5	5285	Sd Rock Mute1 R
A#5	5770	Sd Cut
B5	5745	Sd D&B3
C6	5764	Sd FX1

Chill Out Kit

Note	Wave Number	Wave Name
C0	4922	Bd T8-1
C#0	5723	Sd T8 Rim
D0	5719	Sd T8-2
D#0	4530	Electric Clap1
E0	5668	Sd Elec11
F0	5664	Sd Elec7
F#0	5721	Sd T8-4
G0	4980	Bd Elec2
G#0	5718	Sd T8-1
A0	5057	Bd HipHop8
A#0	5720	Sd T8-3
B0	5058	Bd HipHop9
C1	5057	Bd HipHop8
C#1	5734	Sd AnSm Rim
D1	5834	Sd HipHop4
D#1	4529	Clap AnSm
E1	5835	Sd HipHop5
F1	6465	Tom T8
F#1	6122	HH Closed T8-1
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6635	Splash1 St
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6647	Crash T8-1
G#2	4584	Cowbell T8
A2	6625	China1 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	4573	Conga T8
C#3	4573	Conga T8
D3	4573	Conga T8
D#3	4573	Conga T8
E3	4573	Conga T8
F3	3271	Conga1 Hi Slap
F#3	3270	Conga1 Hi Slap Open
G3	3268	Conga1 Hi Open 2
G#3	3369	Timbale1 Hi 1
A3	3406	Cabasa1A 2
A#3	3401	Maracas1 Slur
B3	2659	Fx Female Voice St
C4	2611	Portamento Lead Seq
C#4	2699	Electric Perc9
D4	3167	Shaker Hip1
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	3168	Shaker Hip2
G4	2705	Electric Perc15
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3170	Shaker Hip4
B4	2683	Ripper
C5	4982	Bd Elec4
C#5	5750	Sd Hip1
D5	5666	Sd Elec9
D#5	5663	Sd Elec6
E5	5832	Sd HipHop2
F5	4988	Bd ElecGate
F#5	6124	HH Closed T8-2
G5	4977	Bd ThickSkin
G#5	6125	HH Open T8-2
A5	4950	Bd Break Heavy
A#5	6125	HH Open T8-2
B5	4947	Bd Break Deep
C6	4945	Bd R&B2

Brush Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5566	Sd Brush Soft St
G#0	3197	Stick1
A0	4745	Bd Funk St1-2
A#0	5192	Sd Basic 3St
B0	4783	Bd Jazz1-2St
C1	4792	Bd FK Jazz St
C#1	5575	Sd Closed Rim4 St
D1	5569	Sd Brush Med St
D#1	3231	Hand Clap1 St
E1	5572	Sd Brush vari St
F1	6424	Tom Brush Floor St
F#1	5956	HH Power ClTip 1-4St
G1	6420	Tom Brush Low St
G#1	5996	HH Power ClPedal St
A1	6420	Tom Brush Low St
A#1	6000	HH Power Open EdgeSt
B1	6416	Tom Brush Mid St
C2	6416	Tom Brush Mid St
C#2	6548	Crash Brush1 St
D2	6412	Tom Brush Hi St
D#2	6607	Ride Brush1 St
E2	6625	China1 St
F2	6552	Crash Brush Cup St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6556	Crash Brush2 St
A#2	3221	Vibraslap1
B2	6611	Ride Brush2 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3331	Bongo1 Lo 1Fingr 1-2
D3	3272	Conga1 Hi SlpMute1-2
D#3	3266	Conga1 Hi Open 1-2
E3	3277	Conga1 Lo Open 1-2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3158	ShakerA 13
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5068	Sd Bld St1-4
D5	5227	Sd Blues 3St
D#5	5271	Sd Hip St1-2
E5	5168	Sd Funk St1-3
F5	5088	Sd Soul St1-4
F#5	5519	Sd LdwHMn
G5	5522	Sd Heavy
G#5	5251	Sd Tight St1-4
A5	5236	Sd BluesHeart St1-3
A#5	4709	Bd Snap 1-2
B5	4718	Bd Tight 1-2
C6	4745	Bd Funk St1-2

Jazz Kit

Note	Wave Number	Wave Name
C0	4783	Bd Jazz1-2St
C#0	5568	Sd Brush Soft R
D0	5581	Sd Brush SwirAtt St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5272	Sd Hip 1St
G#0	3197	Stick1
A0	4750	Bd Funk 1 L
A#0	5259	Sd Tight 3St
B0	4792	Bd FK Jazz St
C1	4745	Bd Funk St1-2
C#1	5540	Sd Closed Rim St
D1	5257	Sd Tight 1St
D#1	5548	Sd RockRoll St
E1	5236	Sd BluesHeart St1-3
F1	6229	Tom Floor St
F#1	5956	HH Power ClTip 1-4St
G1	6229	Tom Floor St
G#1	5996	HH Power ClPedal St
A1	6225	Tom Low St
A#1	6000	HH Power Open EdgeSt
B1	6221	Tom Mid St
C2	6221	Tom Mid St
C#2	6517	Crash2 St
D2	6217	Tom Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6624	Ride Cup Mn2
F#2	3187	Tambourine1 Hit
G2	6635	Splash1 St
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1
F#3	3369	Timbale1 Hi 1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	5568	Sd Brush Soft R
C4	5578	Sd Brush Swir St
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3376	Timbale1 Paila H
G4	3377	Timbale1 Paila L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5228	Sd Blues L1-3
D5	5183	Sd Funk Ay St
D#5	5244	Sd BluesHeart R1-3
E5	5222	Sd Blues St1-2
F5	4758	Bd Low L
F#5	5519	Sd LdwHMn
G5	4776	Bd Dry2
G#5	5581	Sd Brush SwirAtt St
A5	4946	Bd Hip Deep
A#5	5557	Sd Roll Mn
B5	4744	Bd Normal 2R
C6	6556	Crash Brush2 St

Pop Latin Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	3491	Cajon1 Kick
D0	3492	Cajon1 Slap
D#0	3493	Cajon1 Tip 1-2
E0	3559	Claves1
F0	3214	Wood Block
F#0	3231	Hand Clap1 St
G0	6572	Ride2 L
G#0	4572	HipHop Snap2
A0	3202	Castanet1
A#0	3264	Conga1 Hi Tip
B0	3265	Conga1 Hi Heel
C1	3266	Conga1 Hi Open 1-2
C#1	3269	Conga1 Hi Mute
D1	3270	Conga1 Hi Slap Open
D#1	3271	Conga1 Hi Slap
E1	3272	Conga1 Hi SlpMute1-2
F1	3275	Conga1 Lo Tip
F#1	3276	Conga1 Lo Heel
G1	3277	Conga1 Lo Open 1-2
G#1	3280	Conga1 Lo Mute
A1	3281	Conga1 Lo Slap Open
A#1	3281	Conga1 Lo Slap Open
B1	3278	Conga1 Lo Open 1
C2	3321	Bongo1 Hi 1Fingr 1-2
C#2	3324	Bongo1 Hi 3Fingr 1-2
D2	3327	Bongo1 Hi Rim
D#2	3328	Bongo1 Hi Tip
E2	3329	Bongo1 Hi Heel
F2	3330	Bongo1 Hi Slap
F#2	3331	Bongo1 Lo 1Fingr 1-2
G2	3334	Bongo1 Lo 3Fingr 1-2
G#2	3337	Bongo1 Lo Rim
A2	3338	Bongo1 Lo Tip
A#2	3334	Bongo1 Lo 3Fingr 1-2
B2	3330	Bongo1 Hi Slap
C3	3372	Timbale1 Lo 1-2
C#3	3309	Quinto1 Slap
D3	3308	Quinto1 Open
D#3	3264	Conga1 Hi Tip
E3	3312	Tumba Open
F3	3393	Paila L
F#3	3368	Timbale1 Hi 1-3
G3	3428	Pandeiro1 Open
G#3	3429	Pandeiro1 Thump
A3	3430	Pandeiro1 Tip
A#3	3431	Pandeiro1 Heel
B3	3394	Paila H
C4	3566	Cowbell2
C#4	3566	Cowbell2
D4	3447	Agogo1 Hi
D#4	3447	Agogo1 Hi
E4	3455	Guiro1 Short
F4	3454	Guiro1 Long
F#4	3460	MetalGuiro Short 1-2
G4	3463	MetalGuiro Long
G#4	3185	Tambourine1 Sw
A4	3444	Tmbourim Open
A#4	3446	Tmbourim Mute
B4	3445	Tmbourim Finger
C5	3400	Maracas1 Sw
C#5	3158	ShakerA 13
D5	3404	Cabasa1A 1-2
D#5	3316	Cuica1 Lo
E5	3317	Cuica1 Hi
F5	3565	Cowbell1
F#5	3578	Mambo Bell Body
G5	3782	Shekere Down
G#5	3784	Shekere Slap
A5	3226	Triangle1 Mute
A#5	3225	Triangle1 Open
B5	3562	Whistle
C6	3254	Wind Chime 1

Analog T9 Kit

Note	Wave Number	Wave Name
C0	4903	Bd T9-2
C#0	5735	Sd AnCR
D0	5695	Sd T9-5
D#0	4529	Clap AnSm
E0	5696	Sd T9Gate
F0	5548	Sd RockRoll St
F#0	5693	Sd T9-3
G0	5694	Sd T9-4
G#0	5696	Sd T9Gate
A0	4905	Bd T9-4
A#0	5695	Sd T9-5
B0	4902	Bd T9-1
C1	4904	Bd T9-3
C#1	5697	Sd T9Rim
D1	5691	Sd T9-1
D#1	4521	Clap T9-1
E1	5692	Sd T9-2
F1	6449	Tom T9 Lo
F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	4600	Tambourine RX5
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6522	Crash4
A#2	4584	Cowbell T8
B2	6573	Ride2 R
C3	4573	Conga T8
C#3	4573	Conga T8
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	4628	Analog Click
G#3	4573	Conga T8
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5301	Sd Piccolo
D5	5722	Sd T8-5
D#5	5551	Sd RockRollD St
E5	5569	Sd Brush Med St
F5	4938	Bd BlpHd
F#5	5739	Sd Jungle1
G5	4971	Bd Sustain
G#5	5743	Sd D&B1
A5	4949	Bd Break2
A#5	5769	Sd Dist
B5	4972	Bd TekPower
C6	4957	Bd Distortion RM

Analog T8 Kit

Note	Wave Number	Wave Name
C0	4922	Bd T8-1
C#0	5735	Sd AnCR
D0	5721	Sd T8-4
D#0	5768	Sd Clap Analog
E0	5720	Sd T8-3
F0	6465	Tom T8
F#0	5722	Sd T8-5
G0	4924	Bd T8-3
G#0	5721	Sd T8-4
A0	4923	Bd T8-2
A#0	5720	Sd T8-3
B0	2450	T8 Kick Bass
C1	4923	Bd T8-2
C#1	5723	Sd T8 Rim
D1	5719	Sd T8-2
D#1	4521	Clap T9-1
E1	5718	Sd T8-1
F1	6465	Tom T8
F#1	6124	HH Closed T8-2
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6647	Crash T8-1
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	4584	Cowbell T8
A2	6522	Crash4
A#2	3221	Vibraslap1
B2	6573	Ride2 R
C3	4573	Conga T8
C#3	4573	Conga T8
D3	4573	Conga T8
D#3	4573	Conga T8
E3	4573	Conga T8
F3	3369	Timbale1 Hi 1
F#3	3373	Timbale1 Lo 1
G3	2684	Glass
G#3	2684	Glass
A3	3404	Cabasa1A 1-2
A#3	4614	MaracasT8-1
B3	2807	FxGun2
C4	2806	FxGun1
C#4	4592	Analog Shaker
D4	4592	Analog Shaker
D#4	4618	Claves T8-1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5750	Sd Hip1
D5	5751	Sd Hip2
D#5	5753	Sd Hip Gate
E5	5759	Sd Break1
F5	4937	Bd Brip
F#5	5764	Sd FX1
G5	4968	Bd FxHammer
G#5	5779	Sd Hammer
A5	4969	Bd ZapHard
A#5	5772	Sd Garg L
B5	4972	Bd TekPower
C6	4978	Bd Slimy

Tekno Kit

Note	Wave Number	Wave Name
C0	4978	Bd Slimy
C#0	5697	Sd T9Rim
D0	5722	Sd T8-5
D#0	4521	Clap T9-1
E0	5693	Sd T9-3
F0	5737	Sd Human1
F#0	5752	Sd Hip3
G0	5694	Sd T9-4
G#0	5751	Sd Hip2
A0	4977	Bd ThickSkin
A#0	5692	Sd T9-2
B0	4955	Bd Distortion4
C1	4970	Bd ZapMid
C#1	5723	Sd T8 Rim
D1	5722	Sd T8-5
D#1	4521	Clap T9-1
E1	5775	Sd Syn
F1	6465	Tom T8
F#1	6152	HH Closed Lo-Fi
G1	6465	Tom T8
G#1	6153	HH Open Lo-Fi
A1	6465	Tom T8
A#1	6153	HH Open Lo-Fi
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6647	Crash T8-1
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6623	Ride Cup Mn
F#2	4601	Tambourine AnCR
G2	6518	Crash2 L
G#2	4584	Cowbell T8
A2	6645	Crash T9-1
A#2	4584	Cowbell T8
B2	6652	Crash Syn
C3	4573	Conga T8
C#3	4573	Conga T8
D3	4573	Conga T8
D#3	4573	Conga T8
E3	4573	Conga T8
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	2684	Glass
G#3	2684	Glass
A3	3405	Cabasa1A 1
A#3	4614	MaracasT8-1
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	4982	Bd Elec4
C#5	4985	Bd ElecComp3
D5	4987	Bd ElecFX2
D#5	4989	Bd ElecClick
E5	4990	Bd ElecPower1
F5	4991	Bd ElecPower2
F#5	4981	Bd Elec3
G5	4979	Bd Elec1
G#5	5663	Sd Elec6
A5	5664	Sd Elec7
A#5	5665	Sd Elec8
B5	5666	Sd Elec9
C6	5669	Sd Elec12

House Kit 1

Note	Wave Number	Wave Name
C0	4905	Bd T9-4
C#0	5723	Sd T8 Rim
D0	5722	Sd T8-5
D#0	3231	Hand Clap1 St
E0	5772	Sd Garg L
F0	5554	Sd LiveRoll St
F#0	5693	Sd T9-3
G0	5718	Sd T8-1
G#0	5695	Sd T9-5
A0	4902	Bd T9-1
A#0	5696	Sd T9Gate
B0	4903	Bd T9-2
C1	4903	Bd T9-2
C#1	5697	Sd T9Rim
D1	5691	Sd T9-1
D#1	4521	Clap T9-1
E1	5692	Sd T9-2
F1	6449	Tom T9 Lo
F#1	6122	HH Closed T8-1
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1
F#3	3369	Timbale1 Hi 1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5763	Sd Break Roll
D5	2688	Noise Burst
D#5	2511	Vox Bell
E5	5747	Sd R&B1
F5	2517	VoxAlk
F#5	3867	Udu High
G5	2515	Trance Choir
G#5	2809	Swarm
A5	4777	Bd Pop
A#5	5748	Sd R&B1 Rim
B5	4945	Bd R&B2
C6	6521	Crash3

House Kit 2

Note	Wave Number	Wave Name
C0	4903	Bd T9-2
C#0	5723	Sd T8 Rim
D0	3694	Dohol High
D#0	4521	Clap T9-1
E0	5692	Sd T9-2
F0	5696	Sd T9Gate
F#0	5738	Sd Human2
G0	5764	Sd FX1
G#0	5780	Sd Lo-Fi
A0	4907	Bd T9 Hd2
A#0	5697	Sd T9Rim
B0	4904	Bd T9-3
C1	4906	Bd T9 Hd1
C#1	5697	Sd T9Rim
D1	5692	Sd T9-2
D#1	2688	Noise Burst
E1	5118	Sd Strong L1-4
F1	5775	Sd Syn
F#1	6108	HH Closed T9
G1	5775	Sd Syn
G#1	6109	HH Open T9
A1	5775	Sd Syn
A#1	6109	HH Open T9
B1	5775	Sd Syn
C2	5775	Sd Syn
C#2	6645	Crash T9-1
D2	5775	Sd Syn
D#2	6671	Ride T9-1
E2	6652	Crash Syn
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6647	Crash T8-1
G#2	3565	Cowbell1
A2	6521	Crash3
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3265	Conga1 Hi Heel
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	6473	Tom Syn1
F#3	6473	Tom Syn1
G3	4628	Analog Click
G#3	5781	Sd Rim SE
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	4601	Tambourine AnCR
D4	4592	Analog Shaker
D#4	4618	Claves T8-1
E4	4600	Tambourine RX5
F4	4589	Cowbell RX11
F#4	4592	Analog Shaker
G4	2826	Scratch Hi F
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	3630	Tabla1 Bya
D5	3631	Tabla1 Nah
D#5	3632	Tabla1 Mute
E5	2511	Vox Bell
F5	4777	Bd Pop
F#5	3867	Udu High
G5	4899	Bd FX Gate
G#5	2688	Noise Burst
A5	4902	Bd T9-1
A#5	5763	Sd Break Roll
B5	6521	Crash3
C6	2810	TurnTable

HouseCompressedKit

Note	Wave Number	Wave Name
C0	4905	Bd T9-4
C#0	5723	Sd T8 Rim
D0	5722	Sd T8-5
D#0	3231	Hand Clap1 St
E0	5772	Sd Garg L
F0	5554	Sd LiveRoll St
F#0	5693	Sd T9-3
G0	5718	Sd T8-1
G#0	5695	Sd T9-5
A0	4902	Bd T9-1
A#0	5696	Sd T9Gate
B0	4903	Bd T9-2
C1	4904	Bd T9-3
C#1	5697	Sd T9Rim
D1	5691	Sd T9-1
D#1	4521	Clap T9-1
E1	5692	Sd T9-2
F1	6449	Tom T9 Lo
F#1	6122	HH Closed T8-1
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	4584	Cowbell T8
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1
F#3	3369	Timbale1 Hi 1
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2578	Vox Drum
C4	2578	Vox Drum
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5763	Sd Break Roll
D5	2688	Noise Burst
D#5	2511	Vox Bell
E5	5747	Sd R&B1
F5	2517	VoxAlk
F#5	3867	Udu High
G5	2515	Trance Choir
G#5	2809	Swarm
A5	4777	Bd Pop
A#5	5748	Sd R&B1 Rim
B5	4945	Bd R&B2
C6	6521	Crash3

Big Kit

Note	Wave Number	Wave Name
C0	4899	Bd FX Gate
C#0	3334	Bongo1 Lo 3Fingr 1-2
D0	5523	Sd GM
D#0	3231	Hand Clap1 St
E0	5518	Sd Gate2
F0	5548	Sd RockRoll St
F#0	5286	Sd Rock Rim1 St
G0	5301	Sd Piccolo
G#0	5298	Sd Rock Flam St
A0	4781	Bd Room2
A#0	5524	Sd Rock Stick1 St
B0	4782	Bd Room3
C1	4898	Bd Gate
C#1	5305	Sd Mid Rim
D1	5517	Sd Gate1
D#1	4529	Clap AnSm
E1	5306	Sd Ambience
F1	6447	Tom Ambience Lo
F#1	6143	HH Closed D&B
G1	6447	Tom Ambience Lo
G#1	6144	HH Pedal D&B
A1	6447	Tom Ambience Lo
A#1	6145	HH Open D&B
B1	6446	Tom Ambience Hi
C2	6446	Tom Ambience Hi
C#2	6520	Crash2 RL
D2	6446	Tom Ambience Hi
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6570	Ride1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	4958	Bd + HH
F#3	4958	Bd + HH
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5769	Sd Dist
D5	5773	Sd FM
D#5	5774	Sd FM Rim
E5	5776	Sd Clappy
F5	4782	Bd Room3
F#5	5777	Sd Timbr
G5	4769	Bd Rock1 St
G#5	5781	Sd Rim SE
A5	4772	Bd Rock2 St
A#5	5763	Sd Break Roll
B5	4942	Bd D&B1
C6	4781	Bd Room2

Break Kit

Note	Wave Number	Wave Name
C0	4947	Bd Break Deep
C#0	5272	Sd Hip 1St
D0	5780	Sd Lo-Fi
D#0	5776	Sd Clappy
E0	5519	Sd LdwHMn
F0	5551	Sd RockRollD St
F#0	5517	Sd Gate1
G0	5304	Sd Mid
G#0	5520	Sd BreakRim
A0	4950	Bd Break Heavy
A#0	5757	Sd Hip Rim4
B0	4949	Bd Break2
C1	4948	Bd Break1
C#1	5754	Sd Hip Rim1
D1	5761	Sd Break3
D#1	5759	Sd Break1
E1	5760	Sd Break2
F1	6225	Tom Low St
F#1	5926	HH Closed Rock S R
G1	6225	Tom Low St
G#1	5939	HH Pedal Rock R
A1	6225	Tom Low St
A#1	5951	HH Half Open Rock R
B1	6217	Tom Hi St
C2	6217	Tom Hi St
C#2	6518	Crash2 L
D2	6217	Tom Hi St
D#2	6572	Ride2 L
E2	6626	China1 L
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6519	Crash2 R
A#2	4589	Cowbell RX11
B2	6622	Ride Mn
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3321	Bongo1 Hi 1Fingr 1-2
F#3	3334	Bongo1 Lo 3Fingr 1-2
G3	3268	Conga1 Hi Open 2
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	3369	Timbale1 Hi 1
C4	3373	Timbale1 Lo 1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	2810	TurnTable
C#5	5763	Sd Break Roll
D5	2456	FM Bass5
D#5	2525	Mind Bell
E5	5764	Sd FX1
F5	4772	Bd Rock2 St
F#5	2640	LFO Seq
G5	2683	Ripper
G#5	2688	Noise Burst
A5	2811	Police
A#5	2524	Fairwave
B5	2809	Swarm
C6	2639	Radio Noise

Drum'n'Bass Kit

Note	Wave Number	Wave Name
C0	4946	Bd Hip Deep
C#0	3334	Bongo1 Lo 3Fingr 1-2
D0	5749	Sd R&B2
D#0	5777	Sd Timbr
E0	5745	Sd D&B3
F0	5779	Sd Hammer
F#0	2684	Glass
G0	4943	Bd D&B2
G#0	5880	HH Pedal 3 St
A0	4946	Bd Hip Deep
A#0	5913	HH Open2 St
B0	4951	Bd Break Hard
C1	4942	Bd D&B1
C#1	5305	Sd Mid Rim
D1	5743	Sd D&B1
D#1	2688	Noise Burst
E1	5744	Sd D&B2
F1	6447	Tom Ambience Lo
F#1	6143	HH Closed D&B
G1	6447	Tom Ambience Lo
G#1	6144	HH Pedal D&B
A1	6447	Tom Ambience Lo
A#1	6145	HH Open D&B
B1	6446	Tom Ambience Hi
C2	6446	Tom Ambience Hi
C#2	6518	Crash2 L
D2	6446	Tom Ambience Hi
D#2	6567	Ride1 St
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	5746	Sd D&B4
F#3	6146	HH Reverse D&B
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	2698	Electric Perc8
F4	2692	Electric Perc2
F#4	2330	P50-1
G4	2703	Electric Perc13
G#4	2810	TurnTable
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5769	Sd Dist
D5	5773	Sd FM
D#5	5774	Sd FM Rim
E5	5776	Sd Clappy
F5	4942	Bd D&B1
F#5	5777	Sd Timbr
G5	4956	Bd Distortion5
G#5	5781	Sd Rim SE
A5	4955	Bd Distortion4
A#5	5752	Sd Hip3
B5	4978	Bd Slimy
C6	4958	Bd + HH

Acid Kit

Note	Wave Number	Wave Name
C0	4974	Bd Analog Tight
C#0	5723	Sd T8 Rim
D0	5741	Sd Jungle3
D#0	3231	Hand Clap1 St
E0	5718	Sd T8-1
F0	6473	Tom Syn1
F#0	5243	Sd BluesHeart L1-3
G0	5250	Sd BluesHeart 3R
G#0	5202	Sd SonA St1-3
A0	4745	Bd Funk St1-2
A#0	5186	Sd Basic St1-3
B0	4937	Bd Brip
C1	4905	Bd T9-4
C#1	5697	Sd T9Rim
D1	5773	Sd FM
D#1	4521	Clap T9-1
E1	5735	Sd AnCR
F1	6449	Tom T9 Lo
F#1	6147	HH Closed Tek
G1	6449	Tom T9 Lo
G#1	6147	HH Closed Tek
A1	6449	Tom T9 Lo
A#1	6148	HH Open Tek
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6619	Ride Cup2 L
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6638	Splash1 RL
A#2	4584	Cowbell T8
B2	6622	Ride Mn
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1
F#3	3369	Timbale1 Hi 1
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5695	Sd T9-5
D5	5695	Sd T9-5
D#5	5695	Sd T9-5
E5	5695	Sd T9-5
F5	4935	Bd Human1
F#5	5743	Sd D&B1
G5	2980	Acoustic Bass FX03
G#5	2376	DigiOsc4
A5	2375	DigiOsc3
A#5	5759	Sd Break1
B5	4939	Bd Jungle1
C6	4950	Bd Break Heavy

Jungle Kit

Note	Wave Number	Wave Name
C0	4940	Bd Jungle2
C#0	5305	Sd Mid Rim
D0	5741	Sd Jungle3
D#0	5741	Sd Jungle3
E0	5302	Sd Piccolo Rim1
F0	5557	Sd Roll Mn
F#0	5778	Sd Wood
G0	5749	Sd R&B2
G#0	5744	Sd D&B2
A0	4940	Bd Jungle2
A#0	5742	Sd JungleFX
B0	4922	Bd T8-1
C1	4939	Bd Jungle1
C#1	5757	Sd Hip Rim4
D1	5740	Sd Jungle2
D#1	5742	Sd JungleFX
E1	5741	Sd Jungle3
F1	6230	Tom Floor L
F#1	5924	HH Closed Rock Sw R
G1	6226	Tom Low L
G#1	5932	HH Pedal Rock Sw R
A1	6223	Tom Mid R
A#1	5947	HH Open Rock Sw R
B1	6223	Tom Mid R
C2	6219	Tom Hi R
C#2	6518	Crash2 L
D2	6219	Tom Hi R
D#2	6573	Ride2 R
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3631	Tabla1 Nah
F#3	3630	Tabla1 Bya
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	3369	Timbale1 Hi 1
C4	3373	Timbale1 Lo 1
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	6146	HH Reverse D&B
D5	2822	RainLoop
D#5	2823	Scratch H
E5	2824	Scratch L
F5	4938	Bd BlpHd
F#5	5775	Sd Syn
G5	2687	Indus Tom
G#5	3428	Pandeiro1 Open
A5	2683	Ripper
A#5	2817	TelRing
B5	2829	Scratch Lo R
C6	2805	Tape Rewind

Electric Kit

Note	Wave Number	Wave Name
C0	4933	Bd AnCR
C#0	4937	Bd Brip
D0	5722	Sd T8-5
D#0	4529	Clap AnSm
E0	5755	Sd Hip Rim2
F0	5557	Sd Roll Mn
F#0	5718	Sd T8-1
G0	5735	Sd AnCR
G#0	5719	Sd T8-2
A0	4922	Bd T8-1
A#0	5721	Sd T8-4
B0	4937	Bd Brip
C1	4923	Bd T8-2
C#1	5723	Sd T8 Rim
D1	5720	Sd T8-3
D#1	4521	Clap T9-1
E1	4529	Clap AnSm
F1	6474	Tom Syn2
F#1	6124	HH Closed T8-2
G1	6474	Tom Syn2
G#1	6123	HH Open T8-1
A1	6474	Tom Syn2
A#1	6125	HH Open T8-2
B1	6474	Tom Syn2
C2	6474	Tom Syn2
C#2	6645	Crash T9-1
D2	6474	Tom Syn2
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6652	Crash Syn
F#2	6647	Crash T8-1
G2	6521	Crash3
G#2	5781	Sd Rim SE
A2	6517	Crash2 St
A#2	4584	Cowbell T8
B2	6652	Crash Syn
C3	6465	Tom T8
C#3	6465	Tom T8
D3	6465	Tom T8
D#3	6465	Tom T8
E3	6465	Tom T8
F3	2821	Applause
F#3	2812	Door Squeak
G3	2813	Heart Beat
G#3	2804	Bomb
A3	6153	HH Open Lo-Fi
A#3	3159	ShakerA 1
B3	2690	Zap2
C4	2689	Zap1
C#4	2823	Scratch H
D4	2824	Scratch L
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2577	Hit Orchestra2
G#4	6156	HH Closed FX
A4	6157	HH Open FX
A#4	4592	Analog Shaker
B4	4592	Analog Shaker
C5	2810	TurnTable
C#5	5763	Sd Break Roll
D5	2456	FM Bass5
D#5	2525	Mind Bell
E5	5760	Sd Break2
F5	4772	Bd Rock2 St
F#5	2639	Radio Noise
G5	2683	Ripper
G#5	2688	Noise Burst
A5	2837	Scratch Spin
A#5	2653	Bell Choir
B5	2518	Hi-Lo
C6	2639	Radio Noise

Human Kit

Note	Wave Number	Wave Name
C0	4935	Bd Human1
C#0	2834	Scratch Vo F
D0	2576	Hit Uhh
D#0	2835	Scratch Vo R
E0	5742	Sd JungleFX
F0	5548	Sd RockRoll St
F#0	5759	Sd Break1
G0	5735	Sd AnCR
G#0	5691	Sd T9-1
A0	4971	Bd Sustain
A#0	5530	Sd Hip Stick1
B0	4936	Bd Human2
C1	4936	Bd Human2
C#1	5778	Sd Wood
D1	5737	Sd Human1
D#1	5771	Sd Garg H
E1	5738	Sd Human2
F1	4935	Bd Human1
F#1	6158	HH Open Human
G1	4935	Bd Human1
G#1	6158	HH Open Human
A1	4935	Bd Human1
A#1	6158	HH Open Human
B1	4935	Bd Human1
C2	4935	Bd Human1
C#2	2688	Noise Burst
D2	4935	Bd Human1
D#2	6647	Crash T8-1
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	2833	Scratch Sd R
G2	6635	Splash1 St
G#2	2578	Vox Drum
A2	6522	Crash4
A#2	4603	Electric Tambourine2
B2	2575	Stab Aah
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2804	Bomb
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2828	Scratch Lo F
E4	2829	Scratch Lo R
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3160	ShakerA 2
B4	3250	Sleigh Bell1
C5	2810	TurnTable
C#5	5288	Sd Rock Rim1 R
D5	2814	Helicopter
D#5	2573	Stab Hard
E5	5517	Sd Gate1
F5	4769	Bd Rock1 St
F#5	2825	Scratch Down
G5	4932	Bd AnSm
G#5	2526	Sonar1
A5	3825	Wa Taiko
A#5	3825	Wa Taiko
B5	2568	HH Hit
C6	2574	Stab Organ2

Hard Kit

Note	Wave Number	Wave Name
C0	4954	Bd Distortion3
C#0	5778	Sd Wood
D0	5517	Sd Gate1
D#0	3231	Hand Clap1 St
E0	5518	Sd Gate2
F0	5557	Sd Roll Mn
F#0	5768	Sd Clap Analog
G0	5752	Sd Hip3
G#0	2683	Ripper
A0	4957	Bd Distortion RM
A#0	5723	Sd T8 Rim
B0	4953	Bd Distortion2
C1	4952	Bd Distortion1
C#1	5305	Sd Mid Rim
D1	5769	Sd Dist
D#1	2688	Noise Burst
E1	5765	Sd FX2
F1	6477	Tom Dist Lo
F#1	6108	HH Closed T9
G1	6477	Tom Dist Lo
G#1	6109	HH Open T9
A1	6477	Tom Dist Lo
A#1	6109	HH Open T9
B1	6476	Tom Dist Hi
C2	6476	Tom Dist Hi
C#2	6645	Crash T9-1
D2	6476	Tom Dist Hi
D#2	6671	Ride T9-1
E2	6629	China2
F2	6623	Ride Cup Mn
F#2	4601	Tambourine AnCR
G2	6521	Crash3
G#2	4584	Cowbell T8
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6567	Ride1 St
C3	5777	Sd Timbr
C#3	5777	Sd Timbr
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	4958	Bd + HH
F#3	4958	Bd + HH
G3	2684	Glass
G#3	2684	Glass
A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur
B3	2807	FxGun2
C4	2806	FxGun1
C#4	2823	Scratch H
D4	2825	Scratch Down
D#4	2706	Hi Q1
E4	2706	Hi Q1
F4	2707	Hi Q2
F#4	2824	Scratch L
G4	2824	Scratch L
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5769	Sd Dist
D5	5773	Sd FM
D#5	5774	Sd FM Rim
E5	5776	Sd Clappy
F5	4968	Bd FxHammer
F#5	2687	Indus Tom
G5	4942	Bd D&B1
G#5	2687	Indus Tom
A5	4782	Bd Room3
A#5	2687	Indus Tom
B5	4905	Bd T9-4
C6	5779	Sd Hammer

Distorted Kit

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5154	Sd Normal 1St
G#0	3197	Stick1
A0	4774	Bd Rock2 R
A#0	5257	Sd Tight 1St
B0	4948	Bd Break1
C1	4774	Bd Rock2 R
C#1	5529	Sd Rock Stick2 R
D1	5213	Sd SonA 1L
D#1	3232	Hand Clap1 L
E1	5302	Sd Piccolo Rim1
F1	6447	Tom Ambience Lo
F#1	5935	HH Closed Rock 2R
G1	6447	Tom Ambience Lo
G#1	5939	HH Pedal Rock R
A1	6447	Tom Ambience Lo
A#1	5949	HH Open Rock R
B1	6446	Tom Ambience Hi
C2	6446	Tom Ambience Hi
C#2	6518	Crash2 L
D2	6446	Tom Ambience Hi
D#2	6573	Ride2 R
E2	6626	China1 L
F2	6620	Ride Cup2 R
F#2	3185	Tambourine1 Sw
G2	6637	Splash1 R
G#2	3577	Mambo Bell2
A2	6518	Crash2 L
A#2	3221	Vibraslap1
B2	6570	Ride1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	2843	Scratch Combi2
G4	2827	Scratch Hi R
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5301	Sd Piccolo
D5	5522	Sd Heavy
D#5	5768	Sd Clap Analog
E5	5302	Sd Piccolo Rim1
F5	4781	Bd Room2
F#5	5304	Sd Mid
G5	4782	Bd Room3
G#5	5305	Sd Mid Rim
A5	4898	Bd Gate
A#5	5517	Sd Gate1
B5	4899	Bd FX Gate
C6	4942	Bd D&B1

Ambient Kit

Note	Wave Number	Wave Name
C0	4937	Bd Brip
C#0	2707	Hi Q2
D0	5303	Sd Piccolo Rim2
D#0	2706	Hi Q1
E0	5735	Sd AnCR
F0	6473	Tom Syn1
F#0	6154	HH Closed Syn
G0	6473	Tom Syn1
G#0	6156	HH Closed FX
A0	6474	Tom Syn2
A#0	6155	HH Open Syn
B0	4933	Bd AnCR
C1	4902	Bd T9-1
C#1	5532	Sd Hip Stick3
D1	5739	Sd Jungle1
D#1	4521	Clap T9-1
E1	5739	Sd Jungle1
F1	6465	Tom T8
F#1	6124	HH Closed T8-2
G1	6465	Tom T8
G#1	6123	HH Open T8-1
A1	6465	Tom T8
A#1	6125	HH Open T8-2
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6652	Crash Syn
D2	6465	Tom T8
D#2	6671	Ride T9-1
E2	6521	Crash3
F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit
G2	6521	Crash3
G#2	4584	Cowbell T8
A2	6517	Crash2 St
A#2	3221	Vibraslap1
B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	2684	Glass
G#3	2684	Glass
A3	3405	Cabasa1A 1
A#3	4614	MaracasT8-1
B3	2818	Bird
C4	2529	Engine Room St
C#4	2704	Electric Perc14
D4	2820	Gunshot
D#4	4618	Claves T8-1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	4601	Tambourine AnCR
G4	4590	Cowbell AnCR
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5722	Sd T8-5
D5	2526	Sonar1
D#5	5722	Sd T8-5
E5	2526	Sonar1
F5	2580	Bubble
F#5	5722	Sd T8-5
G5	2580	Bubble
G#5	5722	Sd T8-5
A5	2516	Eery
A#5	5722	Sd T8-5
B5	2579	FX Chime
C6	2579	FX Chime

Garage Kit

Note	Wave Number	Wave Name
C0	4973	Bd Hard Long
C#0	4902	Bd T9-1
D0	4978	Bd Slimy
D#0	4975	Bd Analog Hard
E0	4955	Bd Distortion4
F0	4985	Bd ElecComp3
F#0	4946	Bd Hip Deep
G0	4968	Bd FxHammer
G#0	4904	Bd T9-3
A0	4924	Bd T8-3
A#0	4971	Bd Sustain
B0	4945	Bd R&B2
C1	4906	Bd T9 Hd1
C#1	4978	Bd Slimy
D1	5718	Sd T8-1
D#1	5723	Sd T8 Rim
E1	5776	Sd Clappy
F1	5227	Sd Blues 3St
F#1	5895	HH Open 2St
G1	6124	HH Closed T8-2
G#1	5895	HH Open 2St
A1	6125	HH Open T8-2
A#1	5895	HH Open 2St
B1	6125	HH Open T8-2
C2	4529	Clap AnSm
C#2	6517	Crash2 St
D2	6645	Crash T9-1
D#2	6567	Ride1 St
E2	6671	Ride T9-1
F2	4628	Analog Click
F#2	4618	Claves T8-1
G2	4529	Clap AnSm
G#2	4521	Clap T9-1
A2	4592	Analog Shaker
A#2	4573	Conga T8
B2	4573	Conga T8
C3	5735	Sd AnCR
C#3	5548	Sd RockRoll St
D3	3447	Agogo1 Hi
D#3	6628	China1 RL
E3	2707	Hi Q2
F3	2706	Hi Q1
F#3	2690	Zap2
G3	2689	Zap1
G#3	2690	Zap2
A3	2812	Door Squeak
A#3	2844	Scratch Combi3
B3	2926	AcousticGtr FX27 St
C4	812	Play FX Mix
C#4	2826	Scratch Hi F
D4	383	Wr1 Hard+
D#4	383	Wr1 Hard+
E4	383	Wr1 Hard+
F4	2584	Resonance X-Fade
F#4	2526	Sonar1
G4	2578	Vox Drum
G#4	2578	Vox Drum
A4	2578	Vox Drum
A#4	6155	HH Open Syn
B4	6154	HH Closed Syn
C5	2332	Tri Wave
C#5	2332	Tri Wave
D5	2332	Tri Wave
D#5	2332	Tri Wave
E5	2332	Tri Wave
F5	2332	Tri Wave
F#5	2332	Tri Wave
G5	2332	Tri Wave
G#5	2332	Tri Wave
A5	2332	Tri Wave
A#5	2332	Tri Wave
B5	2332	Tri Wave
C6	2332	Tri Wave

Synth Pop Kit

Note	Wave Number	Wave Name
C0	5057	Bd HipHop8
C#0	4902	Bd T9-1
D0	4937	Bd Brip
D#0	4951	Bd Break Hard
E0	4986	Bd ElecFX1
F0	4988	Bd ElecGate
F#0	4987	Bd ElecFX2
G0	4953	Bd Distortion2
G#0	4977	Bd ThickSkin
A0	4984	Bd ElecComp2
A#0	4980	Bd Elec2
B0	4989	Bd ElecClick
C1	4989	Bd ElecClick
C#1	5697	Sd T9Rim
D1	5669	Sd Elec12
D#1	4521	Clap T9-1
E1	5665	Sd Elec8
F1	6449	Tom T9 Lo
F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6448	Tom T9 Hi
C2	6448	Tom T9 Hi
C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi
D#2	6671	Ride T9-1
E2	6645	Crash T9-1
F2	6671	Ride T9-1
F#2	4603	Electric Tambourine2
G2	6645	Crash T9-1
G#2	4591	Electric Cowbell
A2	6645	Crash T9-1
A#2	4602	Electric Tambourine1
B2	6671	Ride T9-1
C3	2695	Electric Perc5
C#3	2694	Electric Perc4
D3	2702	Electric Perc12
D#3	2696	Electric Perc6
E3	2691	Electric Perc1
F3	2685	Bell FX1
F#3	2686	Bell FX2
G3	2840	Scratch Attack
G#3	2841	Scratch R&B
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	2704	Electric Perc14
C4	2705	Electric Perc15
C#4	3168	Shaker Hip2
D4	2693	Electric Perc3
D#4	2697	Electric Perc7
E4	2698	Electric Perc8
F4	2699	Electric Perc9
F#4	2700	Electric Perc10
G4	2703	Electric Perc13
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	4617	Electric Maracas
B4	4621	Electric Triangle
C5	2701	Electric Perc11
C#5	5658	Sd Elec1
D5	5666	Sd Elec9
D#5	5667	Sd Elec10
E5	5668	Sd Elec11
F5	5659	Sd Elec2
F#5	5660	Sd Elec3
G5	5661	Sd Elec4
G#5	5662	Sd Elec5
A5	5663	Sd Elec6
A#5	5664	Sd Elec7
B5	4530	Electric Clap1
C6	4531	Electric Clap2

Orchestra Kit

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	5570	Sd Brush Med L
D0	5580	Sd Brush Swir R
D#0	5570	Sd Brush Med L
E0	5583	Sd Brush SwirAtt R
F0	5629	Sd Orch Roll St
F#0	3202	Castanet1
G0	5597	Sd OrchA 1 St
G#0	3197	Stick1
A0	4871	Bd GranCasaA Mute St
A#0	5602	Sd OrchA 2 L
B0	4871	Bd GranCasaA Mute St
C1	4868	Bd GranCasaA Open St
C#1	5542	Sd Closed Rim R
D1	5598	Sd OrchA 2 St
D#1	3231	Hand Clap1 St
E1	5607	Sd OrchB 2 St
F1	2212	Timpani1 Sw St
F#1	5857	HH Closed 1-4St
G1	2212	Timpani1 Sw St
G#1	5882	HH Pedal 1-3 R
A1	2212	Timpani1 Sw St
A#1	5893	HH Open 1-2St
B1	2212	Timpani1 Sw St
C2	2212	Timpani1 Sw St
C#2	6561	Hand Cymbal Open St
D2	2212	Timpani1 Sw St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3187	Tambourine1 Hit
G2	6564	Hand Cymbal Mute St
G#2	3566	Cowbell2
A2	6513	Crash1 St
A#2	3221	Vibraslap1
B2	6571	Ride2 St
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	3214	Wood Block
D5	3214	Wood Block
D#5	3214	Wood Block
E5	3214	Wood Block
F5	3214	Wood Block
F#5	3214	Wood Block
G5	3214	Wood Block
G#5	3214	Wood Block
A5	3214	Wood Block
A#5	3214	Wood Block
B5	3214	Wood Block
C6	3214	Wood Block

Drum Machines Kit

Note	Wave Number	Wave Name
C0	4973	Bd Hard Long
C#0	4972	Bd TekPower
D0	4956	Bd Distortion5
D#0	4954	Bd Distortion3
E0	4952	Bd Distortion1
F0	4942	Bd D&B1
F#0	4937	Bd Brip
G0	4932	Bd AnSm
G#0	4923	Bd T8-2
A0	4924	Bd T8-3
A#0	4908	Bd T9 Hd3
B0	4903	Bd T9-2
C1	4904	Bd T9-3
C#1	5697	Sd T9Rim
D1	5691	Sd T9-1
D#1	4521	Clap T9-1
E1	5694	Sd T9-4
F1	6449	Tom T9 Lo
F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo
G#1	6109	HH Open T9
A1	6449	Tom T9 Lo
A#1	6109	HH Open T9
B1	6449	Tom T9 Lo
C2	6449	Tom T9 Lo
C#2	6645	Crash T9-1
D2	4573	Conga T8
D#2	6671	Ride T9-1
E2	4573	Conga T8
F2	4628	Analog Click
F#2	4618	Claves T8-1
G2	4614	MaracasT8-1
G#2	4601	Tambourine AnCR
A2	4592	Analog Shaker
A#2	4584	Cowbell T8
B2	4590	Cowbell AnCR
C3	5718	Sd T8-1
C#3	5719	Sd T8-2
D3	5720	Sd T8-3
D#3	5735	Sd AnCR
E3	5739	Sd Jungle1
F3	5743	Sd D&B1
F#3	5750	Sd Hip1
G3	5747	Sd R&B1
G#3	5749	Sd R&B2
A3	5750	Sd Hip1
A#3	5778	Sd Wood
B3	5777	Sd Timbr
C4	6122	HH Closed T8-1
C#4	6123	HH Open T8-1
D4	6124	HH Closed T8-2
D#4	6125	HH Open T8-2
E4	5888	HH Pedal 3 R
F4	5901	HH Open 2R
F#4	5901	HH Open 2R
G4	6152	HH Closed Lo-Fi
G#4	6153	HH Open Lo-Fi
A4	6154	HH Closed Syn
A#4	6155	HH Open Syn
B4	4592	Analog Shaker
C5	4600	Tambourine RX5
C#5	4600	Tambourine RX5
D5	4591	Electric Cowbell
D#5	4573	Conga T8
E5	4621	Electric Triangle
F5	4618	Claves T8-1
F#5	4592	Analog Shaker
G5	4530	Electric Clap1
G#5	4531	Electric Clap2
A5	4601	Tambourine AnCR
A#5	4584	Cowbell T8
B5	4628	Analog Click
C6	4589	Cowbell RX11

Rock Multiple Kits

Note	Wave Number	Wave Name
C0	4736	Bd Normal St1-2
C#0	5524	Sd Rock Stick1 St
D0	5289	Sd Rock Open2 St
D#0	5548	Sd RockRoll St
E0	5280	Sd Rock Open1 St
F0	6225	Tom Low St
F#0	5905	HH Closed Foot St
G0	6225	Tom Low St
G#0	5880	HH Pedal 3 St
A0	6221	Tom Mid St
A#0	5895	HH Open 2St
B0	6217	Tom Hi St
C1	4772	Bd Rock2 St
C#1	5524	Sd Rock Stick1 St
D1	5289	Sd Rock Open2 St
D#1	3231	Hand Clap1 St
E1	5292	Sd Rock Mute2 St
F1	6241	Tom Rock Low St
F#1	5917	HH Closed Rock Sw St
G1	6241	Tom Rock Low St
G#1	5929	HH Pedal Rock Sw St
A1	6237	Tom Rock Mid St
A#1	5941	HH Open Rock Sw St
B1	6237	Tom Rock Mid St
C2	6233	Tom Rock Hi St
C#2	6517	Crash2 St
D2	6233	Tom Rock Hi St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3565	Cowbell1
A2	6517	Crash2 St
A#2	3159	ShakerA 1
B2	6567	Ride1 St
C3	4769	Bd Rock1 St
C#3	5527	Sd Rock Stick2 St
D3	5280	Sd Rock Open1 St
D#3	4521	Clap T9-1
E3	5283	Sd Rock Mute1 St
F3	6241	Tom Rock Low St
F#3	5917	HH Closed Rock Sw St
G3	6241	Tom Rock Low St
G#3	5937	HH Pedal Rock St
A3	6237	Tom Rock Mid St
A#3	5945	HH Half Open Rock St
B3	6237	Tom Rock Mid St
C4	6233	Tom Rock Hi St
C#4	6517	Crash2 St
D4	6233	Tom Rock Hi St
D#4	6572	Ride2 L
E4	6625	China1 St
F4	6595	Ride Cup1 St
F#4	3187	Tambourine1 Hit
G4	6635	Splash1 St
G#4	3577	Mambo Bell2
A4	6517	Crash2 St
A#4	3782	Shekere Down
B4	6573	Ride2 R
C5	4745	Bd Funk St1-2
C#5	5524	Sd Rock Stick1 St
D5	5286	Sd Rock Rim1 St
D#5	5298	Sd Rock Flam St
E5	5295	Sd Rock Rim2 St
F5	6229	Tom Floor St
F#5	5861	HH Closed 4St
G5	6225	Tom Low St
G#5	5880	HH Pedal 3 St
A5	6221	Tom Mid St
A#5	5913	HH Open2 St
B5	6221	Tom Mid St
C6	6217	Tom Hi St

HipHopMultipleKits

Note	Wave Number	Wave Name
C0	4924	Bd T8-3
C#0	5723	Sd T8 Rim
D0	5839	Sd HipHop9
D#0	4521	Clap T9-1
E0	5837	Sd HipHop7
F0	4924	Bd T8-3
F#0	6147	HH Closed Tek
G0	4924	Bd T8-3
G#0	6148	HH Open Tek
A0	4924	Bd T8-3
A#0	6148	HH Open Tek
B0	4924	Bd T8-3
C1	4946	Bd Hip Deep
C#1	5533	Sd Hip Stick4
D1	5754	Sd Hip Rim1
D#1	4553	HipHop Clap1
E1	5751	Sd Hip2
F1	6465	Tom T8
F#1	6124	HH Closed T8-2
G1	6465	Tom T8
G#1	6140	HH Open AnCR
A1	6465	Tom T8
A#1	6123	HH Open T8-1
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6645	Crash T9-1
D2	6465	Tom T8
D#2	6652	Crash Syn
E2	6652	Crash Syn
F2	6647	Crash T8-1
F#2	4600	Tambourine RX5
G2	6637	Splash1 R
G#2	4584	Cowbell T8
A2	6645	Crash T9-1
A#2	4590	Cowbell AnCR
B2	6671	Ride T9-1
C3	4946	Bd Hip Deep
C#3	5534	Sd Hip Stick5
D3	5755	Sd Hip Rim2
D#3	4554	HipHop Clap2
E3	5750	Sd Hip1
F3	6449	Tom T9 Lo
F#3	6136	HH Closed RX5
G3	6449	Tom T9 Lo
G#3	6139	HH Closed AnCR
A3	6449	Tom T9 Lo
A#3	6125	HH Open T8-2
B3	6449	Tom T9 Lo
C4	6448	Tom T9 Hi
C#4	6519	Crash2 R
D4	6448	Tom T9 Hi
D#4	6647	Crash T8-1
E4	6652	Crash Syn
F4	6647	Crash T8-1
F#4	3187	Tambourine1 Hit
G4	6627	China1 R
G#4	4589	Cowbell RX11
A4	6518	Crash2 L
A#4	3565	Cowbell1
B4	6573	Ride2 R
C5	4946	Bd Hip Deep
C#5	5850	Sd HipHop Rim4
D5	5832	Sd HipHop2
D#5	4554	HipHop Clap2
E5	5758	Sd Hip Rim5
F5	6477	Tom Dist Lo
F#5	6149	HH Closed Hip
G5	6477	Tom Dist Lo
G#5	6150	HH Pedal Hip
A5	6476	Tom Dist Hi
A#5	6151	HH Open Hip
B5	6476	Tom Dist Hi
C6	6476	Tom Dist Hi

Percussion Kit

Note	Wave Number	Wave Name
C0	3825	Wa Taiko
C#0	3867	Udu High
D0	3616	Djembe1 Open
D#0	3308	Quinto1 Open
E0	3868	Udu Low
F0	3866	Udu Finger
F#0	3867	Udu High
G0	3630	Tabla1 Bya
G#0	3444	Tmbourim Open
A0	3632	Tabla1 Mute
A#0	3631	Tabla1 Nah
B0	3632	Tabla1 Mute
C1	2212	Timpani1 Sw St
C#1	2576	Hit Uhh
D1	3321	Bongo1 Hi 1Fingr 1-2
D#1	4521	Clap T9-1
E1	3226	Triangle1 Mute
F1	3225	Triangle1 Open
F#1	3202	Castanet1
G1	3202	Castanet1
G#1	3202	Castanet1
A1	3454	Guiro1 Long
A#1	3456	Guiro1 Swp
B1	3455	Guiro1 Short
C2	3221	Vibraslap1
C#2	3559	Claves1
D2	4618	Claves T8-1
D#2	3316	Cuica1 Lo
E2	3317	Cuica1 Hi
F2	3372	Timbale1 Lo 1-2
F#2	3214	Wood Block
G2	3374	Timbale1 Lo 2
G#2	3214	Wood Block
A2	3368	Timbale1 Hi 1-3
A#2	3580	ChaCha Bell
B2	3370	Timbale1 Hi 2
C3	3377	Timbale1 Paila L
C#3	3377	Timbale1 Paila L
D3	3376	Timbale1 Paila H
D#3	3576	Mambo Bell1
E3	3334	Bongo1 Lo 3Fingr 1-2
F3	3334	Bongo1 Lo 3Fingr 1-2
F#3	3248	Handbell L
G3	3321	Bongo1 Hi 1Fingr 1-2
G#3	3249	Handbell H
A3	3321	Bongo1 Hi 1Fingr 1-2
A#3	3448	Agogo1 Lo
B3	3447	Agogo1 Hi
C4	3265	Conga1 Hi Heel
C#4	3264	Conga1 Hi Tip
D4	3313	Tumba Slap
D#4	3401	Maracas1 Slur
E4	3312	Tumba Open
F4	3265	Conga1 Hi Heel
F#4	3264	Conga1 Hi Tip
G4	3270	Conga1 Hi Slap Open
G#4	3159	ShakerA 1
A4	3268	Conga1 Hi Open 2
A#4	3405	Cabasa1A 1
B4	3404	Cabasa1A 1-2
C5	3265	Conga1 Hi Heel
C#5	3264	Conga1 Hi Tip
D5	3309	Quinto1 Slap
D#5	3159	ShakerA 1
E5	3310	Quinto2 Open
F5	3415	Caxixi 1-2
F#5	3186	Tambourine1 Shake
G5	3187	Tambourine1 Hit
G#5	3185	Tambourine1 Sw
A5	3187	Tambourine1 Hit
A#5	3250	Sleigh Bell1
B5	3562	Whistle
C6	3562	Whistle

LatinPercussionKit

Note	Wave Number	Wave Name
C0	4763	Bd L Son St
C#0	5527	Sd Rock Stick2 St
D0	5171	Sd Funk St13
D#0	6517	Crash2 St
E0	6635	Splash1 St
F0	6225	Tom Low St
F#0	5857	HH Closed 1-4St
G0	6225	Tom Low St
G#0	5880	HH Pedal 3 St
A0	6221	Tom Mid St
A#0	5895	HH Open 2St
B0	6217	Tom Hi St
C1	3264	Conga1 Hi Tip
C#1	3265	Conga1 Hi Heel
D1	3313	Tumba Slap
D#1	3559	Claves1
E1	3312	Tumba Open
F1	3264	Conga1 Hi Tip
F#1	3265	Conga1 Hi Heel
G1	3270	Conga1 Hi Slap Open
G#1	3248	Handbell L
A1	3268	Conga1 Hi Open 2
A#1	3249	Handbell H
B1	3576	Mambo Bell1
C2	3264	Conga1 Hi Tip
C#2	3265	Conga1 Hi Heel
D2	3309	Quinto1 Slap
D#2	3580	ChaCha Bell
E2	3308	Quinto1 Open
F2	3334	Bongo1 Lo 3Fingr 1-2
F#2	3321	Bongo1 Hi 1Fingr 1-2
G2	3324	Bongo1 Hi 3Fingr 1-2
G#2	3373	Timbale1 Lo 1
A2	3377	Timbale1 Paila L
A#2	3369	Timbale1 Hi 1
B2	3376	Timbale1 Paila H
C3	3214	Wood Block
C#3	3214	Wood Block
D3	3782	Shekere Down
D#3	3783	Shekere Up
E3	3784	Shekere Slap
F3	3401	Maracas1 Slur
F#3	3402	Maracas1 Staccato
G3	3454	Guiro1 Long
G#3	3456	Guiro1 Swp
A3	3455	Guiro1 Short
A#3	3467	Surdo1 Mute
B3	3466	Surdo1 Open
C4	3430	Pandeiro1 Tip
C#4	3431	Pandeiro1 Heel
D4	3429	Pandeiro1 Thump
D#4	3428	Pandeiro1 Open
E4	3445	Tmbourim Finger
F4	3444	Tmbourim Open
F#4	3446	Tmbourim Mute
G4	3449	Agogo1 Lo1 Tap
G#4	3448	Agogo1 Lo
A4	3447	Agogo1 Hi
A#4	3225	Triangle1 Open
B4	3226	Triangle1 Mute
C5	3160	ShakerA 2
C#5	3159	ShakerA 1
D5	3161	ShakerA 3
D#5	3405	Cabasa1A 1
E5	3406	Cabasa1A 2
F5	3416	Caxixi 1
F#5	3417	Caxixi 2
G5	3316	Cuica1 Lo
G#5	3317	Cuica1 Hi
A5	3562	Whistle
A#5	3562	Whistle
B5	3221	Vibraslap1
C6	3254	Wind Chime 1

Guitar/Bass FX Kit

Note	Wave Number	Wave Name
C0	2983	Acoustic Bass FX06
C#0	2983	Acoustic Bass FX06
D0	812	Play FX Mix
D#0	811	Power Chord Mn
E0	811	Power Chord Mn
F0	2978	Acoustic Bass FX01
F#0	2851	AcousticGtr FX02 St
G0	2991	Electric Bass FX 05
G#0	3002	Electric Bass FX 16
A0	2987	Electric Bass FX 01
A#0	2952	ElectricGtr FX06
B0	3003	Electric Bass FX 17
C1	2990	Electric Bass FX 04
C#1	2996	Electric Bass FX 10
D1	812	Play FX Mix
D#1	2997	Electric Bass FX 11
E1	812	Play FX Mix
F1	3004	Electric Bass FX 18
F#1	3002	Electric Bass FX 16
G1	3004	Electric Bass FX 18
G#1	3003	Electric Bass FX 17
A1	3004	Electric Bass FX 18
A#1	2959	ElectricGtr FX13
B1	3004	Electric Bass FX 18
C2	3004	Electric Bass FX 18
C#2	2932	AcousticGtr FX29 St
D2	3004	Electric Bass FX 18
D#2	2997	Electric Bass FX 11
E2	2932	AcousticGtr FX29 St
F2	2997	Electric Bass FX 11
F#2	2996	Electric Bass FX 10
G2	2932	AcousticGtr FX29 St
G#2	812	Play FX Mix
A2	2932	AcousticGtr FX29 St
A#2	2999	Electric Bass FX 13
B2	2997	Electric Bass FX 11
C3	2996	Electric Bass FX 10
C#3	2996	Electric Bass FX 10
D3	2988	Electric Bass FX 02
D#3	2994	Electric Bass FX 08
E3	3004	Electric Bass FX 18
F3	2986	Acoustic Bass FX09
F#3	2986	Acoustic Bass FX09
G3	2984	Acoustic Bass FX07
G#3	2984	Acoustic Bass FX07
A3	2983	Acoustic Bass FX06
A#3	2986	Acoustic Bass FX09
B3	812	Play FX Mix
C4	812	Play FX Mix
C#4	3008	Electric Bass FX 22
D4	2863	AcousticGtr FX06 St
D#4	3002	Electric Bass FX 16
E4	3002	Electric Bass FX 16
F4	2989	Electric Bass FX 03
F#4	812	Play FX Mix
G4	812	Play FX Mix
G#4	2997	Electric Bass FX 11
A4	3003	Electric Bass FX 17
A#4	2851	AcousticGtr FX02 St
B4	3000	Electric Bass FX 14
C5	2967	ElectricGtr FX21
C#5	2966	ElectricGtr FX20
D5	2965	ElectricGtr FX19
D#5	812	Play FX Mix
E5	812	Play FX Mix
F5	812	Play FX Mix
F#5	812	Play FX Mix
G5	917	Electric Bass FX
G#5	3008	Electric Bass FX 22
A5	2991	Electric Bass FX 05
A#5	3001	Electric Bass FX 15
B5	917	Electric Bass FX
C6	3005	Electric Bass FX 19

Wacko Kit

Note	Wave Number	Wave Name
C0	2987	Electric Bass FX 01
C#0	2690	Zap2
D0	6144	HH Pedal D&B
D#0	3232	Hand Clap1 L
E0	2834	Scratch Vo F
F0	2687	Indus Tom
F#0	5778	Sd Wood
G0	2687	Indus Tom
G#0	5768	Sd Clap Analog
A0	2687	Indus Tom
A#0	5774	Sd FM Rim
B0	4899	Bd FX Gate
C1	4968	Bd FxHammer
C#1	3270	Conga1 Hi Slap Open
D1	5773	Sd FM
D#1	3232	Hand Clap1 L
E1	5777	Sd Timbr
F1	6474	Tom Syn2
F#1	6154	HH Closed Syn
G1	6474	Tom Syn2
G#1	6155	HH Open Syn
A1	6474	Tom Syn2
A#1	6155	HH Open Syn
B1	6474	Tom Syn2
C2	6474	Tom Syn2
C#2	5954	HH Open Mn
D2	2526	Sonar1
D#2	6123	HH Open T8-1
E2	5954	HH Open Mn
F2	6619	Ride Cup2 L
F#2	3250	Sleigh Bell1
G2	6125	HH Open T8-2
G#2	2584	Resonance X-Fade
A2	6518	Crash2 L
A#2	2822	RainLoop
B2	6620	Ride Cup2 R
C3	2520	AirHose L
C#3	2520	AirHose L
D3	3867	Udu High
D#3	2432	Mg Bass2
E3	2434	Mg Bass3
F3	2983	Acoustic Bass FX06
F#3	2983	Acoustic Bass FX06
G3	3448	Agogo1 Lo
G#3	3448	Agogo1 Lo
A3	6158	HH Open Human
A#3	2708	Vox Hit Rev
B3	2706	Hi Q1
C4	2706	Hi Q1
C#4	2640	LFO Seq
D4	2640	LFO Seq
D#4	2513	BellAir
E4	2568	HH Hit
F4	2568	HH Hit
F#4	2523	Ooh Feedback
G4	2523	Ooh Feedback
G#4	2525	Mind Bell
A4	2684	Glass
A#4	2809	Swarm
B4	2807	FxGun2
C5	2581	Lektronica
C#5	812	Play FX Mix
D5	2820	Gunshot
D#5	2811	Police
E5	2683	Ripper
F5	812	Play FX Mix
F#5	2805	Tape Rewind
G5	2806	FxGun1
G#5	2804	Bomb
A5	2690	Zap2
A#5	2688	Noise Burst
B5	2572	Stab Giant
C6	2571	Stab Orchestra

Wood Bits Kit

Note	Wave Number	Wave Name
C0	4618	Claves T8-1
C#0	5536	Sd Hip Stick6 L
D0	3454	Guiro1 Long
D#0	5537	Sd Hip Stick6 R
E0	3454	Guiro1 Long
F0	2884	AcousticGtr FX13 St
F#0	3202	Castanet1
G0	2997	Electric Bass FX 11
G#0	3197	Stick1
A0	2994	Electric Bass FX 08
A#0	2993	Electric Bass FX 07
B0	6448	Tom T9 Hi
C1	3003	Electric Bass FX 17
C#1	5544	Sd Closed Rim3
D1	3198	Stick2
D#1	3454	Guiro1 Long
E1	3198	Stick2
F1	3466	Surdo1 Open
F#1	5734	Sd AnSm Rim
G1	3466	Surdo1 Open
G#1	4529	Clap AnSm
A1	3466	Surdo1 Open
A#1	3221	Vibraslap1
B1	3466	Surdo1 Open
C2	3466	Surdo1 Open
C#2	2815	Seashore
D2	3466	Surdo1 Open
D#2	5527	Sd Rock Stick2 St
E2	2821	Applause
F2	5525	Sd Rock Stick1 L
F#2	3186	Tambourine1 Shake
G2	2815	Seashore
G#2	3214	Wood Block
A2	2821	Applause
A#2	2814	Helicopter
B2	5529	Sd Rock Stick2 R
C3	3270	Conga1 Hi Slap Open
C#3	3270	Conga1 Hi Slap Open
D3	3202	Castanet1
D#3	3202	Castanet1
E3	3214	Wood Block
F3	3377	Timbale1 Paila L
F#3	3377	Timbale1 Paila L
G3	3197	Stick1
G#3	3198	Stick2
A3	3415	Caxixi 1-2
A#3	3417	Caxixi 2
B3	2812	Door Squeak
C4	2812	Door Squeak
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	2812	Door Squeak
G4	2812	Door Squeak
G#4	3214	Wood Block
A4	3559	Claves1
A#4	2812	Door Squeak
B4	3232	Hand Clap1 L
C5	3580	ChaCha Bell
C#5	5289	Sd Rock Open2 St
D5	4941	Bd Jungle3
D#5	3309	Quinto1 Slap
E5	4781	Bd Room2
F5	4760	Bd H Son St
F#5	5522	Sd Heavy
G5	3466	Surdo1 Open
G#5	5524	Sd Rock Stick1 St
A5	4978	Bd Slimy
A#5	5517	Sd Gate1
B5	4766	Bd Funk Son St
C6	4898	Bd Gate

Metal Bits Kit

Note	Wave Number	Wave Name
C0	4584	Cowbell T8
C#0	5871	HH Closed 4R
D0	6620	Ride Cup2 R
D#0	6155	HH Open Syn
E0	6619	Ride Cup2 L
F0	6595	Ride Cup1 St
F#0	2339	FM Metal2
G0	6567	Ride1 St
G#0	2697	Electric Perc7
A0	3566	Cowbell2
A#0	5858	HH Closed 1St
B0	3580	ChaCha Bell
C1	3566	Cowbell2
C#1	6154	HH Closed Syn
D1	6148	HH Open Tek
D#1	6124	HH Closed T8-2
E1	6136	HH Closed RX5
F1	3566	Cowbell2
F#1	6123	HH Open T8-1
G1	3566	Cowbell2
G#1	6154	HH Closed Syn
A1	3566	Cowbell2
A#1	6155	HH Open Syn
B1	3566	Cowbell2
C2	3566	Cowbell2
C#2	6157	HH Open FX
D2	3566	Cowbell2
D#2	6595	Ride Cup1 St
E2	6140	HH Open AnCR
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6157	HH Open FX
G#2	3577	Mambo Bell2
A2	6157	HH Open FX
A#2	3250	Sleigh Bell1
B2	6622	Ride Mn
C3	175	Brite Piano
C#3	175	Brite Piano
D3	2281	Tubular Bell1
D#3	2283	Bell
E3	2286	Brass Bell
F3	3376	Timbale1 Paila H
F#3	3377	Timbale1 Paila L
G3	2283	Bell
G#3	2283	Bell
A3	5858	HH Closed 1St
A#3	6140	HH Open AnCR
B3	2513	BellAir
C4	2579	FX Chime
C#4	5948	HH Open Rock L
D4	2581	Lektronica
D#4	3448	Agogo1 Lo
E4	3565	Cowbell1
F4	3566	Cowbell2
F#4	2518	Hi-Lo
G4	2518	Hi-Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	2579	FX Chime
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	2287	Small Bell
D5	2287	Small Bell
D#5	2286	Brass Bell
E5	2290	Hibashi
F5	175	Brite Piano
F#5	5519	Sd LdwHMn
G5	175	Brite Piano
G#5	5520	Sd BreakRim
A5	2297	Gamelan2
A#5	3866	Udu Finger
B5	2288	Finger Cymbal
C6	2283	Bell

Hands Kit

Note	Wave Number	Wave Name
C0	3632	Tabla1 Mute
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	2932	AcousticGtr FX29 St
F#0	3198	Stick2
G0	3429	Pandeiro1 Thump
G#0	3632	Tabla1 Mute
A0	3002	Electric Bass FX 16
A#0	2896	AcousticGtr FX17 St
B0	3633	Tabla1 Combi
C1	3825	Wa Taiko
C#1	3309	Quinto1 Slap
D1	5569	Sd Brush Med St
D#1	3231	Hand Clap1 St
E1	5183	Sd Funk Ay St
F1	3868	Udu Low
F#1	3632	Tabla1 Mute
G1	3868	Udu Low
G#1	3630	Tabla1 Bya
A1	3867	Udu High
A#1	3631	Tabla1 Nah
B1	3867	Udu High
C2	3866	Udu Finger
C#2	6573	Ride2 R
D2	3866	Udu Finger
D#2	6595	Ride Cup1 St
E2	6624	Ride Cup Mn2
F2	6595	Ride Cup1 St
F#2	3187	Tambourine1 Hit
G2	6595	Ride Cup1 St
G#2	3565	Cowbell1
A2	6622	Ride Mn
A#2	3221	Vibraslap1
B2	6572	Ride2 L
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3445	Tmbourim Finger
A#3	3445	Tmbourim Finger
B3	3232	Hand Clap1 L
C4	3232	Hand Clap1 L
C#4	3454	Guiro1 Long
D4	3454	Guiro1 Long
D#4	3866	Udu Finger
E4	3630	Tabla1 Bya
F4	3264	Conga1 Hi Tip
F#4	3867	Udu High
G4	3867	Udu High
G#4	3866	Udu Finger
A4	2288	Finger Cymbal
A#4	3632	Tabla1 Mute
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	3270	Conga1 Hi Slap Open
D5	3314	Tumba Tip
D#5	3314	Tumba Tip
E5	2994	Electric Bass FX 08
F5	3314	Tumba Tip
F#5	2987	Electric Bass FX 01
G5	3312	Tumba Open
G#5	2992	Electric Bass FX 06
A5	2857	AcousticGtr FX04 St
A#5	3868	Udu Low
B5	3617	Djembe1 Combi
C6	3313	Tumba Slap

Scratches

Note	Wave Number	Wave Name
C0	2823	Scratch H
C#0	2824	Scratch L
D0	2825	Scratch Down
D#0	2826	Scratch Hi F
E0	2827	Scratch Hi R
F0	2828	Scratch Lo F
F#0	2829	Scratch Lo R
G0	2830	Scratch Bd F
G#0	2831	Scratch Bd R
A0	2832	Scratch Sd F
A#0	2833	Scratch Sd R
B0	2834	Scratch Vo F
C1	2823	Scratch H
C#1	2824	Scratch L
D1	2825	Scratch Down
D#1	2826	Scratch Hi F
E1	2827	Scratch Hi R
F1	2828	Scratch Lo F
F#1	2829	Scratch Lo R
G1	2830	Scratch Bd F
G#1	2831	Scratch Bd R
A1	2832	Scratch Sd F
A#1	2833	Scratch Sd R
B1	2834	Scratch Vo F
C2	2835	Scratch Vo R
C#2	2836	Scratch Stop
D2	2837	Scratch Spin
D#2	2838	Scratch Hip
E2	2839	Scratch Hip2
F2	2842	Scratch Combi
F#2	2843	Scratch Combi2
G2	2844	Scratch Combi3
G#2	2845	Scratch Combi4
A2	2823	Scratch H
A#2	2824	Scratch L
B2	2825	Scratch Down
C3	2826	Scratch Hi F
C#3	2827	Scratch Hi R
D3	2828	Scratch Lo F
D#3	2829	Scratch Lo R
E3	2830	Scratch Bd F
F3	2831	Scratch Bd R
F#3	2832	Scratch Sd F
G3	2833	Scratch Sd R
G#3	2834	Scratch Vo F
A3	2835	Scratch Vo R
A#3	2836	Scratch Stop
B3	2837	Scratch Spin
C4	2838	Scratch Hip
C#4	2839	Scratch Hip2
D4	2842	Scratch Combi
D#4	2843	Scratch Combi2
E4	2844	Scratch Combi3
F4	2845	Scratch Combi4
F#4	2823	Scratch H
G4	2824	Scratch L
G#4	2825	Scratch Down
A4	2826	Scratch Hi F
A#4	2827	Scratch Hi R
B4	2828	Scratch Lo F
C5	2829	Scratch Lo R
C#5	2830	Scratch Bd F
D5	2831	Scratch Bd R
D#5	2832	Scratch Sd F
E5	2833	Scratch Sd R
F5	2834	Scratch Vo F
F#5	2835	Scratch Vo R
G5	2836	Scratch Stop
G#5	2837	Scratch Spin
A5	2838	Scratch Hip
A#5	2839	Scratch Hip2
B5	2842	Scratch Combi
C6	2843	Scratch Combi2

Acoustic Snares

Note	Wave Number	Wave Name
C0	5154	Sd Normal 1St
C#0	5155	Sd Normal 2St
D0	5156	Sd Normal 3St
D#0	5157	Sd Normal 4St
E0	5172	Sd Funk 1St
F0	5173	Sd Funk 2St
F#0	5174	Sd Funk 3St
G0	5183	Sd Funk Ay St
G#0	5190	Sd Basic 1St
A0	5191	Sd Basic 2St
A#0	5192	Sd Basic 3St
B0	5207	Sd SonA 1St
C1	5208	Sd SonA 2St
C#1	5209	Sd SonA 3St
D1	5210	Sd SonA 4St
D#1	5225	Sd Blues 1St
E1	5226	Sd Blues 2St
F1	5227	Sd Blues 3St
F#1	5240	Sd BluesHeart 1St
G1	5241	Sd BluesHeart 2St
G#1	5242	Sd BluesHeart 3St
A1	5257	Sd Tight 1St
A#1	5258	Sd Tight 2St
B1	5259	Sd Tight 3St
C2	5260	Sd Tight 4St
C#2	5272	Sd Hip 1St
D2	5273	Sd Hip 2St
D#2	5280	Sd Rock Open1 St
E2	5283	Sd Rock Mute1 St
F2	5286	Sd Rock Rim1 St
F#2	5289	Sd Rock Open2 St
G2	5292	Sd Rock Mute2 St
G#2	5295	Sd Rock Rim2 St
A2	5298	Sd Rock Flam St
A#2	5280	Sd Rock Open1 St
B2	5283	Sd Rock Mute1 St
C3	5286	Sd Rock Rim1 St
C#3	5289	Sd Rock Open2 St
D3	5292	Sd Rock Mute2 St
D#3	5295	Sd Rock Rim2 St
E3	5298	Sd Rock Flam St
F3	5156	Sd Normal 3St
F#3	5183	Sd Funk Ay St
G3	5192	Sd Basic 3St
G#3	5209	Sd SonA 3St
A3	5242	Sd BluesHeart 3St
A#3	5259	Sd Tight 3St
B3	5268	Sd Tight 3R
C4	5068	Sd Bld St1-4
C#4	5088	Sd Soul St1-4
D4	5108	Sd Strong St1-4
D#4	5128	Sd Rng St1-4
E4	5305	Sd Mid Rim
F4	5306	Sd Ambience
F#4	5517	Sd Gate1
G4	5519	Sd LdwHMn
G#4	5520	Sd BreakRim
A4	5521	Sd Dry
A#4	5522	Sd Heavy
B4	5523	Sd GM
C5	5328	Sd PowerB 1-5St
C#5	5352	Sd PowerC 1-5St
D5	5376	Sd PowerD 1-4St
D#5	5523	Sd GM
E5	5566	Sd Brush Soft St
F5	5569	Sd Brush Med St
F#5	5572	Sd Brush vari St
G5	5581	Sd Brush SwirAtt St
G#5	5597	Sd OrchA 1 St
A5	5605	Sd OrchB 1-2 St
A#5	5629	Sd Orch Roll St
B5	5598	Sd OrchA 2 St
C6	5569	Sd Brush Med St

Grouped St Snares

Note	Wave Number	Wave Name
C0	5148	Sd Normal St1-4
C#0	5149	Sd Normal St1-3
D0	5150	Sd Normal St2-4
D#0	5151	Sd Normal St1-2
E0	5152	Sd Normal St2-3
F0	5153	Sd Normal St3-4
F#0	5154	Sd Normal 1St
G0	5155	Sd Normal 2St
G#0	5156	Sd Normal 3St
A0	5157	Sd Normal 4St
A#0	5168	Sd Funk St1-3
B0	5169	Sd Funk St1-2
C1	5170	Sd Funk St2-3
C#1	5171	Sd Funk St13
D1	5172	Sd Funk 1St
D#1	5173	Sd Funk 2St
E1	5174	Sd Funk 3St
F1	5183	Sd Funk Ay St
F#1	5186	Sd Basic St1-3
G1	5187	Sd Basic St1-2
G#1	5188	Sd Basic St2-3
A1	5189	Sd Basic St13
A#1	5190	Sd Basic 1St
B1	5191	Sd Basic 2St
C2	5192	Sd Basic 3St
C#2	5201	Sd SonA St1-4
D2	5202	Sd SonA St1-3
D#2	5203	Sd SonA St2-4
E2	5204	Sd SonA St1-2
F2	5205	Sd SonA St2-3
F#2	5206	Sd SonA St3-4
G2	5207	Sd SonA 1St
G#2	5208	Sd SonA 2St
A2	5209	Sd SonA 3St
A#2	5210	Sd SonA 4St
B2	5221	Sd Blues St1-3
C3	5222	Sd Blues St1-2
C#3	5223	Sd Blues St2-3
D3	5224	Sd Blues St13
D#3	5225	Sd Blues 1St
E3	5226	Sd Blues 2St
F3	5227	Sd Blues 3St
F#3	5236	Sd BluesHeart St1-3
G3	5237	Sd BluesHeart St1-2
G#3	5238	Sd BluesHeart St2-3
A3	5239	Sd BluesHeart St13
A#3	5240	Sd BluesHeart 1St
B3	5241	Sd BluesHeart 2St
C4	5242	Sd BluesHeart 3St
C#4	5251	Sd Tight St1-4
D4	5252	Sd Tight St1-3
D#4	5253	Sd Tight St2-4
E4	5254	Sd Tight St1-2
F4	5255	Sd Tight St2-3
F#4	5256	Sd Tight St3-4
G4	5257	Sd Tight 1St
G#4	5258	Sd Tight 2St
A4	5259	Sd Tight 3St
A#4	5260	Sd Tight 4St
B4	5313	Sd PowerA 1St
C5	5316	Sd PowerA 2St
C#5	5319	Sd PowerA 3St
D5	5322	Sd PowerA 4St
D#5	5325	Sd PowerA 5St
E5	5334	Sd PowerB 1St
F5	5337	Sd PowerB 2St
F#5	5340	Sd PowerB 3St
G5	5343	Sd PowerB 4St
G#5	5346	Sd PowerB 5St
A5	5352	Sd PowerC 1-5St
A#5	5376	Sd PowerD 1-4St
B5	5221	Sd Blues St1-3
C6	5236	Sd BluesHeart St1-3

All Kicks

Note	Wave Number	Wave Name
C0	4736	Bd Normal St1-2
C#0	4709	Bd Snap 1-2
D0	4719	Bd Tight 1
D#0	4739	Bd Normal L1-2
E0	4745	Bd Funk St1-2
F0	4727	Bd Ambience 1-2
F#0	4747	Bd Funk 2St
G0	4754	Bd High St
G#0	4757	Bd Low St
A0	4760	Bd H Son St
A#0	4763	Bd L Son St
B0	4766	Bd Funk Son St
C1	4769	Bd Rock1 St
C#1	4772	Bd Rock2 St
D1	4775	Bd Dry1
D#1	4776	Bd Dry2
E1	4777	Bd Pop
F1	4778	Bd Var1
F#1	4779	Bd Var2
G1	4780	Bd Room1
G#1	4781	Bd Room2
A1	4782	Bd Room3
A#1	4898	Bd Gate
B1	4899	Bd FX Gate
C2	4796	Bd PowerA 1-2St
C#2	4805	Bd PowerB 1-2St
D2	4792	Bd FK Jazz St
D#2	4905	Bd T9-4
E2	4906	Bd T9 Hd1
F2	4907	Bd T9 Hd2
F#2	4908	Bd T9 Hd3
G2	4922	Bd T8-1
G#2	4923	Bd T8-2
A2	4924	Bd T8-3
A#2	4932	Bd AnSm
B2	4933	Bd AnCR
C3	4935	Bd Human1
C#3	4936	Bd Human2
D3	4937	Bd Brip
D#3	4938	Bd BlpHd
E3	4939	Bd Jungle1
F3	4940	Bd Jungle2
F#3	4941	Bd Jungle3
G3	4942	Bd D&B1
G#3	4943	Bd D&B2
A3	4944	Bd R&B1
A#3	4945	Bd R&B2
B3	4946	Bd Hip Deep
C4	4947	Bd Break Deep
C#4	4948	Bd Break1
D4	4949	Bd Break2
D#4	4950	Bd Break Heavy
E4	4951	Bd Break Hard
F4	4952	Bd Distortion1
F#4	4953	Bd Distortion2
G4	4954	Bd Distortion3
G#4	4955	Bd Distortion4
A4	4956	Bd Distortion5
A#4	4957	Bd Distortion RM
B4	4958	Bd + HH
C5	4968	Bd FxHammer
C#5	4969	Bd ZapHard
D5	4970	Bd ZapMid
D#5	4971	Bd Sustain
E5	4972	Bd TekPower
F5	4973	Bd Hard Long
F#5	4974	Bd Analog Tight
G5	4975	Bd Analog Hard
G#5	4976	Bd Lo-Fi
A5	4977	Bd ThickSkin
A#5	4978	Bd Slimy
B5	5057	Bd HipHop8
C6	5059	Bd HipHop10

Dance Kicks

Note	Wave Number	Wave Name
C0	4902	Bd T9-1
C#0	4902	Bd T9-1
D0	4903	Bd T9-2
D#0	4904	Bd T9-3
E0	4904	Bd T9-3
F0	4905	Bd T9-4
F#0	4906	Bd T9 Hd1
G0	4907	Bd T9 Hd2
G#0	4908	Bd T9 Hd3
A0	4908	Bd T9 Hd3
A#0	4973	Bd Hard Long
B0	4933	Bd AnCR
C1	4902	Bd T9-1
C#1	4903	Bd T9-2
D1	4904	Bd T9-3
D#1	4905	Bd T9-4
E1	4906	Bd T9 Hd1
F1	4907	Bd T9 Hd2
F#1	4908	Bd T9 Hd3
G1	4922	Bd T8-1
G#1	4923	Bd T8-2
A1	4924	Bd T8-3
A#1	4979	Bd Elec1
B1	4933	Bd AnCR
C2	4935	Bd Human1
C#2	4979	Bd Elec1
D2	4937	Bd Brip
D#2	4938	Bd BlpHd
E2	4981	Bd Elec3
F2	4986	Bd ElecFX1
F#2	4987	Bd ElecFX2
G2	4988	Bd ElecGate
G#2	4989	Bd ElecClick
A2	4990	Bd ElecPower1
A#2	4945	Bd R&B2
B2	4946	Bd Hip Deep
C3	4947	Bd Break Deep
C#3	4948	Bd Break1
D3	4991	Bd ElecPower2
D#3	4950	Bd Break Heavy
E3	4951	Bd Break Hard
F3	4952	Bd Distortion1
F#3	4953	Bd Distortion2
G3	4954	Bd Distortion3
G#3	4955	Bd Distortion4
A3	4956	Bd Distortion5
A#3	4980	Bd Elec2
B3	4983	Bd ElecComp1
C4	4968	Bd FxHammer
C#4	4969	Bd ZapHard
D4	4970	Bd ZapMid
D#4	4971	Bd Sustain
E4	4972	Bd TekPower
F4	4973	Bd Hard Long
F#4	4974	Bd Analog Tight
G4	4975	Bd Analog Hard
G#4	4984	Bd ElecComp2
A4	4985	Bd ElecComp3
A#4	4978	Bd Slimy
B4	4898	Bd Gate
C5	4899	Bd FX Gate
C#5	5050	Bd HipHop1
D5	5051	Bd HipHop2
D#5	5052	Bd HipHop3
E5	5053	Bd HipHop4
F5	5054	Bd HipHop5
F#5	5055	Bd HipHop6
G5	5056	Bd HipHop7
G#5	5057	Bd HipHop8
A5	5058	Bd HipHop9
A#5	5059	Bd HipHop10
B5	4973	Bd Hard Long
C6	4974	Bd Analog Tight

Arabic Mixed Kit 1

Note	Wave Number	Wave Name
C0	3254	Wind Chime 1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5154	Sd Normal 1St
G#0	3197	Stick1
A0	4903	Bd T9-2
A#0	5186	Sd Basic St1-3
B0	4754	Bd High St
C1	4736	Bd Normal St1-2
C#1	5168	Sd Funk St1-3
D1	5068	Sd Bld St1-4
D#1	3231	Hand Clap1 St
E1	5088	Sd Soul St1-4
F1	6241	Tom Rock Low St
F#1	5857	HH Closed 1-4St
G1	6237	Tom Rock Mid St
G#1	5877	HH Pedal 1-3St
A1	6229	Tom Floor St
A#1	5893	HH Open 1-2St
B1	6225	Tom Low St
C2	6221	Tom Mid St
C#2	6517	Crash2 St
D2	6217	Tom Hi St
D#2	5893	HH Open 1-2St
E2	6688	Reverse Cymbal1
F2	3372	Timbale1 Lo 1-2
F#2	3268	Conga1 Hi Open 2
G2	3368	Timbale1 Hi 1-3
G#2	3270	Conga1 Hi Slap Open
A2	3185	Tambourine1 Sw
A#2	3312	Tumba Open
B2	3565	Cowbell1
C3	3559	Claves1
C#3	3321	Bongo1 Hi 1Fingr 1-2
D3	3214	Wood Block
D#3	3334	Bongo1 Lo 3Fingr 1-2
E3	3214	Wood Block
F3	3693	Dohol Low
F#3	3404	Cabasa1A 1-2
G3	3694	Dohol High
G#3	3159	ShakerA 1
A3	3202	Castanet1
A#3	3400	Maracas1 Sw
B3	3202	Castanet1
C4	3909	Twaisat3
C#4	3907	Twaisat1
D4	3908	Twaisat2
D#4	3910	Twaisat4
E4	3910	Twaisat4
F4	3851	Small Tabla Dom
F#4	3885	Barasim Dom
G4	3852	Small Tabla Snap
G#4	3886	Barasim Sak
A4	3853	Small Tabla Sak
A#4	3887	Barasim Tak
B4	3854	Small Tabla Tak
C5	3855	Big Tabla Dom
C#5	3905	Segal Dom
D5	3856	Big Tabla Tak
D#5	3906	Segal Tak
E5	3857	Big Tabla Sak
F5	3858	Tabla Dom
F#5	3859	Tabla Tak1
G5	3865	Tabla Tremolo
G#5	3860	Tabla Tak2
A5	3861	Tabla Tik1
A#5	3864	Tabla Sak1
B5	3863	Tabla Tik3
C6	3862	Tabla Tik2

Belly Dance Kit

Note	Wave Number	Wave Name
C0	3862	Tabla Tik2
C#0	3825	Wa Taiko
D0	3614	Djembe1 Edge
D#0	3615	Djembe1 Mute
E0	3616	Djembe1 Open
F0	3617	Djembe1 Combi
F#0	3630	Tabla1 Bya
G0	3631	Tabla1 Nah
G#0	3632	Tabla1 Mute
A0	3633	Tabla1 Combi
A#0	3851	Small Tabla Dom
B0	3851	Small Tabla Dom
C1	4973	Bd Hard Long
C#1	4902	Bd T9-1
D1	5692	Sd T9-2
D#1	4530	Electric Clap1
E1	5118	Sd Strong L1-4
F1	6477	Tom Dist Lo
F#1	6108	HH Closed T9
G1	6476	Tom Dist Hi
G#1	6122	HH Closed T8-1
A1	6473	Tom Syn1
A#1	6109	HH Open T9
B1	6474	Tom Syn2
C2	5750	Sd Hip1
C#2	6522	Crash4
D2	5746	Sd D&B4
D#2	6141	HH Closed Break
E2	6688	Reverse Cymbal1
F2	3372	Timbale1 Lo 1-2
F#2	3268	Conga1 Hi Open 2
G2	3368	Timbale1 Hi 1-3
G#2	3270	Conga1 Hi Slap Open
A2	3185	Tambourine1 Sw
A#2	3312	Tumba Open
B2	3565	Cowbell1
C3	3559	Claves1
C#3	3321	Bongo1 Hi 1Fingr 1-2
D3	3214	Wood Block
D#3	3334	Bongo1 Lo 3Fingr 1-2
E3	3214	Wood Block
F3	3693	Dohol Low
F#3	3404	Cabasa1A 1-2
G3	3694	Dohol High
G#3	3159	ShakerA 1
A3	3202	Castanet1
A#3	3400	Maracas1 Sw
B3	3202	Castanet1
C4	3909	Twaisat3
C#4	3907	Twaisat1
D4	3908	Twaisat2
D#4	3910	Twaisat4
E4	3910	Twaisat4
F4	3851	Small Tabla Dom
F#4	3885	Barasim Dom
G4	3852	Small Tabla Snap
G#4	3886	Barasim Sak
A4	3853	Small Tabla Sak
A#4	3887	Barasim Tak
B4	3854	Small Tabla Tak
C5	3855	Big Tabla Dom
C#5	3905	Segal Dom
D5	3856	Big Tabla Tak
D#5	3906	Segal Tak
E5	3857	Big Tabla Sak
F5	3858	Tabla Dom
F#5	3859	Tabla Tak1
G5	3865	Tabla Tremolo
G#5	3860	Tabla Tak2
A5	3861	Tabla Tik1
A#5	3864	Tabla Sak1
B5	3863	Tabla Tik3
C6	3862	Tabla Tik2

Dance Snares

Note	Wave Number	Wave Name
C0	5764	Sd FX1
C#0	5765	Sd FX2
D0	5766	Sd FX3
D#0	5767	Sd FX4
E0	5769	Sd Dist
F0	5770	Sd Cut
F#0	5771	Sd Garg H
G0	5772	Sd Garg L
G#0	5773	Sd FM
A0	5775	Sd Syn
A#0	5779	Sd Hammer
B0	5780	Sd Lo-Fi
C1	5691	Sd T9-1
C#1	5692	Sd T9-2
D1	5693	Sd T9-3
D#1	5694	Sd T9-4
E1	5695	Sd T9-5
F1	5696	Sd T9Gate
F#1	5718	Sd T8-1
G1	5719	Sd T8-2
G#1	5720	Sd T8-3
A1	5721	Sd T8-4
A#1	5722	Sd T8-5
B1	5733	Sd AnSm
C2	5735	Sd AnCR
C#2	5737	Sd Human1
D2	5739	Sd Jungle1
D#2	5740	Sd Jungle2
E2	5741	Sd Jungle3
F2	5742	Sd JungleFX
F#2	5743	Sd D&B1
G2	5744	Sd D&B2
G#2	5745	Sd D&B3
A2	5746	Sd D&B4
A#2	5747	Sd R&B1
B2	5748	Sd R&B1 Rim
C3	5749	Sd R&B2
C#3	5750	Sd Hip1
D3	5751	Sd Hip2
D#3	5752	Sd Hip3
E3	5753	Sd Hip Gate
F3	5754	Sd Hip Rim1
F#3	5755	Sd Hip Rim2
G3	5756	Sd Hip Rim3
G#3	5757	Sd Hip Rim4
A3	5758	Sd Hip Rim5
A#3	5760	Sd Break2
B3	5762	Sd Break Heavy
C4	5658	Sd Elec1
C#4	5659	Sd Elec2
D4	5660	Sd Elec3
D#4	5661	Sd Elec4
E4	5662	Sd Elec5
F4	5663	Sd Elec6
F#4	5664	Sd Elec7
G4	5665	Sd Elec8
G#4	5666	Sd Elec9
A4	5667	Sd Elec10
A#4	5668	Sd Elec11
B4	5669	Sd Elec12
C5	5658	Sd Elec1
C#5	5719	Sd T8-2
D5	5660	Sd Elec3
D#5	5661	Sd Elec4
E5	5662	Sd Elec5
F5	5663	Sd Elec6
F#5	5664	Sd Elec7
G5	5658	Sd Elec1
G#5	5665	Sd Elec8
A5	5667	Sd Elec10
A#5	5668	Sd Elec11
B5	5669	Sd Elec12
C6	5693	Sd T9-3

Special SFXs

Note	Wave Number	Wave Name
C0	2471	Mini Brip2
C#0	2470	Mini Brip1
D0	2472	Mini Brip3
D#0	2473	Mini Brip4
E0	2474	Mini Brip5
F0	2475	Mini Brip6
F#0	2685	Bell FX1
G0	2686	Bell FX2
G#0	2694	Electric Perc4
A0	2696	Electric Perc6
A#0	2705	Electric Perc15
B0	2695	Electric Perc5
C1	2692	Electric Perc2
C#1	2693	Electric Perc3
D1	2697	Electric Perc7
D#1	2698	Electric Perc8
E1	2699	Electric Perc9
F1	2700	Electric Perc10
F#1	2704	Electric Perc14
G1	2703	Electric Perc13
G#1	2591	Neo Seq Em-3
A1	2400	Spectrum1
A#1	2402	Spectrum3
B1	2401	Spectrum2
C2	2597	Whisper Seq Bb
C#2	2674	Digi Voice Mod
D2	2532	Moving Chime St
D#2	2529	Engine Room St
E2	2641	Raspberry
F2	2642	Digi Heli
F#2	2586	Hop FX1
G2	2501	Willow St
G#2	2504	Anemone St
A2	2507	Magnitude St
A#2	2639	Radio Noise
B2	2585	Quiek
C3	2572	Stab Giant
C#3	2568	HH Hit
D3	2573	Stab Hard
D#3	2574	Stab Organ2
E3	2575	Stab Aah
F3	2576	Hit Uhh
F#3	2577	Hit Orchestra2
G3	2569	Hit Orchestra1
G#3	2570	Hit Brass
A3	2560	Orchestra Hit1 St
A#3	2563	Orchestra Hit2 St
B3	1452	Brass Sect Fall
C4	812	Play FX Mix
C#4	812	Play FX Mix
D4	2969	ElectricGtr FX23
D#4	2981	Acoustic Bass FX04
E4	2982	Acoustic Bass FX05
F4	2978	Acoustic Bass FX01
F#4	2823	Scratch H
G4	2824	Scratch L
G#4	2825	Scratch Down
A4	2826	Scratch Hi F
A#4	2836	Scratch Stop
B4	2805	Tape Rewind
C5	2683	Ripper
C#5	2688	Noise Burst
D5	2689	Zap1
D#5	2690	Zap2
E5	2706	Hi Q1
F5	2707	Hi Q2
F#5	2804	Bomb
G5	2806	FxGun1
G#5	2535	Motion Beam
A5	2498	Birch St
A#5	2332	Tri Wave
B5	2453	FM Bass2
C6	2339	FM Metal2

Synthetic Kit

Note	Wave Number	Wave Name
C0	4980	Bd Elec2
C#0	2836	Scratch Stop
D0	5579	Sd Brush Swir L
D#0	5571	Sd Brush Med R
E0	5578	Sd Brush Swir St
F0	5557	Sd Roll Mn
F#0	2457	FM Bass6
G0	2815	Seashore
G#0	2694	Electric Perc4
A0	4985	Bd ElecComp3
A#0	5125	Sd Strong R2
B0	4980	Bd Elec2
C1	4978	Bd Slimy
C#1	3376	Timbale1 Paila H
D1	5301	Sd Piccolo
D#1	4529	Clap AnSm
E1	5667	Sd Elec10
F1	2432	Mg Bass2
F#1	2707	Hi Q2
G1	2432	Mg Bass2
G#1	2697	Electric Perc7
A1	6465	Tom T8
A#1	6125	HH Open T8-2
B1	6465	Tom T8
C2	6465	Tom T8
C#2	6521	Crash3
D2	6465	Tom T8
D#2	6623	Ride Cup Mn
E2	6623	Ride Cup Mn
F2	6623	Ride Cup Mn
F#2	2832	Scratch Sd F
G2	6598	Ride Cup1 RL
G#2	2697	Electric Perc7
A2	6521	Crash3
A#2	2518	Hi-Lo
B2	6629	China2
C3	2335	Ring Mod
C#3	2698	Electric Perc8
D3	2335	Ring Mod
D#3	2697	Electric Perc7
E3	2701	Electric Perc11
F3	3394	Paila H
F#3	3394	Paila H
G3	2586	Hop FX1
G#3	2587	Hop FX2
A3	2823	Scratch H
A#3	2826	Scratch Hi F
B3	2690	Zap2
C4	2640	LFO Seq
C#4	2640	LFO Seq
D4	2410	Mini Bass3a
D#4	2585	Quiek
E4	2528	Digi Breath
F4	2642	Digi Heli
F#4	2697	Electric Perc7
G4	2343	FM Organ1
G#4	3773	Tibetan Bowl
A4	3773	Tibetan Bowl
A#4	3905	Segal Dom
B4	2531	Engine Room R
C5	2698	Electric Perc8
C#5	666	Steel1 Slide St
D5	2471	Mini Brip2
D#5	2401	Spectrum2
E5	2474	Mini Brip5
F5	2476	Noise
F#5	4942	Bd D&B1
G5	2401	Spectrum2
G#5	2510	SabreTone
A5	2704	Electric Perc14
A#5	2698	Electric Perc8
B5	2642	Digi Heli
C6	3254	Wind Chime 1

SFX Kit

Note	Wave Number	Wave Name
C0	2145	Fat Saw Mn
C#0	2840	Scratch Attack
D0	2401	Spectrum2
D#0	2404	3o3 Saw2
E0	2810	TurnTable
F0	5557	Sd Roll Mn
F#0	2457	FM Bass6
G0	2805	Tape Rewind
G#0	2695	Electric Perc5
A0	4984	Bd ElecComp2
A#0	5148	Sd Normal St1-4
B0	4978	Bd Slimy
C1	4980	Bd Elec2
C#1	2410	Mini Bass3a
D1	5236	Sd BluesHeart St1-3
D#1	2405	3o3 Square
E1	5217	Sd SonA 3L
F1	6476	Tom Dist Hi
F#1	2642	Digi Heli
G1	6476	Tom Dist Hi
G#1	2692	Electric Perc2
A1	6476	Tom Dist Hi
A#1	6125	HH Open T8-2
B1	6476	Tom Dist Hi
C2	6476	Tom Dist Hi
C#2	6521	Crash3
D2	6476	Tom Dist Hi
D#2	6597	Ride Cup1 R
E2	6574	Ride2 RL
F2	6624	Ride Cup Mn2
F#2	2826	Scratch Hi F
G2	6636	Splash1 L
G#2	2406	Mini Bass1
A2	6513	Crash1 St
A#2	2529	Engine Room St
B2	6598	Ride Cup1 RL
C3	2310	Sync LFO
C#3	2311	P5 SawDown 0 dg
D3	2159	OB Strings
D#3	5149	Sd Normal St1-3
E3	2701	Electric Perc11
F3	2167	PWM Slow
F#3	2640	LFO Seq
G3	2514	BigSyn
G#3	2514	BigSyn
A3	2577	Hit Orchestra2
A#3	3851	Small Tabla Dom
B3	2354	Digi 03
C4	2354	Digi 03
C#4	2352	Digi 01
D4	2352	Digi 01
D#4	2526	Sonar1
E4	2573	Stab Hard
F4	2529	Engine Room St
F#4	2646	Chatter
G4	2652	Hoo
G#4	3771	Mondira
A4	3771	Mondira
A#4	540	Rotor
B4	2641	Raspberry
C5	2642	Digi Heli
C#5	2405	3o3 Square
D5	2587	Hop FX2
D#5	2391	DigiBell3
E5	2708	Vox Hit Rev
F5	2706	Hi Q1
F#5	2805	Tape Rewind
G5	2807	FxGun2
G#5	2806	FxGun1
A5	2808	Thunder
A#5	2811	Police
B5	2804	Bomb
C6	2804	Bomb

Stereo GM Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5554	Sd LiveRoll St
F#0	3202	Castanet1
G0	5154	Sd Normal 1St
G#0	3197	Stick1
A0	4745	Bd Funk St1-2
A#0	5188	Sd Basic St2-3
B0	4754	Bd High St
C1	4736	Bd Normal St1-2
C#1	5540	Sd Closed Rim St
D1	5148	Sd Normal St1-4
D#1	4521	Clap T9-1
E1	5187	Sd Basic St1-2
F1	6229	Tom Floor St
F#1	5857	HH Closed 1-4St
G1	6225	Tom Low St
G#1	5880	HH Pedal 3 St
A1	6225	Tom Low St
A#1	5895	HH Open 2St
B1	6221	Tom Mid St
C2	6221	Tom Mid St
C#2	6517	Crash2 St
D2	6217	Tom Hi St
D#2	6567	Ride1 St
E2	6625	China1 St
F2	6595	Ride Cup1 St
F#2	3185	Tambourine1 Sw
G2	6635	Splash1 St
G#2	3566	Cowbell2
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6570	Ride1 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5228	Sd Blues L1-3
D5	5251	Sd Tight St1-4
D#5	5244	Sd BluesHeart R1-3
E5	5271	Sd Hip St1-2
F5	4757	Bd Low St
F#5	5519	Sd LdwHMn
G5	4944	Bd R&B1
G#5	5522	Sd Heavy
A5	4780	Bd Room1
A#5	5306	Sd Ambience
B5	4766	Bd Funk Son St
C6	4781	Bd Room2

Maple Custom Kit

Note	Wave Number	Wave Name
C0	3566	Cowbell2
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5424	Sd Beech 1-4 St
G#0	3198	Stick2
A0	4832	Bd Oak Open 1-2 St
A#0	5442	Sd Beech OpRm 1-2 St
B0	4814	Bd Maple Close 1-2St
C1	4823	Bd Maple Open 1-2 St
C#1	5481	Sd Metal ClRm St
D1	5454	Sd Metal 1-4 St
D#1	3231	Hand Clap1 St
E1	5472	Sd Metal OpRm 1-2 St
F1	6317	Tom Maple Flr 1-2 St
F#1	6004	HH Dark Closed 1-4St
G1	6317	Tom Maple Flr 1-2 St
G#1	6024	HH Dark Pedal 1-2 St
A1	6305	Tom Maple Mid 1-2 St
A#1	6036	HH Dark Open 1-2 St
B1	6293	Tom Maple Hi 1-2 St
C2	6293	Tom Maple Hi 1-2 St
C#2	6523	Crash Brite St
D2	6293	Tom Maple Hi 1-2 St
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3252	Ghunghuru
C#5	3469	Surdo2 Mute
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Oak Custom Kit

Note	Wave Number	Wave Name
C0	3566	Cowbell2
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3202	Castanet1
G0	5454	Sd Metal 1-4 St
G#0	3198	Stick2
A0	4832	Bd Oak Open 1-2 St
A#0	5472	Sd Metal OpRm 1-2 St
B0	4841	Bd Oak Close 1-2 St
C1	4832	Bd Oak Open 1-2 St
C#1	5421	Sd Oak ClRm St
D1	5394	Sd Oak 1-4 St
D#1	3231	Hand Clap1 St
E1	5412	Sd Oak OpRm 1-2 St
F1	6353	Tom Oak Floor 1-2 St
F#1	6004	HH Dark Closed 1-4St
G1	6353	Tom Oak Floor 1-2 St
G#1	6024	HH Dark Pedal 1-2 St
A1	6341	Tom Oak Mid 1-2 St
A#1	6036	HH Dark Open 1-2 St
B1	6341	Tom Oak Mid 1-2 St
C2	6329	Tom Oak Hi 1-2 St
C#2	6523	Crash Brite St
D2	6329	Tom Oak Hi 1-2 St
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6527	Crash Dark St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3380	Timbale2 Hi 2
F#3	3384	Timbale2 Lo 2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3251	Sleigh Bell2
C5	3254	Wind Chime 1
C#5	3469	Surdo2 Mute
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Nu Jazzy Kit

Note	Wave Number	Wave Name
C0	3566	Cowbell2
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5484	Sd Metal SnRoll St
F#0	3245	Finger Snap1
G0	5454	Sd Metal 1-4 St
G#0	3198	Stick2
A0	4832	Bd Oak Open 1-2 St
A#0	5472	Sd Metal OpRm 1-2 St
B0	4850	Bd NJz Closed 1-2 St
C1	4859	Bd NJz Open 1-2 St
C#1	5514	Sd NJz ClRm St
D1	5487	Sd NJz 1-4 St
D#1	3234	Hand Clap2 Sw
E1	5505	Sd NJz OpRm 1-2 St
F1	6389	Tom NJz Floor 1-2 St
F#1	6048	HH NJz Closed 1-4 St
G1	6389	Tom NJz Floor 1-2 St
G#1	6068	HH NJz Pedal 1-2 St
A1	6377	Tom NJz Low 1-2 St
A#1	6080	HH NJz Open 1-2 St
B1	6377	Tom NJz Low 1-2 St
C2	6365	Tom NJz Mid 1-2 St
C#2	6535	Crash NJzB St
D2	6365	Tom NJz Mid 1-2 St
D#2	6587	Ride NJz St
E2	6630	China3 St
F2	6591	Ride NJz Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	6531	Crash NJzA St
A#2	3222	Vibraslap2
B2	6583	Ride Warm St
C3	3342	Bongo2 Hi Open 2
C#3	3346	Bongo2 Lo Open 2
D3	3286	Conga2 Hi Slap 2
D#3	3289	Conga2 Hi Open 2
E3	3292	Conga2 Lo Open 1
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3407	Cabasa1B 1-4
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3460	MetalGuiro Short 1-2
D4	3463	MetalGuiro Long
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	3469	Surdo2 Mute
D5	3468	Surdo2 Open
D#5	3283	Conga2 Hi Tip
E5	3282	Conga2 Hi Heel
F5	3284	Conga2 Hi Slap 1-2
F#5	3290	Conga2 Hi Mute
G5	3287	Conga2 Hi Open 1-2
G#5	3294	Conga2 Lo Slide
A5	3291	Conga2 Lo Open 1-2
A#5	3620	Djembe2 Mute
B5	3618	Djembe2 Lo
C6	3619	Djembe2 Slap

Illest Hip Hop Kit

Note	Wave Number	Wave Name
C0	5051	Bd HipHop2
C#0	5844	Sd HipHop14
D0	5837	Sd HipHop7
D#0	4561	HipHop Clap9
E0	5060	Bd HipHop11
F0	4562	HipHop Clap10
F#0	5843	Sd HipHop13
G0	5834	Sd HipHop4
G#0	5842	Sd HipHop12
A0	5057	Bd HipHop8
A#0	5852	Sd HipHop Rim6
B0	5062	Bd HipHop13
C1	5061	Bd HipHop12
C#1	5850	Sd HipHop Rim4
D1	5841	Sd HipHop11
D#1	4565	HipHop Clap13
E1	5832	Sd HipHop2
F1	6436	Tom Dry Lo
F#1	5990	HH Power ClEgde 3R
G1	6436	Tom Dry Lo
G#1	5994	HH Power ClEgde 4R
A1	6435	Tom Dry Hi
A#1	6002	HH Power Open EdgeR
B1	6435	Tom Dry Hi
C2	6435	Tom Dry Hi
C#2	6522	Crash4
D2	6435	Tom Dry Hi
D#2	6572	Ride2 L
E2	6518	Crash2 L
F2	6622	Ride Mn
F#2	3187	Tambourine1 Hit
G2	6562	Hand Cymbal Open L
G#2	3578	Mambo Bell Body
A2	6627	China1 R
A#2	3248	Handbell L
B2	6624	Ride Cup Mn2
C3	3270	Conga1 Hi Slap Open
C#3	3278	Conga1 Lo Open 1
D3	3275	Conga1 Lo Tip
D#3	3281	Conga1 Lo Slap Open
E3	3279	Conga1 Lo Open 2
F3	5053	Bd HipHop4
F#3	4555	HipHop Clap3
G3	6147	HH Closed Tek
G#3	6147	HH Closed Tek
A3	3160	ShakerA 2
A#3	3159	ShakerA 1
B3	5059	Bd HipHop10
C4	4958	Bd + HH
C#4	5840	Sd HipHop10
D4	5845	Sd HipHop15
D#4	4564	HipHop Clap12
E4	5059	Bd HipHop10
F4	5836	Sd HipHop6
F#4	4566	HipHop Clap14
G4	4563	HipHop Clap11
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3185	Tambourine1 Sw
B4	3160	ShakerA 2
C5	5057	Bd HipHop8
C#5	4521	Clap T9-1
D5	5718	Sd T8-1
D#5	5846	Sd HipHop16
E5	5721	Sd T8-4
F5	6465	Tom T8
F#5	6124	HH Closed T8-2
G5	6465	Tom T8
G#5	6124	HH Closed T8-2
A5	6465	Tom T8
A#5	6125	HH Open T8-2
B5	6465	Tom T8
C6	6647	Crash T8-1

Perc Master Kit

Note	Wave Number	Wave Name
C0	3566	Cowbell2
C#0	3618	Djembe2 Lo
D0	3619	Djembe2 Slap
D#0	3620	Djembe2 Mute
E0	3428	Pandeiro1 Open
F0	3431	Pandeiro1 Heel
F#0	3429	Pandeiro1 Thump
G0	3430	Pandeiro1 Tip
G#0	3203	Castanet2 Sw
A0	3623	Djembe3 Mute
A#0	3622	Djembe3 Slap
B0	3621	Djembe3 Lo
C1	3497	Cajon2 Lo
C#1	3496	Cajon2 Foot
D1	3498	Cajon2 Slap
D#1	3234	Hand Clap2 Sw
E1	3499	Cajon2 Mute
F1	6443	Rotary Tom Lo 1-2
F#1	3500	Cajon2 Tip
G1	3813	Sangban Sw
G#1	3501	Cajon2 Ghost1
A1	6440	Rotary Tom Mid 1-2
A#1	3502	Cajon2 Ghost2
B1	3813	Sangban Sw
C2	6437	Rotary Tom Hi 1-2
C#2	3816	Dundun Bell Sw
D2	3797	Kenkeni Sw
D#2	6575	Ride Brite St
E2	6630	China3 St
F2	6579	Ride Brite Cup St
F#2	3188	Tambourine2 Sw
G2	6639	Splash2 St
G#2	3567	Cowbell3 Sw
A2	3394	Paila H
A#2	3222	Vibraslap2
B2	3393	Paila L
C3	3282	Conga2 Hi Heel
C#3	3283	Conga2 Hi Tip
D3	3284	Conga2 Hi Slap 1-2
D#3	3290	Conga2 Hi Mute
E3	3287	Conga2 Hi Open 1-2
F3	3378	Timbale2 Hi Sw
F#3	3382	Timbale2 Lo Sw
G3	3579	ChaCha Bell Sw
G#3	3575	Mambo Bell Sw
A3	3407	Cabasa1B 1-4
A#3	3415	Caxixi 1-2
B3	3339	Bongo2 Hi Mute
C4	3340	Bongo2 Hi Open 1-2
C#4	3343	Bongo2 Lo Mute
D4	3344	Bongo2 Lo Open 1-2
D#4	3560	Claves2
E4	3256	Resin Block Small
F4	3257	Resin Block Large
F#4	3294	Conga2 Lo Slide
G4	3291	Conga2 Lo Open 1-2
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3162	ShakerB Sw
B4	3254	Wind Chime 1
C5	3788	TalkingDrum Bend 1-4
C#5	3787	TalkingDrum Mute
D5	3785	TalkingDrum Open
D#5	3786	TalkingDrum Slap
E5	3585	Repique1 Open 1-2
F5	3584	Repique Mute
F#5	3781	Shekere Shake Sw
G5	3784	Shekere Slap
G#5	3582	Samba Tambourim Slap
A5	3581	Samba Tambourim Open
A#5	3583	Samba Tambourim Mute
B5	3469	Surdo2 Mute
C6	3468	Surdo2 Open

Nu Orchestra Kit

Note	Wave Number	Wave Name
C0	3560	Claves2
C#0	5570	Sd Brush Med L
D0	5580	Sd Brush Swir R
D#0	5570	Sd Brush Med L
E0	5583	Sd Brush SwirAtt R
F0	5629	Sd Orch Roll St
F#0	3203	Castanet2 Sw
G0	5596	Sd OrchA 1-2 St
G#0	3197	Stick1
A0	4889	Bd GranCasaB Mfl St
A#0	4886	Bd GranCasaB Hoop St
B0	4874	Bd GranCasaB 1-3 St
C1	4874	Bd GranCasaB 1-3 St
C#1	5451	Sd Beech ClRm St
D1	5614	Sd OrchC 1-4 St
D#1	3231	Hand Clap1 St
E1	5614	Sd OrchC 1-4 St
F1	6281	Tom Power04 1-2St
F#1	3259	OrchTamb Shake 1-2
G1	6281	Tom Power04 1-2St
G#1	3262	OrchTamb Hit Close
A1	6277	Tom Power03 2St
A#1	3263	OrchTamb Hit Open
B1	6277	Tom Power03 2St
C2	6257	Tom Power02 1-2St
C#2	6561	Hand Cymbal Open St
D2	6257	Tom Power02 1-2St
D#2	6590	Ride NJz RL
E2	6630	China3 St
F2	6594	Ride NJz Cup RL
F#2	3185	Tambourine1 Sw
G2	3771	Mondira
G#2	3567	Cowbell3 Sw
A2	6564	Hand Cymbal Mute St
A#2	3222	Vibraslap2
B2	6610	Ride Brush1 RL
C3	4868	Bd GranCasaA Open St
C#3	4871	Bd GranCasaA Mute St
D3	5635	Sd Field 1 St
D#3	3251	Sleigh Bell2
E3	5635	Sd Field 1 St
F3	3214	Wood Block
F#3	3214	Wood Block
G3	4630	HipHop Flex2
G#3	3226	Triangle1 Mute
A3	3225	Triangle1 Open
A#3	3162	ShakerB Sw
B3	3407	Cabasa1B 1-4
C4	2245	Timpani2 Hard St-
C#4	2245	Timpani2 Hard St-
D4	2245	Timpani2 Hard St-
D#4	2245	Timpani2 Hard St-
E4	2245	Timpani2 Hard St-
F4	2245	Timpani2 Hard St-
F#4	2245	Timpani2 Hard St-
G4	2245	Timpani2 Hard St-
G#4	2245	Timpani2 Hard St-
A4	2245	Timpani2 Hard St-
A#4	2245	Timpani2 Hard St-
B4	2245	Timpani2 Hard St-
C5	2245	Timpani2 Hard St-
C#5	2245	Timpani2 Hard St-
D5	2245	Timpani2 Hard St-
D#5	2245	Timpani2 Hard St-
E5	2245	Timpani2 Hard St-
F5	2245	Timpani2 Hard St-
F#5	2245	Timpani2 Hard St-
G5	2245	Timpani2 Hard St-
G#5	2245	Timpani2 Hard St-
A5	2245	Timpani2 Hard St-
A#5	2245	Timpani2 Hard St-
B5	2245	Timpani2 Hard St-
C6	2245	Timpani2 Hard St-

Japan Kit

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	3825	Wa Taiko
D0	3825	Wa Taiko
D#0	3825	Wa Taiko
E0	3825	Wa Taiko
F0	3825	Wa Taiko
F#0	3825	Wa Taiko
G0	3825	Wa Taiko
G#0	3251	Sleigh Bell2
A0	3830	Oo Taiko2 Zu
A#0	3831	Oo Taiko2 Ka
B0	3829	Oo Taiko2 Don Hard
C1	3829	Oo Taiko2 Don Hard
C#1	3831	Oo Taiko2 Ka
D1	3839	Shime Taiko1 Tsu
D#1	3840	Shime Taiko1 Ku
E1	3838	Shime Taiko1 Ten
F1	3835	Yagura Taiko2 Don
F#1	3822	Chanchiki Ki
G1	3836	Yagura Taiko2 Zu
G#1	3822	Chanchiki Ki
A1	3837	Yagura Taiko2 Ka
A#1	3821	Chanchiki Chan
B1	3826	Oo Taiko1 Don
C2	3826	Oo Taiko1 Don
C#2	3827	Oo Taiko1 Ka
D2	3842	Shime Taiko2 Tsu
D#2	3843	Shime Taiko2 Ku
E2	3841	Shime Taiko2 Ten
F2	3832	Yagura Taiko1 Don
F#2	3824	Atarigane Chi
G2	3833	Yagura Taiko1 Zu
G#2	3824	Atarigane Chi
A2	3834	Yagura Taiko1 Ka
A#2	3823	Atarigane Con
B2	3850	Oo Kawa Ton
C3	3848	Oo Kawa Chon
C#3	3849	Oo Kawa Tsu
D3	3844	Tsuzumi Pon
D#3	3846	Tsuzumi Chi
E3	3845	Tsuzumi Pu
F3	3847	Tsuzumi Ta
F#3	3819	Ainote 1
G3	3844	Tsuzumi Pon
G#3	3846	Tsuzumi Chi
A3	3845	Tsuzumi Pu
A#3	3820	Ainote 2
B3	3847	Tsuzumi Ta
C4	3838	Shime Taiko1 Ten
C#4	3838	Shime Taiko1 Ten
D4	3838	Shime Taiko1 Ten
D#4	3838	Shime Taiko1 Ten
E4	3838	Shime Taiko1 Ten
F4	3838	Shime Taiko1 Ten
F#4	3838	Shime Taiko1 Ten
G4	3838	Shime Taiko1 Ten
G#4	3838	Shime Taiko1 Ten
A4	3838	Shime Taiko1 Ten
A#4	3838	Shime Taiko1 Ten
B4	3838	Shime Taiko1 Ten
C5	1963	Pan Flute
C#5	1963	Pan Flute
D5	1963	Pan Flute
D#5	1963	Pan Flute
E5	1963	Pan Flute
F5	1963	Pan Flute
F#5	1963	Pan Flute
G5	1963	Pan Flute
G#5	1963	Pan Flute
A5	1963	Pan Flute
A#5	1963	Pan Flute
B5	1963	Pan Flute
C6	1963	Pan Flute

Turkish Kit

Note	Wave Number	Wave Name
C0	3559	Claves1
C#0	3915	AsmaDavul L Side 1-2
D0	3919	AsmaDavul R Side 1-2
D#0	3912	AsmaDavulSideBdy 1-2
E0	3918	AsmaDavul Both Sides
F0	3933	KoltukDavulOpenFlam
F#0	3925	KoltukDavulTekeOp1-3
G0	3929	KoltukDavulTekOp 1-3
G#0	3922	Koltuk Davul Dum 1-2
A0	3968	Bendir Teke OpenFlam
A#0	3975	Bendir1 Teke Dead1-2
B0	3972	Bendir1 Tek Dead1-2
C1	3964	Bendir Teke 1-3
C#1	3960	Bendir Tek 1-3
D1	3969	Bendir Slap 1-2
D#1	3957	Bendir Dum 1-2
E1	4055	Sagat1 R Close 1-2
F1	4054	Sagat1 R Open
F#1	4059	Sagat1 L Close 1-2
G1	4058	Sagat1 L Open
G#1	4085	Riq1 Teke Flam
A1	4079	Riq1 Tek Mute 1-2
A#1	4082	Riq1 Teke Damped 1-2
B1	4086	Riq1 TekMtMed 1-2
C2	4072	Riq1 Dum Mute
C#2	4096	Riq1 Cymbal 1-2
D2	4099	Riq1 Cymbal Mute 1-2
D#2	4109	Riq1 Tremolo
E2	4103	Riq1 ShakeA 1-2
F2	4106	Riq1 ShakeB 1-2
F#2	4095	Riq1 Tek Flam
G2	4102	Riq1 Full Open
G#2	4092	Riq1 TekeOpnShrt 1-2
A2	4089	Riq1 TekOpnShrt 1-2
A#2	4076	Riq1 Tek Open 1-2
B2	4073	Riq1 Dum Open 1-2
C3	4179	Hollo FingerDead 1-2
C#3	4176	Hollo Slap 1-2
D3	4173	Hollo Dum 1-2
D#3	4456	Kasik 1-2
E3	4460	Kasik Flam
F3	4200	Tombek Tek Dead Sw
F#3	4202	Tombek Tek Flam
G3	4206	Tombek Teke 1-3
G#3	4196	TombekTekeOthFng 1-3
A3	4192	TombekTekeIndFng 1-3
A#3	4188	Tombek Tek 1-3
B3	4185	Tombek Slap 1-2
C4	4203	Tombek Slap Med 1-2
C#4	4182	Tombek Dum 1-2
D4	4292	Darbuka1 Roll Close
D#4	4290	Darbuka1 RollOpen
E4	4291	Darbuka1 TekeDmpFlam
F4	4293	Darbuka1 TekDead 1-3
F#4	4297	Darbuka1 TekDampd1-3
G4	4289	Darbuka1 TekeOpnFlam
G#4	4301	Darbuka1 TekeOpen1-3
A4	4275	Darb1TekeOthFngA 1-3
A#4	4267	Darb1TekeIndFngA 1-3
B4	4259	Darbuka1 Teka1 1-3
C5	4279	Darb1TekeOthFngB 1-3
C#5	4271	Darb1TekeIndFngB 1-3
D5	4263	Darbuka1 TekB 1-3
D#5	4286	Darbuka1 SlapMed 1-2
E5	4283	Darbuka1 Slap 1-2
F5	4256	Darbuka1 Dum 1-2
F#5	4469	Bonges Tek Roll
G5	4470	Bonges Flam
G#5	4468	Bonges Tek Flam
A5	4464	Bonges Tek 1-2
A#5	4467	Bonges Slap
B5	4471	Bonges Flam Hi
C6	4461	Bonges Dum 1-2

80's Drummer

Note	Wave Number	Wave Name
C0	4628	Analog Click
C#0	5566	Sd Brush Soft St
D0	5578	Sd Brush Swir St
D#0	5569	Sd Brush Med St
E0	5581	Sd Brush SwirAtt St
F0	5548	Sd RockRoll St
F#0	3202	Castanet1
G0	5289	Sd Rock Open2 St
G#0	3197	Stick1
A0	4780	Bd Room1
A#0	5295	Sd Rock Rim2 St
B0	4730	Bd Ambience L1-2
C1	4772	Bd Rock2 St
C#1	5527	Sd Rock Stick2 St
D1	5289	Sd Rock Open2 St
D#1	3231	Hand Clap1 St
E1	5292	Sd Rock Mute2 St
F1	6241	Tom Rock Low St
F#1	5933	HH Closed Rock 2St
G1	6241	Tom Rock Low St
G#1	5945	HH Half Open Rock St
A1	6237	Tom Rock Mid St
A#1	5943	HH Open Rock St
B1	6237	Tom Rock Mid St
C2	6233	Tom Rock Hi St
C#2	6517	Crash2 St
D2	6233	Tom Rock Hi St
D#2	6571	Ride2 St
E2	6625	China1 St
F2	6618	Ride Cup2 St
F#2	4600	Tambourine RX5
G2	6635	Splash1 St
G#2	3565	Cowbell1
A2	6520	Crash2 RL
A#2	3221	Vibraslap1
B2	6574	Ride2 RL
C3	3321	Bongo1 Hi 1Fingr 1-2
C#3	3334	Bongo1 Lo 3Fingr 1-2
D3	3264	Conga1 Hi Tip
D#3	3268	Conga1 Hi Open 2
E3	3312	Tumba Open
F3	3368	Timbale1 Hi 1-3
F#3	3372	Timbale1 Lo 1-2
G3	3447	Agogo1 Hi
G#3	3448	Agogo1 Lo
A3	3404	Cabasa1A 1-2
A#3	3401	Maracas1 Slur
B3	3562	Whistle
C4	3562	Whistle
C#4	3455	Guiro1 Short
D4	3454	Guiro1 Long
D#4	3559	Claves1
E4	3214	Wood Block
F4	3214	Wood Block
F#4	3317	Cuica1 Hi
G4	3316	Cuica1 Lo
G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open
A#4	3159	ShakerA 1
B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1
C#5	5298	Sd Rock Flam St
D5	5280	Sd Rock Open1 St
D#5	5286	Sd Rock Rim1 St
E5	5283	Sd Rock Mute1 St
F5	4769	Bd Rock1 St
F#5	5551	Sd RockRollD St
G5	4747	Bd Funk 2St
G#5	5251	Sd Tight St1-4
A5	4754	Bd High St
A#5	5210	Sd SonA 4St
B5	4763	Bd L Son St
C6	4769	Bd Rock1 St

Underground

Note	Wave Number	Wave Name	Note	Wave Number	Wave Name
C0	4974	Bd Analog Tight	C0	4954	Bd Distortion3
C#0	5723	Sd T8 Rim	C#0	5778	Sd Wood
D0	5741	Sd Jungle3	D0	5517	Sd Gate1
D#0	3231	Hand Clap1 St	D#0	3231	Hand Clap1 St
E0	5718	Sd T8-1	E0	5518	Sd Gate2
F0	6473	Tom Syn1	F0	5557	Sd Roll Mn
F#0	5243	Sd BluesHeart L1-3	F#0	5768	Sd Clap Analog
G0	5250	Sd BluesHeart 3R	G0	5752	Sd Hip3
G#0	5202	Sd SonA St1-3	G#0	2683	Ripper
A0	4745	Bd Funk St1-2	A0	4957	Bd Distortion RM
A#0	5186	Sd Basic St1-3	A#0	5723	Sd T8 Rim
B0	4937	Bd Brip	B0	4953	Bd Distortion2
C1	4905	Bd T9-4	C1	4952	Bd Distortion1
C#1	5697	Sd T9Rim	C#1	5305	Sd Mid Rim
D1	5773	Sd FM	D1	5769	Sd Dist
D#1	4521	Clap T9-1	D#1	2688	Noise Burst
E1	5735	Sd AnCR	E1	5765	Sd FX2
F1	6449	Tom T9 Lo	F1	6477	Tom Dist Lo
F#1	6147	HH Closed Tek	F#1	6108	HH Closed T9
G1	6449	Tom T9 Lo	G1	6477	Tom Dist Lo
G#1	6147	HH Closed Tek	G#1	6109	HH Open T9
A1	6449	Tom T9 Lo	A1	6477	Tom Dist Lo
A#1	6148	HH Open Tek	A#1	6109	HH Open T9
B1	6448	Tom T9 Hi	B1	6476	Tom Dist Hi
C2	6448	Tom T9 Hi	C2	6476	Tom Dist Hi
C#2	6645	Crash T9-1	C#2	6645	Crash T9-1
D2	6448	Tom T9 Hi	D2	6476	Tom Dist Hi
D#2	6671	Ride T9-1	D#2	6671	Ride T9-1
E2	6521	Crash3	E2	6629	China2
F2	6619	Ride Cup2 L	F2	6623	Ride Cup Mn
F#2	3187	Tambourine1 Hit	F#2	4601	Tambourine AnCR
G2	6521	Crash3	G2	6521	Crash3
G#2	3565	Cowbell1	G#2	4584	Cowbell T8
A2	6638	Splash1 RL	A2	6517	Crash2 St
A#2	4584	Cowbell T8	A#2	3221	Vibraslap1
B2	6622	Ride Mn	B2	6567	Ride1 St
C3	3321	Bongo1 Hi 1Fingr 1-2	C3	5777	Sd Timbr
C#3	3334	Bongo1 Lo 3Fingr 1-2	C#3	5777	Sd Timbr
D3	3264	Conga1 Hi Tip	D3	3264	Conga1 Hi Tip
D#3	3270	Conga1 Hi Slap Open	D#3	3270	Conga1 Hi Slap Open
E3	3268	Conga1 Hi Open 2	E3	3268	Conga1 Hi Open 2
F3	3369	Timbale1 Hi 1	F3	4958	Bd + HH
F#3	3369	Timbale1 Hi 1	F#3	4958	Bd + HH
G3	3447	Agogo1 Hi	G3	2684	Glass
G#3	3448	Agogo1 Lo	G#3	2684	Glass
A3	3405	Cabasa1A 1	A3	3405	Cabasa1A 1
A#3	3401	Maracas1 Slur	A#3	3401	Maracas1 Slur
B3	2807	FxGun2	B3	2807	FxGun2
C4	2806	FxGun1	C4	2806	FxGun1
C#4	2823	Scratch H	C#4	2823	Scratch H
D4	2825	Scratch Down	D4	2825	Scratch Down
D#4	2706	Hi Q1	D#4	2706	Hi Q1
E4	2706	Hi Q1	E4	2706	Hi Q1
F4	2707	Hi Q2	F4	2707	Hi Q2
F#4	2824	Scratch L	F#4	2824	Scratch L
G4	2824	Scratch L	G4	2824	Scratch L
G#4	3226	Triangle1 Mute	G#4	3226	Triangle1 Mute
A4	3225	Triangle1 Open	A4	3225	Triangle1 Open
A#4	4592	Analog Shaker	A#4	4592	Analog Shaker
B4	3250	Sleigh Bell1	B4	3250	Sleigh Bell1
C5	3254	Wind Chime 1	C5	3254	Wind Chime 1
C#5	5695	Sd T9-5	C#5	5769	Sd Dist
D5	5695	Sd T9-5	D5	5773	Sd FM
D#5	5695	Sd T9-5	D#5	5774	Sd FM Rim
E5	5695	Sd T9-5	E5	5776	Sd Clappy
F5	4935	Bd Human1	F5	4968	Bd FxHammer
F#5	5743	Sd D&B1	F#5	2687	Indus Tom
G5	2980	Acoustic Bass FX03	G5	4942	Bd D&B1
G#5	2376	DigiOsc4	G#5	2687	Indus Tom
A5	2375	DigiOsc3	A5	4782	Bd Room3
A#5	5759	Sd Break1	A#5	2687	Indus Tom
B5	4939	Bd Jungle1	B5	4905	Bd T9-4
C6	4950	Bd Break Heavy	C6	5779	Sd Hammer

Waveform List

No.	Name	Main Category	Sub Category
1	CFX v01 St	Piano	Piano
2	CFX v02 St	Piano	Piano
3	CFX v03 St	Piano	Piano
4	CFX v04 St	Piano	Piano
5	CFX v05 St	Piano	Piano
6	CFX v06 St	Piano	Piano
7	CFX v07 St	Piano	Piano
8	CFX v08 St	Piano	Piano
9	CFX v09 St	Piano	Piano
10	CFX KeyOff St	Piano	Piano
11	C7 pp St	Piano	Piano
12	C7 mp St	Piano	Piano
13	C7 mf St	Piano	Piano
14	C7 f St	Piano	Piano
15	C7 ff St	Piano	Piano
16	C7 KeyOff St	Piano	Piano
17	Nashville C3 p St	Piano	Piano
18	Nashville C3 mp St	Piano	Piano
19	Nashville C3 mf St	Piano	Piano
20	Nashville C3 f St	Piano	Piano
21	Nashville C3 ff St	Piano	Piano
22	Nashville C3 KeyOff St	Piano	Piano
23	CF3-2 mf St	Piano	Piano
24	CF3-2 f St	Piano	Piano
25	CF3-2 ff St	Piano	Piano
26	CF3-2 KeyOff St	Piano	Piano
27	CF3 Stretch Sw St	Piano	Piano
28	CF3 Stretch Sw Mn	Piano	Piano
29	CF3 Stretch Soft St	Piano	Piano
30	CF3 Stretch Soft Mn	Piano	Piano
31	CF3 Stretch Soft St+	Piano	Piano
32	CF3 Stretch Soft Mn+	Piano	Piano
33	CF3 Stretch Soft St-	Piano	Piano
34	CF3 Stretch Soft Mn-	Piano	Piano
35	CF3 Stretch Med St	Piano	Piano
36	CF3 Stretch Med Mn	Piano	Piano
37	CF3 Stretch Med St+	Piano	Piano
38	CF3 Stretch Med Mn+	Piano	Piano
39	CF3 Stretch Med St-	Piano	Piano
40	CF3 Stretch Med Mn-	Piano	Piano
41	CF3 Stretch Hard St	Piano	Piano
42	CF3 Stretch Hard Mn	Piano	Piano
43	CF3 Stretch Hard St+	Piano	Piano
44	CF3 Stretch Hard Mn+	Piano	Piano
45	CF3 Stretch Hard St-	Piano	Piano
46	CF3 Stretch Hard Mn-	Piano	Piano
47	CF3 KeyOff St	Piano	Piano
48	CF3 KeyOff L	Piano	Piano
49	CF3 KeyOff R	Piano	Piano
50	CF3 Flat Sw St	Piano	Piano
51	CF3 Flat Sw Mn	Piano	Piano
52	CF3 Flat Soft St	Piano	Piano
53	CF3 Flat Soft Mn	Piano	Piano
54	CF3 Flat Soft St+	Piano	Piano
55	CF3 Flat Soft Mn+	Piano	Piano
56	CF3 Flat Soft St-	Piano	Piano
57	CF3 Flat Soft Mn-	Piano	Piano
58	CF3 Flat Med St	Piano	Piano
59	CF3 Flat Med Mn	Piano	Piano
60	CF3 Flat Med St+	Piano	Piano
61	CF3 Flat Med Mn+	Piano	Piano
62	CF3 Flat Med St-	Piano	Piano
63	CF3 Flat Med Mn-	Piano	Piano
64	CF3 Flat Hard St	Piano	Piano
65	CF3 Flat Hard Mn	Piano	Piano
66	CF3 Flat Hard St+	Piano	Piano
67	CF3 Flat Hard Mn+	Piano	Piano
68	CF3 Flat Hard St-	Piano	Piano
69	CF3 Flat Hard Mn-	Piano	Piano
70	S6 Stretch pp St	Piano	Piano
71	S6 Stretch pp Mn	Piano	Piano
72	S6 Stretch pp L	Piano	Piano
73	S6 Stretch pp R	Piano	Piano
74	S6 Stretch pp St Pan	Piano	Piano
75	S6 Stretch pp St+	Piano	Piano
76	S6 Stretch pp Mn+	Piano	Piano
77	S6 Stretch pp St-	Piano	Piano
78	S6 Stretch pp Mn-	Piano	Piano
79	S6 Stretch mp St	Piano	Piano
80	S6 Stretch mp Mn	Piano	Piano
81	S6 Stretch mp L	Piano	Piano
82	S6 Stretch mp R	Piano	Piano
83	S6 Stretch mp St Pan	Piano	Piano
84	S6 Stretch mp St+	Piano	Piano
85	S6 Stretch mp Mn+	Piano	Piano
86	S6 Stretch mp St-	Piano	Piano
87	S6 Stretch mp Mn-	Piano	Piano
88	S6 Stretch mf St	Piano	Piano
89	S6 Stretch mf Mn	Piano	Piano
90	S6 Stretch mf L	Piano	Piano
91	S6 Stretch mf R	Piano	Piano
92	S6 Stretch mf St Pan	Piano	Piano
93	S6 Stretch mf St+	Piano	Piano
94	S6 Stretch mf Mn+	Piano	Piano
95	S6 Stretch mf St-	Piano	Piano
96	S6 Stretch mf Mn-	Piano	Piano
97	S6 Stretch ff St	Piano	Piano
98	S6 Stretch ff Mn	Piano	Piano
99	S6 Stretch ff L	Piano	Piano
100	S6 Stretch ff R	Piano	Piano
101	S6 Stretch ff St Pan	Piano	Piano
102	S6 Stretch ff St+	Piano	Piano
103	S6 Stretch ff Mn+	Piano	Piano
104	S6 Stretch ff St-	Piano	Piano
105	S6 Stretch ff Mn-	Piano	Piano
106	S6 Stretch Sw St	Piano	Piano
107	S6 Stretch Sw Mn	Piano	Piano
108	S6 Stretch Sw L	Piano	Piano
109	S6 Stretch Sw R	Piano	Piano
110	S6 Stretch Sw St Pan	Piano	Piano
111	S6 Stretch Sw St2	Piano	Piano
112	S6 Stretch Sw St+	Piano	Piano
113	S6 Stretch Sw Mn+	Piano	Piano
114	S6 Stretch Sw St-	Piano	Piano
115	S6 Stretch Sw Mn-	Piano	Piano
116	S6 Stretch KeyOff St	Piano	Piano
117	S6 Stretch KeyOff Mn	Piano	Piano
118	S6 Stretch KeyOff L	Piano	Piano
119	S6 Stretch KeyOff R	Piano	Piano
120	S6 Stretch KeyOff St Pn	Piano	Piano
121	S6 Flat pp St	Piano	Piano
122	S6 Flat pp Mn	Piano	Piano
123	S6 Flat pp L	Piano	Piano
124	S6 Flat pp R	Piano	Piano
125	S6 Flat pp St Pan	Piano	Piano
126	S6 Flat pp St+	Piano	Piano
127	S6 Flat pp Mn+	Piano	Piano
128	S6 Flat pp St-	Piano	Piano
129	S6 Flat pp Mn-	Piano	Piano
130	S6 Flat mp St	Piano	Piano
131	S6 Flat mp Mn	Piano	Piano
132	S6 Flat mp L	Piano	Piano
133	S6 Flat mp R	Piano	Piano
134	S6 Flat mp St Pan	Piano	Piano
135	S6 Flat mp St+	Piano	Piano
136	S6 Flat mp Mn+	Piano	Piano
137	S6 Flat mp St-	Piano	Piano
138	S6 Flat mp Mn-	Piano	Piano
139	S6 Flat mf St	Piano	Piano
140	S6 Flat mf Mn	Piano	Piano
141	S6 Flat mf L	Piano	Piano
142	S6 Flat mf R	Piano	Piano
143	S6 Flat mf St Pan	Piano	Piano
144	S6 Flat mf St+	Piano	Piano
145	S6 Flat mf Mn+	Piano	Piano
146	S6 Flat mf St-	Piano	Piano
147	S6 Flat mf Mn-	Piano	Piano
148	S6 Flat ff St	Piano	Piano
149	S6 Flat ff Mn	Piano	Piano
150	S6 Flat ff L	Piano	Piano
151	S6 Flat ff R	Piano	Piano
152	S6 Flat ff St Pan	Piano	Piano
153	S6 Flat ff St+	Piano	Piano
154	S6 Flat ff Mn+	Piano	Piano
155	S6 Flat ff St-	Piano	Piano
156	S6 Flat ff Mn-	Piano	Piano
157	S6 Flat Sw St	Piano	Piano
158	S6 Flat Sw Mn	Piano	Piano
159	S6 Flat Sw L	Piano	Piano
160	S6 Flat Sw R	Piano	Piano
161	S6 Flat Sw St Pan	Piano	Piano
162	S6 Flat Sw St2	Piano	Piano
163	S6 Flat Sw St+	Piano	Piano
164	S6 Flat Sw Mn+	Piano	Piano
165	S6 Flat Sw St-	Piano	Piano
166	S6 Flat Sw Mn-	Piano	Piano
167	S6 Flat KeyOff St	Piano	Piano
168	S6 Flat KeyOff Mn	Piano	Piano
169	S6 Flat KeyOff L	Piano	Piano
170	S6 Flat KeyOff R	Piano	Piano
171	S6 Flat KeyOff St Pan	Piano	Piano
172	S700 pp St	Piano	Piano
173	S700 mf St	Piano	Piano
174	S700 ff St	Piano	Piano
175	Brite Piano	Piano	Piano
176	Brite Piano-	Piano	Piano
177	Imperial ppp St	Piano	Piano
178	Imperial pp St	Piano	Piano
179	Imperial p St	Piano	Piano
180	Imperial mp St	Piano	Piano
181	Imperial mf St	Piano	Piano
182	Imperial f St	Piano	Piano
183	Imperial ff St	Piano	Piano
184	Imperial fff St	Piano	Piano
185	Imperial KeyOff St	Piano	Piano
186	Hamburg Grand v01 St	Piano	Piano
187	Hamburg Grand v02 St	Piano	Piano
188	Hamburg Grand v03 St	Piano	Piano
189	Hamburg Grand v04 St	Piano	Piano
190	Hamburg Grand v05 St	Piano	Piano
191	Hamburg Grand v06 St	Piano	Piano
192	Hamburg Grand v07 St	Piano	Piano
193	Hamburg Grand v08 St	Piano	Piano
194	Hamburg Grand v09 St	Piano	Piano
195	Hamburg Grand v10 St	Piano	Piano
196	Hamburg Grand KeyOff St	Piano	Piano
197	U1 Upright p St	Piano	Piano
198	U1 Upright mp St	Piano	Piano
199	U1 Upright mf St	Piano	Piano
200	U1 Upright f St	Piano	Piano
201	U1 Upright ff St	Piano	Piano
202	U1 Upright KeyOff St	Piano	Piano
203	Felt Piano p St	Piano	Piano
204	Felt Piano mp St	Piano	Piano
205	Felt Piano mf St	Piano	Piano
206	Felt Piano f St	Piano	Piano
207	Felt Piano KeyOff St	Piano	Piano
208	Upright Piano Sw	Piano	Piano
209	Upright Piano mp	Piano	Piano
210	Upright Piano f	Piano	Piano
211	Upright Piano ff	Piano	Piano
212	Upright Piano KeyOff	Piano	Piano
213	CP80-2 Body	Keys	Other
214	CP80-2 Attack mp	Keys	Other
215	CP80-2 Attack mf	Keys	Other
216	CP80-2 Attack f	Keys	Other
217	CP80-2 Attack ff	Keys	Other
218	CP80-2 KeyOff	Keys	Other
219	CP80 p	Keys	Other
220	CP80 mp	Keys	Other
221	CP80 mf	Keys	Other
222	CP80 f	Keys	Other
223	CP80 ff	Keys	Other
224	CP80 5Sw	Keys	Other
225	CP80 4Sw Soft	Keys	Other
226	CP80 4Sw Hard	Keys	Other
227	CP80 3Sw	Keys	Other
228	CP80 KeyOff p	Keys	Other
229	CP80 KeyOff mf	Keys	Other
230	CP80 KeyOff f	Keys	Other
231	CP80 KeyOff 3Sw	Keys	Other
232	CP80 KeyOff 2Sw	Keys	Other
233	CP70	Keys	Other
234	CP70+	Keys	Other
235	CP70-	Keys	Other
236	67Rd v01	Keys	Rd
237	67Rd v02	Keys	Rd
238	67Rd v03	Keys	Rd
239	67Rd v04	Keys	Rd
240	67Rd v05	Keys	Rd
241	67Rd v06	Keys	Rd
242	67Rd v07	Keys	Rd
243	67Rd v08	Keys	Rd
244	67Rd v09	Keys	Rd
245	67Rd KeyOff	Keys	Rd
246	67Rd Pedal On	Keys	Rd
247	67Rd Pedal Off	Keys	Rd
248	73Rd Studio v01 Body	Keys	Rd
249	73Rd Studio v01 Atk	Keys	Rd
250	73Rd Studio v02	Keys	Rd
251	73Rd Studio v03	Keys	Rd
252	73Rd Studio v04	Keys	Rd
253	73Rd Studio v05	Keys	Rd
254	73Rd Studio v06	Keys	Rd
255	73Rd Studio v07	Keys	Rd
256	73Rd Studio v08	Keys	Rd
257	73Rd Studio KeyOff	Keys	Rd
258	74Rd Stage v01	Keys	Rd
259	74Rd Stage v02	Keys	Rd
260	74Rd Stage v03	Keys	Rd
261	74Rd Stage v04	Keys	Rd
262	74Rd Stage v05	Keys	Rd
263	74Rd Stage v06	Keys	Rd
264	74Rd Stage v07	Keys	Rd
265	74Rd Stage v08	Keys	Rd
266	74Rd Stage v09	Keys	Rd
267	74Rd Stage v10	Keys	Rd
268	74Rd Stage KeyOff	Keys	Rd
269	78Rd Studio v01 Body	Keys	Rd
270	78Rd Studio v01 Atk	Keys	Rd
271	78Rd Studio v02	Keys	Rd
272	78Rd Studio v03	Keys	Rd
273	78Rd Studio v04	Keys	Rd
274	78Rd Studio v05	Keys	Rd
275	78Rd Studio v06	Keys	Rd
276	78Rd Studio v07	Keys	Rd
277	78Rd Studio v08	Keys	Rd
278	78Rd Studio v09	Keys	Rd
279	78Rd Studio v10	Keys	Rd
280	78Rd Studio KeyOff	Keys	Rd
281	EP1 Sw	Keys	Rd
282	EP1 Soft	Keys	Rd
283	EP1 Soft+	Keys	Rd
284	EP1 Soft-	Keys	Rd
285	EP1 Med	Keys	Rd
286	EP1 Med+	Keys	Rd
287	EP1 Med-	Keys	Rd
288	EP1 Hard	Keys	Rd
289	EP1 Hard+	Keys	Rd
290	EP1 Hard-	Keys	Rd
291	EP2 Sw	Keys	Rd
292	EP2 Soft1	Keys	Rd
293	EP2 Soft1+	Keys	Rd
294	EP2 Soft1-	Keys	Rd
295	EP2 Soft2	Keys	Rd
296	EP2 Soft2+	Keys	Rd
297	EP2 Soft2-	Keys	Rd
298	EP2 Hard1	Keys	Rd
299	EP2 Hard1+	Keys	Rd
300	EP2 Hard1-	Keys	Rd
301	EP2 Hard2	Keys	Rd
302	EP2 Hard2+	Keys	Rd
303	EP2 Hard2-	Keys	Rd
304	EP3 Sw	Keys	Rd
305	EP3 Soft1	Keys	Rd
306	EP3 Soft1+	Keys	Rd
307	EP3 Soft1-	Keys	Rd
308	EP3 Soft2	Keys	Rd
309	EP3 Soft2+	Keys	Rd
310	EP3 Soft2-	Keys	Rd
311	EP3 Hard1	Keys	Rd
312	EP3 Hard1+	Keys	Rd
313	EP3 Hard1-	Keys	Rd
314	EP3 Hard2	Keys	Rd
315	EP3 Hard2+	Keys	Rd
316	EP3 Hard2-	Keys	Rd

No.	Name	Main Category	Sub Category
317	EP4 p	Keys	Rd
318	EP4 mp	Keys	Rd
319	EP4 mf	Keys	Rd
320	EP4 f	Keys	Rd
321	EP4 ff	Keys	Rd
322	EP4 KeyOff	Keys	Rd
323	EP KeyOff	Keys	Rd
324	Rd Soft p	Keys	Rd
325	Rd Soft mp	Keys	Rd
326	Rd Soft mf	Keys	Rd
327	Rd Soft f	Keys	Rd
328	Rd Soft ff	Keys	Rd
329	Rd Soft KeyOff	Keys	Rd
330	Rd Hard mp	Keys	Rd
331	Rd Hard mf	Keys	Rd
332	Rd Hard f	Keys	Rd
333	Rd Hard ff	Keys	Rd
334	Rd Hard KeyOff	Keys	Rd
335	73Rd p	Keys	Rd
336	73Rd mp	Keys	Rd
337	73Rd mf	Keys	Rd
338	73Rd f	Keys	Rd
339	73Rd ff	Keys	Rd
340	73Rd KeyOff	Keys	Rd
341	78Rd p	Keys	Rd
342	78Rd mp	Keys	Rd
343	78Rd mf	Keys	Rd
344	78Rd f	Keys	Rd
345	78Rd ff	Keys	Rd
346	78Rd KeyOff	Keys	Rd
347	Rd KeyNoise p	Keys	Rd
348	Rd KeyNoise mf	Keys	Rd
349	Rd KeyNoise f	Keys	Rd
350	Rd KeyOff mf	Keys	Rd
351	Rd KeyOff f	Keys	Rd
352	Wr Warm v01	Keys	Wr
353	Wr Warm v02	Keys	Wr
354	Wr Warm v03	Keys	Wr
355	Wr Warm v04	Keys	Wr
356	Wr Warm v05	Keys	Wr
357	Wr Warm v06	Keys	Wr
358	Wr Warm v07	Keys	Wr
359	Wr Warm v08	Keys	Wr
360	Wr Warm v09	Keys	Wr
361	Wr Warm v10	Keys	Wr
362	Wr Warm v11	Keys	Wr
363	Wr Warm v12	Keys	Wr
364	Wr Warm KeyOff	Keys	Wr
365	Wr Wide v01	Keys	Wr
366	Wr Wide v02	Keys	Wr
367	Wr Wide v03	Keys	Wr
368	Wr Wide v04	Keys	Wr
369	Wr Wide v05	Keys	Wr
370	Wr Wide v06	Keys	Wr
371	Wr Wide v07	Keys	Wr
372	Wr Wide v08	Keys	Wr
373	Wr Wide v09	Keys	Wr
374	Wr Wide v10	Keys	Wr
375	Wr Wide KeyOff	Keys	Wr
376	Wr1 Soft	Keys	Wr
377	Wr1 Soft+	Keys	Wr
378	Wr1 Soft-	Keys	Wr
379	Wr1 Med	Keys	Wr
380	Wr1 Med+	Keys	Wr
381	Wr1 Med-	Keys	Wr
382	Wr1 Hard	Keys	Wr
383	Wr1 Hard+	Keys	Wr
384	Wr1 Hard-	Keys	Wr
385	Wr1 KeyOff	Keys	Wr
386	Wr2 p	Keys	Wr
387	Wr2 mf	Keys	Wr
388	Wr2 f	Keys	Wr
389	Wr2 ff	Keys	Wr
390	Wr2 3Sw	Keys	Wr
391	Wr2 KeyOff	Keys	Wr
392	Wr2 SinLayer	Keys	Wr
393	Wr3 p	Keys	Wr
394	Wr3 mp	Keys	Wr
395	Wr3 mf	Keys	Wr
396	Wr3 f	Keys	Wr
397	Wr3 ff	Keys	Wr
398	Wr3 KeyOff	Keys	Wr
399	Wr KeyNoise p	Keys	Wr
400	Wr KeyNoise mf	Keys	Wr
401	Wr KeyNoise f	Keys	Wr
402	Wr KeyOff mf	Keys	Wr
403	Wr KeyOff f	Keys	Wr
404	DX1	Keys	FM
405	DX2	Keys	FM
406	DX3	Keys	FM
407	DX4	Keys	FM
408	DX Body Soft	Keys	FM
409	DX Body Med	Keys	FM
410	DX Body Hard	Keys	FM
411	DX Attack1	Keys	FM
412	DX Attack2	Keys	FM
413	DX Attack3	Keys	FM
414	DX Attack4	Keys	FM
415	DX Attack5	Keys	FM
416	Clavi B pp	Keys	Clavi
417	Clavi B mp	Keys	Clavi
418	Clavi B mf	Keys	Clavi
419	Clavi B ff	Keys	Clavi
420	Clavi B KeyOff	Keys	Clavi
421	Clavi S pp	Keys	Clavi
422	Clavi S mp	Keys	Clavi
423	Clavi S mf	Keys	Clavi
424	Clavi S ff	Keys	Clavi
425	Clavi S KeyOff	Keys	Clavi
426	Clav1	Keys	Clavi
427	Clav1+	Keys	Clavi
428	Clav1-	Keys	Clavi
429	Clav2	Keys	Clavi
430	Clav2+	Keys	Clavi
431	Clav2-	Keys	Clavi
432	Clav3	Keys	Clavi
433	Clav3+	Keys	Clavi
434	Clav3-	Keys	Clavi
435	Clav4 Med	Keys	Clavi
436	Clav4 Med+	Keys	Clavi
437	Clav4 Med-	Keys	Clavi
438	Clav4 Hard	Keys	Clavi
439	Clav4 Hard+	Keys	Clavi
440	Clav4 Hard-	Keys	Clavi
441	Clav KeyOff 1	Keys	Clavi
442	Clav KeyOff 2	Keys	Clavi
443	Clav5 mp	Keys	Clavi
444	Clav5 mf	Keys	Clavi
445	Clav5 f	Keys	Clavi
446	Clav5 KeyOff	Keys	Clavi
447	Clav KeyNoise p	Keys	Clavi
448	Clav KeyNoise mf	Keys	Clavi
449	Clav KeyNoise f	Keys	Clavi
450	Clav KeyOff mf	Keys	Clavi
451	Clav KeyOff f	Keys	Clavi
452	Harpsichord1	Keys	Other
453	Harpsichord2 St	Keys	Other
454	Harpsichord2 L	Keys	Other
455	Harpsichord2 R	Keys	Other
456	Harpsichord2 St+	Keys	Other
457	Harpsichord2 L+	Keys	Other
458	Harpsichord2 R+	Keys	Other
459	Harpsichord2 St-	Keys	Other
460	Harpsichord2 L-	Keys	Other
461	Harpsichord2 R-	Keys	Other
462	Harpsichord2 KeyOff St	Keys	Other
463	Harpsichord2 KeyOff L	Keys	Other
464	Harpsichord2 KeyOff R	Keys	Other
465	Harpsichord3 St	Keys	Other
466	Harpsichord3 KeyOff St	Keys	Other
467	ToyEP p	Keys	Other
468	ToyEP f	Keys	Other
469	ToyEP KeyOff	Keys	Other
470	Celesta	Keys	Other
471	Rock Chorus Vibrato	Organ	TnWhl
472	Rock Percussion	Organ	TnWhl
473	Rock2	Organ	TnWhl
474	Rock2+	Organ	TnWhl
475	Rock2-	Organ	TnWhl
476	Jazz wPercussion	Organ	TnWhl
477	Jazz wPercussion-	Organ	TnWhl
478	Jazz	Organ	TnWhl
479	Jazz+	Organ	TnWhl
480	Jazz-	Organ	TnWhl
481	Full Draw	Organ	TnWhl
482	Full Draw+	Organ	TnWhl
483	Full Draw-	Organ	TnWhl
484	Swish	Organ	TnWhl
485	Swish-	Organ	TnWhl
486	Bow	Organ	TnWhl
487	Bow Chorus Vibrato	Organ	TnWhl
488	Gospel	Organ	TnWhl
489	Soul	Organ	TnWhl
490	1st Four Draw	Organ	TnWhl
491	Draw 16'	Organ	TnWhl
492	Draw 5 1/3'	Organ	TnWhl
493	Draw 8'	Organ	TnWhl
494	Draw 4'	Organ	TnWhl
495	Draw 2 2/3'	Organ	TnWhl
496	Draw 2'	Organ	TnWhl
497	Draw 1 3/5'	Organ	TnWhl
498	Draw 1 1/3'	Organ	TnWhl
499	Draw 1'	Organ	TnWhl
500	Draw 16' Offset	Organ	TnWhl
501	Draw 5 1/3' Offset	Organ	TnWhl
502	Draw 8' Offset	Organ	TnWhl
503	Draw 4' Offset	Organ	TnWhl
504	Draw 2 2/3' Offset	Organ	TnWhl
505	Draw 2' Offset	Organ	TnWhl
506	Draw 1 3/5' Offset	Organ	TnWhl
507	Draw 1 1/3' Offset	Organ	TnWhl
508	Draw 1' Offset	Organ	TnWhl
509	Draw 1+3	Organ	TnWhl
510	Draw 1+3+	Organ	TnWhl
511	Draw 1+3-	Organ	TnWhl
512	Draw 2+4	Organ	TnWhl
513	Draw 2+4+	Organ	TnWhl
514	Draw 2+4-	Organ	TnWhl
515	Draw Even	Organ	TnWhl
516	Draw Even+	Organ	TnWhl
517	Draw Even-	Organ	TnWhl
518	Draw Odd	Organ	TnWhl
519	Draw Odd+	Organ	TnWhl
520	Draw Odd-	Organ	TnWhl
521	Percussion	Organ	TnWhl
522	Percussion+	Organ	TnWhl
523	Percussion-	Organ	TnWhl
524	Tonewheel Key Click	Organ	TnWhl
525	Tonewheel1 Fast	Organ	TnWhl
526	Tonewheel1 Slow	Organ	TnWhl
527	Tonewheel2 Fast	Organ	TnWhl
528	Tonewheel2 Slow	Organ	TnWhl
529	Tonewheel3 Fast L	Organ	TnWhl
530	Tonewheel3 Fast R	Organ	TnWhl
531	Tonewheel3 Fast St	Organ	TnWhl
532	Tonewheel3 Slow L	Organ	TnWhl
533	Tonewheel3 Slow R	Organ	TnWhl
534	Tonewheel3 Slow St	Organ	TnWhl
535	Tonewheel4 Fast	Organ	TnWhl
536	Tonewheel5 Fast	Organ	TnWhl
537	Tonewheel6 Fast	Organ	TnWhl
538	Clack 1	Organ	TnWhl
539	Clack 2	Organ	TnWhl
540	Rotor	Organ	TnWhl
541	Rotor Whistle	Organ	TnWhl
542	Rotor Grit1	Organ	TnWhl
543	Rotor Grit2	Organ	TnWhl
544	Compact Electronic	Organ	Other
545	Compact Electronic-	Organ	Other
546	Portable Electronic	Organ	Other
547	Portable Electronic-	Organ	Other
548	Fr All Tabs	Organ	Other
549	Fr Bright Boost	Organ	Other
550	Fr Flute	Organ	Other
551	Fr String Lo	Organ	Other
552	Fr String Hi	Organ	Other
553	Fr Trumpet	Organ	Other
554	Fr Piccolo	Organ	Other
555	Fr Pedal	Organ	Other
556	Fr KeyOff	Organ	Other
557	Vx Drawbar1-3	Organ	Other
558	Vx DrawbarIV	Organ	Other
559	Vx KeyOff	Organ	Other
560	Pipe Organ1 St	Organ	Other
561	Pipe Organ1 L	Organ	Other
562	Pipe Organ1 R	Organ	Other
563	Pipe Organ2	Organ	Other
564	Pipe Organ3 St	Organ	Other
565	Pipe Organ3 L	Organ	Other
566	Pipe Organ3 R	Organ	Other
567	Pipe Organ4	Organ	Other
568	Pipe Organ5	Organ	Other
569	Harmonium Side	Organ	Other
570	Harmonium Main	Organ	Other
571	Accordion1	Organ	Other
572	Accordion2	Organ	Other
573	Accordion3	Organ	Other
574	Tango Accordion1	Organ	Other
575	Tango Accordion2	Organ	Other
576	Tango Accordion Bass	Organ	Other
577	Mussete Accordion	Organ	Other
578	Steirisch Accordion	Organ	Other
579	SctAcc Mussete	Ethnc	Blown
580	SctAcc Mussete KeyOff	Ethnc	Blown
581	SctAcc 1	Ethnc	Blown
582	SctAcc 1 KeyOff	Ethnc	Blown
583	SctAcc 2	Ethnc	Blown
584	SctAcc Bass Splt	Ethnc	Blown
585	SctAcc Bass Splt KeyOff	Ethnc	Blown
586	Acc Key On RH A	Ethnc	Blown
587	Acc Key On RH B	Ethnc	Blown
588	Acc KeyOff RH	Ethnc	Blown
589	Acc Key On Chords A	Ethnc	Blown
590	Acc Key On Chords B	Ethnc	Blown
591	Acc KeyOff Chords	Ethnc	Blown
592	Acc Key On Bass A	Ethnc	Blown
593	Acc Key On Bass B	Ethnc	Blown
594	Acc KeyOff Bass	Ethnc	Blown
595	Nylon1 Open Soft St	Guitr	A.Gtr
596	Nylon1 Open Soft L	Guitr	A.Gtr
597	Nylon1 Open Soft R	Guitr	A.Gtr
598	Nylon1 Open Med St	Guitr	A.Gtr
599	Nylon1 Open Med L	Guitr	A.Gtr
600	Nylon1 Open Med R	Guitr	A.Gtr
601	Nylon1 Open Hard St	Guitr	A.Gtr
602	Nylon1 Open Hard L	Guitr	A.Gtr
603	Nylon1 Open Hard R	Guitr	A.Gtr
604	Nylon1 Open Sw St	Guitr	A.Gtr
605	Nylon1 Open Sw L	Guitr	A.Gtr
606	Nylon1 Open Sw R	Guitr	A.Gtr
607	Nylon1 Open Sw Kb St	Guitr	A.Gtr
608	Nylon1 Open Sw Kb L	Guitr	A.Gtr
609	Nylon1 Open Sw Kb R	Guitr	A.Gtr
610	Nylon1 Dead Notes St	Guitr	A.Gtr
611	Nylon1 Dead Notes L	Guitr	A.Gtr
612	Nylon1 Dead Notes R	Guitr	A.Gtr
613	Nylon1 Mute St	Guitr	A.Gtr
614	Nylon1 Mute L	Guitr	A.Gtr
615	Nylon1 Mute R	Guitr	A.Gtr
616	Nylon1 Hammer On St	Guitr	A.Gtr
617	Nylon1 Hammer On L	Guitr	A.Gtr
618	Nylon1 Hammer On R	Guitr	A.Gtr
619	Nylon1 Slide St	Guitr	A.Gtr
620	Nylon1 Slide L	Guitr	A.Gtr
621	Nylon1 Slide R	Guitr	A.Gtr
622	Nylon1 Harmonics St	Guitr	A.Gtr
623	Nylon1 Harmonics L	Guitr	A.Gtr
624	Nylon1 Harmonics R	Guitr	A.Gtr
625	Nylon1 FX St	S.EFX	MgFX
626	Nylon1 FX L	S.EFX	MgFX
627	Nylon1 FX R	S.EFX	MgFX
628	Nylon2 Open Soft	Guitr	A.Gtr
629	Nylon2 Open Medium	Guitr	A.Gtr
630	Nylon2 Open Hard	Guitr	A.Gtr
631	Nylon2 Open Sw	Guitr	A.Gtr
632	Nylon2 Dead Notes	Guitr	A.Gtr

No.	Name	Main Category	Sub Category
633	Nylon2 Hammer On	Guitr	A.Gtr
634	Nylon2 Slide	Guitr	A.Gtr
635	Nylon2 Harmonics	Guitr	A.Gtr
636	Nylon2 Strum Noises	S.EFX	MgFX
637	Flamenco Finger p	Guitr	A.Gtr
638	Flamenco Finger mp	Guitr	A.Gtr
639	Flamenco Finger mf	Guitr	A.Gtr
640	Flamenco Finger f	Guitr	A.Gtr
641	Flamenco Finger Sw	Guitr	A.Gtr
642	Flamenco Slide Up	Guitr	A.Gtr
643	Flamenco Slide Down	Guitr	A.Gtr
644	Flamenco Damp KeyOff	Guitr	A.Gtr
645	Flamenco FX1	S.EFX	MgFX
646	Flamenco FX2	S.EFX	MgFX
647	Flamenco Shout	S.EFX	SE
648	Steel1 Open Soft St	Guitr	A.Gtr
649	Steel1 Open Soft L	Guitr	A.Gtr
650	Steel1 Open Soft R	Guitr	A.Gtr
651	Steel1 Open Med St	Guitr	A.Gtr
652	Steel1 Open Med L	Guitr	A.Gtr
653	Steel1 Open Med R	Guitr	A.Gtr
654	Steel1 Open Hard St	Guitr	A.Gtr
655	Steel1 Open Hard L	Guitr	A.Gtr
656	Steel1 Open Hard R	Guitr	A.Gtr
657	Steel1 Open Sw St	Guitr	A.Gtr
658	Steel1 Open Sw L	Guitr	A.Gtr
659	Steel1 Open Sw R	Guitr	A.Gtr
660	Steel1 Open Sw Kb St	Guitr	A.Gtr
661	Steel1 Open Sw Kb L	Guitr	A.Gtr
662	Steel1 Open Sw Kb R	Guitr	A.Gtr
663	Steel1 Hammer On St	Guitr	A.Gtr
664	Steel1 Hammer On L	Guitr	A.Gtr
665	Steel1 Hammer On R	Guitr	A.Gtr
666	Steel1 Slide St	Guitr	A.Gtr
667	Steel1 Slide L	Guitr	A.Gtr
668	Steel1 Slide R	Guitr	A.Gtr
669	Steel1 Harmonics St	Guitr	A.Gtr
670	Steel1 Harmonics L	Guitr	A.Gtr
671	Steel1 Harmonics R	Guitr	A.Gtr
672	Steel1 Mute St	Guitr	A.Gtr
673	Steel1 Mute L	Guitr	A.Gtr
674	Steel1 Mute R	Guitr	A.Gtr
675	Steel1 Dead Notes St	Guitr	A.Gtr
676	Steel1 Dead Notes L	Guitr	A.Gtr
677	Steel1 Dead Notes R	Guitr	A.Gtr
678	Steel1 FX St	S.EFX	MgFX
679	Steel1 FX L	S.EFX	MgFX
680	Steel1 FX R	S.EFX	MgFX
681	Steel2 Open p	Guitr	A.Gtr
682	Steel2 Open mp	Guitr	A.Gtr
683	Steel2 Open mf	Guitr	A.Gtr
684	Steel2 Open f	Guitr	A.Gtr
685	Steel2 Open Sw	Guitr	A.Gtr
686	Steel2 Slide mp	Guitr	A.Gtr
687	Steel2 Slide mf	Guitr	A.Gtr
688	Steel2 Slide Sw	Guitr	A.Gtr
689	Steel2 Harmonics mp	Guitr	A.Gtr
690	Steel2 Harmonics mf	Guitr	A.Gtr
691	Steel2 Harmonics Sw	Guitr	A.Gtr
692	Steel2 Mute mp	Guitr	A.Gtr
693	Steel2 Mute mf	Guitr	A.Gtr
694	Steel2 Mute Sw	Guitr	A.Gtr
695	Steel2 Dead p	Guitr	A.Gtr
696	Steel2 Dead mp	Guitr	A.Gtr
697	Steel2 Dead mf	Guitr	A.Gtr
698	Steel2 Dead f	Guitr	A.Gtr
699	Steel2 Dead Sw	Guitr	A.Gtr
700	Steel2 FX	S.EFX	MgFX
701	Steel3 Pick Open p	Guitr	A.Gtr
702	Steel3 Pick Open mf	Guitr	A.Gtr
703	Steel3 Pick Open f	Guitr	A.Gtr
704	Steel3 Pick Open Sw	Guitr	A.Gtr
705	Steel3 Pick Slides	Guitr	A.Gtr
706	Steel3 Hammer	Guitr	A.Gtr
707	Steel3 Pick Harmnics	Guitr	A.Gtr
708	Steel3 Pick Mute Soft	Guitr	A.Gtr
709	Steel3 Pick Mute Hard	Guitr	A.Gtr
710	Steel3 Pick Dead p	Guitr	A.Gtr
711	Steel3 Pick Dead f	Guitr	A.Gtr
712	Steel3 Pick FX	S.EFX	MgFX
713	Steel3 Finger Open p	Guitr	A.Gtr
714	Steel3 Finger Open mf	Guitr	A.Gtr
715	Steel3 Finger Open f	Guitr	A.Gtr
716	Steel3 Finger Slp Soft	Guitr	A.Gtr
717	Steel3 Finger Slp Hard	Guitr	A.Gtr
718	Steel3 Finger Slide	S.EFX	MgFX
719	Steel3 Finger Hrmncs	Guitr	A.Gtr
720	Steel3 Finger Dead p	Guitr	A.Gtr
721	Steel3 Finger Dead f	Guitr	A.Gtr
722	Steel3 Finger FX	Guitr	A.Gtr
723	High Strings Soft St	Guitr	A.Gtr
724	High Strings Soft L	Guitr	A.Gtr
725	High Strings Soft R	Guitr	A.Gtr
726	High Strings Hard St	Guitr	A.Gtr
727	High Strings Hard L	Guitr	A.Gtr
728	High Strings Hard R	Guitr	A.Gtr
729	High Strings FX St	S.EFX	MgFX
730	High Strings FX L	S.EFX	MgFX
731	High Strings FX R	S.EFX	MgFX
732	High Strings FX2 St	S.EFX	MgFX
733	Clean Open Med	Guitr	E.Cln
734	Clean Open Hard	Guitr	E.Cln
735	Clean Open Sw	Guitr	E.Cln
736	Clean Open Sw Kb	Guitr	E.Cln
737	Clean Hammer On	Guitr	E.Cln
738	Clean Slap	Guitr	E.Cln
739	Clean Slide	Guitr	E.Cln
740	Clean Harmonics	Guitr	E.Cln
741	Clean Mute	Guitr	E.Cln
742	Clean Dead	Guitr	E.Cln
743	Clean FX	S.EFX	MgFX
744	60s Clean Open Soft	Guitr	E.Cln
745	60s Clean Open Med	Guitr	E.Cln
746	60s Clean Open Hard	Guitr	E.Cln
747	60s Clean Open Sw	Guitr	E.Cln
748	60s Clean Open Sw Kb	Guitr	E.Cln
749	60s Clean Open Sw2	Guitr	E.Cln
750	60s Clean Dead	Guitr	E.Cln
751	60s Clean Mute	Guitr	E.Cln
752	60s Clean Hammer On	Guitr	E.Cln
753	60s Clean Slide	Guitr	E.Cln
754	60s Clean Harmonics	Guitr	E.Cln
755	60s Clean FX	S.EFX	MgFX
756	60s Clean Slap	Guitr	E.Cln
757	1Coil Open Sw	Guitr	E.Cln
758	1Coil Open Soft	Guitr	E.Cln
759	1Coil Open Med	Guitr	E.Cln
760	1Coil Open Hard	Guitr	E.Cln
761	1Coil Dead	Guitr	E.Cln
762	1Coil Mute	Guitr	E.Cln
763	1Coil Hammer On	Guitr	E.Cln
764	1Coil Slide	Guitr	E.Cln
765	1Coil Harmonics	Guitr	E.Cln
766	1Coil FX	S.EFX	MgFX
767	Jazz Guitar	Guitr	E.Cln
768	Jazz Open Soft	Guitr	E.Cln
769	Jazz Open Med	Guitr	E.Cln
770	Jazz Open Hard	Guitr	E.Cln
771	Jazz Open Sw	Guitr	E.Cln
772	Jazz Dead Med	Guitr	E.Cln
773	Jazz Dead Hard	Guitr	E.Cln
774	Jazz Hammer On	Guitr	E.Cln
775	Jazz Slide	Guitr	E.Cln
776	Jazz Harmonics	Guitr	E.Cln
777	Jazz FX	S.EFX	MgFX
778	Vintage Amp1	Guitr	E.Cln
779	Vintage Amp2	Guitr	E.Cln
780	Neck Pickup	Guitr	E.Cln
781	TC Cln Pick Open pp	Guitr	E.Cln
782	TC Cln Pick Open mf	Guitr	E.Cln
783	TC Cln Pick Open ff	Guitr	E.Cln
784	TC Cln Pick Open Sw	Guitr	E.Cln
785	TC Cln Pick Slide f	Guitr	E.Cln
786	TC Cln Pick Mute mp	Guitr	E.Cln
787	TC Cln Pick Mute mf	Guitr	E.Cln
788	TC Cln Pick Mute Sw	Guitr	E.Cln
789	TC Cln Pick Dead mp	Guitr	E.Cln
790	TC Cln Pick Dead mf	Guitr	E.Cln
791	TC Cln Pick Dead Sw	Guitr	E.Cln
792	TC Cln Fing p	Guitr	E.Cln
793	TC Cln Fing mf	Guitr	E.Cln
794	TC Cln Fing f	Guitr	E.Cln
795	TC Cln Fing Sw	Guitr	E.Cln
796	TC Cln Fing Slap Amp	Guitr	E.Cln
797	TC Cln Fing Slap Lin	Guitr	E.Cln
798	TC Cln Fing Slides	Guitr	E.Cln
799	TC Cln Fing Dead mp	Guitr	E.Cln
800	TC Cln Fing Dead mf	Guitr	E.Cln
801	TC Cln Fing Dead Sw	Guitr	E.Cln
802	Distortion Open	Guitr	E.Dst
803	Distortion Harmonics	Guitr	E.Dst
804	Distortion Mute	Guitr	E.Dst
805	Overdrive Open	Guitr	E.Dst
806	Overdrive Mute	Guitr	E.Dst
807	Distortion FX	S.EFX	MgFX
808	DistOverdrive FX	S.EFX	MgFX
809	Feedback	Guitr	E.Dst
810	Power Chord St	Guitr	E.Dst
811	Power Chord Mn	Guitr	E.Dst
812	Play FX Mix	S.EFX	MgFX
813	Power Chord FX St	S.EFX	MgFX
814	Power Chord FX Mn	S.EFX	MgFX
815	Banjo1	Guitr	A.Gtr
816	Banjo2 Med	Guitr	A.Gtr
817	Banjo2 Med+	Guitr	A.Gtr
818	Banjo2 Med-	Guitr	A.Gtr
819	Banjo2 Hard	Guitr	A.Gtr
820	Banjo2 Hard+	Guitr	A.Gtr
821	Banjo2 Hard-	Guitr	A.Gtr
822	Sitar1	Ethnc	Pluk
823	Sitar2 Soft	Ethnc	Pluk
824	Sitar2 Soft+	Ethnc	Pluk
825	Sitar2 Soft-	Ethnc	Pluk
826	Sitar2 Med	Ethnc	Pluk
827	Sitar2 Med+	Ethnc	Pluk
828	Sitar2 Med-	Ethnc	Pluk
829	Sitar2 Hard	Ethnc	Pluk
830	Sitar2 Hard+	Ethnc	Pluk
831	Sitar2 Hard-	Ethnc	Pluk
832	Sitar Waves1	Ethnc	Pluk
833	Sitar Waves2	Ethnc	Pluk
834	Sitar Waves3	Ethnc	Pluk
835	Sitar Waves4	Ethnc	Pluk
836	Sitar Waves5	Ethnc	Pluk
837	Sitar Waves6	Ethnc	Pluk
838	Tambura	Ethnc	Pluk
839	Tambura Waves1	Ethnc	Pluk
840	Tambura Waves2	Ethnc	Pluk
841	Tambura Waves3	Ethnc	Pluk
842	Santur	Ethnc	Pluk
843	Ud	Ethnc	Pluk
844	Kanun	Ethnc	Pluk
845	Baglama	Ethnc	Pluk
846	Bouzouki	Ethnc	Pluk
847	Shamisen	Ethnc	Pluk
848	Koto	Ethnc	Pluk
849	Acoustic1 Med	Bass	ABass
850	Acoustic1 Hard	Bass	ABass
851	Acoustic1 Harmonics	Bass	ABass
852	Acoustic1 Dead	Bass	ABass
853	Acoustic1 FX1	Bass	ABass
854	Acoustic1 FX2	Bass	ABass
855	Acoustic1 Med+	Bass	ABass
856	Acoustic1 Hard+	Bass	ABass
857	Acoustic1 Med-	Bass	ABass
858	Acoustic1 Hard-	Bass	ABass
859	Acoustic2 Soft	Bass	ABass
860	Acoustic2 Hard	Bass	ABass
861	Acoustic2 Soft Offset	Bass	ABass
862	Acoustic2 Hard Offset	Bass	ABass
863	Acoustic2 Dead	Bass	ABass
864	Pick Open	Bass	EBass
865	Pick Harmonics	Bass	EBass
866	Pick Mute	Bass	EBass
867	Pick Dead	Bass	EBass
868	Pick Open+	Bass	EBass
869	Pick Mute+	Bass	EBass
870	Pick Open-	Bass	EBass
871	Pick Mute-	Bass	EBass
872	Pick Rndwound1 Med	Bass	EBass
873	Pick Rndwound1 Hard	Bass	EBass
874	Pick Rndwound1 Med+	Bass	EBass
875	Pick Rndwound1 Hard+	Bass	EBass
876	Pick Rndwound1 Med-	Bass	EBass
877	Pick Rndwound1 Hard-	Bass	EBass
878	Pick Rndwound2 Open	Bass	EBass
879	Pick Rndwound2 Open+	Bass	EBass
880	Pick Rndwound2 Open-	Bass	EBass
881	Pick Rndwound2 Mute	Bass	EBass
882	Pick Rndwound2 Mute+	Bass	EBass
883	Pick Rndwound2 Mute-	Bass	EBass
884	Pick Rndwound2 Dead	Bass	EBass
885	Pick Rndwound2 Harm	Bass	EBass
886	Pick Rndwound2 FX	Bass	EBass
887	Pick Flatwound	Bass	EBass
888	Pick Flatwound+	Bass	EBass
889	Pick Flatwound-	Bass	EBass
890	Finger Med	Bass	EBass
891	Finger Hard	Bass	EBass
892	Finger Harmonics	Bass	EBass
893	Finger Med+	Bass	EBass
894	Finger Hard+	Bass	EBass
895	Finger Med-	Bass	EBass
896	Finger Hard-	Bass	EBass
897	Finger Dead	Bass	EBass
898	Finger Rndwound Soft	Bass	EBass
899	Finger Rndwound Soft+	Bass	EBass
900	Finger Rndwound Soft-	Bass	EBass
901	Finger Rndwound Hard	Bass	EBass
902	Finger Rndwound Hard+	Bass	EBass
903	Finger Rndwound Hard-	Bass	EBass
904	Finger Rndwound Dead	Bass	EBass
905	Finger Rndwound Harm	Bass	EBass
906	Thumb Pull Hard	Bass	EBass
907	Thumb Hard	Bass	EBass
908	Thumb Harmonics	Bass	EBass
909	Thumb Soft	Bass	EBass
910	Thumb Dead	Bass	EBass
911	Pull Dead	Bass	EBass
912	Fretless	Bass	EBass
913	Fretless Harmonics	Bass	EBass
914	Fretless+	Bass	EBass
915	Fretless-	Bass	EBass
916	Fretless Dead	Bass	EBass
917	Electric Bass FX	Bass	EBass
918	Violin1 Non-Vib	Strng	Solo
919	Violin1 Non-Vib+	Strng	Solo
920	Violin1 Non-Vib-	Strng	Solo
921	Violin1 Non-Vib Offset	Strng	Solo
922	Violin1 Non-Vib+ Offset	Strng	Solo
923	Violin1 Non-Vib- Offset	Strng	Solo
924	Violin1 St	Strng	Solo
925	Violin1 L	Strng	Solo
926	Violin1 R	Strng	Solo
927	Violin1 St+	Strng	Solo
928	Violin1 L+	Strng	Solo
929	Violin1 R+	Strng	Solo
930	Violin1 St-	Strng	Solo
931	Violin1 L-	Strng	Solo
932	Violin1 R-	Strng	Solo
933	Violin1 St Offset	Strng	Solo
934	Violin1 L Offset	Strng	Solo
935	Violin1 R Offset	Strng	Solo
936	Violin2 1st St	Strng	Solo
937	Violin2 1st St Offset	Strng	Solo
938	Violin2 2nd St	Strng	Solo
939	Violin2 2nd St Offset	Strng	Solo
940	Viola1 St	Strng	Solo
941	Viola1 L	Strng	Solo
942	Viola1 R	Strng	Solo
943	Viola1 St+	Strng	Solo
944	Viola1 L+	Strng	Solo
945	Viola1 R+	Strng	Solo
946	Viola1 St-	Strng	Solo
947	Viola1 L-	Strng	Solo
948	Viola1 R-	Strng	Solo

No.	Name	Main Category	Sub Category
949	Viola1 St Offset	Strng	Solo
950	Viola1 L Offset	Strng	Solo
951	Viola1 R Offset	Strng	Solo
952	Viola2 St	Strng	Solo
953	Viola2 St Offset	Strng	Solo
954	Cello1 St	Strng	Solo
955	Cello1 L	Strng	Solo
956	Cello1 R	Strng	Solo
957	Cello1 St+	Strng	Solo
958	Cello1 L+	Strng	Solo
959	Cello1 R+	Strng	Solo
960	Cello1 St-	Strng	Solo
961	Cello1 L-	Strng	Solo
962	Cello1 R-	Strng	Solo
963	Cello1 St Offset	Strng	Solo
964	Cello1 L Offset	Strng	Solo
965	Cello1 R Offset	Strng	Solo
966	Cello2 St	Strng	Solo
967	Cello2 St Offset	Strng	Solo
968	Contrabass St	Strng	Solo
969	Contrabass L	Strng	Solo
970	Contrabass R	Strng	Solo
971	Contrabass St+	Strng	Solo
972	Contrabass L+	Strng	Solo
973	Contrabass R+	Strng	Solo
974	Contrabass St-	Strng	Solo
975	Contrabass L-	Strng	Solo
976	Contrabass R-	Strng	Solo
977	Contrabass St Offset	Strng	Solo
978	Contrabass L Offset	Strng	Solo
979	Contrabass R Offset	Strng	Solo
980	Solo Combi1 St	Strng	Solo
981	Solo Combi1 L	Strng	Solo
982	Solo Combi1 R	Strng	Solo
983	Solo Combi1 St+	Strng	Solo
984	Solo Combi1 L+	Strng	Solo
985	Solo Combi1 R+	Strng	Solo
986	Solo Combi1 St-	Strng	Solo
987	Solo Combi1 L-	Strng	Solo
988	Solo Combi1 R-	Strng	Solo
989	Solo Combi1 St Offset	Strng	Solo
990	Solo Combi1 L Offset	Strng	Solo
991	Solo Combi1 R Offset	Strng	Solo
992	Solo Combi2 St	Strng	Solo
993	Solo Combi2 L	Strng	Solo
994	Solo Combi2 R	Strng	Solo
995	Solo Combi2 St Offset	Strng	Solo
996	Solo Combi2 L Offset	Strng	Solo
997	Solo Combi2 R Offset	Strng	Solo
998	Solo Combi3 St	Strng	Solo
999	Solo Combi3 L	Strng	Solo
1000	Solo Combi3 R	Strng	Solo
1001	Solo Combi3 St Offset	Strng	Solo
1002	Solo Combi3 L Offset	Strng	Solo
1003	Solo Combi3 R Offset	Strng	Solo
1004	Solo Spiccato Combi	Strng	Solo
1005	Solo Spiccato Combi+	Strng	Solo
1006	Solo Spiccato Combi-	Strng	Solo
1007	Celtic Violin mf	Ethnc	Bowed
1008	Celtic Violin mf Offset	Ethnc	Bowed
1009	Celtic Violin f	Ethnc	Bowed
1010	Celtic Violin f Offset	Ethnc	Bowed
1011	Celtic Violin Sw	Ethnc	Bowed
1012	Celtic Violin Sw Offset	Ethnc	Bowed
1013	Kernan	Ethnc	Bowed
1014	Kernan Offset	Ethnc	Bowed
1015	CinemaStr Vn p St	Strng	Ensem
1016	CinemaStr Vn mf St	Strng	Ensem
1017	CinemaStr Vn f St	Strng	Ensem
1018	CinemaStr Vn Legato p St	Strng	Ensem
1019	CinemaStr Vn Legato mf St	Strng	Ensem
1020	CinemaStr Vn Legato f St	Strng	Ensem
1021	CinemaStr Vn Spic mf St	Strng	Ensem
1022	CinemaStr Vn Spic mf St Offset	Strng	Ensem
1023	CinemaStr Vn Spic f St	Strng	Ensem
1024	CinemaStr Vn Spic f St Offset	Strng	Ensem
1025	CinemaStr Vn Trem St	Strng	Ensem
1026	CinemaStr Va p St	Strng	Ensem
1027	CinemaStr Va mf St	Strng	Ensem

No.	Name	Main Category	Sub Category
1028	CinemaStr Va f St	Strng	Ensem
1029	CinemaStr Va Legato p St	Strng	Ensem
1030	CinemaStr Va Legato mf St	Strng	Ensem
1031	CinemaStr Va Legato f St	Strng	Ensem
1032	CinemaStr Va Spic mf St	Strng	Ensem
1033	CinemaStr Va Spic mf St Offset	Strng	Ensem
1034	CinemaStr Va Spic f St	Strng	Ensem
1035	CinemaStr Va Spic f St Offset	Strng	Ensem
1036	CinemaStr Va Trem St	Strng	Ensem
1037	CinemaStr Va Trem Legato St	Strng	Ensem
1038	CinemaStr Vc p St	Strng	Ensem
1039	CinemaStr Vc mf St	Strng	Ensem
1040	CinemaStr Vc f St	Strng	Ensem
1041	CinemaStr Vc Legato p St	Strng	Ensem
1042	CinemaStr Vc Legato mf St	Strng	Ensem
1043	CinemaStr Vc Legato f St	Strng	Ensem
1044	CinemaStr Vc Spic mf St	Strng	Ensem
1045	CinemaStr Vc Spic mf St Offset	Strng	Ensem
1046	CinemaStr Vc Spic f St	Strng	Ensem
1047	CinemaStr Vc Spic f St Offset	Strng	Ensem
1048	CinemaStr Vc Trem St	Strng	Ensem
1049	CinemaStr Vc Trem Legato St	Strng	Ensem
1050	CinemaStr Cb mf St	Strng	Ensem
1051	CinemaStr Cb f St	Strng	Ensem
1052	CinemaStr Cb Legato mf St	Strng	Ensem
1053	CinemaStr Cb Legato f St	Strng	Ensem
1054	CinemaStr Cb Spic f St	Strng	Ensem
1055	CinemaStr Cb Spic f St Offset	Strng	Ensem
1056	CinemaStr Cb Spic ff St	Strng	Ensem
1057	CinemaStr Cb Spic ff St Offset	Strng	Ensem
1058	Ensemble Mix	Strng	Ensem
1059	Ensemble Mix St	Strng	Ensem
1060	Ensemble Mix L	Strng	Ensem
1061	Ensemble Mix R	Strng	Ensem
1062	Ensemble Mix St Offset	Strng	Ensem
1063	Ensemble Mix L Offset	Strng	Ensem
1064	Ensemble Mix R Offset	Strng	Ensem
1065	Ensemble Mute St	Strng	Ensem
1066	Ensemble Mute	Strng	Ensem
1067	Ensemble Mute-	Strng	Ensem
1068	Ensemble Mute St Offset	Strng	Ensem
1069	Ensemble Mute Offset	Strng	Ensem
1070	Ensemble Mute- Offset	Strng	Ensem
1071	Hard Ensemble St	Strng	Ensem
1072	Hard Ensemble St+	Strng	Ensem
1073	Hard Ensemble St-	Strng	Ensem
1074	Hard Ensemble L	Strng	Ensem
1075	Hard Ensemble L+	Strng	Ensem
1076	Hard Ensemble L-	Strng	Ensem
1077	Hard Ensemble R	Strng	Ensem
1078	Hard Ensemble R+	Strng	Ensem
1079	Hard Ensemble R-	Strng	Ensem
1080	Hard Ensemble St Offset	Strng	Ensem
1081	Hard Ensemble L Offset	Strng	Ensem
1082	Hard Ensemble R Offset	Strng	Ensem
1083	OrchStrgs Soft St	Strng	Ensem
1084	OrchStrgs Soft St+	Strng	Ensem
1085	OrchStrgs Soft St-	Strng	Ensem
1086	OrchStrgs Soft L	Strng	Ensem
1087	OrchStrgs Soft L+	Strng	Ensem
1088	OrchStrgs Soft L-	Strng	Ensem
1089	OrchStrgs Soft R	Strng	Ensem
1090	OrchStrgs Soft R+	Strng	Ensem
1091	OrchStrgs Soft R-	Strng	Ensem
1092	OrchStrgs Soft St Offset	Strng	Ensem
1093	OrchStrgs Soft L Offset	Strng	Ensem
1094	OrchStrgs Soft R Offset	Strng	Ensem
1095	OrchStrgs Med St	Strng	Ensem
1096	OrchStrgs Med St+	Strng	Ensem
1097	OrchStrgs Med St-	Strng	Ensem
1098	OrchStrgs Med L	Strng	Ensem
1099	OrchStrgs Med L+	Strng	Ensem
1100	OrchStrgs Med L-	Strng	Ensem
1101	OrchStrgs Med R	Strng	Ensem
1102	OrchStrgs Med R+	Strng	Ensem
1103	OrchStrgs Med R-	Strng	Ensem
1104	OrchStrgs Med St Offset	Strng	Ensem
1105	OrchStrgs Med L Offset	Strng	Ensem
1106	OrchStrgs Med R Offset	Strng	Ensem

No.	Name	Main Category	Sub Category
1107	OrchStrgs Hard St	Strng	Ensem
1108	OrchStrgs Hard St+	Strng	Ensem
1109	OrchStrgs Hard St-	Strng	Ensem
1110	OrchStrgs Hard L	Strng	Ensem
1111	OrchStrgs Hard L+	Strng	Ensem
1112	OrchStrgs Hard L-	Strng	Ensem
1113	OrchStrgs Hard R	Strng	Ensem
1114	OrchStrgs Hard R+	Strng	Ensem
1115	OrchStrgs Hard R-	Strng	Ensem
1116	OrchStrgs Hard St Offset	Strng	Ensem
1117	OrchStrgs Hard L Offset	Strng	Ensem
1118	OrchStrgs Hard R Offset	Strng	Ensem
1119	Sect Strgs Soft St	Strng	Ensem
1120	Sect Strgs Soft L	Strng	Ensem
1121	Sect Strgs Soft R	Strng	Ensem
1122	Sect Strgs Soft St+	Strng	Ensem
1123	Sect Strgs Soft L+	Strng	Ensem
1124	Sect Strgs Soft R+	Strng	Ensem
1125	Sect Strgs Soft St-	Strng	Ensem
1126	Sect Strgs Soft L-	Strng	Ensem
1127	Sect Strgs Soft R-	Strng	Ensem
1128	Sect Strgs Soft St Offset	Strng	Ensem
1129	Sect Strgs Soft L Offset	Strng	Ensem
1130	Sect Strgs Soft R Offset	Strng	Ensem
1131	Sect Strgs Med St	Strng	Ensem
1132	Sect Strgs Med L	Strng	Ensem
1133	Sect Strgs Med R	Strng	Ensem
1134	Sect Strgs Med St+	Strng	Ensem
1135	Sect Strgs Med L+	Strng	Ensem
1136	Sect Strgs Med R+	Strng	Ensem
1137	Sect Strgs Med St-	Strng	Ensem
1138	Sect Strgs Med L-	Strng	Ensem
1139	Sect Strgs Med R-	Strng	Ensem
1140	Sect Strgs Med St Offset	Strng	Ensem
1141	Sect Strgs Med L Offset	Strng	Ensem
1142	Sect Strgs Med R Offset	Strng	Ensem
1143	Sect Strgs Hard St	Strng	Ensem
1144	Sect Strgs Hard L	Strng	Ensem
1145	Sect Strgs Hard R	Strng	Ensem
1146	Sect Strgs Hard St+	Strng	Ensem
1147	Sect Strgs Hard L+	Strng	Ensem
1148	Sect Strgs Hard R+	Strng	Ensem
1149	Sect Strgs Hard St-	Strng	Ensem
1150	Sect Strgs Hard L-	Strng	Ensem
1151	Sect Strgs Hard R-	Strng	Ensem
1152	Sect Strgs Hard St Offset	Strng	Ensem
1153	Sect Strgs Hard L Offset	Strng	Ensem
1154	Sect Strgs Hard R Offset	Strng	Ensem
1155	Sect Strgs Gliss St	Strng	Ensem
1156	Sect Strgs Gliss L	Strng	Ensem
1157	Sect Strgs Gliss R	Strng	Ensem
1158	Sect Strgs Gliss St+	Strng	Ensem
1159	Sect Strgs Gliss L+	Strng	Ensem
1160	Sect Strgs Gliss R+	Strng	Ensem
1161	Sect Strgs Gliss St-	Strng	Ensem
1162	Sect Strgs Gliss L-	Strng	Ensem
1163	Sect Strgs Gliss R-	Strng	Ensem
1164	Sect Strgs Spicc St	Strng	Ensem
1165	Sect Strgs Spicc L	Strng	Ensem
1166	Sect Strgs Spicc R	Strng	Ensem
1167	Sect Strgs Spicc St+	Strng	Ensem
1168	Sect Strgs Spicc L+	Strng	Ensem
1169	Sect Strgs Spicc R+	Strng	Ensem
1170	Sect Strgs Spicc St-	Strng	Ensem
1171	Sect Strgs Spicc L-	Strng	Ensem
1172	Sect Strgs Spicc R-	Strng	Ensem
1173	Tremolo Strings St	Strng	Ensem
1174	Tremolo Strings L	Strng	Ensem
1175	Tremolo Strings R	Strng	Ensem
1176	Tremolo Strings St+	Strng	Ensem
1177	Tremolo Strings L+	Strng	Ensem
1178	Tremolo Strings R+	Strng	Ensem
1179	Tremolo Strings St-	Strng	Ensem
1180	Tremolo Strings L-	Strng	Ensem
1181	Tremolo Strings R-	Strng	Ensem
1182	Tremolo Strings St Offset	Strng	Ensem
1183	Tremolo Strings L Offset	Strng	Ensem
1184	Tremolo Strings R Offset	Strng	Ensem
1185	US Strings p St	Strng	Ensem

No.	Name	Main Category	Sub Category
1186	US Strings p St Offset	Strng	Ensem
1187	US Strings mf St	Strng	Ensem
1188	US Strings mf St Offset	Strng	Ensem
1189	US Strings f St	Strng	Ensem
1190	US Strings f St Offset	Strng	Ensem
1191	US Strings Sw St	Strng	Ensem
1192	US Strings Sw St Offset	Strng	Ensem
1193	US Strings Spic St	Strng	Ensem
1194	Violins 1st p St	Strng	Ensem
1195	Violins 1st p St Offset	Strng	Ensem
1196	Violins 1st mf St	Strng	Ensem
1197	Violins 1st mf St Offset	Strng	Ensem
1198	Violins 1st f St	Strng	Ensem
1199	Violins 1st f St Offset	Strng	Ensem
1200	Violins 1st Sw St	Strng	Ensem
1201	Violins 1st Sw St Offset	Strng	Ensem
1202	Violins 2nd p St	Strng	Ensem
1203	Violins 2nd p St Offset	Strng	Ensem
1204	Violins 2nd mf St	Strng	Ensem
1205	Violins 2nd mf St Offset	Strng	Ensem
1206	Violins 2nd f St	Strng	Ensem
1207	Violins 2nd f St Offset	Strng	Ensem
1208	Violins 2nd Sw St	Strng	Ensem
1209	Violins 2nd Sw St Offset	Strng	Ensem
1210	Violas mp St	Strng	Ensem
1211	Violas mp St Offset	Strng	Ensem
1212	Violas mf St	Strng	Ensem
1213	Violas mf St Offset	Strng	Ensem
1214	Violas f St	Strng	Ensem
1215	Violas f St Offset	Strng	Ensem
1216	Violas Sw St	Strng	Ensem
1217	Violas Sw St Offset	Strng	Ensem
1218	Cellos p St	Strng	Ensem
1219	Cellos p St Offset	Strng	Ensem
1220	Cellos mf St	Strng	Ensem
1221	Cellos mf St Offset	Strng	Ensem
1222	Cellos f St	Strng	Ensem
1223	Cellos f St Offset	Strng	Ensem
1224	Cellos Sw St	Strng	Ensem
1225	Cellos Sw St Offset	Strng	Ensem
1226	ContBasses p St	Strng	Ensem
1227	ContBasses p St Offset	Strng	Ensem
1228	ContBasses mf St	Strng	Ensem
1229	ContBasses mf St Offset	Strng	Ensem
1230	ContBasses f St	Strng	Ensem
1231	ContBasses f St Offset	Strng	Ensem
1232	ContBasses Sw St	Strng	Ensem
1233	ContBasses Sw St Offset	Strng	Ensem
1234	Pizzicato1 St	Strng	Pizz
1235	Pizzicato1 Mn	Strng	Pizz
1236	Pizzicato2	Strng	Pizz
1237	Pop Pizzicato	Strng	Pizz
1238	Large Pizzicato St	Strng	Pizz
1239	Large Pizzicato L	Strng	Pizz
1240	Large Pizzicato R	Strng	Pizz
1241	Large Pizzicato St+	Strng	Pizz
1242	Large Pizzicato L+	Strng	Pizz
1243	Large Pizzicato R+	Strng	Pizz
1244	Large Pizzicato St-	Strng	Pizz
1245	Large Pizzicato L-	Strng	Pizz
1246	Large Pizzicato R-	Strng	Pizz
1247	Live Pizzct Soft St	Strng	Pizz
1248	Live Pizzct Soft L	Strng	Pizz
1249	Live Pizzct Soft R	Strng	Pizz
1250	Live Pizzct Soft St+	Strng	Pizz
1251	Live Pizzct Soft L+	Strng	Pizz
1252	Live Pizzct Soft R+	Strng	Pizz
1253	Live Pizzct Soft St-	Strng	Pizz
1254	Live Pizzct Soft L-	Strng	Pizz
1255	Live Pizzct Soft R-	Strng	Pizz
1256	Live Pizzct Hard St	Strng	Pizz
1257	Live Pizzct Hard L	Strng	Pizz
1258	Live Pizzct Hard R	Strng	Pizz
1259	Live Pizzct Hard St+	Strng	Pizz
1260	Live Pizzct Hard L+	Strng	Pizz
1261	Live Pizzct Hard R+	Strng	Pizz
1262	Live Pizzct Hard St-	Strng	Pizz
1263	Live Pizzct Hard L-	Strng	Pizz
1264	Live Pizzct Hard R-	Strng	Pizz

No.	Name	Main Category	Sub Category
1265	Orchestral Harp1	Strng	Pizz
1266	Orch Harp2 Soft St	Strng	Pizz
1267	Orch Harp2 Soft L	Strng	Pizz
1268	Orch Harp2 Soft R	Strng	Pizz
1269	Orch Harp2 Soft St+	Strng	Pizz
1270	Orch Harp2 Soft L+	Strng	Pizz
1271	Orch Harp2 Soft R+	Strng	Pizz
1272	Orch Harp2 Soft St-	Strng	Pizz
1273	Orch Harp2 Soft L-	Strng	Pizz
1274	Orch Harp2 Soft R-	Strng	Pizz
1275	Orch Harp2 Med St	Strng	Pizz
1276	Orch Harp2 Med L	Strng	Pizz
1277	Orch Harp2 Med R	Strng	Pizz
1278	Orch Harp2 Med St+	Strng	Pizz
1279	Orch Harp2 Med L+	Strng	Pizz
1280	Orch Harp2 Med R+	Strng	Pizz
1281	Orch Harp2 Med St-	Strng	Pizz
1282	Orch Harp2 Med L-	Strng	Pizz
1283	Orch Harp2 Med R-	Strng	Pizz
1284	Orch Harp3 p	Strng	Pizz
1285	Orch Harp3 mf	Strng	Pizz
1286	CelticHarp p	Ethnc	Pluk
1287	CelticHarp mf	Ethnc	Pluk
1288	CelticHarp f	Ethnc	Pluk
1289	CelticHarp NoteOff	Ethnc	Pluk
1290	CelticHarp Gliss1	Ethnc	Pluk
1291	CelticHarp Gliss2	Ethnc	Pluk
1292	Trumpet1 Med	Brass	Solo
1293	Trumpet1 Hard	Brass	Solo
1294	Trumpet1 Med Offset	Brass	Solo
1295	Trumpet1 Hard Offset	Brass	Solo
1296	Trumpet2	Brass	Solo
1297	Trumpet2+	Brass	Solo
1298	Trumpet2-	Brass	Solo
1299	Trumpet2 Offset	Brass	Solo
1300	Trumpet3 p	Brass	Solo
1301	Trumpet3 p Offset	Brass	Solo
1302	Trumpet3 mp	Brass	Solo
1303	Trumpet3 mp Offset	Brass	Solo
1304	Trumpet3 mf	Brass	Solo
1305	Trumpet3 mf Offset	Brass	Solo
1306	Trumpet3 f	Brass	Solo
1307	Trumpet3 f Offset	Brass	Solo
1308	Trumpet3 ff	Brass	Solo
1309	Trumpet3 ff Offset	Brass	Solo
1310	Trumpet3 Sw	Brass	Solo
1311	Trumpet3 Sw Offset	Brass	Solo
1312	Trumpet Mute	Brass	Solo
1313	Trumpet Mute Offset	Brass	Solo
1314	Soft Trumpet Soft	Brass	Solo
1315	Soft Trumpet Soft+	Brass	Solo
1316	Soft Trumpet Soft-	Brass	Solo
1317	Soft Trumpet Soft Offset	Brass	Solo
1318	Soft Trumpet Med	Brass	Solo
1319	Soft Trumpet Med+	Brass	Solo
1320	Soft Trumpet Med-	Brass	Solo
1321	Soft Trumpet Med Offset	Brass	Solo
1322	Trumpet Vib Soft	Brass	Solo
1323	Trumpet Vib Soft+	Brass	Solo
1324	Trumpet Vib Soft-	Brass	Solo
1325	Trumpet Vib Soft Offset	Brass	Solo
1326	Trumpet Vib Med	Brass	Solo
1327	Trumpet Vib Med+	Brass	Solo
1328	Trumpet Vib Med-	Brass	Solo
1329	Trumpet Vib Med Offset	Brass	Solo
1330	Trumpet Vib Hard	Brass	Solo
1331	Trumpet Vib Hard+	Brass	Solo
1332	Trumpet Vib Hard-	Brass	Solo
1333	Trumpet Vib Hard Offset	Brass	Solo
1334	Trumpet Shake	Brass	Solo
1335	Trumpet Shake+	Brass	Solo
1336	Trumpet Shake-	Brass	Solo
1337	Trumpet Shake Offset	Brass	Solo
1338	Piccolo Tp pp	Brass	Solo
1339	Piccolo Tp pp Offset	Brass	Solo
1340	Piccolo Tp p	Brass	Solo
1341	Piccolo Tp p Offset	Brass	Solo
1342	Piccolo Tp mp	Brass	Solo
1343	Piccolo Tp mp Offset	Brass	Solo
1344	Piccolo Tp mf	Brass	Solo
1345	Piccolo Tp mf Offset	Brass	Solo
1346	Piccolo Tp f	Brass	Solo
1347	Piccolo Tp f Offset	Brass	Solo
1348	Piccolo Tp Sw	Brass	Solo
1349	Piccolo Tp Sw Offset	Brass	Solo
1350	Trombone1	Brass	Solo
1351	Trombone1-	Brass	Solo
1352	Trombone1 Offset	Brass	Solo
1353	Trombone1- Offset	Brass	Solo
1354	Trombone2	Brass	Solo
1355	Trombone2 Offset	Brass	Solo
1356	Trombone3 p	Brass	Solo
1357	Trombone3 p Offset	Brass	Solo
1358	Trombone3 mp	Brass	Solo
1359	Trombone3 mp Offset	Brass	Solo
1360	Trombone3 mf	Brass	Solo
1361	Trombone3 mf Offset	Brass	Solo
1362	Trombone3 f	Brass	Solo
1363	Trombone3 f Offset	Brass	Solo
1364	Trombone3 ff	Brass	Solo
1365	Trombone3 ff Offset	Brass	Solo
1366	Trombone3 Sw	Brass	Solo
1367	Trombone3 Sw Offset	Brass	Solo
1368	Soft Trombone	Brass	Solo
1369	Soft Trombone Offset	Brass	Solo
1370	Bass Trombone mp	Brass	Solo
1371	Bass Trombone mp Offset	Brass	Solo
1372	Bass Trombone mf	Brass	Solo
1373	Bass Trombone mf Offset	Brass	Solo
1374	Bass Trombone f	Brass	Solo
1375	Bass Trombone f Offset	Brass	Solo
1376	Bass Trombone ff	Brass	Solo
1377	Bass Trombone ff Offset	Brass	Solo
1378	Bass Trombone fff	Brass	Solo
1379	Bass Trombone fff Offset	Brass	Solo
1380	Bass Trombone Sw	Brass	Solo
1381	Bass Trombone Sw Offset	Brass	Solo
1382	Soft Flugelhorn	Brass	Solo
1383	Soft Flugelhorn-	Brass	Solo
1384	Soft Flugelhorn Offset	Brass	Solo
1385	Soft Flugelhorn- Offset	Brass	Solo
1386	Flugelhorn1	Brass	Solo
1387	Flugelhorn1 Offset	Brass	Solo
1388	Flugelhorn2	Brass	Solo
1389	Flugelhorn2+	Brass	Solo
1390	Flugelhorn2-	Brass	Solo
1391	Flugelhorn2 Offset	Brass	Solo
1392	French Horn1	Brass	Solo
1393	French Horn1+	Brass	Solo
1394	French Horn1-	Brass	Solo
1395	French Horn1 Offset	Brass	Solo
1396	French Horn1+ Offset	Brass	Solo
1397	French Horn1- Offset	Brass	Solo
1398	French Horn2 mp	Brass	Solo
1399	French Horn2 mp Offset	Brass	Solo
1400	French Horn2 mf	Brass	Solo
1401	French Horn2 mf Offset	Brass	Solo
1402	French Horn2 f	Brass	Solo
1403	French Horn2 f Offset	Brass	Solo
1404	French Horn2 ff	Brass	Solo
1405	French Horn2 ff Offset	Brass	Solo
1406	French Horn2 fff	Brass	Solo
1407	French Horn2 fff Offset	Brass	Solo
1408	French Horn2 Sw	Brass	Solo
1409	French Horn2 Sw Offset	Brass	Solo
1410	Euphonium p St	Brass	Solo
1411	Euphonium p St Offset	Brass	Solo
1412	Euphonium mp St	Brass	Solo
1413	Euphonium mp St Offset	Brass	Solo
1414	Euphonium mf St	Brass	Solo
1415	Euphonium mf St Offset	Brass	Solo
1416	Euphonium f St	Brass	Solo
1417	Euphonium f St Offset	Brass	Solo
1418	Euphonium ff St	Brass	Solo
1419	Euphonium ff St Offset	Brass	Solo
1420	Euphonium Sw St	Brass	Solo
1421	Euphonium Sw St Offset	Brass	Solo
1422	Tuba	Brass	Solo
1423	Tuba Lp	Brass	Solo
1424	SectionHorns p St	Brass	Ensem
1425	SectionHorns p St Offset	Brass	Ensem
1426	SectionHorns mp St	Brass	Ensem
1427	SectionHorns mp St Offset	Brass	Ensem
1428	SectionHorns mf St	Brass	Ensem
1429	SectionHorns mf St Offset	Brass	Ensem
1430	SectionHorns f St	Brass	Ensem
1431	SectionHorns f St Offset	Brass	Ensem
1432	SectionHorns ff St	Brass	Ensem
1433	SectionHorns ff St Offset	Brass	Ensem
1434	Brass Sect1 St	Brass	Ensem
1435	Brass Sect1 St+	Brass	Ensem
1436	Brass Sect1 St-	Brass	Ensem
1437	Brass Sect1 L	Brass	Ensem
1438	Brass Sect1 L+	Brass	Ensem
1439	Brass Sect1 L-	Brass	Ensem
1440	Brass Sect1 R	Brass	Ensem
1441	Brass Sect1 R+	Brass	Ensem
1442	Brass Sect1 R-	Brass	Ensem
1443	Brass Sect1 St Offset	Brass	Ensem
1444	Brass Sect1 St+ Offset	Brass	Ensem
1445	Brass Sect1 St- Offset	Brass	Ensem
1446	Brass Sect1 L Offset	Brass	Ensem
1447	Brass Sect1 L+ Offset	Brass	Ensem
1448	Brass Sect1 L- Offset	Brass	Ensem
1449	Brass Sect1 R Offset	Brass	Ensem
1450	Brass Sect1 R+ Offset	Brass	Ensem
1451	Brass Sect1 R- Offset	Brass	Ensem
1452	Brass Sect Fall	Brass	Ensem
1453	Brass Sect2 Soft St	Brass	Ensem
1454	Brass Sect2 Soft St+	Brass	Ensem
1455	Brass Sect2 Soft St-	Brass	Ensem
1456	Brass Sect2 Soft L	Brass	Ensem
1457	Brass Sect2 Soft L+	Brass	Ensem
1458	Brass Sect2 Soft L-	Brass	Ensem
1459	Brass Sect2 Soft R	Brass	Ensem
1460	Brass Sect2 Soft R+	Brass	Ensem
1461	Brass Sect2 Soft R-	Brass	Ensem
1462	Brass Sect2 Soft St Offset	Brass	Ensem
1463	Brass Sect2 Soft L Offset	Brass	Ensem
1464	Brass Sect2 Soft R Offset	Brass	Ensem
1465	Brass Sect2 Med St	Brass	Ensem
1466	Brass Sect2 Med St+	Brass	Ensem
1467	Brass Sect2 Med St-	Brass	Ensem
1468	Brass Sect2 Med L	Brass	Ensem
1469	Brass Sect2 Med L+	Brass	Ensem
1470	Brass Sect2 Med L-	Brass	Ensem
1471	Brass Sect2 Med R	Brass	Ensem
1472	Brass Sect2 Med R+	Brass	Ensem
1473	Brass Sect2 Med R-	Brass	Ensem
1474	Brass Sect2 Med St Offset	Brass	Ensem
1475	Brass Sect2 Med L Offset	Brass	Ensem
1476	Brass Sect2 Med R Offset	Brass	Ensem
1477	Brass Sect2 Hard St	Brass	Ensem
1478	Brass Sect2 Hard St+	Brass	Ensem
1479	Brass Sect2 Hard St-	Brass	Ensem
1480	Brass Sect2 Hard L	Brass	Ensem
1481	Brass Sect2 Hard L+	Brass	Ensem
1482	Brass Sect2 Hard L-	Brass	Ensem
1483	Brass Sect2 Hard R	Brass	Ensem
1484	Brass Sect2 Hard R+	Brass	Ensem
1485	Brass Sect2 Hard R-	Brass	Ensem
1486	Brass Sect2 Hard St Offset	Brass	Ensem
1487	Brass Sect2 Hard L Offset	Brass	Ensem
1488	Brass Sect2 Hard R Offset	Brass	Ensem
1489	BrassSect3 Acc p	Brass	Ensem
1490	BrassSect3 Acc p Offset	Brass	Ensem
1491	BrassSect3 Acc mp	Brass	Ensem
1492	BrassSect3 Acc mp Offset	Brass	Ensem
1493	BrassSect3 Acc mf	Brass	Ensem
1494	BrassSect3 Acc mf Offset	Brass	Ensem
1495	BrassSect3 Sus ff	Brass	Ensem
1496	BrassSect3 Doits	Brass	Ensem
1497	BrassSect3 Shake	Brass	Ensem
1498	BrassSect3 Fall	Brass	Ensem
1499	Trumpets1 pp St	Brass	Ensem
1500	Trumpets1 mp St	Brass	Ensem
1501	Trumpets1 mf St	Brass	Ensem
1502	Trumpets1 f St	Brass	Ensem
1503	Trumpets1 ff St	Brass	Ensem
1504	Trumpets1 5Sw St	Brass	Ensem
1505	Trumpets1 4Sw St	Brass	Ensem
1506	Trumpets2 pp St	Brass	Ensem
1507	Trumpets2 mp St	Brass	Ensem
1508	Trumpets2 mf St	Brass	Ensem
1509	Trumpets2 ff St	Brass	Ensem
1510	Trumpets2 Sw St	Brass	Ensem
1511	Trombones1 pp St	Brass	Ensem
1512	Trombones1 mp St	Brass	Ensem
1513	Trombones1 mf St	Brass	Ensem
1514	Trombones1 f St	Brass	Ensem
1515	Trombones1 ff St	Brass	Ensem
1516	Trombones1 5Sw St	Brass	Ensem
1517	Trombones1 4Sw St	Brass	Ensem
1518	Trombones2 pp St	Brass	Ensem
1519	Trombones2 mp St	Brass	Ensem
1520	Trombones2 mf St	Brass	Ensem
1521	Trombones2 ff St	Brass	Ensem
1522	Trombones2 Sw St	Brass	Ensem
1523	FrHorns1 Soft St	Brass	Ensem
1524	FrHorns1 Soft L	Brass	Ensem
1525	FrHorns1 Soft R	Brass	Ensem
1526	FrHorns1 Soft St+	Brass	Ensem
1527	FrHorns1 Soft L+	Brass	Ensem
1528	FrHorns1 Soft R+	Brass	Ensem
1529	FrHorns1 Soft St-	Brass	Ensem
1530	FrHorns1 Soft L-	Brass	Ensem
1531	FrHorns1 Soft R-	Brass	Ensem
1532	FrHorns1 Soft St Offset	Brass	Ensem
1533	FrHorns1 Soft L Offset	Brass	Ensem
1534	FrHorns1 Soft R Offset	Brass	Ensem
1535	FrHorns1 Soft St+ Offset	Brass	Ensem
1536	FrHorns1 Soft L+ Offset	Brass	Ensem
1537	FrHorns1 Soft R+ Offset	Brass	Ensem
1538	FrHorns1 Soft St- Offset	Brass	Ensem
1539	FrHorns1 Soft L- Offset	Brass	Ensem
1540	FrHorns1 Soft R- Offset	Brass	Ensem
1541	FrHorns1 Med St	Brass	Ensem
1542	FrHorns1 Med L	Brass	Ensem
1543	FrHorns1 Med R	Brass	Ensem
1544	FrHorns1 Med St+	Brass	Ensem
1545	FrHorns1 Med L+	Brass	Ensem
1546	FrHorns1 Med R+	Brass	Ensem
1547	FrHorns1 Med St-	Brass	Ensem
1548	FrHorns1 Med L-	Brass	Ensem
1549	FrHorns1 Med R-	Brass	Ensem
1550	FrHorns1 Med St Offset	Brass	Ensem
1551	FrHorns1 Med L Offset	Brass	Ensem
1552	FrHorns1 Med R Offset	Brass	Ensem
1553	FrHorns1 Med St+ Offset	Brass	Ensem
1554	FrHorns1 Med L+ Offset	Brass	Ensem
1555	FrHorns1 Med R+ Offset	Brass	Ensem
1556	FrHorns1 Med St- Offset	Brass	Ensem
1557	FrHorns1 Med L- Offset	Brass	Ensem
1558	FrHorns1 Med R- Offset	Brass	Ensem
1559	FrHorns2 p St	Brass	Ensem
1560	FrHorns2 mp St	Brass	Ensem
1561	FrHorns2 mf St	Brass	Ensem
1562	FrHorns2 f St	Brass	Ensem
1563	FrHorns2 ff St	Brass	Ensem
1564	FrHorns2 5Sw St	Brass	Ensem
1565	FrHorns2 4Sw St	Brass	Ensem
1566	FrHorns3 p St	Brass	Ensem
1567	FrHorns3 mp St	Brass	Ensem
1568	FrHorns3 mf St	Brass	Ensem
1569	FrHorns3 f St	Brass	Ensem
1570	FrHorns3 Sw St	Brass	Ensem
1571	Soprano Sax1	SaxWW	Sax
1572	Soprano Sax1 Offset	SaxWW	Sax
1573	Soprano Sax2	SaxWW	Sax
1574	Soprano Sax2 Offset	SaxWW	Sax
1575	Soprano Sax3	SaxWW	Sax
1576	Soprano Sax3+	SaxWW	Sax
1577	Soprano Sax3-	SaxWW	Sax
1578	Soprano Sax3 Offset	SaxWW	Sax
1579	Alto Sax1	SaxWW	Sax
1580	Alto Sax1 Offset	SaxWW	Sax

No.	Name	Main Category	Sub Category
1581	Alto Sax2	SaxWW	Sax
1582	Alto Sax2 Offset	SaxWW	Sax
1583	Alto Sax Vb	SaxWW	Sax
1584	Alto Sax Vb Offset	SaxWW	Sax
1585	Alto Sax3	SaxWW	Sax
1586	Alto Sax3+	SaxWW	Sax
1587	Alto Sax3-	SaxWW	Sax
1588	Alto Sax3 Offset	SaxWW	Sax
1589	Tenor Sax1	SaxWW	Sax
1590	Tenor Sax1 Offset	SaxWW	Sax
1591	Tenor Sax2 Soft	SaxWW	Sax
1592	Tenor Sax2 Soft+	SaxWW	Sax
1593	Tenor Sax2 Soft-	SaxWW	Sax
1594	Tenor Sax2 Soft Offset	SaxWW	Sax
1595	Tenor Sax2 Med	SaxWW	Sax
1596	Tenor Sax2 Med+	SaxWW	Sax
1597	Tenor Sax2 Med-	SaxWW	Sax
1598	Tenor Sax2 Med Offset	SaxWW	Sax
1599	Tenor Sax2 Hard	SaxWW	Sax
1600	Tenor Sax2 Hard+	SaxWW	Sax
1601	Tenor Sax2 Hard-	SaxWW	Sax
1602	Tenor Sax2 Hard Offset	SaxWW	Sax
1603	Tenor Sax2 Growl	SaxWW	Sax
1604	Tenor Sax2 Growl+	SaxWW	Sax
1605	Tenor Sax2 Growl-	SaxWW	Sax
1606	Tenor Sax2 Growl Offset	SaxWW	Sax
1607	Tenor Sax2 Falls	SaxWW	Sax
1608	Tenor Sax2 Falls+	SaxWW	Sax
1609	Tenor Sax2 Falls-	SaxWW	Sax
1610	Baritone Sax	SaxWW	Sax
1611	Baritone Sax Offset	SaxWW	Sax
1612	Sax Breath	SaxWW	Sax
1613	Clarinet1 Soft St	SaxWW	Orche
1614	Clarinet1 Soft St+	SaxWW	Orche
1615	Clarinet1 Soft St-	SaxWW	Orche
1616	Clarinet1 Soft L	SaxWW	Orche
1617	Clarinet1 Soft L+	SaxWW	Orche
1618	Clarinet1 Soft L-	SaxWW	Orche
1619	Clarinet1 Soft R	SaxWW	Orche
1620	Clarinet1 Soft R+	SaxWW	Orche
1621	Clarinet1 Soft R-	SaxWW	Orche
1622	Clarinet1 Soft St Offset	SaxWW	Orche
1623	Clarinet1 Soft L Offset	SaxWW	Orche
1624	Clarinet1 Soft R Offset	SaxWW	Orche
1625	Clarinet1 Med St	SaxWW	Orche
1626	Clarinet1 Med St+	SaxWW	Orche
1627	Clarinet1 Med St-	SaxWW	Orche
1628	Clarinet1 Med L	SaxWW	Orche
1629	Clarinet1 Med L+	SaxWW	Orche
1630	Clarinet1 Med L-	SaxWW	Orche
1631	Clarinet1 Med R	SaxWW	Orche
1632	Clarinet1 Med R+	SaxWW	Orche
1633	Clarinet1 Med R-	SaxWW	Orche
1634	Clarinet1 Med St Offset	SaxWW	Orche
1635	Clarinet1 Med L Offset	SaxWW	Orche
1636	Clarinet1 Med R Offset	SaxWW	Orche
1637	Clarinet1 Hard St	SaxWW	Orche
1638	Clarinet1 Hard St+	SaxWW	Orche
1639	Clarinet1 Hard St-	SaxWW	Orche
1640	Clarinet1 Hard L	SaxWW	Orche
1641	Clarinet1 Hard L+	SaxWW	Orche
1642	Clarinet1 Hard L-	SaxWW	Orche
1643	Clarinet1 Hard R	SaxWW	Orche
1644	Clarinet1 Hard R+	SaxWW	Orche
1645	Clarinet1 Hard R-	SaxWW	Orche
1646	Clarinet1 Hard St Offset	SaxWW	Orche
1647	Clarinet1 Hard L Offset	SaxWW	Orche
1648	Clarinet1 Hard R Offset	SaxWW	Orche
1649	Clarinet2 pp St	SaxWW	Orche
1650	Clarinet2 pp St Offset	SaxWW	Orche
1651	Clarinet2 mp St	SaxWW	Orche
1652	Clarinet2 mp St Offset	SaxWW	Orche
1653	Clarinet2 mf St	SaxWW	Orche
1654	Clarinet2 mf St Offset	SaxWW	Orche
1655	Clarinet2 ff St	SaxWW	Orche
1656	Clarinet2 ff St Offset	SaxWW	Orche
1657	Clarinet2 Sw St	SaxWW	Orche
1658	Clarinet2 Sw St Offset	SaxWW	Orche
1659	Clarinet3 pp St	SaxWW	Orche
1660	Clarinet3 pp St Offset	SaxWW	Orche
1661	Clarinet3 mp St	SaxWW	Orche
1662	Clarinet3 mp St Offset	SaxWW	Orche
1663	Clarinet3 mf St	SaxWW	Orche
1664	Clarinet3 mf St Offset	SaxWW	Orche
1665	Clarinet3 ff St	SaxWW	Orche
1666	Clarinet3 ff St Offset	SaxWW	Orche
1667	Clarinet3 Sw St	SaxWW	Orche
1668	Clarinet3 Sw St Offset	SaxWW	Orche
1669	Clarinet3 Stac pp St	SaxWW	Orche
1670	Clarinet3 Stac mp St	SaxWW	Orche
1671	Clarinet3 Stac mf St	SaxWW	Orche
1672	Clarinet3 Stac ff St	SaxWW	Orche
1673	Clarinet3 Stac Sw St	SaxWW	Orche
1674	Oboe1	SaxWW	Orche
1675	Oboe1 Offset	SaxWW	Orche
1676	Oboe2 Med St	SaxWW	Orche
1677	Oboe2 Med St+	SaxWW	Orche
1678	Oboe2 Med St-	SaxWW	Orche
1679	Oboe2 Med L	SaxWW	Orche
1680	Oboe2 Med L+	SaxWW	Orche
1681	Oboe2 Med L-	SaxWW	Orche
1682	Oboe2 Med R	SaxWW	Orche
1683	Oboe2 Med R+	SaxWW	Orche
1684	Oboe2 Med R-	SaxWW	Orche
1685	Oboe2 Med St Offset	SaxWW	Orche
1686	Oboe2 Med L Offset	SaxWW	Orche
1687	Oboe2 Med R Offset	SaxWW	Orche
1688	Oboe2 Hard St	SaxWW	Orche
1689	Oboe2 Hard St+	SaxWW	Orche
1690	Oboe2 Hard St-	SaxWW	Orche
1691	Oboe2 Hard L	SaxWW	Orche
1692	Oboe2 Hard L+	SaxWW	Orche
1693	Oboe2 Hard L-	SaxWW	Orche
1694	Oboe2 Hard R	SaxWW	Orche
1695	Oboe2 Hard R+	SaxWW	Orche
1696	Oboe2 Hard R-	SaxWW	Orche
1697	Oboe2 Hard St Offset	SaxWW	Orche
1698	Oboe2 Hard L Offset	SaxWW	Orche
1699	Oboe2 Hard R Offset	SaxWW	Orche
1700	Oboe3 pp St	SaxWW	Orche
1701	Oboe3 pp St Offset	SaxWW	Orche
1702	Oboe3 mp St	SaxWW	Orche
1703	Oboe3 mp St Offset	SaxWW	Orche
1704	Oboe3 mf St	SaxWW	Orche
1705	Oboe3 mf St Offset	SaxWW	Orche
1706	Oboe3 ff St	SaxWW	Orche
1707	Oboe3 ff St Offset	SaxWW	Orche
1708	Oboe3 Sw St	SaxWW	Orche
1709	Oboe3 Sw St Offset	SaxWW	Orche
1710	Oboe4 pp St	SaxWW	Orche
1711	Oboe4 pp St Offset	SaxWW	Orche
1712	Oboe4 mp St	SaxWW	Orche
1713	Oboe4 mp St Offset	SaxWW	Orche
1714	Oboe4 mf St	SaxWW	Orche
1715	Oboe4 mf St Offset	SaxWW	Orche
1716	Oboe4 ff St	SaxWW	Orche
1717	Oboe4 ff St Offset	SaxWW	Orche
1718	Oboe4 Sw St	SaxWW	Orche
1719	Oboe4 Sw St Offset	SaxWW	Orche
1720	Oboe4 NV pp St	SaxWW	Orche
1721	Oboe4 NV pp St Offset	SaxWW	Orche
1722	Oboe4 NV mp St	SaxWW	Orche
1723	Oboe4 NV mp St Offset	SaxWW	Orche
1724	Oboe4 NV mf St	SaxWW	Orche
1725	Oboe4 NV mf St Offset	SaxWW	Orche
1726	Oboe4 NV ff St	SaxWW	Orche
1727	Oboe4 NV ff St Offset	SaxWW	Orche
1728	Oboe4 NV Sw St	SaxWW	Orche
1729	Oboe4 NV Sw St Offset	SaxWW	Orche
1730	Oboe4 Stac pp St	SaxWW	Orche
1731	Oboe4 Stac mp St	SaxWW	Orche
1732	Oboe4 Stac mf St	SaxWW	Orche
1733	Oboe4 Stac ff St	SaxWW	Orche
1734	Oboe4 Stac Sw St	SaxWW	Orche
1735	English Horn	SaxWW	Orche
1736	English Horn Offset	SaxWW	Orche
1737	Bassoon1 Med St	SaxWW	Orche
1738	Bassoon1 Med St+	SaxWW	Orche
1739	Bassoon1 Med St-	SaxWW	Orche
1740	Bassoon1 Med L	SaxWW	Orche
1741	Bassoon1 Med L+	SaxWW	Orche
1742	Bassoon1 Med L-	SaxWW	Orche
1743	Bassoon1 Med R	SaxWW	Orche
1744	Bassoon1 Med R+	SaxWW	Orche
1745	Bassoon1 Med R-	SaxWW	Orche
1746	Bassoon1 Med St Offset	SaxWW	Orche
1747	Bassoon1 Med L Offset	SaxWW	Orche
1748	Bassoon1 Med R Offset	SaxWW	Orche
1749	Bassoon1 Hard St	SaxWW	Orche
1750	Bassoon1 Hard St+	SaxWW	Orche
1751	Bassoon1 Hard St-	SaxWW	Orche
1752	Bassoon1 Hard L	SaxWW	Orche
1753	Bassoon1 Hard L+	SaxWW	Orche
1754	Bassoon1 Hard L-	SaxWW	Orche
1755	Bassoon1 Hard R	SaxWW	Orche
1756	Bassoon1 Hard R+	SaxWW	Orche
1757	Bassoon1 Hard R-	SaxWW	Orche
1758	Bassoon1 Hard St Offset	SaxWW	Orche
1759	Bassoon1 Hard L Offset	SaxWW	Orche
1760	Bassoon1 Hard R Offset	SaxWW	Orche
1761	Bassoon2 pp St	SaxWW	Orche
1762	Bassoon2 pp St Offset	SaxWW	Orche
1763	Bassoon2 mp St	SaxWW	Orche
1764	Bassoon2 mp St Offset	SaxWW	Orche
1765	Bassoon2 mf St	SaxWW	Orche
1766	Bassoon2 mf St Offset	SaxWW	Orche
1767	Bassoon2 ff St	SaxWW	Orche
1768	Bassoon2 ff St Offset	SaxWW	Orche
1769	Bassoon2 Sw St	SaxWW	Orche
1770	Bassoon2 Sw St Offset	SaxWW	Orche
1771	Bassoon3 pp St	SaxWW	Orche
1772	Bassoon3 pp St Offset	SaxWW	Orche
1773	Bassoon3 mp St	SaxWW	Orche
1774	Bassoon3 mp St Offset	SaxWW	Orche
1775	Bassoon3 mf St	SaxWW	Orche
1776	Bassoon3 mf St Offset	SaxWW	Orche
1777	Bassoon3 ff St	SaxWW	Orche
1778	Bassoon3 ff St Offset	SaxWW	Orche
1779	Bassoon3 Sw St	SaxWW	Orche
1780	Bassoon3 Sw St Offset	SaxWW	Orche
1781	Bassoon3 NV pp St	SaxWW	Orche
1782	Bassoon3 NV pp St Offset	SaxWW	Orche
1783	Bassoon3 NV mp St	SaxWW	Orche
1784	Bassoon3 NV mp St Offset	SaxWW	Orche
1785	Bassoon3 NV mf St	SaxWW	Orche
1786	Bassoon3 NV mf St Offset	SaxWW	Orche
1787	Bassoon3 NV ff St	SaxWW	Orche
1788	Bassoon3 NV ff St Offset	SaxWW	Orche
1789	Bassoon3 NV Sw St	SaxWW	Orche
1790	Bassoon3 NV Sw St Offset	SaxWW	Orche
1791	Bassoon3 Stac pp St	SaxWW	Orche
1792	Bassoon3 Stac mp St	SaxWW	Orche
1793	Bassoon3 Stac mf St	SaxWW	Orche
1794	Bassoon3 Stac ff St	SaxWW	Orche
1795	Bassoon3 Stac Sw St	SaxWW	Orche
1796	CBassoon1 pp St	SaxWW	Orche
1797	CBassoon1 pp Offset	SaxWW	Orche
1798	CBassoon1 mp St	SaxWW	Orche
1799	CBassoon1 mp Offset	SaxWW	Orche
1800	CBassoon1 mf St	SaxWW	Orche
1801	CBassoon1 mf Offset	SaxWW	Orche
1802	CBassoon1 ff St	SaxWW	Orche
1803	CBassoon1 ff Offset	SaxWW	Orche
1804	CBassoon1 Sw St	SaxWW	Orche
1805	CBassoon1 Sw Offset	SaxWW	Orche
1806	CBassoon2 pp St	SaxWW	Orche
1807	CBassoon2 pp Offset	SaxWW	Orche
1808	CBassoon2 mp St	SaxWW	Orche
1809	CBassoon2 mp Offset	SaxWW	Orche
1810	CBassoon2 mf St	SaxWW	Orche
1811	CBassoon2 mf Offset	SaxWW	Orche
1812	CBassoon2 ff St	SaxWW	Orche
1813	CBassoon2 ff Offset	SaxWW	Orche
1814	CBassoon2 Sw St	SaxWW	Orche
1815	CBassoon2 Sw Offset	SaxWW	Orche
1816	CBassoon2 Vib pp St	SaxWW	Orche
1817	CBassoon2 Vib pp Offset	SaxWW	Orche
1818	CBassoon2 Vib mp St	SaxWW	Orche
1819	CBassoon2 Vib mp Offset	SaxWW	Orche
1820	CBassoon2 Vib mf St	SaxWW	Orche
1821	CBassoon2 Vib mf Offset	SaxWW	Orche
1822	CBassoon2 Vib ff St	SaxWW	Orche
1823	CBassoon2 Vib ff Offset	SaxWW	Orche
1824	CBassoon2 Vib Sw St	SaxWW	Orche
1825	CBassoon2 Vib Sw Offset	SaxWW	Orche
1826	CBassoon2 Stac pp St	SaxWW	Orche
1827	CBassoon2 Stac mp St	SaxWW	Orche
1828	CBassoon2 Stac mf St	SaxWW	Orche
1829	CBassoon2 Stac ff St	SaxWW	Orche
1830	CBassoon2 Stac Sw St	SaxWW	Orche
1831	Bagpipe1	SaxWW	Other
1832	Bagpipe2	SaxWW	Other
1833	Harmonica	SaxWW	Other
1834	Chromatic Harmonica	SaxWW	Other
1835	Blues Harmonica	SaxWW	Other
1836	Flute Non-Vib	SaxWW	Orche
1837	Flute Non-Vib Offset	SaxWW	Orche
1838	Flute1	SaxWW	Orche
1839	Flute1 Offset	SaxWW	Orche
1840	Flute1 Attack	SaxWW	Orche
1841	Flute2 Soft St	SaxWW	Orche
1842	Flute2 Soft St+	SaxWW	Orche
1843	Flute2 Soft St-	SaxWW	Orche
1844	Flute2 Soft L	SaxWW	Orche
1845	Flute2 Soft L+	SaxWW	Orche
1846	Flute2 Soft L-	SaxWW	Orche
1847	Flute2 Soft R	SaxWW	Orche
1848	Flute2 Soft R+	SaxWW	Orche
1849	Flute2 Soft R-	SaxWW	Orche
1850	Flute2 Soft St Offset	SaxWW	Orche
1851	Flute2 Soft L Offset	SaxWW	Orche
1852	Flute2 Soft R Offset	SaxWW	Orche
1853	Flute2 Med St	SaxWW	Orche
1854	Flute2 Med St+	SaxWW	Orche
1855	Flute2 Med St-	SaxWW	Orche
1856	Flute2 Med L	SaxWW	Orche
1857	Flute2 Med L+	SaxWW	Orche
1858	Flute2 Med L-	SaxWW	Orche
1859	Flute2 Med R	SaxWW	Orche
1860	Flute2 Med R+	SaxWW	Orche
1861	Flute2 Med R-	SaxWW	Orche
1862	Flute2 Med St Offset	SaxWW	Orche
1863	Flute2 Med L Offset	SaxWW	Orche
1864	Flute2 Med R Offset	SaxWW	Orche
1865	Flute2 Hard St	SaxWW	Orche
1866	Flute2 Hard St+	SaxWW	Orche
1867	Flute2 Hard St-	SaxWW	Orche
1868	Flute2 Hard L	SaxWW	Orche
1869	Flute2 Hard L+	SaxWW	Orche
1870	Flute2 Hard L-	SaxWW	Orche
1871	Flute2 Hard R	SaxWW	Orche
1872	Flute2 Hard R+	SaxWW	Orche
1873	Flute2 Hard R-	SaxWW	Orche
1874	Flute2 Hard St Offset	SaxWW	Orche
1875	Flute2 Hard L Offset	SaxWW	Orche
1876	Flute2 Hard R Offset	SaxWW	Orche
1877	Flute3 pp St	SaxWW	Orche
1878	Flute3 pp St Offset	SaxWW	Orche
1879	Flute3 mp St	SaxWW	Orche
1880	Flute3 mp St Offset	SaxWW	Orche
1881	Flute3 mf St	SaxWW	Orche
1882	Flute3 mf St Offset	SaxWW	Orche
1883	Flute3 ff St	SaxWW	Orche
1884	Flute3 ff St Offset	SaxWW	Orche
1885	Flute3 Sw St	SaxWW	Orche
1886	Flute3 Sw St Offset	SaxWW	Orche
1887	Flute4 pp St	SaxWW	Orche
1888	Flute4 pp St Offset	SaxWW	Orche
1889	Flute4 mp St	SaxWW	Orche
1890	Flute4 mp St Offset	SaxWW	Orche
1891	Flute4 mf St	SaxWW	Orche
1892	Flute4 mf St Offset	SaxWW	Orche
1893	Flute4 ff St	SaxWW	Orche
1894	Flute4 ff St Offset	SaxWW	Orche
1895	Flute4 Sw St	SaxWW	Orche
1896	Flute4 Sw St Offset	SaxWW	Orche

No.	Name	Main Category	Sub Category
1897	Flute4 NV pp St	SaxWW	Orche
1898	Flute4 NV pp St Offset	SaxWW	Orche
1899	Flute4 NV mp St	SaxWW	Orche
1900	Flute4 NV mp St Offset	SaxWW	Orche
1901	Flute4 NV mf St	SaxWW	Orche
1902	Flute4 NV mf St Offset	SaxWW	Orche
1903	Flute4 NV ff St	SaxWW	Orche
1904	Flute4 NV ff St Offset	SaxWW	Orche
1905	Flute4 NV Sw St	SaxWW	Orche
1906	Flute4 NV Sw St Offset	SaxWW	Orche
1907	Flute4 Stac pp St	SaxWW	Orche
1908	Flute4 Stac mp St	SaxWW	Orche
1909	Flute4 Stac mf St	SaxWW	Orche
1910	Flute4 Stac ff St	SaxWW	Orche
1911	Flute4 Stac Sw St	SaxWW	Orche
1912	Flute4 Flutter St	SaxWW	Orche
1913	Piccolo1	SaxWW	Orche
1914	Piccolo1 Offset	SaxWW	Orche
1915	Piccolo2 St	SaxWW	Orche
1916	Piccolo2 L	SaxWW	Orche
1917	Piccolo2 R	SaxWW	Orche
1918	Piccolo2 St+	SaxWW	Orche
1919	Piccolo2 L+	SaxWW	Orche
1920	Piccolo2 R+	SaxWW	Orche
1921	Piccolo2 St-	SaxWW	Orche
1922	Piccolo2 L-	SaxWW	Orche
1923	Piccolo2 R-	SaxWW	Orche
1924	Piccolo2 St Offset	SaxWW	Orche
1925	Piccolo2 L Offset	SaxWW	Orche
1926	Piccolo2 R Offset	SaxWW	Orche
1927	Piccolo3 pp St	SaxWW	Orche
1928	Piccolo3 pp St Offset	SaxWW	Orche
1929	Piccolo3 mp St	SaxWW	Orche
1930	Piccolo3 mp St Offset	SaxWW	Orche
1931	Piccolo3 mf St	SaxWW	Orche
1932	Piccolo3 mf St Offset	SaxWW	Orche
1933	Piccolo3 ff St	SaxWW	Orche
1934	Piccolo3 ff St Offset	SaxWW	Orche
1935	Piccolo3 Sw St	SaxWW	Orche
1936	Piccolo3 Sw St Offset	SaxWW	Orche
1937	Piccolo4 pp St	SaxWW	Orche
1938	Piccolo4 pp St Offset	SaxWW	Orche
1939	Piccolo4 mp St	SaxWW	Orche
1940	Piccolo4 mp St Offset	SaxWW	Orche
1941	Piccolo4 mf St	SaxWW	Orche
1942	Piccolo4 mf St Offset	SaxWW	Orche
1943	Piccolo4 ff St	SaxWW	Orche
1944	Piccolo4 ff St Offset	SaxWW	Orche
1945	Piccolo4 Sw St	SaxWW	Orche
1946	Piccolo4 Sw St Offset	SaxWW	Orche
1947	Piccolo4 NV pp St	SaxWW	Orche
1948	Piccolo4 NV pp St Offset	SaxWW	Orche
1949	Piccolo4 NV mp St	SaxWW	Orche
1950	Piccolo4 NV mp St Offset	SaxWW	Orche
1951	Piccolo4 NV mf St	SaxWW	Orche
1952	Piccolo4 NV mf St Offset	SaxWW	Orche
1953	Piccolo4 NV ff St	SaxWW	Orche
1954	Piccolo4 NV ff St Offset	SaxWW	Orche
1955	Piccolo4 NV Sw St	SaxWW	Orche
1956	Piccolo4 NV Sw St Offset	SaxWW	Orche
1957	Piccolo4 Stac pp St	SaxWW	Orche
1958	Piccolo4 Stac mp St	SaxWW	Orche
1959	Piccolo4 Stac mf St	SaxWW	Orche
1960	Piccolo4 Stac ff St	SaxWW	Orche
1961	Piccolo4 Stac Sw St	SaxWW	Orche
1962	Breath One Shot	SaxWW	Orche
1963	Pan Flute	Ethnc	Blown
1964	Pan Flute-	Ethnc	Blown
1965	Irish Pipe	Ethnc	Blown
1966	Irish Pipe Offset	Ethnc	Blown
1967	LowWhistle Soft Vb	Ethnc	Blown
1968	LowWhistle Soft Vb Offset	Ethnc	Blown
1969	LowWhistle Hard Vb	Ethnc	Blown
1970	LowWhistle Hard Vb Offset	Ethnc	Blown
1971	LowWhistle Soft	Ethnc	Blown
1972	LowWhistle Soft Offset	Ethnc	Blown
1973	LowWhistle Hard	Ethnc	Blown
1974	LowWhistle Hard Offset	Ethnc	Blown
1975	LowWhistle Mordent	Ethnc	Blown
1976	LowWhistle Grace	Ethnc	Blown
1977	LowWhistle KeyNoise	Ethnc	Blown
1978	LowWhitsle KeyOff	Ethnc	Blown
1979	HighWhistle Soft	Ethnc	Blown
1980	HighWhistle Soft Offset	Ethnc	Blown
1981	HighWhistle Hard	Ethnc	Blown
1982	HighWhistle Hard Offset	Ethnc	Blown
1983	HighWhistle OctDispl	Ethnc	Blown
1984	HighWhistle KeyNoise	Ethnc	Blown
1985	Shakuhachi	Ethnc	Blown
1986	Shakuhachi Offset	Ethnc	Blown
1987	Recorder	SaxWW	Other
1988	Recorder Offset	SaxWW	Other
1989	Bottle	SaxWW	Other
1990	Ocarina	SaxWW	Other
1991	Ocarina Offset	SaxWW	Other
1992	Human Whistle	SaxWW	Other
1993	Didgeridoo 1	Ethnc	Blown
1994	Didgeridoo 2	Ethnc	Blown
1995	Didgeridoo 3	Ethnc	Blown
1996	Didgeridoo Combi1	Ethnc	Blown
1997	Didgeridoo Combi2	Ethnc	Blown
1998	Sho	Ethnc	Blown
1999	Shanai	Ethnc	Blown
2000	Shanai Offset	Ethnc	Blown
2001	Ney	Ethnc	Blown
2002	Ney Offset	Ethnc	Blown
2003	Kaval	Ethnc	Blown
2004	Kaval Offset	Ethnc	Blown
2005	Hah Choir St	Pads	Voice
2006	Hah Choir L	Pads	Voice
2007	Hah Choir R	Pads	Voice
2008	Ooh Choir St	Pads	Voice
2009	Ooh Choir L	Pads	Voice
2010	Ooh Choir R	Pads	Voice
2011	Ooh St	Pads	Voice
2012	Ooh L	Pads	Voice
2013	Ooh R	Pads	Voice
2014	Ooh St Offset	Pads	Voice
2015	Ooh L Offset	Pads	Voice
2016	Ooh R Offset	Pads	Voice
2017	Cho Breath L	Pads	Voice
2018	Cho Breath R	Pads	Voice
2019	Syn Vox	Pads	Voice
2020	Vox Noise	Pads	Voice
2021	Itopia	Pads	Voice
2022	Granu Vox	Pads	Voice
2023	Day	Pads	Voice
2024	So Long	Pads	Voice
2025	Vocal Osc	Pads	Voice
2026	Boys Choir Oh p	Pads	Voice
2027	Boys Choir Oh mf	Pads	Voice
2028	Boys Choir Ah p	Pads	Voice
2029	Boys Choir Ah mf	Pads	Voice
2030	Gospel Choir Hmm f	Pads	Voice
2031	Gospel Choir Wow f	Pads	Voice
2032	Gospel Choir Hey f	Pads	Voice
2033	M Bah Soft	Pads	Voice
2034	F Bah Soft	Pads	Voice
2035	Mix Bah Soft	Pads	Voice
2036	M Bah Loud	Pads	Voice
2037	F Bah Loud	Pads	Voice
2038	Mix Bah Loud	Pads	Voice
2039	M Hah Soft	Pads	Voice
2040	F Hah Soft	Pads	Voice
2041	Mix Hah Soft	Pads	Voice
2042	M Hah Loud	Pads	Voice
2043	F Hah Loud	Pads	Voice
2044	Mix Hah Loud	Pads	Voice
2045	M Yah Soft	Pads	Voice
2046	F Yah Soft	Pads	Voice
2047	Mix Yah Soft	Pads	Voice
2048	M Huh Soft	Pads	Voice
2049	F Huh Soft	Pads	Voice
2050	Mix Huh Soft	Pads	Voice
2051	M Huh Loud	Pads	Voice
2052	F Huh Loud	Pads	Voice
2053	Mix Huh Loud	Pads	Voice
2054	M Huh Vib Soft	Pads	Voice
2055	F Huh Vib Soft	Pads	Voice
2056	Mix Huh Vib Soft	Pads	Voice
2057	M Huh Vib Loud	Pads	Voice
2058	F Huh Vib Loud	Pads	Voice
2059	Mix Huh Vib Loud	Pads	Voice
2060	M Dooh Soft	Pads	Voice
2061	F Dooh Soft	Pads	Voice
2062	Mix Dooh Soft	Pads	Voice
2063	M Dooh Loud	Pads	Voice
2064	F Dooh Loud	Pads	Voice
2065	Mix Dooh Loud	Pads	Voice
2066	M Shoo Soft	Pads	Voice
2067	F Shoo Soft	Pads	Voice
2068	Mix Shoo Soft	Pads	Voice
2069	M Whee	Pads	Voice
2070	F Whee	Pads	Voice
2071	Mix Whee	Pads	Voice
2072	M Eeh Vib	Pads	Voice
2073	F Eeh Vib	Pads	Voice
2074	Mix Eeh Vib	Pads	Voice
2075	M Bee	Pads	Voice
2076	F Bee	Pads	Voice
2077	Mix Bee	Pads	Voice
2078	M Dah Soft	Pads	Voice
2079	F Dah Soft	Pads	Voice
2080	Mix Dah Soft	Pads	Voice
2081	M Dah Loud	Pads	Voice
2082	F Dah Loud	Pads	Voice
2083	Mix Dah Loud	Pads	Voice
2084	Vocal Breathing	Pads	Voice
2085	F Bah Soft -12	Pads	Voice
2086	F Bah Loud -12	Pads	Voice
2087	F Hah Soft -12	Pads	Voice
2088	F Hah Loud -12	Pads	Voice
2089	F Yah Soft -12	Pads	Voice
2090	F Huh Soft -12	Pads	Voice
2091	F Huh Loud -12	Pads	Voice
2092	F Huh Vib Soft -12	Pads	Voice
2093	F Huh Vib Loud -12	Pads	Voice
2094	F Dooh Soft -12	Pads	Voice
2095	F Dooh Loud -12	Pads	Voice
2096	F Shoo Soft -12	Pads	Voice
2097	F Whee -12	Pads	Voice
2098	F Eeh Vib -12	Pads	Voice
2099	F Bee -12	Pads	Voice
2100	F Dah Soft -12	Pads	Voice
2101	F Dah Loud -12	Pads	Voice
2102	Bah Soft Split	Pads	Voice
2103	Bah Vib Loud Split	Pads	Voice
2104	Hah Soft Split	Pads	Voice
2105	Hah Loud Split	Pads	Voice
2106	Yah Soft Split	Pads	Voice
2107	Huh Soft Split	Pads	Voice
2108	Huh Loud Split	Pads	Voice
2109	Huh Vib Soft Split	Pads	Voice
2110	Huh Vib Loud Split	Pads	Voice
2111	Dooh Soft Split	Pads	Voice
2112	Dooh Loud Split	Pads	Voice
2113	Shoo Soft Split	Pads	Voice
2114	Whee Split	Pads	Voice
2115	Eeh Vib Split	Pads	Voice
2116	Bee Split	Pads	Voice
2117	Dah Soft Split	Pads	Voice
2118	Dah Loud Split	Pads	Voice
2119	ScatCycle1-1	Pads	Voice
2120	ScatCycle1-2	Pads	Voice
2121	ScatCycle2-1	Pads	Voice
2122	ScatCycle2-2	Pads	Voice
2123	ScatCycle3-1	Pads	Voice
2124	ScatCycle3-2	Pads	Voice
2125	ScatCycle4-1	Pads	Voice
2126	ScatCycle4-2	Pads	Voice
2127	LatinCycle1	Pads	Voice
2128	LatinCycle2	Pads	Voice
2129	LatinCycle3	Pads	Voice
2130	ScatCycle Split1-1	Pads	Voice
2131	ScatCycle Split1-2	Pads	Voice
2132	ScatCycle Split2-1	Pads	Voice
2133	ScatCycle Split2-2	Pads	Voice
2134	ScatCycle Split3-1	Pads	Voice
2135	ScatCycle Split3-2	Pads	Voice
2136	ScatCycle Split4-1	Pads	Voice
2137	ScatCycle Split4-2	Pads	Voice
2138	LatinCycle Split1	Pads	Voice
2139	LatinCycle Split2	Pads	Voice
2140	LatinCycle Split3	Pads	Voice
2141	PWM Strings St	Pads	Str
2142	PWM Strings Mn	Pads	Str
2143	Long Saw	Pads	Other
2144	Fat Saw St	Pads	Other
2145	Fat Saw Mn	Pads	Other
2146	Fat Saw Mn-	Pads	Other
2147	OB Mod Saw	Pads	Other
2148	Uni Six St	Pads	Other
2149	Trance ABS St	Pads	Other
2150	Hyper Trance St	Pads	Other
2151	Phat Stack St	Pads	Other
2152	Saw Eight Detune St	Pads	Other
2153	Chorus Pad St	Pads	Other
2154	Dance Fat St	Pads	Other
2155	Monster Pad St	Pads	Other
2156	VP Strings St	Pads	Str
2157	VP Strings L	Pads	Str
2158	VP Strings R	Pads	Str
2159	OB Strings	Pads	Str
2160	Syzzle Strings	Pads	Str
2161	Padd	Pads	Other
2162	Dark Light	Pads	Other
2163	OB Brass	Pads	Brass
2164	Trance St	Pads	Other
2165	Trance Mn	Pads	Other
2166	PWM Fast	Pads	Other
2167	PWM Slow	Pads	Other
2168	CS80 Brass	Pads	Brass
2169	Airy Sine	Pads	Other
2170	String Machine	Pads	Str
2171	String Machine+	Pads	Str
2172	String Machine-	Pads	Str
2173	Med Detuned Pad St	Pads	Other
2174	Med Detuned Pad L	Pads	Other
2175	Med Detuned Pad R	Pads	Other
2176	StrongDetuned Pad St	Pads	Other
2177	StrongDetuned Pad L	Pads	Other
2178	StrongDetuned Pad R	Pads	Other
2179	Med Detuned 3osc	Pads	Other
2180	XP Brass	Pads	Brass
2181	XP Brass Lp	Pads	Brass
2182	String Pad St	Pads	Str
2183	String Pad L	Pads	Str
2184	String Pad R	Pads	Str
2185	OB Brassy Pad St	Pads	Brass
2186	OB Brassy Pad L	Pads	Brass
2187	OB Brassy Pad R	Pads	Brass
2188	Fat PWM St	Pads	Other
2189	Fat PWM L	Pads	Other
2190	Fat PWM R	Pads	Other
2191	Soft Ensemble St	Pads	Str
2192	Soft Ensemble L	Pads	Str
2193	Soft Ensemble R	Pads	Str
2194	Vibraphone1	CPerc	Malet
2195	Vibraphone2 Med	CPerc	Malet
2196	Vibraphone2 Med+	CPerc	Malet
2197	Vibraphone2 Med-	CPerc	Malet
2198	Vibraphone2 Hard	CPerc	Malet
2199	Vibraphone2 Hard+	CPerc	Malet
2200	Vibraphone2 Hard-	CPerc	Malet
2201	Vibraphone3 p	CPerc	Malet
2202	Vibraphone3 mf	CPerc	Malet
2203	Vibraphone3 ff	CPerc	Malet
2204	Vibraphone3 Sw	CPerc	Malet
2205	Motor Vibes mf	CPerc	Malet
2206	Motor Vibes f	CPerc	Malet
2207	Marimba 1	CPerc	Malet
2208	Marimba 2	CPerc	Malet
2209	Glockenspiel	CPerc	Malet
2210	Xylophone1	CPerc	Malet
2211	Xylophone2	CPerc	Malet
2212	Timpani1 Sw St	CPerc	Malet

No.	Name	Main Category	Sub Category
2213	Timpani1 Soft St	CPerc	Malet
2214	Timpani1 Hard St	CPerc	Malet
2215	Timpani1 Sw L	CPerc	Malet
2216	Timpani1 Soft L	CPerc	Malet
2217	Timpani1 Hard L	CPerc	Malet
2218	Timpani1 Sw R	CPerc	Malet
2219	Timpani1 Soft R	CPerc	Malet
2220	Timpani1 Hard R	CPerc	Malet
2221	Timpani2 Soft St	CPerc	Malet
2222	Timpani2 Soft L	CPerc	Malet
2223	Timpani2 Soft R	CPerc	Malet
2224	Timpani2 Soft St+	CPerc	Malet
2225	Timpani2 Soft L+	CPerc	Malet
2226	Timpani2 Soft R+	CPerc	Malet
2227	Timpani2 Soft St-	CPerc	Malet
2228	Timpani2 Soft L-	CPerc	Malet
2229	Timpani2 Soft R-	CPerc	Malet
2230	Timpani2 Med St	CPerc	Malet
2231	Timpani2 Med L	CPerc	Malet
2232	Timpani2 Med R	CPerc	Malet
2233	Timpani2 Med St+	CPerc	Malet
2234	Timpani2 Med L+	CPerc	Malet
2235	Timpani2 Med R+	CPerc	Malet
2236	Timpani2 Med St-	CPerc	Malet
2237	Timpani2 Med L-	CPerc	Malet
2238	Timpani2 Med R-	CPerc	Malet
2239	Timpani2 Hard St	CPerc	Malet
2240	Timpani2 Hard L	CPerc	Malet
2241	Timpani2 Hard R	CPerc	Malet
2242	Timpani2 Hard St+	CPerc	Malet
2243	Timpani2 Hard L+	CPerc	Malet
2244	Timpani2 Hard R+	CPerc	Malet
2245	Timpani2 Hard St-	CPerc	Malet
2246	Timpani2 Hard L-	CPerc	Malet
2247	Timpani2 Hard R-	CPerc	Malet
2248	Timpani2 Muffl St	CPerc	Malet
2249	Timpani2 Muffl L	CPerc	Malet
2250	Timpani2 Muffl R	CPerc	Malet
2251	Timpani2 Oct Soft St	CPerc	Malet
2252	Timpani2 Oct Soft L	CPerc	Malet
2253	Timpani2 Oct Soft R	CPerc	Malet
2254	Timpani2 Oct Soft St+	CPerc	Malet
2255	Timpani2 Oct Soft L+	CPerc	Malet
2256	Timpani2 Oct Soft R+	CPerc	Malet
2257	Timpani2 Oct Soft St-	CPerc	Malet
2258	Timpani2 Oct Soft L-	CPerc	Malet
2259	Timpani2 Oct Soft R-	CPerc	Malet
2260	Timpani2 Oct Med St	CPerc	Malet
2261	Timpani2 Oct Med L	CPerc	Malet
2262	Timpani2 Oct Med R	CPerc	Malet
2263	Timpani2 Oct Med St+	CPerc	Malet
2264	Timpani2 Oct Med L+	CPerc	Malet
2265	Timpani2 Oct Med R+	CPerc	Malet
2266	Timpani2 Oct Med St-	CPerc	Malet
2267	Timpani2 Oct Med L-	CPerc	Malet
2268	Timpani2 Oct Med R-	CPerc	Malet
2269	Timpani2 Oct Hard St	CPerc	Malet
2270	Timpani2 Oct Hard L	CPerc	Malet
2271	Timpani2 Oct Hard R	CPerc	Malet
2272	Timpani2 Oct Hard St+	CPerc	Malet
2273	Timpani2 Oct Hard L+	CPerc	Malet
2274	Timpani2 Oct Hard R+	CPerc	Malet
2275	Timpani2 Oct Hard St-	CPerc	Malet
2276	Timpani2 Oct Hard L-	CPerc	Malet
2277	Timpani2 Oct Hard R-	CPerc	Malet
2278	Timpani2 Oct Muffl St	CPerc	Malet
2279	Timpani2 Oct Muffl L	CPerc	Malet
2280	Timpani2 Oct Muffl R	CPerc	Malet
2281	Tubular Bell1	CPerc	Other
2282	Tubular Bell2	CPerc	Other
2283	Bell	CPerc	Other
2284	Bell St1	CPerc	Other
2285	Bell St2	CPerc	Other
2286	Brass Bell	CPerc	Other
2287	Small Bell	CPerc	Other
2288	Finger Cymbal	CPerc	Other
2289	Hand Bell	CPerc	Other
2290	Hibashi	CPerc	Other
2291	Stone Hard	CPerc	Other
2292	Stone Soft	CPerc	Other
2293	Wood Bell1	CPerc	Other
2294	Wood Bell2	CPerc	Other
2295	Kalimba	CPerc	Other
2296	Gamelan1	CPerc	Other
2297	Gamelan2	CPerc	Other
2298	Steel Drum	CPerc	Other
2299	CS80 Saw	SynLd	Analg
2300	CS80 Square	SynLd	Analg
2301	CS80 Sine	SynLd	Analg
2302	CS15 Saw	SynLd	Analg
2303	CS15 Square	SynLd	Analg
2304	CS15 Triangle	SynLd	Analg
2305	Sync Lead1	SynLd	Analg
2306	Sync Lead2	SynLd	Analg
2307	Sync Lead3	SynLd	Analg
2308	Sync Lead4	SynLd	Analg
2309	Sync Lead5	SynLd	Analg
2310	Sync LFO	SynLd	Analg
2311	P5 SawDown 0 dg	SynLd	Analg
2312	P5 SawDown 180 dg	SynLd	Analg
2313	P5 SawDown PhaseRndm	SynLd	Analg
2314	P5 SawUp 0 dg	SynLd	Analg
2315	P5 SawUp 90 dg	SynLd	Analg
2316	P5 SawUp 180 dg	SynLd	Analg
2317	P5 SawUp 270 dg	SynLd	Analg
2318	OB Saw	SynLd	Analg
2319	Saw	SynLd	Analg
2320	1o1 Saw	SynLd	Analg
2321	1o1 Sub	SynLd	Analg
2322	Saw Square	SynLd	Analg
2323	Square Saw	SynLd	Analg
2324	Mg Ramp	SynLd	Analg
2325	P10-1	SynLd	Analg
2326	P10-2	SynLd	Analg
2327	P10-3	SynLd	Analg
2328	P25-1	SynLd	Analg
2329	P25-2	SynLd	Analg
2330	P50-1	SynLd	Analg
2331	P50-2	SynLd	Analg
2332	Tri Wave	SynLd	Analg
2333	Sine	SynLd	Analg
2334	Heterodyning	SynLd	Analg
2335	Ring Mod	SynLd	Digi
2336	FM Square	SynLd	Digi
2337	FM Shaper	SynLd	Digi
2338	FM Metal1	SynLd	Digi
2339	FM Metal2	SynLd	Digi
2340	Formant Ring Osc	SynLd	Digi
2341	Log Spectrum1	SynLd	Digi
2342	Log Spectrum2	SynLd	Digi
2343	FM Organ1	Pads	Other
2344	FM Organ2	Pads	Other
2345	FM Organ3	Pads	Other
2346	FM Organ4	Pads	Other
2347	FM Tubular Bass	SynLd	Digi
2348	FM Funk	SynLd	Digi
2349	FM Guitar	SynLd	Digi
2350	FS Buzz	SynLd	Digi
2351	Wet Pluck	SynLd	Digi
2352	Digi 01	SynLd	Digi
2353	Digi 02	SynLd	Digi
2354	Digi 03	SynLd	Digi
2355	Digi 04	SynLd	Digi
2356	Digi 05	SynLd	Digi
2357	Digi 06	SynLd	Digi
2358	Digi 07	SynLd	Digi
2359	Digi 08	SynLd	Digi
2360	Digi 09	SynLd	Digi
2361	Digi 10	SynLd	Digi
2362	Digi 11	SynLd	Digi
2363	Digi 12	SynLd	Digi
2364	Bell1 Wave	SynLd	Digi
2365	Bell2 Wave	SynLd	Digi
2366	DigiVox1	SynLd	Voice
2367	DigiVox2	SynLd	Voice
2368	DigiVox3	SynLd	Voice
2369	DigiVox4	SynLd	Voice
2370	DigiVox5	SynLd	Voice
2371	Vox G2	SynLd	Voice
2372	Vox E3	SynLd	Voice
2373	DigiOsc1	SynLd	Digi
2374	DigiOsc2	SynLd	Digi
2375	DigiOsc3	SynLd	Digi
2376	DigiOsc4	SynLd	Digi
2377	DigiOsc5	SynLd	Digi
2378	DigiOsc6	SynLd	Digi
2379	DigiOsc7	SynLd	Digi
2380	EP Wave 1	SyCmp	Other
2381	EP Wave 2	SyCmp	Other
2382	EP Wave 3	SyCmp	Other
2383	EP Wave 4	SyCmp	Other
2384	EP Wave 5	SyCmp	Other
2385	EP Wave 6	SyCmp	Other
2386	Organ Wave1	Pads	Other
2387	Organ Wave2	Pads	Other
2388	Organ Wave3	Pads	Other
2389	DigiBell1	SyCmp	Other
2390	DigiBell2	SyCmp	Other
2391	DigiBell3	SyCmp	Other
2392	DigiBell4	SyCmp	Other
2393	DigiBell5	SyCmp	Other
2394	DigiBell6	SyCmp	Other
2395	DigiBell7	SyCmp	Other
2396	Trance Attack St	SyCmp	Stab
2397	Mini Short Attack	SyCmp	Stab
2398	VA Attacks1	SyCmp	Stab
2399	VA Attacks2	SyCmp	Stab
2400	Spectrum1	Pads	Other
2401	Spectrum2	Pads	Other
2402	Spectrum3	Pads	Other
2403	3o3 Saw	Bass	SynBs
2404	3o3 Saw2	Bass	SynBs
2405	3o3 Square	Bass	SynBs
2406	Mini Bass1	Bass	SynBs
2407	Mini Bass1 Offset	Bass	SynBs
2408	Mini Bass2	Bass	SynBs
2409	Mini Bass2 Offset	Bass	SynBs
2410	Mini Bass3a	Bass	SynBs
2411	Mini Bass3b	Bass	SynBs
2412	Mini Bass3c	Bass	SynBs
2413	Q Synbass	Bass	SynBs
2414	Q Synbass Offset	Bass	SynBs
2415	Punch	Bass	SynBs
2416	Punch Offset	Bass	SynBs
2417	Synth Bass1	Bass	SynBs
2418	Synth Bass2	Bass	SynBs
2419	Brip Bass	Bass	SynBs
2420	Brip Bass Offset	Bass	SynBs
2421	Klick Bass	Bass	SynBs
2422	Klick Bass Offset	Bass	SynBs
2423	Puls Bass	Bass	SynBs
2424	Puls Bass Offset	Bass	SynBs
2425	Dirty Perc	Bass	SynBs
2426	Short Uni	Bass	SynBs
2427	Short Uni Offset	Bass	SynBs
2428	Noise Bass	Bass	SynBs
2429	Noise Bass Offset	Bass	SynBs
2430	Mg Bass1	Bass	SynBs
2431	Mg Bass1 Offset	Bass	SynBs
2432	Mg Bass2	Bass	SynBs
2433	Mg Bass2 Offset	Bass	SynBs
2434	Mg Bass3	Bass	SynBs
2435	Mg Bass3 Offset	Bass	SynBs
2436	Mod Bass	Bass	SynBs
2437	Analog Bass1	Bass	SynBs
2438	Analog Bass1 Offset	Bass	SynBs
2439	Analog Bass2	Bass	SynBs
2440	Analog Bass2 Offset	Bass	SynBs
2441	Analog Bass3	Bass	SynBs
2442	Analog Bass4	Bass	SynBs
2443	Analog Bass4 Offset	Bass	SynBs
2444	Analog Bass5	Bass	SynBs
2445	Analog Bass5 Offset	Bass	SynBs
2446	Analog Bass6	Bass	SynBs
2447	Analog Bass6 Offset	Bass	SynBs
2448	UniBass	Bass	SynBs
2449	UniBass Offset	Bass	SynBs
2450	T8 Kick Bass	Bass	SynBs
2451	T8 Kick Bass Offset	Bass	SynBs
2452	FM Bass1	Bass	SynBs
2453	FM Bass2	Bass	SynBs
2454	FM Bass3	Bass	SynBs
2455	FM Bass4	Bass	SynBs
2456	FM Bass5	Bass	SynBs
2457	FM Bass6	Bass	SynBs
2458	Lately-S	Bass	SynBs
2459	Lately-L	Bass	SynBs
2460	Seq Bass	Bass	SynBs
2461	JP Short Seq St	Bass	SynBs
2462	JP Short Seq L	Bass	SynBs
2463	JP Short Seq R	Bass	SynBs
2464	Sharp Perc St	Bass	SynBs
2465	Sharp Perc L	Bass	SynBs
2466	Sharp Perc R	Bass	SynBs
2467	Short Stepper St	Bass	SynBs
2468	Short Stepper L	Bass	SynBs
2469	Short Stepper R	Bass	SynBs
2470	Mini Brip1	SynLd	Other
2471	Mini Brip2	SynLd	Other
2472	Mini Brip3	SynLd	Other
2473	Mini Brip4	SynLd	Other
2474	Mini Brip5	SynLd	Other
2475	Mini Brip6	SynLd	Other
2476	Noise	SynLd	Other
2477	Saturation	SynLd	Other
2478	Voc Beat The Band	SyCmp	Voice
2479	Voc Born Happy	SyCmp	Voice
2480	Voc Close Eyes	SyCmp	Voice
2481	Voc Complication	SyCmp	Voice
2482	Voc Day Life	SyCmp	Voice
2483	Voc DeepWater	SyCmp	Voice
2484	Voc Desperation	SyCmp	Voice
2485	Voc Destiny	SyCmp	Voice
2486	Voc Dreamin Offset U	SyCmp	Voice
2487	Voc Enjoying This	SyCmp	Voice
2488	Voc Feel Good	SyCmp	Voice
2489	Voc Forbidden Dreams	SyCmp	Voice
2490	Voc Freezing Cold	SyCmp	Voice
2491	Voc Infinity	SyCmp	Voice
2492	Voc Love Is Blind	SyCmp	Voice
2493	Voc Mystery	SyCmp	Voice
2494	Voc Reality	SyCmp	Voice
2495	Voc Revolution	SyCmp	Voice
2496	Voc Sweeping	SyCmp	Voice
2497	Voc Yesterday	SyCmp	Voice
2498	Birch St	M.EFX	Ambie
2499	Birch L	M.EFX	Ambie
2500	Birch R	M.EFX	Ambie
2501	Willow St	M.EFX	Ambie
2502	Willow L	M.EFX	Ambie
2503	Willow R	M.EFX	Ambie
2504	Anemone St	M.EFX	Ambie
2505	Anemone L	M.EFX	Ambie
2506	Anemone R	M.EFX	Ambie
2507	Magnitude St	M.EFX	Ambie
2508	Magnitude L	M.EFX	Ambie
2509	Magnitude R	M.EFX	Ambie
2510	SabreTone	M.EFX	Ambie
2511	Vox Bell	M.EFX	Ambie
2512	Mellow	M.EFX	Ambie
2513	BellAir	M.EFX	Ambie
2514	BigSyn	M.EFX	Ambie
2515	Trance Choir	M.EFX	Ambie
2516	Eery	M.EFX	Ambie
2517	VoxAlk	M.EFX	Ambie
2518	Hi-Lo	M.EFX	Ambie
2519	AirHose St	M.EFX	Ambie
2520	AirHose L	M.EFX	Ambie
2521	AirHose R	M.EFX	Ambie
2522	Space Scream	M.EFX	Ambie
2523	Ooh Feedback	M.EFX	Ambie
2524	Fairwave	M.EFX	Ambie
2525	Mind Bell	M.EFX	Ambie
2526	Sonar1	M.EFX	Ambie
2527	Sonar2	M.EFX	Ambie
2528	Digi Breath	M.EFX	Ambie

No.	Name	Main Category	Sub Category
2529	Engine Room St	M.EFX	Ambie
2530	Engine Room L	M.EFX	Ambie
2531	Engine Room R	M.EFX	Ambie
2532	Moving Chime St	M.EFX	Ambie
2533	Moving Chime L	M.EFX	Ambie
2534	Moving Chime R	M.EFX	Ambie
2535	Motion Beam	M.EFX	Ambie
2536	Bell Spectrum St	M.EFX	Ambie
2537	Bell Spectrum L	M.EFX	Ambie
2538	Bell Spectrum R	M.EFX	Ambie
2539	Hybrid Pad St	M.EFX	Ambie
2540	Hybrid Pad L	M.EFX	Ambie
2541	Hybrid Pad R	M.EFX	Ambie
2542	Wavedance St	M.EFX	Ambie
2543	Wavedance L	M.EFX	Ambie
2544	Wavedance R	M.EFX	Ambie
2545	Leftpitch St	M.EFX	Ambie
2546	Leftpitch L	M.EFX	Ambie
2547	Leftpitch R	M.EFX	Ambie
2548	Pitchomat St	M.EFX	Ambie
2549	Pitchomat L	M.EFX	Ambie
2550	Pitchomat R	M.EFX	Ambie
2551	Reflecting St	M.EFX	Ambie
2552	Reflecting L	M.EFX	Ambie
2553	Reflecting R	M.EFX	Ambie
2554	Spectrals St	M.EFX	Ambie
2555	Spectrals L	M.EFX	Ambie
2556	Spectrals R	M.EFX	Ambie
2557	The Fog St	M.EFX	Ambie
2558	The Fog L	M.EFX	Ambie
2559	The Fog R	M.EFX	Ambie
2560	Orchestra Hit1 St	M.EFX	Hit
2561	Orchestra Hit1 L	M.EFX	Hit
2562	Orchestra Hit1 R	M.EFX	Hit
2563	Orchestra Hit2 St	M.EFX	Hit
2564	Orchestra Hit2 L	M.EFX	Hit
2565	Orchestra Hit2 R	M.EFX	Hit
2566	Orchestra Hit3	M.EFX	Hit
2567	StabOrgan1	M.EFX	Hit
2568	HH Hit	M.EFX	Hit
2569	Hit Orchestra1	M.EFX	Hit
2570	Hit Brass	M.EFX	Hit
2571	Stab Orchestra	M.EFX	Hit
2572	Stab Giant	M.EFX	Hit
2573	Stab Hard	M.EFX	Hit
2574	Stab Organ2	M.EFX	Hit
2575	Stab Aah	M.EFX	Hit
2576	Hit Uhh	M.EFX	Hit
2577	Hit Orchestra2	M.EFX	Hit
2578	Vox Drum	M.EFX	Hit
2579	FX Chime	M.EFX	EFX
2580	Bubble	M.EFX	EFX
2581	Lektronica	M.EFX	EFX
2582	Loop145	M.EFX	EFX
2583	X-Fade	M.EFX	EFX
2584	Resonance X-Fade	M.EFX	EFX
2585	Quiek	M.EFX	EFX
2586	Hop FX1	M.EFX	EFX
2587	Hop FX2	M.EFX	EFX
2588	Neo Seq Em All	M.EFX	EFX
2589	Neo Seq Em-1	M.EFX	EFX
2590	Neo Seq Em-2	M.EFX	EFX
2591	Neo Seq Em-3	M.EFX	EFX
2592	Neo Seq Em-4	M.EFX	EFX
2593	Neo Seq Em-5	M.EFX	EFX
2594	Neo Seq Em-6	M.EFX	EFX
2595	Neo Seq Em-7	M.EFX	EFX
2596	Neo Seq Em-8	M.EFX	EFX
2597	Whisper Seq Bb	M.EFX	EFX
2598	Whisper Seq Bb Offset	M.EFX	EFX
2599	Woody Seq St	M.EFX	EFX
2600	Woody Seq L	M.EFX	EFX
2601	Woody Seq R	M.EFX	EFX
2602	Neo Seq2 Em All	M.EFX	EFX
2603	Neo Seq2 Em-1	M.EFX	EFX
2604	Neo Seq2 Em-2	M.EFX	EFX
2605	Neo Seq2 Em-3	M.EFX	EFX
2606	Neo Seq2 Em-4	M.EFX	EFX
2607	Neo Seq2 Em-5	M.EFX	EFX
2608	Neo Seq2 Em-6	M.EFX	EFX
2609	Neo Seq2 Em-7	M.EFX	EFX
2610	Neo Seq2 Em-8	M.EFX	EFX
2611	Portamento Lead Seq	M.EFX	EFX
2612	Aero Seq All	M.EFX	EFX
2613	Aero Seq-1	M.EFX	EFX
2614	Aero Seq-2	M.EFX	EFX
2615	Aero Seq-3	M.EFX	EFX
2616	Aero Seq-4	M.EFX	EFX
2617	Aero Seq-5	M.EFX	EFX
2618	Aero Seq-6	M.EFX	EFX
2619	Aero Seq-7	M.EFX	EFX
2620	Aero Seq-8	M.EFX	EFX
2621	Aero Seq-9	M.EFX	EFX
2622	Aero Seq-10	M.EFX	EFX
2623	Aero Seq-11	M.EFX	EFX
2624	Aero Seq-12	M.EFX	EFX
2625	Aero Seq-13	M.EFX	EFX
2626	Aero Seq-14	M.EFX	EFX
2627	Aero Seq-15	M.EFX	EFX
2628	Aero Seq-16	M.EFX	EFX
2629	Epic FX Loop1	M.EFX	EFX
2630	Epic FX Loop2	M.EFX	EFX
2631	Epic FX Loop3	M.EFX	EFX
2632	Epic FX Loop4	M.EFX	EFX
2633	Epic FX Loop5	M.EFX	EFX
2634	Epic FX Loop6	M.EFX	EFX
2635	Epic FX Loop7	M.EFX	EFX
2636	Epic FX Loop8	M.EFX	EFX
2637	Electer	M.EFX	Other
2638	Multi Piano	M.EFX	Other
2639	Radio Noise	M.EFX	Other
2640	LFO Seq	M.EFX	Other
2641	Raspberry	M.EFX	Other
2642	Digi Heli	M.EFX	Other
2643	Computer St	M.EFX	Other
2644	Computer L	M.EFX	Other
2645	Computer R	M.EFX	Other
2646	Chatter	M.EFX	Other
2647	Fx Cymbals St	M.EFX	Other
2648	Fx Cymbals L	M.EFX	Other
2649	Fx Cymbals R	M.EFX	Other
2650	Warning Mod	M.EFX	Other
2651	Vocal Res	M.EFX	Other
2652	Hoo	M.EFX	Other
2653	Bell Choir	M.EFX	Other
2654	Bell Choir Lp	M.EFX	Other
2655	VibeNP	M.EFX	Other
2656	Shower St	S.EFX	SE
2657	Shower L	S.EFX	SE
2658	Shower R	S.EFX	SE
2659	Fx Female Voice St	S.EFX	SE
2660	Fx Female Voice L	S.EFX	SE
2661	Fx Female Voice R	S.EFX	SE
2662	Grain1	S.EFX	SE
2663	Grain2 St	S.EFX	SE
2664	Grain2 L	S.EFX	SE
2665	Grain2 R	S.EFX	SE
2666	Grain3 St	S.EFX	SE
2667	Grain3 L	S.EFX	SE
2668	Grain3 R	S.EFX	SE
2669	Moving Harp St	S.EFX	SE
2670	Moving Harp L	S.EFX	SE
2671	Moving Harp R	S.EFX	SE
2672	Metal Mod	S.EFX	SE
2673	Digital Wind	S.EFX	SE
2674	Digi Voice Mod	S.EFX	SE
2675	Ethnic Rhythm Rv All	S.EFX	SE
2676	Ethnic Rhythm Rv-1	S.EFX	SE
2677	Ethnic Rhythm Rv-2	S.EFX	SE
2678	Ethnic Rhythm Rv-3	S.EFX	SE
2679	Ethnic Rhythm Rv-4	S.EFX	SE
2680	Ethnic Rhythm Rv-5	S.EFX	SE
2681	Ethnic Rhythm Rv-6	S.EFX	SE
2682	Ethnic Rhythm Rv-7	S.EFX	SE
2683	Ripper	S.EFX	SE
2684	Glass	S.EFX	SE
2685	Bell FX1	S.EFX	SE
2686	Bell FX2	S.EFX	SE
2687	Indus Tom	S.EFX	SE
2688	Noise Burst	S.EFX	SE
2689	Zap1	S.EFX	SE
2690	Zap2	S.EFX	SE
2691	Electric Perc1	S.EFX	SE
2692	Electric Perc2	S.EFX	SE
2693	Electric Perc3	S.EFX	SE
2694	Electric Perc4	S.EFX	SE
2695	Electric Perc5	S.EFX	SE
2696	Electric Perc6	S.EFX	SE
2697	Electric Perc7	S.EFX	SE
2698	Electric Perc8	S.EFX	SE
2699	Electric Perc9	S.EFX	SE
2700	Electric Perc10	S.EFX	SE
2701	Electric Perc11	S.EFX	SE
2702	Electric Perc12	S.EFX	SE
2703	Electric Perc13	S.EFX	SE
2704	Electric Perc14	S.EFX	SE
2705	Electric Perc15	S.EFX	SE
2706	Hi Q1	S.EFX	SE
2707	Hi Q2	S.EFX	SE
2708	Vox Hit Rev	S.EFX	SE
2709	Mega Complextro1	S.EFX	SE
2710	Mega Complextro2	S.EFX	SE
2711	Mega Complextro3	S.EFX	SE
2712	Mega Complextro4	S.EFX	SE
2713	Mega Complextro5	S.EFX	SE
2714	Mega Complextro6	S.EFX	SE
2715	Mega Complextro7	S.EFX	SE
2716	Mega Complextro8	S.EFX	SE
2717	Granular Loop1	S.EFX	SE
2718	Granular Loop2	S.EFX	SE
2719	Granular Loop3	S.EFX	SE
2720	Granular Loop4	S.EFX	SE
2721	Granular Loop5	S.EFX	SE
2722	Granular Loop6	S.EFX	SE
2723	Granular Loop7	S.EFX	SE
2724	Granular Loop8	S.EFX	SE
2725	Abstract Fx1	S.EFX	SE
2726	Abstract Fx2	S.EFX	SE
2727	Abstract Fx3	S.EFX	SE
2728	Abstract Fx4	S.EFX	SE
2729	Abstract Fx5	S.EFX	SE
2730	Bazer Fx	S.EFX	SE
2731	Damage Fx1	S.EFX	SE
2732	Damage Fx2	S.EFX	SE
2733	Damage Fx3	S.EFX	SE
2734	Damage Fx4	S.EFX	SE
2735	Damage Fx5	S.EFX	SE
2736	Damage Fx6	S.EFX	SE
2737	Damage Fx7	S.EFX	SE
2738	Damage Fx8	S.EFX	SE
2739	Damage Fx9	S.EFX	SE
2740	Damage Fx10	S.EFX	SE
2741	Damage Fx11	S.EFX	SE
2742	Dist Synth Fx	S.EFX	SE
2743	HiQ Rize	S.EFX	SE
2744	Noize Fx1	S.EFX	SE
2745	Noize Fx2	S.EFX	SE
2746	Noize Rize1	S.EFX	SE
2747	Noize Rize2	S.EFX	SE
2748	Shimmer Fx	S.EFX	SE
2749	XMod Loop	S.EFX	SE
2750	Electric FX Perc1	S.EFX	SE
2751	Electric FX Perc2	S.EFX	SE
2752	Electric FX Perc3	S.EFX	SE
2753	Electric FX Perc4	S.EFX	SE
2754	Electric FX Perc5	S.EFX	SE
2755	Electric FX Perc6	S.EFX	SE
2756	Electric FX Perc7	S.EFX	SE
2757	Electric FX Perc8	S.EFX	SE
2758	Electric FX Perc9	S.EFX	SE
2759	Electric FX Perc10	S.EFX	SE
2760	Electric FX Perc11	S.EFX	SE
2761	Electric FX Perc12	S.EFX	SE
2762	Electric FX Perc13	S.EFX	SE
2763	Electric FX Perc14	S.EFX	SE
2764	Electric FX Perc15	S.EFX	SE
2765	Electric FX Perc16	S.EFX	SE
2766	White Noise	S.EFX	SE
2767	Pink Noise	S.EFX	SE
2768	Dub Fx1 Mn	S.EFX	SE
2769	Dub Fx2 St	S.EFX	SE
2770	Trap Fx1 St	S.EFX	SE
2771	Trap Fx2 St	S.EFX	SE
2772	Trap Fx3 St	S.EFX	SE
2773	Trap Fx4 St	S.EFX	SE
2774	Trap Fx5 St	S.EFX	SE
2775	Trap Fx6 St	S.EFX	SE
2776	HipHop Fx1 St	S.EFX	SE
2777	HipHop Fx2 St	S.EFX	SE
2778	HipHop Fx3 St	S.EFX	SE
2779	EDM Fx1 St	S.EFX	SE
2780	EDM Fx2 St	S.EFX	SE
2781	EDM Fx3 St	S.EFX	SE
2782	House Fx1 Mn	S.EFX	SE
2783	House Fx2 St	S.EFX	SE
2784	House Fx3 St	S.EFX	SE
2785	House FX Sw	Dr/Pc	PC
2786	Electro FX St	S.EFX	SE
2787	Vocal Snare St	S.EFX	SE
2788	Vocal Ambi SE St	S.EFX	SE
2789	Vocal Shout Yeah St	S.EFX	SE
2790	Vocal Shout Go St	S.EFX	SE
2791	Rainmaker St	S.EFX	SE
2792	Glitch 1	S.EFX	SE
2793	Glitch 2	S.EFX	SE
2794	Glitch 3	S.EFX	SE
2795	Glitch 4	S.EFX	SE
2796	Glitch 5	S.EFX	SE
2797	Glitch 6	S.EFX	SE
2798	Glitch 7	S.EFX	SE
2799	Glitch 8	S.EFX	SE
2800	Glitch 9	S.EFX	SE
2801	Glitch 10	S.EFX	SE
2802	T8 Bend	S.EFX	SE
2803	T8 Bass SE St	S.EFX	SE
2804	Bomb	S.EFX	SE
2805	Tape Rewind	S.EFX	SE
2806	FxGun1	S.EFX	SE
2807	FxGun2	S.EFX	SE
2808	Thunder	S.EFX	SE
2809	Swarm	S.EFX	SE
2810	TurnTable	S.EFX	SE
2811	Police	S.EFX	SE
2812	Door Squeak	S.EFX	SE
2813	Heart Beat	S.EFX	SE
2814	Helicopter	S.EFX	SE
2815	Seashore	S.EFX	SE
2816	Telephone	S.EFX	SE
2817	TelRing	S.EFX	SE
2818	Bird	S.EFX	SE
2819	Stream	S.EFX	SE
2820	Gunshot	S.EFX	SE
2821	Applause	S.EFX	SE
2822	RainLoop	S.EFX	SE
2823	Scratch H	S.EFX	Scrtc
2824	Scratch L	S.EFX	Scrtc
2825	Scratch Down	S.EFX	Scrtc
2826	Scratch Hi F	S.EFX	Scrtc
2827	Scratch Hi R	S.EFX	Scrtc
2828	Scratch Lo F	S.EFX	Scrtc
2829	Scratch Lo R	S.EFX	Scrtc
2830	Scratch Bd F	S.EFX	Scrtc
2831	Scratch Bd R	S.EFX	Scrtc
2832	Scratch Sd F	S.EFX	Scrtc
2833	Scratch Sd R	S.EFX	Scrtc
2834	Scratch Vo F	S.EFX	Scrtc
2835	Scratch Vo R	S.EFX	Scrtc
2836	Scratch Stop	S.EFX	Scrtc
2837	Scratch Spin	S.EFX	Scrtc
2838	Scratch Hip	S.EFX	Scrtc
2839	Scratch Hip2	S.EFX	Scrtc
2840	Scratch Attack	S.EFX	Scrtc
2841	Scratch R&B	S.EFX	Scrtc
2842	Scratch Combi	S.EFX	Scrtc
2843	Scratch Combi2	S.EFX	Scrtc
2844	Scratch Combi3	S.EFX	Scrtc

No.	Name	Main Category	Sub Category
2845	Scratch Combi4	S.EFX	Scrtc
2846	HipHop Scratch1 St	S.EFX	Scrtc
2847	HipHop Scratch2 St	S.EFX	Scrtc
2848	AcousticGtr FX01 St	S.EFX	MgFX
2849	AcousticGtr FX01 L	S.EFX	MgFX
2850	AcousticGtr FX01 R	S.EFX	MgFX
2851	AcousticGtr FX02 St	S.EFX	MgFX
2852	AcousticGtr FX02 L	S.EFX	MgFX
2853	AcousticGtr FX02 R	S.EFX	MgFX
2854	AcousticGtr FX03 St	S.EFX	MgFX
2855	AcousticGtr FX03 L	S.EFX	MgFX
2856	AcousticGtr FX03 R	S.EFX	MgFX
2857	AcousticGtr FX04 St	S.EFX	MgFX
2858	AcousticGtr FX04 L	S.EFX	MgFX
2859	AcousticGtr FX04 R	S.EFX	MgFX
2860	AcousticGtr FX05 St	S.EFX	MgFX
2861	AcousticGtr FX05 L	S.EFX	MgFX
2862	AcousticGtr FX05 R	S.EFX	MgFX
2863	AcousticGtr FX06 St	S.EFX	MgFX
2864	AcousticGtr FX06 L	S.EFX	MgFX
2865	AcousticGtr FX06 R	S.EFX	MgFX
2866	AcousticGtr FX07 St	S.EFX	MgFX
2867	AcousticGtr FX07 L	S.EFX	MgFX
2868	AcousticGtr FX07 R	S.EFX	MgFX
2869	AcousticGtr FX08 St	S.EFX	MgFX
2870	AcousticGtr FX08 L	S.EFX	MgFX
2871	AcousticGtr FX08 R	S.EFX	MgFX
2872	AcousticGtr FX09 St	S.EFX	MgFX
2873	AcousticGtr FX09 L	S.EFX	MgFX
2874	AcousticGtr FX09 R	S.EFX	MgFX
2875	AcousticGtr FX10 St	S.EFX	MgFX
2876	AcousticGtr FX10 L	S.EFX	MgFX
2877	AcousticGtr FX10 R	S.EFX	MgFX
2878	AcousticGtr FX11 St	S.EFX	MgFX
2879	AcousticGtr FX11 L	S.EFX	MgFX
2880	AcousticGtr FX11 R	S.EFX	MgFX
2881	AcousticGtr FX12 St	S.EFX	MgFX
2882	AcousticGtr FX12 L	S.EFX	MgFX
2883	AcousticGtr FX12 R	S.EFX	MgFX
2884	AcousticGtr FX13 St	S.EFX	MgFX
2885	AcousticGtr FX13 L	S.EFX	MgFX
2886	AcousticGtr FX13 R	S.EFX	MgFX
2887	AcousticGtr FX14 St	S.EFX	MgFX
2888	AcousticGtr FX14 L	S.EFX	MgFX
2889	AcousticGtr FX14 R	S.EFX	MgFX
2890	AcousticGtr FX15 St	S.EFX	MgFX
2891	AcousticGtr FX15 L	S.EFX	MgFX
2892	AcousticGtr FX15 R	S.EFX	MgFX
2893	AcousticGtr FX16 St	S.EFX	MgFX
2894	AcousticGtr FX16 L	S.EFX	MgFX
2895	AcousticGtr FX16 R	S.EFX	MgFX
2896	AcousticGtr FX17 St	S.EFX	MgFX
2897	AcousticGtr FX17 L	S.EFX	MgFX
2898	AcousticGtr FX17 R	S.EFX	MgFX
2899	AcousticGtr FX18 St	S.EFX	MgFX
2900	AcousticGtr FX18 L	S.EFX	MgFX
2901	AcousticGtr FX18 R	S.EFX	MgFX
2902	AcousticGtr FX19 St	S.EFX	MgFX
2903	AcousticGtr FX19 L	S.EFX	MgFX
2904	AcousticGtr FX19 R	S.EFX	MgFX
2905	AcousticGtr FX20 St	S.EFX	MgFX
2906	AcousticGtr FX20 L	S.EFX	MgFX
2907	AcousticGtr FX20 R	S.EFX	MgFX
2908	AcousticGtr FX21 St	S.EFX	MgFX
2909	AcousticGtr FX21 L	S.EFX	MgFX
2910	AcousticGtr FX21 R	S.EFX	MgFX
2911	AcousticGtr FX22 St	S.EFX	MgFX
2912	AcousticGtr FX22 L	S.EFX	MgFX
2913	AcousticGtr FX22 R	S.EFX	MgFX
2914	AcousticGtr FX23 St	S.EFX	MgFX
2915	AcousticGtr FX23 L	S.EFX	MgFX
2916	AcousticGtr FX23 R	S.EFX	MgFX
2917	AcousticGtr FX24 St	S.EFX	MgFX
2918	AcousticGtr FX24 L	S.EFX	MgFX
2919	AcousticGtr FX24 R	S.EFX	MgFX
2920	AcousticGtr FX25 St	S.EFX	MgFX
2921	AcousticGtr FX25 L	S.EFX	MgFX
2922	AcousticGtr FX25 R	S.EFX	MgFX
2923	AcousticGtr FX26 St	S.EFX	MgFX
2924	AcousticGtr FX26 L	S.EFX	MgFX
2925	AcousticGtr FX26 R	S.EFX	MgFX
2926	AcousticGtr FX27 St	S.EFX	MgFX
2927	AcousticGtr FX27 L	S.EFX	MgFX
2928	AcousticGtr FX27 R	S.EFX	MgFX
2929	AcousticGtr FX28 St	S.EFX	MgFX
2930	AcousticGtr FX28 L	S.EFX	MgFX
2931	AcousticGtr FX28 R	S.EFX	MgFX
2932	AcousticGtr FX29 St	S.EFX	MgFX
2933	AcousticGtr FX29 L	S.EFX	MgFX
2934	AcousticGtr FX29 R	S.EFX	MgFX
2935	AcousticGtr FX30 St	S.EFX	MgFX
2936	AcousticGtr FX30 L	S.EFX	MgFX
2937	AcousticGtr FX30 R	S.EFX	MgFX
2938	AcousticGtr FX31 St	S.EFX	MgFX
2939	AcousticGtr FX32 St	S.EFX	MgFX
2940	AcousticGtr FX33 St	S.EFX	MgFX
2941	AcousticGtr FX34 St	S.EFX	MgFX
2942	AcousticGtr FX35 St	S.EFX	MgFX
2943	Flamenco SlideNoise1	S.EFX	MgFX
2944	Flamenco SlideNoise2	S.EFX	MgFX
2945	Flamenco SlideNoise3	S.EFX	MgFX
2946	Flamenco TapClick	S.EFX	MgFX
2947	ElectricGtr FX01	S.EFX	MgFX
2948	ElectricGtr FX02	S.EFX	MgFX
2949	ElectricGtr FX03	S.EFX	MgFX
2950	ElectricGtr FX04	S.EFX	MgFX
2951	ElectricGtr FX05	S.EFX	MgFX
2952	ElectricGtr FX06	S.EFX	MgFX
2953	ElectricGtr FX07	S.EFX	MgFX
2954	ElectricGtr FX08	S.EFX	MgFX
2955	ElectricGtr FX09	S.EFX	MgFX
2956	ElectricGtr FX10	S.EFX	MgFX
2957	ElectricGtr FX11	S.EFX	MgFX
2958	ElectricGtr FX12	S.EFX	MgFX
2959	ElectricGtr FX13	S.EFX	MgFX
2960	ElectricGtr FX14	S.EFX	MgFX
2961	ElectricGtr FX15	S.EFX	MgFX
2962	ElectricGtr FX16	S.EFX	MgFX
2963	ElectricGtr FX17	S.EFX	MgFX
2964	ElectricGtr FX18	S.EFX	MgFX
2965	ElectricGtr FX19	S.EFX	MgFX
2966	ElectricGtr FX20	S.EFX	MgFX
2967	ElectricGtr FX21	S.EFX	MgFX
2968	ElectricGtr FX22	S.EFX	MgFX
2969	ElectricGtr FX23	S.EFX	MgFX
2970	TC FX01	S.EFX	MgFX
2971	TC FX02	S.EFX	MgFX
2972	TC FX03	S.EFX	MgFX
2973	TC FX04	S.EFX	MgFX
2974	TC FX05	S.EFX	MgFX
2975	TC FX06	S.EFX	MgFX
2976	TC FX07	S.EFX	MgFX
2977	TC FX08	S.EFX	MgFX
2978	Acoustic Bass FX01	S.EFX	MgFX
2979	Acoustic Bass FX02	S.EFX	MgFX
2980	Acoustic Bass FX03	S.EFX	MgFX
2981	Acoustic Bass FX04	S.EFX	MgFX
2982	Acoustic Bass FX05	S.EFX	MgFX
2983	Acoustic Bass FX06	S.EFX	MgFX
2984	Acoustic Bass FX07	S.EFX	MgFX
2985	Acoustic Bass FX08	S.EFX	MgFX
2986	Acoustic Bass FX09	S.EFX	MgFX
2987	Electric Bass FX 01	S.EFX	MgFX
2988	Electric Bass FX 02	S.EFX	MgFX
2989	Electric Bass FX 03	S.EFX	MgFX
2990	Electric Bass FX 04	S.EFX	MgFX
2991	Electric Bass FX 05	S.EFX	MgFX
2992	Electric Bass FX 06	S.EFX	MgFX
2993	Electric Bass FX 07	S.EFX	MgFX
2994	Electric Bass FX 08	S.EFX	MgFX
2995	Electric Bass FX 09	S.EFX	MgFX
2996	Electric Bass FX 10	S.EFX	MgFX
2997	Electric Bass FX 11	S.EFX	MgFX
2998	Electric Bass FX 12	S.EFX	MgFX
2999	Electric Bass FX 13	S.EFX	MgFX
3000	Electric Bass FX 14	S.EFX	MgFX
3001	Electric Bass FX 15	S.EFX	MgFX
3002	Electric Bass FX 16	S.EFX	MgFX
3003	Electric Bass FX 17	S.EFX	MgFX
3004	Electric Bass FX 18	S.EFX	MgFX
3005	Electric Bass FX 19	S.EFX	MgFX
3006	Electric Bass FX 20	S.EFX	MgFX
3007	Electric Bass FX 21	S.EFX	MgFX
3008	Electric Bass FX 22	S.EFX	MgFX
3009	Electric Bass FX 23	S.EFX	MgFX
3010	OP SusC20 Bow Lo St	Dr/Pc	PC
3011	OP Paiste Tam St	Dr/Pc	PC
3012	OP TamTam small St	Dr/Pc	PC
3013	OP TamTam Lo St	Dr/Pc	PC
3014	OP Wuhan Tam Lo St	Dr/Pc	PC
3015	OP Wuhan Orient 1 St	Dr/Pc	PC
3016	OP Gong 2Sw St	Dr/Pc	PC
3017	OP Crash18 Top 3Sw St	Dr/Pc	PC
3018	OP Splash Top 3Sw St	Dr/Pc	PC
3019	OP Splash Chk 3Sw St	Dr/Pc	PC
3020	OP Ride18 Top 2Sw St	Dr/Pc	PC
3021	OP Ride18 Cup 2Sw St	Dr/Pc	PC
3022	OP SusC20 RII Low St	Dr/Pc	PC
3023	OP SusC20 Top Low 3Sw St	Dr/Pc	PC
3024	OP SusC18 RII Med St	Dr/Pc	PC
3025	OP SusC18 Top Med 3Sw St	Dr/Pc	PC
3026	OP SusC14 RII Hi St	Dr/Pc	PC
3027	OP SusC14 Top Hi 2Sw St	Dr/Pc	PC
3028	OP Piat20 Top Low 2Sw St	Dr/Pc	PC
3029	OP Piat20 Chk Low 2Sw St	Dr/Pc	PC
3030	OP Piat18 Top Med 3Sw St	Dr/Pc	PC
3031	OP Piat18 Chk Med 2Sw St	Dr/Pc	PC
3032	OP Piat16 Top Hi 3Sw St	Dr/Pc	PC
3033	OP Piat16 Chk Hi 2Sw St	Dr/Pc	PC
3034	OP WoSht C0 2Sw St	Dr/Pc	PC
3035	OP Taiko Gong Fro 3Sw St	Dr/Pc	PC
3036	OP Taiko Gong Bac 3Sw St	Dr/Pc	PC
3037	OP Taiko Top Lo 3Sw St	Dr/Pc	PC
3038	OP Taiko Top Med 3Sw St	Dr/Pc	PC
3039	OP Taiko Top Hi 3Sw St	Dr/Pc	PC
3040	OP GrCa32 OpSoft 5Sw St	Dr/Pc	PC
3041	OP GrCa32 OpLd 5Sw St	Dr/Pc	PC
3042	OP GrCa32 OpWood 5Sw St	Dr/Pc	PC
3043	OP GrCa30 OpSoft 5Sw St	Dr/Pc	PC
3044	OP GrCa30 OpLd 5Sw St	Dr/Pc	PC
3045	OP GrCa26 MuSoft 5Sw St	Dr/Pc	PC
3046	OP GrCa26 OpLd 5Sw St	Dr/Pc	PC
3047	OP GrCa26 OpSoft 5Sw St	Dr/Pc	PC
3048	OP Tom TimpStck 5 5Sw St	Dr/Pc	PC
3049	OP Tom TimpStck 4 5Sw St	Dr/Pc	PC
3050	OP Tom TimpStck 3 5Sw St	Dr/Pc	PC
3051	OP Tom TimpStck 2 5Sw St	Dr/Pc	PC
3052	OP Tom TimpStck 1 5Sw St	Dr/Pc	PC
3053	OP Rotot Top 5 3Sw St	Dr/Pc	PC
3054	OP Rotot Top 4 3Sw St	Dr/Pc	PC
3055	OP Rotot Top 3 3Sw St	Dr/Pc	PC
3056	OP Rotot Top 2 3Sw St	Dr/Pc	PC
3057	OP Rotot Top 1 3Sw St	Dr/Pc	PC
3058	OP SnTop Lan D Lh 5Sw St	Dr/Pc	PC
3059	OP SnTop Lan D Rh 5Sw St	Dr/Pc	PC
3060	OP SnRII Lan D St	Dr/Pc	PC
3061	OP SnRbd Lan D 2Sw St	Dr/Pc	PC
3062	OP SnSdstk Lan D 3Sw St	Dr/Pc	PC
3063	OP SnTop Mar C Lh 5Sw St	Dr/Pc	PC
3064	OP SnTop Mar C Rh 5Sw St	Dr/Pc	PC
3065	OP SnRII Mar C St	Dr/Pc	PC
3066	OP SnRbd Mar C 2Sw St	Dr/Pc	PC
3067	OP SnSdstk Mar C 3Sw St	Dr/Pc	PC
3068	OP SnTop Dre A Lh 5Sw St	Dr/Pc	PC
3069	OP SnTop Dre A Rh 5Sw St	Dr/Pc	PC
3070	OP SnRII Dre A St	Dr/Pc	PC
3071	OP SnRbd Dre A 2Sw St	Dr/Pc	PC
3072	OP SnSdstk Dre A 3Sw St	Dr/Pc	PC
3073	OP SnTop Pic B Lh 5Sw St	Dr/Pc	PC
3074	OP SnTop Pic B Rh 5Sw St	Dr/Pc	PC
3075	OP SnRII Pic B St	Dr/Pc	PC
3076	OP SnRbd Pic B 2Sw St	Dr/Pc	PC
3077	OP SnSdstk Pic B 3Sw St	Dr/Pc	PC
3078	OP SnTop Ensemble 5Sw St	Dr/Pc	PC
3079	OP SnTopFlam Ensemble 3Sw St	Dr/Pc	PC
3080	OP SnRII Ioud St	Dr/Pc	PC
3081	OP SnTop crescend St	Dr/Pc	PC
3082	OP Whip Top Lo 3Sw St	Dr/Pc	PC
3083	OP Whip Top Hi 3Sw St	Dr/Pc	PC
3084	OP WoBlo Top Lo 3Sw St	Dr/Pc	PC
3085	OP WoBlo Top Hi 3Sw St	Dr/Pc	PC
3086	OP TempB Top Lo 3Sw St	Dr/Pc	PC
3087	OP BOBA Gis rim 3Sw Alt1 St	Dr/Pc	PC
3088	OP BOBA Gis rim 3Sw Alt2 St	Dr/Pc	PC
3089	OP BOBA Gis rim 3Sw Alt3 St	Dr/Pc	PC
3090	OP BOBA A rim 3Sw Alt1 St	Dr/Pc	PC
3091	OP BOBA A rim 3Sw Alt2 St	Dr/Pc	PC
3092	OP BOBA A rim 3Sw Alt3 St	Dr/Pc	PC
3093	OP BOBA Bb rim 3Sw Alt1 St	Dr/Pc	PC
3094	OP BOBA Bb rim 3Sw Alt2 St	Dr/Pc	PC
3095	OP BOBA Bb rim 3Sw Alt3 St	Dr/Pc	PC
3096	OP BOBA H rim 3Sw Alt1 St	Dr/Pc	PC
3097	OP BOBA H rim 3Sw Alt2 St	Dr/Pc	PC
3098	OP BOBA H rim 3Sw Alt3 St	Dr/Pc	PC
3099	OP BOBA C rim 3Sw Alt1 St	Dr/Pc	PC
3100	OP BOBA C rim 3Sw Alt2 St	Dr/Pc	PC
3101	OP BOBA C rim 3Sw Alt3 St	Dr/Pc	PC
3102	OP BOBA Cis rim 3Sw Alt1 St	Dr/Pc	PC
3103	OP BOBA Cis rim 3Sw Alt2 St	Dr/Pc	PC
3104	OP BOBA Cis rim 3Sw Alt3 St	Dr/Pc	PC
3105	OP BOBA D rim 3Sw Alt1 St	Dr/Pc	PC
3106	OP BOBA D rim 3Sw Alt2 St	Dr/Pc	PC
3107	OP BOBA D rim 3Sw Alt3 St	Dr/Pc	PC
3108	OP BOBA Dis rim 3Sw Alt1 St	Dr/Pc	PC
3109	OP BOBA Dis rim 3Sw Alt2 St	Dr/Pc	PC
3110	OP BOBA Dis rim 3Sw Alt3 St	Dr/Pc	PC
3111	OP BOBA E rim 3Sw Alt1 St	Dr/Pc	PC
3112	OP BOBA E rim 3Sw Alt2 St	Dr/Pc	PC
3113	OP BOBA E rim 3Sw Alt3 St	Dr/Pc	PC
3114	OP Bongo Top Hi 3Sw St	Dr/Pc	PC
3115	OP Bongo Top Lo 3Sw St	Dr/Pc	PC
3116	OP Conga Hi 5Sw St	Dr/Pc	PC
3117	OP Conga Lo 5Sw St	Dr/Pc	PC
3118	OP Triang Dyn 1 3Sw St	Dr/Pc	PC
3119	OP Triang Dyn Mtd 3Sw St	Dr/Pc	PC
3120	OP Triang RII 2 St	Dr/Pc	PC
3121	OP Triang RII 1 St	Dr/Pc	PC
3122	OP WiChi RII DoM St	Dr/Pc	PC
3123	OP WiChi RII DoF St	Dr/Pc	PC
3124	OP BeTree RII Do St	Dr/Pc	PC
3125	OP BeTree RII Up St	Dr/Pc	PC
3126	OP SIBells Top 3Sw St	Dr/Pc	PC
3127	OP FiCym Top 2Sw St	Dr/Pc	PC
3128	OP FiCym Rub Tip 2Sw St	Dr/Pc	PC
3129	OP FiCym Top Ham 2Sw St	Dr/Pc	PC
3130	OP FiCym RII Ham St	Dr/Pc	PC
3131	OP TamTr Top 5Sw St	Dr/Pc	PC
3132	OP TamTr RII 1 St	Dr/Pc	PC
3133	OP JRTam Top 5Sw St	Dr/Pc	PC
3134	OP TamTr RII 2 St	Dr/Pc	PC
3135	OP Casta Top 5Sw St	Dr/Pc	PC
3136	OP Casta RII Do St	Dr/Pc	PC
3137	OP Anveil Top 2Sw St	Dr/Pc	PC
3138	OP Cowbell Top 2Sw St	Dr/Pc	PC
3139	OP Cowbell Tip 2Sw St	Dr/Pc	PC
3140	OP Cuica Top Alt 1 St	Dr/Pc	PC
3141	OP Cuica Top Alt 2 St	Dr/Pc	PC
3142	OP Cuica Top Alt 3 St	Dr/Pc	PC
3143	OP Cuica Top Alt 4 St	Dr/Pc	PC
3144	OP Cuica Top Alt 5 St	Dr/Pc	PC
3145	OP Lion Top St	Dr/Pc	PC
3146	OP Shake1 Top Alt 1 St	Dr/Pc	PC
3147	OP Shake1 Top Alt 2 St	Dr/Pc	PC
3148	OP Shake1 Top Alt 3 St	Dr/Pc	PC
3149	OP Shake2 Top Alt 2 St	Dr/Pc	PC
3150	OP Shake2 Top Alt 3 St	Dr/Pc	PC
3151	OP Shake2 Top Alt 5 St	Dr/Pc	PC
3152	OP MeShak Top Alt 1 St	Dr/Pc	PC
3153	OP MeShak Top Alt 3 St	Dr/Pc	PC
3154	OP MeShak Top Alt 5 St	Dr/Pc	PC
3155	OP Rainm Top Fast St	Dr/Pc	PC
3156	OP Rainm Top Slow St	Dr/Pc	PC
3157	OP Spira Top St	Dr/Pc	PC
3158	ShakerA 13	Dr/Pc	PC
3159	ShakerA 1	Dr/Pc	PC
3160	ShakerA 2	Dr/Pc	PC

No.	Name	Main Category	Sub Category
3161	ShakerA 3	Dr/Pc	PC
3162	ShakerB Sw	Dr/Pc	PC
3163	ShakerB Shake	Dr/Pc	PC
3164	ShakerB Hit	Dr/Pc	PC
3165	ShakerC 1 Sw	Dr/Pc	PC
3166	ShakerC 2 Sw	Dr/Pc	PC
3167	Shaker Hip1	Dr/Pc	PC
3168	Shaker Hip2	Dr/Pc	PC
3169	Shaker Hip3	Dr/Pc	PC
3170	Shaker Hip4	Dr/Pc	PC
3171	Std Shaker	Dr/Pc	PC
3172	Shaker Fresh 1	Dr/Pc	PC
3173	Shaker Fresh 2	Dr/Pc	PC
3174	Shaker Fresh 3	Dr/Pc	PC
3175	Shaker Muffled 1 St	Dr/Pc	PC
3176	Shaker Muffled 2 St	Dr/Pc	PC
3177	HipHop Shaker1 Mn	Dr/Pc	PC
3178	HipHop Shaker2 Mn	Dr/Pc	PC
3179	HipHop Shaker Sw	Dr/Pc	PC
3180	HipHop Shaker Lng Mn	Dr/Pc	PC
3181	House Shaker1 Mn	Dr/Pc	PC
3182	House Shaker2 Mn	Dr/Pc	PC
3183	House Shaker St	Dr/Pc	PC
3184	House Shaker Long Mn	Dr/Pc	PC
3185	Tambourine1 Sw	Dr/Pc	PC
3186	Tambourine1 Shake	Dr/Pc	PC
3187	Tambourine1 Hit	Dr/Pc	PC
3188	Tambourine2 Sw	Dr/Pc	PC
3189	Tambourine2 Shake	Dr/Pc	PC
3190	Tambourine2 Hit	Dr/Pc	PC
3191	Tambourine3	Dr/Pc	PC
3192	Tambourine FX 1	Dr/Pc	PC
3193	Tambourine FX 2	Dr/Pc	PC
3194	HipHop Tamb1 Mn	Dr/Pc	PC
3195	HipHop Tamb2 Mn	Dr/Pc	PC
3196	HipHop Tamb3 Sw	Dr/Pc	PC
3197	Stick1	Dr/Pc	PC
3198	Stick2	Dr/Pc	PC
3199	HipHop Stick1 Mn	Dr/Pc	PC
3200	HipHop Stick2 Mn	Dr/Pc	PC
3201	HipHop Stick Sw	Dr/Pc	PC
3202	Castanet1	Dr/Pc	PC
3203	Castanet2 Sw	Dr/Pc	PC
3204	Castanet2 Soft	Dr/Pc	PC
3205	Castanet2 Hard	Dr/Pc	PC
3206	Castanet3 Flam1	Dr/Pc	Ethnc
3207	Castanet3 Flam2	Dr/Pc	Ethnc
3208	Castanet3 LH Normal	Dr/Pc	Ethnc
3209	Castanet3 LH Mute	Dr/Pc	Ethnc
3210	Castanet3 LH&RH Normal	Dr/Pc	Ethnc
3211	Castanet3 LH&RH Mute	Dr/Pc	Ethnc
3212	Castanet3 RH Normal	Dr/Pc	Ethnc
3213	Castanet3 RH Mute	Dr/Pc	Ethnc
3214	Wood Block	Dr/Pc	PC
3215	HipHop WB1 Mn	Dr/Pc	PC
3216	HipHop WB2 Mn	Dr/Pc	PC
3217	HipHop WB3 Mn	Dr/Pc	PC
3218	House WB1 Mn	Dr/Pc	PC
3219	House WB2 Mn	Dr/Pc	PC
3220	House WB3 Mn	Dr/Pc	PC
3221	Vibraslap1	Dr/Pc	PC
3222	Vibraslap2	Dr/Pc	PC
3223	Vibraslap3	Dr/Pc	PC
3224	Triangle1 Sw	Dr/Pc	PC
3225	Triangle1 Open	Dr/Pc	PC
3226	Triangle1 Mute	Dr/Pc	PC
3227	Triangle2 Open	Dr/Pc	PC
3228	Triangle2 Mute	Dr/Pc	PC
3229	Triangle3 Open	Dr/Pc	PC
3230	Triangle3 Mute	Dr/Pc	PC
3231	Hand Clap1 St	Dr/Pc	PC
3232	Hand Clap1 L	Dr/Pc	PC
3233	Hand Clap1 R	Dr/Pc	PC
3234	Hand Clap2 Sw	Dr/Pc	PC
3235	Hand Clap2 Close	Dr/Pc	PC
3236	Hand Clap2 Open	Dr/Pc	PC
3237	Hand Clap3 Sw	Dr/Pc	PC
3238	Hand Clap4	Dr/Pc	PC
3239	Arabic Hand Clap	Dr/Pc	Ethnc
3240	Khaligi Hand Clap1	Dr/Pc	Ethnc
3241	Khaligi Hand Clap2	Dr/Pc	Ethnc
3242	Khaligi Hand Clap3	Dr/Pc	Ethnc
3243	Khaligi Hand Clap4	Dr/Pc	Ethnc
3244	Iran Hand Clap	Dr/Pc	Ethnc
3245	Finger Snap1	Dr/Pc	PC
3246	Finger Snap2	Dr/Pc	PC
3247	Finger Snap3	Dr/Pc	PC
3248	Handbell L	Dr/Pc	PC
3249	Handbell H	Dr/Pc	PC
3250	Sleigh Bell1	Dr/Pc	PC
3251	Sleigh Bell2	Dr/Pc	PC
3252	Ghunghuru	Dr/Pc	PC
3253	Chocal Forward	Dr/Pc	PC
3254	Wind Chime 1	Dr/Pc	PC
3255	Wind Chime 2 St	Dr/Pc	PC
3256	Resin Block Small	Dr/Pc	PC
3257	Resin Block Large	Dr/Pc	PC
3258	OrchTamb Shake-Hit	Dr/Pc	PC
3259	OrchTamb Shake 1-2	Dr/Pc	PC
3260	OrchTamb Shake 1	Dr/Pc	PC
3261	OrchTamb Shake 2	Dr/Pc	PC
3262	OrchTamb Hit Close	Dr/Pc	PC
3263	OrchTamb Hit Open	Dr/Pc	PC
3264	Conga1 Hi Tip	Dr/Pc	PC
3265	Conga1 Hi Heel	Dr/Pc	PC
3266	Conga1 Hi Open 1-2	Dr/Pc	PC
3267	Conga1 Hi Open 1	Dr/Pc	PC
3268	Conga1 Hi Open 2	Dr/Pc	PC
3269	Conga1 Hi Mute	Dr/Pc	PC
3270	Conga1 Hi Slap Open	Dr/Pc	PC
3271	Conga1 Hi Slap	Dr/Pc	PC
3272	Conga1 Hi SlpMute1-2	Dr/Pc	PC
3273	Conga1 Hi SlapMute 1	Dr/Pc	PC
3274	Conga1 Hi SlapMute 2	Dr/Pc	PC
3275	Conga1 Lo Tip	Dr/Pc	PC
3276	Conga1 Lo Heel	Dr/Pc	PC
3277	Conga1 Lo Open 1-2	Dr/Pc	PC
3278	Conga1 Lo Open 1	Dr/Pc	PC
3279	Conga1 Lo Open 2	Dr/Pc	PC
3280	Conga1 Lo Mute	Dr/Pc	PC
3281	Conga1 Lo Slap Open	Dr/Pc	PC
3282	Conga2 Hi Heel	Dr/Pc	PC
3283	Conga2 Hi Tip	Dr/Pc	PC
3284	Conga2 Hi Slap 1-2	Dr/Pc	PC
3285	Conga2 Hi Slap 1	Dr/Pc	PC
3286	Conga2 Hi Slap 2	Dr/Pc	PC
3287	Conga2 Hi Open 1-2	Dr/Pc	PC
3288	Conga2 Hi Open 1	Dr/Pc	PC
3289	Conga2 Hi Open 2	Dr/Pc	PC
3290	Conga2 Hi Mute	Dr/Pc	PC
3291	Conga2 Lo Open 1-2	Dr/Pc	PC
3292	Conga2 Lo Open 1	Dr/Pc	PC
3293	Conga2 Lo Open 2	Dr/Pc	PC
3294	Conga2 Lo Slide	Dr/Pc	PC
3295	Conga3 Hi Open	Dr/Pc	PC
3296	Conga3 Hi Mute	Dr/Pc	PC
3297	Conga3 Lo Open	Dr/Pc	PC
3298	Conga Fine 1 St	Dr/Pc	PC
3299	Conga Fine 2 St	Dr/Pc	PC
3300	Conga FX	Dr/Pc	PC
3301	Khalg Conga1 Hi Sak1	Dr/Pc	Ethnc
3302	Khalg Conga1 Hi Sak2	Dr/Pc	Ethnc
3303	Khalg Conga1 Lo Dom1	Dr/Pc	Ethnc
3304	Khalg Conga1 Lo Dom2	Dr/Pc	Ethnc
3305	Khalg Conga1 Lo Sak1	Dr/Pc	Ethnc
3306	Khalg Conga2 Hi Dom	Dr/Pc	Ethnc
3307	Khalg Conga2 Hi Sak	Dr/Pc	Ethnc
3308	Quinto1 Open	Dr/Pc	PC
3309	Quinto1 Slap	Dr/Pc	PC
3310	Quinto2 Open	Dr/Pc	PC
3311	Quinto2 Heel	Dr/Pc	PC
3312	Tumba Open	Dr/Pc	PC
3313	Tumba Slap	Dr/Pc	PC
3314	Tumba Tip	Dr/Pc	PC
3315	Tumba Heel	Dr/Pc	PC
3316	Cuica1 Lo	Dr/Pc	PC
3317	Cuica1 Hi	Dr/Pc	PC
3318	Cuica2 Low	Dr/Pc	PC
3319	Cuica2 Med	Dr/Pc	PC
3320	Cuica2 Hi	Dr/Pc	PC
3321	Bongo1 Hi 1Fingr 1-2	Dr/Pc	PC
3322	Bongo1 Hi 1Finger 1	Dr/Pc	PC
3323	Bongo1 Hi 1Finger 2	Dr/Pc	PC
3324	Bongo1 Hi 3Fingr 1-2	Dr/Pc	PC
3325	Bongo1 Hi 3Finger 1	Dr/Pc	PC
3326	Bongo1 Hi 3Finger 2	Dr/Pc	PC
3327	Bongo1 Hi Rim	Dr/Pc	PC
3328	Bongo1 Hi Tip	Dr/Pc	PC
3329	Bongo1 Hi Heel	Dr/Pc	PC
3330	Bongo1 Hi Slap	Dr/Pc	PC
3331	Bongo1 Lo 1Fingr 1-2	Dr/Pc	PC
3332	Bongo1 Lo 1Finger 1	Dr/Pc	PC
3333	Bongo1 Lo 1Finger 2	Dr/Pc	PC
3334	Bongo1 Lo 3Fingr 1-2	Dr/Pc	PC
3335	Bongo1 Lo 3Finger 1	Dr/Pc	PC
3336	Bongo1 Lo 3Finger 2	Dr/Pc	PC
3337	Bongo1 Lo Rim	Dr/Pc	PC
3338	Bongo1 Lo Tip	Dr/Pc	PC
3339	Bongo2 Hi Mute	Dr/Pc	PC
3340	Bongo2 Hi Open 1-2	Dr/Pc	PC
3341	Bongo2 Hi Open 1	Dr/Pc	PC
3342	Bongo2 Hi Open 2	Dr/Pc	PC
3343	Bongo2 Lo Mute	Dr/Pc	PC
3344	Bongo2 Lo Open 1-2	Dr/Pc	PC
3345	Bongo2 Lo Open 1	Dr/Pc	PC
3346	Bongo2 Lo Open 2	Dr/Pc	PC
3347	Bongo3 Hi Open	Dr/Pc	PC
3348	Bongo3 Lo Open	Dr/Pc	PC
3349	Bongo Extent 1 St	Dr/Pc	PC
3350	Bongo Extent 2 St	Dr/Pc	PC
3351	Bongo Extent 3 St	Dr/Pc	PC
3352	HipHop Bongo1 Mn	Dr/Pc	PC
3353	HipHop Bongo2 Mn	Dr/Pc	PC
3354	Khalg Bongo Lo Dom	Dr/Pc	Ethnc
3355	Khalg Bongo Lo Sak	Dr/Pc	Ethnc
3356	Khalg Bongo Lo Tak	Dr/Pc	Ethnc
3357	Khalg Bongo Hi Snap1	Dr/Pc	Ethnc
3358	Khalg Bongo Hi Snap2	Dr/Pc	Ethnc
3359	Khalg Bongo Hi Sak	Dr/Pc	Ethnc
3360	Iran Bongo Lo Tom	Dr/Pc	Ethnc
3361	Iran Bongo Lo Flm Tm	Dr/Pc	Ethnc
3362	Iran Bongo Lo Roll	Dr/Pc	Ethnc
3363	Iran Bongo Hi Bk LH	Dr/Pc	Ethnc
3364	Iran Bongo Hi Bk RH	Dr/Pc	Ethnc
3365	Iran Bongo Hi Mt RH	Dr/Pc	Ethnc
3366	Iran Bongo Hi Flm Bk	Dr/Pc	Ethnc
3367	Iran Bongo Hi Roll	Dr/Pc	Ethnc
3368	Timbale1 Hi 1-3	Dr/Pc	PC
3369	Timbale1 Hi 1	Dr/Pc	PC
3370	Timbale1 Hi 2	Dr/Pc	PC
3371	Timbale1 Hi 3	Dr/Pc	PC
3372	Timbale1 Lo 1-2	Dr/Pc	PC
3373	Timbale1 Lo 1	Dr/Pc	PC
3374	Timbale1 Lo 2	Dr/Pc	PC
3375	Timbale1 Rim	Dr/Pc	PC
3376	Timbale1 Paila H	Dr/Pc	PC
3377	Timbale1 Paila L	Dr/Pc	PC
3378	Timbale2 Hi Sw	Dr/Pc	PC
3379	Timbale2 Hi 1	Dr/Pc	PC
3380	Timbale2 Hi 2	Dr/Pc	PC
3381	Timbale2 Hi Rim	Dr/Pc	PC
3382	Timbale2 Lo Sw	Dr/Pc	PC
3383	Timbale2 Lo 1	Dr/Pc	PC
3384	Timbale2 Lo 2	Dr/Pc	PC
3385	Timbale2 Lo Rim	Dr/Pc	PC
3386	Timbale3 Lo	Dr/Pc	PC
3387	Timbale3 Hi	Dr/Pc	PC
3388	Timbale3 Lo Rim	Dr/Pc	PC
3389	Timbale3 Hi Rim	Dr/Pc	PC
3390	Timbale4 Lo	Dr/Pc	PC
3391	Tanak Dom1	Dr/Pc	Ethnc
3392	Tanak Dom2	Dr/Pc	Ethnc
3393	Paila L	Dr/Pc	PC
3394	Paila H	Dr/Pc	PC
3395	Ganza1 Accent	Dr/Pc	PC
3396	Ganza1 Back	Dr/Pc	PC
3397	Ganza1 Forward	Dr/Pc	PC
3398	Ganza2 Forward1	Dr/Pc	PC
3399	Ganza2 Forward2	Dr/Pc	PC
3400	Maracas1 Sw	Dr/Pc	PC
3401	Maracas1 Slur	Dr/Pc	PC
3402	Maracas1 Staccato	Dr/Pc	PC
3403	Maracas2	Dr/Pc	PC
3404	Cabasa1A 1-2	Dr/Pc	PC
3405	Cabasa1A 1	Dr/Pc	PC
3406	Cabasa1A 2	Dr/Pc	PC
3407	Cabasa1B 1-4	Dr/Pc	PC
3408	Cabasa1B 1	Dr/Pc	PC
3409	Cabasa1B 2	Dr/Pc	PC
3410	Cabasa1B 3	Dr/Pc	PC
3411	Cabasa1B 4	Dr/Pc	PC
3412	Cabasa2	Dr/Pc	PC
3413	Cabasa3	Dr/Pc	PC
3414	Cabasa4	Dr/Pc	PC
3415	Caxixi 1-2	Dr/Pc	PC
3416	Caxixi 1	Dr/Pc	PC
3417	Caxixi 2	Dr/Pc	PC
3418	Caxixi 3	Dr/Pc	PC
3419	Afoxe Open	Dr/Pc	PC
3420	Tumbo 1	Dr/Pc	PC
3421	Tumbo 2	Dr/Pc	PC
3422	Tumbo 3	Dr/Pc	PC
3423	Tumbo4 Up	Dr/Pc	PC
3424	Tumbo4 Down	Dr/Pc	PC
3425	Tumbo5 Finger Back	Dr/Pc	PC
3426	Tumbo5 Center Open	Dr/Pc	PC
3427	Tumbo5 Rim Close	Dr/Pc	PC
3428	Pandeiro1 Open	Dr/Pc	PC
3429	Pandeiro1 Thump	Dr/Pc	PC
3430	Pandeiro1 Tip	Dr/Pc	PC
3431	Pandeiro1 Heel	Dr/Pc	PC
3432	Pandeiro2 LHeel	Dr/Pc	PC
3433	Pandeiro2 LToe Rim	Dr/Pc	PC
3434	Pandeiro2 LSlap	Dr/Pc	PC
3435	Pandeiro2 LThmb Opn	Dr/Pc	PC
3436	Pandeiro2 LThmb Cls	Dr/Pc	PC
3437	Pandeiro2 LRoll	Dr/Pc	PC
3438	Pandeiro2 CHeel	Dr/Pc	PC
3439	Pandeiro2 CToLo Opn	Dr/Pc	PC
3440	Pandeiro2 CSlap	Dr/Pc	PC
3441	Pandeiro2 CThmb Opn	Dr/Pc	PC
3442	Pandeiro2 CThmb Cls	Dr/Pc	PC
3443	Pandeiro2 CRoll Lng	Dr/Pc	PC
3444	Tmbourim Open	Dr/Pc	PC
3445	Tmbourim Finger	Dr/Pc	PC
3446	Tmbourim Mute	Dr/Pc	PC
3447	Agogo1 Hi	Dr/Pc	PC
3448	Agogo1 Lo	Dr/Pc	PC
3449	Agogo1 Lo1 Tap	Dr/Pc	PC
3450	Agogo2 Bell1	Dr/Pc	PC
3451	Agogo2 Bell2	Dr/Pc	PC
3452	Agogo3 Click	Dr/Pc	PC
3453	Agogo4 Click	Dr/Pc	PC
3454	Guiro1 Long	Dr/Pc	PC
3455	Guiro1 Short	Dr/Pc	PC
3456	Guiro1 Swp	Dr/Pc	PC
3457	Guiro2 Long	Dr/Pc	PC
3458	HipHop Guiro Mn	Dr/Pc	PC
3459	House Guiro Mn	Dr/Pc	PC
3460	MetalGuiro Short 1-2	Dr/Pc	PC
3461	MetalGuiro Short 1	Dr/Pc	PC
3462	MetalGuiro Short 2	Dr/Pc	PC
3463	MetalGuiro Long	Dr/Pc	PC
3464	Reco1	Dr/Pc	PC
3465	Reco2	Dr/Pc	PC
3466	Surdo1 Open	Dr/Pc	PC
3467	Surdo1 Mute	Dr/Pc	PC
3468	Surdo2 Open	Dr/Pc	PC
3469	Surdo2 Mute	Dr/Pc	PC
3470	Surdo3 Stop	Dr/Pc	PC
3471	Surdo3 Open	Dr/Pc	PC
3472	Surdo3 Mute	Dr/Pc	PC
3473	Surdo4 Stop	Dr/Pc	PC
3474	Surdo4 Open	Dr/Pc	PC
3475	Surdo4 Mute	Dr/Pc	PC
3476	Surdo5-1 Stop	Dr/Pc	PC

No.	Name	Main Category	Sub Category
3477	Surdo5-1 Open	Dr/Pc	PC
3478	Surdo5-1 Mute	Dr/Pc	PC
3479	Surdo5-2 Sdstck	Dr/Pc	PC
3480	Tntan1 Body	Dr/Pc	PC
3481	Tntan1 Slap RH	Dr/Pc	PC
3482	Tntan1 Thmb Open RH	Dr/Pc	PC
3483	Tntan1 Open RH	Dr/Pc	PC
3484	Tntan2 Body LH	Dr/Pc	PC
3485	Tntan2 Slap RH	Dr/Pc	PC
3486	Tntan2 Open RH	Dr/Pc	PC
3487	Tntan2 Close RH	Dr/Pc	PC
3488	Zabmba STick LH	Dr/Pc	PC
3489	Zabmba Open RH	Dr/Pc	PC
3490	Zabmba Mute RH	Dr/Pc	PC
3491	Cajon1 Kick	Dr/Pc	PC
3492	Cajon1 Slap	Dr/Pc	PC
3493	Cajon1 Tip 1-2	Dr/Pc	PC
3494	Cajon1 Tip 1	Dr/Pc	PC
3495	Cajon1 Tip 2	Dr/Pc	PC
3496	Cajon2 Foot	Dr/Pc	PC
3497	Cajon2 Lo	Dr/Pc	PC
3498	Cajon2 Slap	Dr/Pc	PC
3499	Cajon2 Mute	Dr/Pc	PC
3500	Cajon2 Tip	Dr/Pc	PC
3501	Cajon2 Ghost1	Dr/Pc	PC
3502	Cajon2 Ghost2	Dr/Pc	PC
3503	Cajon3 Vari 1	Dr/Pc	Ethnc
3504	Cajon3 Vari 2	Dr/Pc	Ethnc
3505	Cajon3 Vari 3	Dr/Pc	Ethnc
3506	Cajon3 Vari 4	Dr/Pc	Ethnc
3507	Cajon3 Vari 5	Dr/Pc	Ethnc
3508	Cajon3 Vari 6	Dr/Pc	Ethnc
3509	Cajon3 Vari 7	Dr/Pc	Ethnc
3510	Cajon3 Vari 8	Dr/Pc	Ethnc
3511	Cajon3 Vari 9	Dr/Pc	Ethnc
3512	Cajon3 Vari 10	Dr/Pc	Ethnc
3513	Cajon3 Vari 11	Dr/Pc	Ethnc
3514	Cajon3 Vari 12	Dr/Pc	Ethnc
3515	Cajon3 Vari 13	Dr/Pc	Ethnc
3516	Cajon3 Vari 14	Dr/Pc	Ethnc
3517	Cajon3 Vari 15	Dr/Pc	Ethnc
3518	Cajon3 Vari 16	Dr/Pc	Ethnc
3519	Cajon3 Vari 17	Dr/Pc	Ethnc
3520	Cajon3 Vari 18	Dr/Pc	Ethnc
3521	Cajon3 Vari 19	Dr/Pc	Ethnc
3522	Cajon3 Vari 20	Dr/Pc	Ethnc
3523	Cajon3 Vari 21	Dr/Pc	Ethnc
3524	Cajon3 Vari 22	Dr/Pc	Ethnc
3525	Cajon3 Vari 23	Dr/Pc	Ethnc
3526	Cajon3 Vari 24	Dr/Pc	Ethnc
3527	Cajon3 Vari 25	Dr/Pc	Ethnc
3528	Cajon3 Vari 26	Dr/Pc	Ethnc
3529	Cajon3 Vari 27	Dr/Pc	Ethnc
3530	Cajon3 Vari 28	Dr/Pc	Ethnc
3531	Cajon3 Vari 29	Dr/Pc	Ethnc
3532	Cajon3 Vari 30	Dr/Pc	Ethnc
3533	Cajon3 Vari 31	Dr/Pc	Ethnc
3534	Cajon3 Vari 32	Dr/Pc	Ethnc
3535	Cajon3 Vari 33	Dr/Pc	Ethnc
3536	Cajon3 Vari 34	Dr/Pc	Ethnc
3537	Cajon3 Vari 35	Dr/Pc	Ethnc
3538	Cajon3 Vari 36	Dr/Pc	Ethnc
3539	Cajon3 Vari 37	Dr/Pc	Ethnc
3540	Cajon3 Vari 38	Dr/Pc	Ethnc
3541	Cajon3 Vari 39	Dr/Pc	Ethnc
3542	Cajon3 Vari 40	Dr/Pc	Ethnc
3543	Cajon3 Vari 41	Dr/Pc	Ethnc
3544	Cajon3 Vari 42	Dr/Pc	Ethnc
3545	Cajon3 Vari 43	Dr/Pc	Ethnc
3546	Cajon3 Vari 44	Dr/Pc	Ethnc
3547	Cajon3 Vari 45	Dr/Pc	Ethnc
3548	Cajon3 Vari 46	Dr/Pc	Ethnc
3549	Cajon3 Vari 47	Dr/Pc	Ethnc
3550	Cajon3 Vari 48	Dr/Pc	Ethnc
3551	Cajon3 Vari 49	Dr/Pc	Ethnc
3552	Cajon3 Vari 50	Dr/Pc	Ethnc
3553	Cajon3 Vari 51	Dr/Pc	Ethnc
3554	Cajon3 Vari 52	Dr/Pc	Ethnc
3555	Cajon3 Vari 53	Dr/Pc	Ethnc
3556	Cajon3 Vari 54	Dr/Pc	Ethnc
3557	Cajon3 Vari 55	Dr/Pc	Ethnc
3558	Cajon3 Vari 56	Dr/Pc	Ethnc
3559	Claves1	Dr/Pc	PC
3560	Claves2	Dr/Pc	PC
3561	Claves3	Dr/Pc	PC
3562	Whistle	Dr/Pc	PC
3563	Apito Lo Short	Dr/Pc	PC
3564	Apito Hi Short	Dr/Pc	PC
3565	Cowbell1	Dr/Pc	PC
3566	Cowbell2	Dr/Pc	PC
3567	Cowbell3 Sw	Dr/Pc	PC
3568	Cowbell3 Mute	Dr/Pc	PC
3569	Cowbell3 Open	Dr/Pc	PC
3570	Cowbell4	Dr/Pc	PC
3571	Cowbell5	Dr/Pc	PC
3572	HipHop Cowbell 1 Mn	Dr/Pc	PC
3573	HipHop Cowbell 2 Mn	Dr/Pc	PC
3574	HipHop Cowbell Sw	Dr/Pc	PC
3575	Mambo Bell Sw	Dr/Pc	PC
3576	Mambo Bell1	Dr/Pc	PC
3577	Mambo Bell2	Dr/Pc	PC
3578	Mambo Bell Body	Dr/Pc	PC
3579	ChaCha Bell Sw	Dr/Pc	PC
3580	ChaCha Bell	Dr/Pc	PC
3581	Samba Tambourim Open	Dr/Pc	PC
3582	Samba Tambourim Slap	Dr/Pc	PC
3583	Samba Tambourim Mute	Dr/Pc	PC
3584	Repique Mute	Dr/Pc	PC
3585	Repique1 Open 1-2	Dr/Pc	PC
3586	Repique1 Open 1	Dr/Pc	PC
3587	Repique1 Open 2	Dr/Pc	PC
3588	Repique2 St Centr	Dr/Pc	PC
3589	Repique2 St Hd Slap	Dr/Pc	PC
3590	Repique2 St Rim	Dr/Pc	PC
3591	Repique2 St RmSht	Dr/Pc	PC
3592	Repique3 St Centr	Dr/Pc	PC
3593	Repique3 St RmSht	Dr/Pc	PC
3594	Repique4 Anel Open	Dr/Pc	PC
3595	Repique4 Anel Mute	Dr/Pc	PC
3596	Repique4 Anel Rim RH	Dr/Pc	PC
3597	Repique4 Anel Rim LH	Dr/Pc	PC
3598	Repique5 Mao Open	Dr/Pc	PC
3599	Repique5 Mao Rim	Dr/Pc	PC
3600	Repique5 Mao Slap	Dr/Pc	PC
3601	Berimbau Med	Dr/Pc	PC
3602	Berimbau Hard	Dr/Pc	PC
3603	Stomp St	Dr/Pc	PC
3604	Ethnic Perc 1	Dr/Pc	PC
3605	Ethnic Perc 2	Dr/Pc	PC
3606	Ethnic Perc 3	Dr/Pc	PC
3607	Ethnic Perc 4	Dr/Pc	PC
3608	Ethnic Perc 5	Dr/Pc	PC
3609	Ethnic Perc 6	Dr/Pc	PC
3610	Ethnic Perc 7	Dr/Pc	PC
3611	Ethnic Perc 8	Dr/Pc	PC
3612	Log Drum1	Dr/Pc	Ethnc
3613	Log Drum2	Dr/Pc	Ethnc
3614	Djembe1 Edge	Dr/Pc	Ethnc
3615	Djembe1 Mute	Dr/Pc	Ethnc
3616	Djembe1 Open	Dr/Pc	Ethnc
3617	Djembe1 Combi	Dr/Pc	Ethnc
3618	Djembe2 Lo	Dr/Pc	Ethnc
3619	Djembe2 Slap	Dr/Pc	Ethnc
3620	Djembe2 Mute	Dr/Pc	Ethnc
3621	Djembe3 Lo	Dr/Pc	Ethnc
3622	Djembe3 Slap	Dr/Pc	Ethnc
3623	Djembe3 Mute	Dr/Pc	Ethnc
3624	Djembe4 Dom1	Dr/Pc	Ethnc
3625	Djembe4 Dom2	Dr/Pc	Ethnc
3626	Djembe4 Tak1	Dr/Pc	Ethnc
3627	Djembe4 Tak2	Dr/Pc	Ethnc
3628	Djembe4 Flame	Dr/Pc	Ethnc
3629	Djembe4 Flame & Tak	Dr/Pc	Ethnc
3630	Tabla1 Bya	Dr/Pc	Ethnc
3631	Tabla1 Nah	Dr/Pc	Ethnc
3632	Tabla1 Mute	Dr/Pc	Ethnc
3633	Tabla1 Combi	Dr/Pc	Ethnc
3634	Tabla2 Dom & Tak	Dr/Pc	Ethnc
3635	Tabla2 Dom	Dr/Pc	Ethnc
3636	Tabla2 Tak1	Dr/Pc	Ethnc
3637	Tabla2 Tak2	Dr/Pc	Ethnc
3638	Tabla2 Tak3	Dr/Pc	Ethnc
3639	Tabla2 Tak4	Dr/Pc	Ethnc
3640	Tabla2 Sak	Dr/Pc	Ethnc
3641	Tabla2 Rak1	Dr/Pc	Ethnc
3642	Tabla2 Rak2	Dr/Pc	Ethnc
3643	Tabla2 Flam1	Dr/Pc	Ethnc
3644	Tabla2 Flam2	Dr/Pc	Ethnc
3645	Tabla2 Tak Roll	Dr/Pc	Ethnc
3646	Tabla3 Dom	Dr/Pc	Ethnc
3647	Tabla3 Tak	Dr/Pc	Ethnc
3648	Tabla3 Sak	Dr/Pc	Ethnc
3649	Tabla4 Dom	Dr/Pc	Ethnc
3650	Tabla4 Tak	Dr/Pc	Ethnc
3651	Tabla4 Tik	Dr/Pc	Ethnc
3652	Tabla4 Sak	Dr/Pc	Ethnc
3653	Tunisian Tabla Dom	Dr/Pc	Ethnc
3654	Tunisian Tabla Tak1	Dr/Pc	Ethnc
3655	Tunisian Tabla Tak2	Dr/Pc	Ethnc
3656	Tunisian Tabla Sak	Dr/Pc	Ethnc
3657	Tunisian Tabla TakMt	Dr/Pc	Ethnc
3658	Tablah Small Dom	Dr/Pc	Ethnc
3659	Tablah Small Snap	Dr/Pc	Ethnc
3660	Tablah Small Sak	Dr/Pc	Ethnc
3661	Tablah Small Tik	Dr/Pc	Ethnc
3662	Tablah Dom	Dr/Pc	Ethnc
3663	Tablah Tak1	Dr/Pc	Ethnc
3664	Tablah Tak2	Dr/Pc	Ethnc
3665	Tablah Tik1	Dr/Pc	Ethnc
3666	Tablah Tik2	Dr/Pc	Ethnc
3667	Tablah Tik3	Dr/Pc	Ethnc
3668	Tablah Sak	Dr/Pc	Ethnc
3669	Tablah Big Dom	Dr/Pc	Ethnc
3670	Tablah Big Tak	Dr/Pc	Ethnc
3671	Tablah Big Sak	Dr/Pc	Ethnc
3672	Tablah Tremolo	Dr/Pc	Ethnc
3673	Tabol Low Dom	Dr/Pc	Ethnc
3674	Tabol Low Tak	Dr/Pc	Ethnc
3675	Tabol Low Sak	Dr/Pc	Ethnc
3676	Tabol High Dom	Dr/Pc	Ethnc
3677	Tabol High Tak	Dr/Pc	Ethnc
3678	Tabol High Sak	Dr/Pc	Ethnc
3679	Tabel Saaidi Dom	Dr/Pc	Ethnc
3680	Tabel Saaidi Tak	Dr/Pc	Ethnc
3681	Tabel Saaidi Rim	Dr/Pc	Ethnc
3682	Tabel Dom	Dr/Pc	Ethnc
3683	Tabel Tak	Dr/Pc	Ethnc
3684	Tabel Tak Wood	Dr/Pc	Ethnc
3685	Tunisian Tabel Dom1	Dr/Pc	Ethnc
3686	Tunisian Tabel Dom2	Dr/Pc	Ethnc
3687	Tunisian Tabel Dom3	Dr/Pc	Ethnc
3688	Tunisian Tabel Tak1	Dr/Pc	Ethnc
3689	Tunisian Tabel Tak2	Dr/Pc	Ethnc
3690	Tunisian Tabel Tak3	Dr/Pc	Ethnc
3691	Moroccan Tamtam Lo	Dr/Pc	Ethnc
3692	Moroccan Tamtam Hi	Dr/Pc	Ethnc
3693	Dohol Low	Dr/Pc	Ethnc
3694	Dohol High	Dr/Pc	Ethnc
3695	Dohol Gorz	Dr/Pc	Ethnc
3696	Dohol Gorz & Tarkeh	Dr/Pc	Ethnc
3697	Dohol Tarkeh1	Dr/Pc	Ethnc
3698	Dohol Tarkeh2	Dr/Pc	Ethnc
3699	Kurdish Dohol1 Lo	Dr/Pc	Ethnc
3700	Kurdish Dohol1 Hi	Dr/Pc	Ethnc
3701	Kurdish Dohol2 Lo	Dr/Pc	Ethnc
3702	Kurdish Dohol2 Hi	Dr/Pc	Ethnc
3703	Kurdish Dohol2LoBuzz	Dr/Pc	Ethnc
3704	Lurish Dohol Lo	Dr/Pc	Ethnc
3705	Lurish Dohol Lo Buzz	Dr/Pc	Ethnc
3706	Lurish Dohol Hi	Dr/Pc	Ethnc
3707	Nakrazan Dom	Dr/Pc	Ethnc
3708	Nakrazan Flam	Dr/Pc	Ethnc
3709	Nakrazan Tak 1	Dr/Pc	Ethnc
3710	Nakrazan Tak 2	Dr/Pc	Ethnc
3711	Nakrazan Tak 3	Dr/Pc	Ethnc
3712	Nakrazan GlisDn pppp	Dr/Pc	Ethnc
3713	Nakrazan GlisDn ppp	Dr/Pc	Ethnc
3714	Nakrazan GlisDn pp	Dr/Pc	Ethnc
3715	Nakrazan GlisDn p	Dr/Pc	Ethnc
3716	Nakrazan Noise FX	Dr/Pc	Ethnc
3717	Nakrazan Roll1	Dr/Pc	Ethnc
3718	Nakrazan Roll2	Dr/Pc	Ethnc
3719	Merjaf Group1 Dom	Dr/Pc	Ethnc
3720	Merjaf Group1 Sak	Dr/Pc	Ethnc
3721	Merjaf Group2 Dom	Dr/Pc	Ethnc
3722	Merjaf Group2 Tak	Dr/Pc	Ethnc
3723	Merjaf Group2 Sak	Dr/Pc	Ethnc
3724	Zeer1 Dom	Dr/Pc	Ethnc
3725	Zeer1 Flam	Dr/Pc	Ethnc
3726	Zeer2 Dom1	Dr/Pc	Ethnc
3727	Zeer2 Dom2	Dr/Pc	Ethnc
3728	Zeer2 Flam	Dr/Pc	Ethnc
3729	Zeer3 Dom1	Dr/Pc	Ethnc
3730	Zeer3 Dom2	Dr/Pc	Ethnc
3731	Zeer3 Tak1	Dr/Pc	Ethnc
3732	Zeer3 Tak2	Dr/Pc	Ethnc
3733	Merwas Group Dom	Dr/Pc	Ethnc
3734	Merwas Group Sak	Dr/Pc	Ethnc
3735	Merwas Group Tak	Dr/Pc	Ethnc
3736	Merwas Dom	Dr/Pc	Ethnc
3737	Merwas Sak	Dr/Pc	Ethnc
3738	Merwas Tak	Dr/Pc	Ethnc
3739	Kaser Flam	Dr/Pc	Ethnc
3740	Kaser Dom1	Dr/Pc	Ethnc
3741	Kaser Dom2	Dr/Pc	Ethnc
3742	Kaser Sak1	Dr/Pc	Ethnc
3743	Kaser Sak2	Dr/Pc	Ethnc
3744	Rana Low1 Dom	Dr/Pc	Ethnc
3745	Rana Low2 Dom	Dr/Pc	Ethnc
3746	Rana Low1 Tak	Dr/Pc	Ethnc
3747	Rana Low2 Tak	Dr/Pc	Ethnc
3748	Rana Low1 Sak	Dr/Pc	Ethnc
3749	Rana Low2 Sak	Dr/Pc	Ethnc
3750	Rana High1 Dom	Dr/Pc	Ethnc
3751	Rana High2 Dom	Dr/Pc	Ethnc
3752	Rana High1 Tak	Dr/Pc	Ethnc
3753	Rana High2 Tak	Dr/Pc	Ethnc
3754	Rana High1 Sak	Dr/Pc	Ethnc
3755	Rana High2 Sak	Dr/Pc	Ethnc
3756	Medando1 Dom	Dr/Pc	Ethnc
3757	Medando1 Sak	Dr/Pc	Ethnc
3758	Medando2 Dom	Dr/Pc	Ethnc
3759	Medando2 Sak	Dr/Pc	Ethnc
3760	Medando Flam	Dr/Pc	Ethnc
3761	Mesando Dom	Dr/Pc	Ethnc
3762	Mesando Sak1	Dr/Pc	Ethnc
3763	Mesando Sak2	Dr/Pc	Ethnc
3764	Schekanka Dom	Dr/Pc	Ethnc
3765	Schekanka Sak 1	Dr/Pc	Ethnc
3766	Schekanka Sak 2	Dr/Pc	Ethnc
3767	Ras Low Dom	Dr/Pc	Ethnc
3768	Ras Low Sak	Dr/Pc	Ethnc
3769	Ras High Dom	Dr/Pc	Ethnc
3770	Lama Cymbal	Dr/Pc	Ethnc
3771	Mondira	Dr/Pc	Ethnc
3772	Tibetan Bell	Dr/Pc	Ethnc
3773	Tibetan Bowl	Dr/Pc	Ethnc
3774	Finger Cymbal Opn LH	Dr/Pc	Ethnc
3775	Finger Cymbal Mt LH	Dr/Pc	Ethnc
3776	Finger Cymbal Opn RH	Dr/Pc	Ethnc
3777	Finger Cymbal Mt RH	Dr/Pc	Ethnc
3778	Finger Cymbal Mt L&R	Dr/Pc	Ethnc
3779	Zangooreh Roll	Dr/Pc	Ethnc
3780	Zangooreh Shot	Dr/Pc	Ethnc
3781	Shekere Shake Sw	Dr/Pc	Ethnc
3782	Shekere Down	Dr/Pc	Ethnc
3783	Shekere Up	Dr/Pc	Ethnc
3784	Shekere Slap	Dr/Pc	Ethnc
3785	TalkingDrum Open	Dr/Pc	Ethnc
3786	TalkingDrum Slap	Dr/Pc	Ethnc
3787	TalkingDrum Mute	Dr/Pc	Ethnc
3788	TalkingDrum Bend 1-4	Dr/Pc	Ethnc
3789	TalkingDrum Bend 1	Dr/Pc	Ethnc
3790	TalkingDrum Bend 2	Dr/Pc	Ethnc
3791	TalkingDrum Bend 3	Dr/Pc	Ethnc
3792	TalkingDrum Bend 4	Dr/Pc	Ethnc

No.	Name	Main Category	Sub Category
3793	Kasoor Dom	Dr/Pc	Ethnc
3794	Kasoor Sak	Dr/Pc	Ethnc
3795	Kheshba Dom	Dr/Pc	Ethnc
3796	Kheshba Sak	Dr/Pc	Ethnc
3797	Kenkeni Sw	Dr/Pc	Ethnc
3798	Kenkeni Close	Dr/Pc	Ethnc
3799	Kenkeni Open	Dr/Pc	Ethnc
3800	Neghareh Tom	Dr/Pc	Ethnc
3801	Neghareh Chap	Dr/Pc	Ethnc
3802	Neghareh Back	Dr/Pc	Ethnc
3803	Neghareh Snap	Dr/Pc	Ethnc
3804	Neghareh Eshareh	Dr/Pc	Ethnc
3805	Neghareh Roll	Dr/Pc	Ethnc
3806	Gosha Naghareh Lo	Dr/Pc	Ethnc
3807	Gosha Naghareh LoRim	Dr/Pc	Ethnc
3808	Gosha Naghareh LoFlm	Dr/Pc	Ethnc
3809	Gosha Naghareh Hi1	Dr/Pc	Ethnc
3810	Gosha Naghareh Hi2	Dr/Pc	Ethnc
3811	Gosha Naghareh HiRim	Dr/Pc	Ethnc
3812	Gosha Naghareh HiFlm	Dr/Pc	Ethnc
3813	Sangban Sw	Dr/Pc	Ethnc
3814	Sangban Close	Dr/Pc	Ethnc
3815	Sangban Open	Dr/Pc	Ethnc
3816	Dundun Bell Sw	Dr/Pc	Ethnc
3817	Dundun Bell Close	Dr/Pc	Ethnc
3818	Dundun Bell Open	Dr/Pc	Ethnc
3819	Ainote 1	Dr/Pc	Ethnc
3820	Ainote 2	Dr/Pc	Ethnc
3821	Chanchiki Chan	Dr/Pc	Ethnc
3822	Chanchiki Ki	Dr/Pc	Ethnc
3823	Atarigane Con	Dr/Pc	Ethnc
3824	Atarigane Chi	Dr/Pc	Ethnc
3825	Wa Taiko	Dr/Pc	Ethnc
3826	Oo Taiko1 Don	Dr/Pc	Ethnc
3827	Oo Taiko1 Ka	Dr/Pc	Ethnc
3828	Oo Taiko2 Don Soft	Dr/Pc	Ethnc
3829	Oo Taiko2 Don Hard	Dr/Pc	Ethnc
3830	Oo Taiko2 Zu	Dr/Pc	Ethnc
3831	Oo Taiko2 Ka	Dr/Pc	Ethnc
3832	Yagura Taiko1 Don	Dr/Pc	Ethnc
3833	Yagura Taiko1 Zu	Dr/Pc	Ethnc
3834	Yagura Taiko1 Ka	Dr/Pc	Ethnc
3835	Yagura Taiko2 Don	Dr/Pc	Ethnc
3836	Yagura Taiko2 Zu	Dr/Pc	Ethnc
3837	Yagura Taiko2 Ka	Dr/Pc	Ethnc
3838	Shime Taiko1 Ten	Dr/Pc	Ethnc
3839	Shime Taiko1 Tsu	Dr/Pc	Ethnc
3840	Shime Taiko1 Ku	Dr/Pc	Ethnc
3841	Shime Taiko2 Ten	Dr/Pc	Ethnc
3842	Shime Taiko2 Tsu	Dr/Pc	Ethnc
3843	Shime Taiko2 Ku	Dr/Pc	Ethnc
3844	Tsuzumi Pon	Dr/Pc	Ethnc
3845	Tsuzumi Pu	Dr/Pc	Ethnc
3846	Tsuzumi Chi	Dr/Pc	Ethnc
3847	Tsuzumi Ta	Dr/Pc	Ethnc
3848	Oo Kawa Chon	Dr/Pc	Ethnc
3849	Oo Kawa Tsu	Dr/Pc	Ethnc
3850	Oo Kawa Ton	Dr/Pc	Ethnc
3851	Small Tabla Dom	Dr/Pc	Ethnc
3852	Small Tabla Snap	Dr/Pc	Ethnc
3853	Small Tabla Sak	Dr/Pc	Ethnc
3854	Small Tabla Tak	Dr/Pc	Ethnc
3855	Big Tabla Dom	Dr/Pc	Ethnc
3856	Big Tabla Tak	Dr/Pc	Ethnc
3857	Big Tabla Sak	Dr/Pc	Ethnc
3858	Tabla Dom	Dr/Pc	Ethnc
3859	Tabla Tak1	Dr/Pc	Ethnc
3860	Tabla Tak2	Dr/Pc	Ethnc
3861	Tabla Tik1	Dr/Pc	Ethnc
3862	Tabla Tik2	Dr/Pc	Ethnc
3863	Tabla Tik3	Dr/Pc	Ethnc
3864	Tabla Sak1	Dr/Pc	Ethnc
3865	Tabla Tremolo	Dr/Pc	Ethnc
3866	Udu Finger	Dr/Pc	Ethnc
3867	Udu High	Dr/Pc	Ethnc
3868	Udu Low	Dr/Pc	Ethnc
3869	Udu Combi	Dr/Pc	Ethnc
3870	Udho Tom Hole	Dr/Pc	Ethnc
3871	Udho Tom Hole Stop	Dr/Pc	Ethnc
3872	Udho Back1	Dr/Pc	Ethnc
3873	Udho Back2	Dr/Pc	Ethnc
3874	Udho Chap Body	Dr/Pc	Ethnc
3875	Udho Chap Skin	Dr/Pc	Ethnc
3876	Udho Chap Top Hole	Dr/Pc	Ethnc
3877	Udho Flam Skin	Dr/Pc	Ethnc
3878	Udho Flam Body	Dr/Pc	Ethnc
3879	Udho Roll Body	Dr/Pc	Ethnc
3880	Udho Roll Skin	Dr/Pc	Ethnc
3881	Jahla Group Dom	Dr/Pc	Ethnc
3882	Jahla Group Sak	Dr/Pc	Ethnc
3883	Jahla Dom	Dr/Pc	Ethnc
3884	Jahla Sak	Dr/Pc	Ethnc
3885	Barasim Dom	Dr/Pc	Ethnc
3886	Barasim Sak	Dr/Pc	Ethnc
3887	Barasim Tak	Dr/Pc	Ethnc
3888	Taar Barashim1 Dom	Dr/Pc	Ethnc
3889	Taar Barashim1 Sak	Dr/Pc	Ethnc
3890	Taar Barashim1 Tak	Dr/Pc	Ethnc
3891	Taar Barashim2 Dom	Dr/Pc	Ethnc
3892	Taar Barashim2 Sak	Dr/Pc	Ethnc
3893	Taar Barashim2 Tak	Dr/Pc	Ethnc
3894	Taar Barashim3 Dom	Dr/Pc	Ethnc
3895	Taar Barashim3 Sak	Dr/Pc	Ethnc
3896	Taar Barashim4 Dom	Dr/Pc	Ethnc
3897	Taar Barashim4 Sak	Dr/Pc	Ethnc
3898	Taar Barashim Shake	Dr/Pc	Ethnc
3899	Sgl TaarBarashim Dom	Dr/Pc	Ethnc
3900	Sgl TaarBarashim Sak	Dr/Pc	Ethnc
3901	Sgl TaarBarashim Tak	Dr/Pc	Ethnc
3902	Tar Barashim Dom	Dr/Pc	Ethnc
3903	Tar Barashim Sak	Dr/Pc	Ethnc
3904	Tar Barashim Tak	Dr/Pc	Ethnc
3905	Segal Dom	Dr/Pc	Ethnc
3906	Segal Tak	Dr/Pc	Ethnc
3907	Twaisat1	Dr/Pc	Ethnc
3908	Twaisat2	Dr/Pc	Ethnc
3909	Twaisat3	Dr/Pc	Ethnc
3910	Twaisat4	Dr/Pc	Ethnc
3911	Twaisat5	Dr/Pc	Ethnc
3912	AsmaDavulSideBdy 1-2	Dr/Pc	Ethnc
3913	AsmaDavulSideBody 1	Dr/Pc	Ethnc
3914	AsmaDavulSideBody 2	Dr/Pc	Ethnc
3915	AsmaDavul L Side 1-2	Dr/Pc	Ethnc
3916	AsmaDavul L Side 1	Dr/Pc	Ethnc
3917	AsmaDavul L Side 2	Dr/Pc	Ethnc
3918	AsmaDavul Both Sides	Dr/Pc	Ethnc
3919	AsmaDavul R Side 1-2	Dr/Pc	Ethnc
3920	AsmaDavul R Side 1	Dr/Pc	Ethnc
3921	AsmaDavul R Side 2	Dr/Pc	Ethnc
3922	Koltuk Davul Dum 1-2	Dr/Pc	Ethnc
3923	Koltuk Davul Dum 1	Dr/Pc	Ethnc
3924	Koltuk Davul Dum 2	Dr/Pc	Ethnc
3925	KoltukDavulTekeOp1-3	Dr/Pc	Ethnc
3926	KoltukDavulTekeOp 1	Dr/Pc	Ethnc
3927	KoltukDavulTekeOp 2	Dr/Pc	Ethnc
3928	KoltukDavulTekeOp 3	Dr/Pc	Ethnc
3929	KoltukDavulTekOp 1-3	Dr/Pc	Ethnc
3930	KoltukDavulTekOp 1	Dr/Pc	Ethnc
3931	KoltukDavulTekOp 2	Dr/Pc	Ethnc
3932	KoltukDavulTekOp 3	Dr/Pc	Ethnc
3933	KoltukDavulOpenFlam	Dr/Pc	Ethnc
3934	Bodhran Opn Center	Dr/Pc	Ethnc
3935	Bodhran Opn Mid	Dr/Pc	Ethnc
3936	Bodhran Opn Edge	Dr/Pc	Ethnc
3937	Bodhran Stck Mt Cent	Dr/Pc	Ethnc
3938	Bodhran Stck Mt Mid	Dr/Pc	Ethnc
3939	Bodhran Stck Mt Edge	Dr/Pc	Ethnc
3940	Bodhran Finger Mt	Dr/Pc	Ethnc
3941	Bodhran Palm Mt	Dr/Pc	Ethnc
3942	Bodhran Op Rim Clk	Dr/Pc	Ethnc
3943	Bodhran Mt Rim Clk	Dr/Pc	Ethnc
3944	Bodhran Mt Rm Clk Rs	Dr/Pc	Ethnc
3945	Bodhran OpRimClk Rs	Dr/Pc	Ethnc
3946	Bodhran Grace Note	Dr/Pc	Ethnc
3947	Bodhran Harmonics	Dr/Pc	Ethnc
3948	Bodhran Drags	Dr/Pc	Ethnc
3949	Bodhran Mute Bend	Dr/Pc	Ethnc
3950	Bodhran Palm Slide1	Dr/Pc	Ethnc
3951	Bodhran Palm Slide2	Dr/Pc	Ethnc
3952	Bodhran Palm Slide3	Dr/Pc	Ethnc
3953	Bodhran Palm Slide4	Dr/Pc	Ethnc
3954	Bodhran Stck SldStrt	Dr/Pc	Ethnc
3955	Bodhran Stck Sld Mid	Dr/Pc	Ethnc
3956	Bodhran Stck Sld End	Dr/Pc	Ethnc
3957	Bendir Dum 1-2	Dr/Pc	Ethnc
3958	Bendir Dum 1	Dr/Pc	Ethnc
3959	Bendir Dum 2	Dr/Pc	Ethnc
3960	Bendir Tek 1-3	Dr/Pc	Ethnc
3961	Bendir Tek 1	Dr/Pc	Ethnc
3962	Bendir Tek 2	Dr/Pc	Ethnc
3963	Bendir Tek 3	Dr/Pc	Ethnc
3964	Bendir Teke 1-3	Dr/Pc	Ethnc
3965	Bendir Teke 1	Dr/Pc	Ethnc
3966	Bendir Teke 2	Dr/Pc	Ethnc
3967	Bendir Teke 3	Dr/Pc	Ethnc
3968	Bendir Teke OpenFlam	Dr/Pc	Ethnc
3969	Bendir Slap 1-2	Dr/Pc	Ethnc
3970	Bendir Slap 1	Dr/Pc	Ethnc
3971	Bendir Slap 2	Dr/Pc	Ethnc
3972	Bendir1 Tek Dead1-2	Dr/Pc	Ethnc
3973	Bendir1 Tek Dead1	Dr/Pc	Ethnc
3974	Bendir1 Tek Dead2	Dr/Pc	Ethnc
3975	Bendir1 Teke Dead1-2	Dr/Pc	Ethnc
3976	Bendir1 Teke Dead1	Dr/Pc	Ethnc
3977	Bendir1 Teke Dead2	Dr/Pc	Ethnc
3978	Bendir2 Lrg Dom Opn1	Dr/Pc	Ethnc
3979	Bendir2 Lrg Dom Opn2	Dr/Pc	Ethnc
3980	Bendir2 Lrg Dom Cls	Dr/Pc	Ethnc
3981	Bendir2 Lrg Sak1	Dr/Pc	Ethnc
3982	Bendir2 Lrg Sak2	Dr/Pc	Ethnc
3983	Bendir2 Lrg Tak Opn1	Dr/Pc	Ethnc
3984	Bendir2 Lrg Tak Opn2	Dr/Pc	Ethnc
3985	Bendir2 Lrg 1	Dr/Pc	Ethnc
3986	Bendir2 Lrg 2	Dr/Pc	Ethnc
3987	Bendir2 Lrg 3	Dr/Pc	Ethnc
3988	Bendir2 Lrg Flam	Dr/Pc	Ethnc
3989	Bendir2 Lrg Flam&Tak	Dr/Pc	Ethnc
3990	Tnsn Bendir1 Dom1	Dr/Pc	Ethnc
3991	Tnsn Bendir1 Dom2	Dr/Pc	Ethnc
3992	Tnsn Bendir1 TakOpn1	Dr/Pc	Ethnc
3993	Tnsn Bendir1 TakOpn2	Dr/Pc	Ethnc
3994	Tnsn Bendir1 TakOpn3	Dr/Pc	Ethnc
3995	Tnsn Bendir1 TakCls1	Dr/Pc	Ethnc
3996	Tnsn Bendir1 TakCls2	Dr/Pc	Ethnc
3997	Tnsn Bendir1 TakCls3	Dr/Pc	Ethnc
3998	Tnsn Bendir1 TakCls4	Dr/Pc	Ethnc
3999	Tnsn Bendir1 TakMute	Dr/Pc	Ethnc
4000	Tnsn Bendir1 Roll	Dr/Pc	Ethnc
4001	Tnsn Bendir2 Dom Opn	Dr/Pc	Ethnc
4002	Tnsn Bendir2 Dom Cls	Dr/Pc	Ethnc
4003	Tnsn Bendir2 TakSml	Dr/Pc	Ethnc
4004	Tnsn Bendir2 TakOpn1	Dr/Pc	Ethnc
4005	Tnsn Bendir2 TakOpn2	Dr/Pc	Ethnc
4006	Tnsn Bendir2 TakOpn3	Dr/Pc	Ethnc
4007	Tnsn Bendir2 TakOpn4	Dr/Pc	Ethnc
4008	Tnsn Bendir2 TakCls1	Dr/Pc	Ethnc
4009	Tnsn Bendir2 TakCls2	Dr/Pc	Ethnc
4010	Tnsn Bendir2 TakCls3	Dr/Pc	Ethnc
4011	Tnsn Bendir2 TakMute	Dr/Pc	Ethnc
4012	Tnsn Bendir2 DomRoll	Dr/Pc	Ethnc
4013	Mrcn Bendir1 Dom Opn	Dr/Pc	Ethnc
4014	Mrcn Bendir1 Dom Cls	Dr/Pc	Ethnc
4015	Mrcn Bendir1 Tik Opn	Dr/Pc	Ethnc
4016	Mrcn Bendir1 TikCls1	Dr/Pc	Ethnc
4017	Mrcn Bendir1 TikCls2	Dr/Pc	Ethnc
4018	Mrcn Bendir1 Zim	Dr/Pc	Ethnc
4019	Mrcn Bendir2 Dom Opn	Dr/Pc	Ethnc
4020	Mrcn Bendir2 Dom Cls	Dr/Pc	Ethnc
4021	Mrcn Bendir2 Tik Opn	Dr/Pc	Ethnc
4022	Mrcn Bendir2 TikCls1	Dr/Pc	Ethnc
4023	Mrcn Bendir2 TikCls2	Dr/Pc	Ethnc
4024	Mrcn Bendir2 Zim	Dr/Pc	Ethnc
4025	Mrcn Bendir3 Dom Opn	Dr/Pc	Ethnc
4026	Mrcn Bendir3 Edg Opn	Dr/Pc	Ethnc
4027	Mrcn Bendir3 Tik Opn	Dr/Pc	Ethnc
4028	Mrcn Bendir3 Tik Cls	Dr/Pc	Ethnc
4029	Mrcn Bendir3 Tik Stp	Dr/Pc	Ethnc
4030	AlgrnBendir Deza	Dr/Pc	Ethnc
4031	AlgrnBendir TakDroit	Dr/Pc	Ethnc
4032	AlgrnBendir TakGuche	Dr/Pc	Ethnc
4033	AlgrnBendir Kaf	Dr/Pc	Ethnc
4034	Iran Bendir1 Tom	Dr/Pc	Ethnc
4035	Iran Bendir1 Slap	Dr/Pc	Ethnc
4036	Iran Bendir1 Chap1	Dr/Pc	Ethnc
4037	Iran Bendir1 Chap2	Dr/Pc	Ethnc
4038	Iran Bendir1 Rim	Dr/Pc	Ethnc
4039	Iran Bendir1 Bck&Chp	Dr/Pc	Ethnc
4040	Iran Bendir1 Back	Dr/Pc	Ethnc
4041	Iran Bendir1 Roll	Dr/Pc	Ethnc
4042	Iran Bendir2 Tom	Dr/Pc	Ethnc
4043	Iran Bendir2 Slap	Dr/Pc	Ethnc
4044	Iran Bendir2 Chap1	Dr/Pc	Ethnc
4045	Iran Bendir2 Chap2	Dr/Pc	Ethnc
4046	Iran Bendir2 Chap Mt	Dr/Pc	Ethnc
4047	Iran Bendir2 Back	Dr/Pc	Ethnc
4048	Iran Bendir2 Bak Rim	Dr/Pc	Ethnc
4049	Iran Bendir2 Flam	Dr/Pc	Ethnc
4050	Iran Bendir2 FlamTom	Dr/Pc	Ethnc
4051	Iran Bendir2 FlamBck	Dr/Pc	Ethnc
4052	Iran Bendir2 Roll	Dr/Pc	Ethnc
4053	Iran Bendir2 RimRoll	Dr/Pc	Ethnc
4054	Sagat1 R Open	Dr/Pc	Ethnc
4055	Sagat1 R Close 1-2	Dr/Pc	Ethnc
4056	Sagat1 R Close 1	Dr/Pc	Ethnc
4057	Sagat1 R Close 2	Dr/Pc	Ethnc
4058	Sagat1 L Open	Dr/Pc	Ethnc
4059	Sagat1 L Close 1-2	Dr/Pc	Ethnc
4060	Sagat1 L Close 1	Dr/Pc	Ethnc
4061	Sagat1 L Close 2	Dr/Pc	Ethnc
4062	Sagat2 Close	Dr/Pc	Ethnc
4063	Sagat3 Open	Dr/Pc	Ethnc
4064	Sagat3 Close	Dr/Pc	Ethnc
4065	Sagat4 Open	Dr/Pc	Ethnc
4066	Sagat4 Close	Dr/Pc	Ethnc
4067	Sajat1 Open	Dr/Pc	Ethnc
4068	Sajat1 Close	Dr/Pc	Ethnc
4069	Sajat2 Open	Dr/Pc	Ethnc
4070	Sajat2 Close	Dr/Pc	Ethnc
4071	Sajat2 Hawan	Dr/Pc	Ethnc
4072	Riq1 Dum Mute	Dr/Pc	Ethnc
4073	Riq1 Dum Open 1-2	Dr/Pc	Ethnc
4074	Riq1 Dum Open 1	Dr/Pc	Ethnc
4075	Riq1 Dum Open 2	Dr/Pc	Ethnc
4076	Riq1 Tek Open 1-2	Dr/Pc	Ethnc
4077	Riq1 Tek Open 1	Dr/Pc	Ethnc
4078	Riq1 Tek Open 2	Dr/Pc	Ethnc
4079	Riq1 Tek Mute 1-2	Dr/Pc	Ethnc
4080	Riq1 Tek Mute 1	Dr/Pc	Ethnc
4081	Riq1 Tek Mute 2	Dr/Pc	Ethnc
4082	Riq1 Teke Damped 1-2	Dr/Pc	Ethnc
4083	Riq1 Teke Damped 1	Dr/Pc	Ethnc
4084	Riq1 Teke Damped 2	Dr/Pc	Ethnc
4085	Riq1 Teke Flam	Dr/Pc	Ethnc
4086	Riq1 TekMtMed 1-2	Dr/Pc	Ethnc
4087	Riq1 TekMtMed 1	Dr/Pc	Ethnc
4088	Riq1 TekMtMed 2	Dr/Pc	Ethnc
4089	Riq1 TekOpnShrt 1-2	Dr/Pc	Ethnc
4090	Riq1 TekOpnShrt 1	Dr/Pc	Ethnc
4091	Riq1 TekOpnShrt 2	Dr/Pc	Ethnc
4092	Riq1 TekeOpnShrt 1-2	Dr/Pc	Ethnc
4093	Riq1 TekeOpnShrt 1	Dr/Pc	Ethnc
4094	Riq1 TekeOpnShrt 2	Dr/Pc	Ethnc
4095	Riq1 Tek Flam	Dr/Pc	Ethnc
4096	Riq1 Cymbal 1-2	Dr/Pc	Ethnc
4097	Riq1 Cymbal 1	Dr/Pc	Ethnc
4098	Riq1 Cymbal 2	Dr/Pc	Ethnc
4099	Riq1 Cymbal Mute 1-2	Dr/Pc	Ethnc
4100	Riq1 Cymbal Mute 1	Dr/Pc	Ethnc
4101	Riq1 Cymbal Mute 2	Dr/Pc	Ethnc
4102	Riq1 Full Open	Dr/Pc	Ethnc
4103	Riq1 ShakeA 1-2	Dr/Pc	Ethnc
4104	Riq1 ShakeA 1	Dr/Pc	Ethnc
4105	Riq1 ShakeA 2	Dr/Pc	Ethnc
4106	Riq1 ShakeB 1-2	Dr/Pc	Ethnc
4107	Riq1 ShakeB 1	Dr/Pc	Ethnc
4108	Riq1 ShakeB 2	Dr/Pc	Ethnc

No.	Name	Main Category	Sub Category
4109	Riq1 Tremolo	Dr/Pc	Ethnc
4110	Riq2 Sak	Dr/Pc	Ethnc
4111	Riq3 Dom Open	Dr/Pc	Ethnc
4112	Riq3 Dom Close	Dr/Pc	Ethnc
4113	Riq3 Tak Open	Dr/Pc	Ethnc
4114	Riq3 Tak Close1	Dr/Pc	Ethnc
4115	Riq3 Tak Close2	Dr/Pc	Ethnc
4116	Riq3 Tak Snouj	Dr/Pc	Ethnc
4117	Riq3 Snouj Close1	Dr/Pc	Ethnc
4118	Riq3 Snouj Close2	Dr/Pc	Ethnc
4119	Riq3 Sak	Dr/Pc	Ethnc
4120	Riq3 Flam	Dr/Pc	Ethnc
4121	Riq3 Snouj Roll	Dr/Pc	Ethnc
4122	Req Sak	Dr/Pc	Ethnc
4123	Req Dom1	Dr/Pc	Ethnc
4124	Req Dom2	Dr/Pc	Ethnc
4125	Req Open	Dr/Pc	Ethnc
4126	Req Slap	Dr/Pc	Ethnc
4127	Req Sajat	Dr/Pc	Ethnc
4128	Req Tom & Zang	Dr/Pc	Ethnc
4129	Req Chap Zang Open	Dr/Pc	Ethnc
4130	Req Roll	Dr/Pc	Ethnc
4131	Req Sak SW	Dr/Pc	Ethnc
4132	Daf Tom	Dr/Pc	Ethnc
4133	Daf Tom bb	Dr/Pc	Ethnc
4134	Daf Slap Open	Dr/Pc	Ethnc
4135	Daf Slap Mute	Dr/Pc	Ethnc
4136	Daf Chap	Dr/Pc	Ethnc
4137	Daf Back1	Dr/Pc	Ethnc
4138	Daf Back2	Dr/Pc	Ethnc
4139	Daf Chain Up1	Dr/Pc	Ethnc
4140	Daf Chain Down1	Dr/Pc	Ethnc
4141	Daf Chain Up2	Dr/Pc	Ethnc
4142	Daf Chain Down2	Dr/Pc	Ethnc
4143	Daf Chap No Chain	Dr/Pc	Ethnc
4144	Daf Roll	Dr/Pc	Ethnc
4145	Daf Roll Chain	Dr/Pc	Ethnc
4146	Daf Roll Rim	Dr/Pc	Ethnc
4147	Daf Full Roll	Dr/Pc	Ethnc
4148	Daf Chain Roll	Dr/Pc	Ethnc
4149	Daf Whipping Roll	Dr/Pc	Ethnc
4150	Dayereh1 Tom	Dr/Pc	Ethnc
4151	Dayereh1 Tom Mute	Dr/Pc	Ethnc
4152	Dayereh1 Back	Dr/Pc	Ethnc
4153	Dayereh1 Back Mute1	Dr/Pc	Ethnc
4154	Dayereh1 Back Mute2	Dr/Pc	Ethnc
4155	Dayereh1 Snap	Dr/Pc	Ethnc
4156	Dayereh1 Chap	Dr/Pc	Ethnc
4157	Dayereh1 Soft Roll	Dr/Pc	Ethnc
4158	Dayereh1 Tom Roll	Dr/Pc	Ethnc
4159	Dayereh1 Rim Roll	Dr/Pc	Ethnc
4160	Dayereh1 Roll	Dr/Pc	Ethnc
4161	Dayereh2 Tom	Dr/Pc	Ethnc
4162	Dayereh2 Eshareh	Dr/Pc	Ethnc
4163	Dayereh2 Back	Dr/Pc	Ethnc
4164	Dayereh2 Snap	Dr/Pc	Ethnc
4165	Dayereh2 Flam Tom	Dr/Pc	Ethnc
4166	Dayereh2 Flam Back	Dr/Pc	Ethnc
4167	Dayereh2 Edge Roll	Dr/Pc	Ethnc
4168	Mazhar Dom Open	Dr/Pc	Ethnc
4169	Mazhar Dom Close	Dr/Pc	Ethnc
4170	Mazhar Tak Open	Dr/Pc	Ethnc
4171	Mazhar Tak Close	Dr/Pc	Ethnc
4172	Mazhar Sak Close	Dr/Pc	Ethnc
4173	Hollo Dum 1-2	Dr/Pc	Ethnc
4174	Hollo Dum 1	Dr/Pc	Ethnc
4175	Hollo Dum 2	Dr/Pc	Ethnc
4176	Hollo Slap 1-2	Dr/Pc	Ethnc
4177	Hollo Slap 1	Dr/Pc	Ethnc
4178	Hollo Slap 2	Dr/Pc	Ethnc
4179	Hollo FingerDead 1-2	Dr/Pc	Ethnc
4180	Hollo FingerDead 1	Dr/Pc	Ethnc
4181	Hollo FingerDead 2	Dr/Pc	Ethnc
4182	Tombek Dum 1-2	Dr/Pc	Ethnc
4183	Tombek Dum 1	Dr/Pc	Ethnc
4184	Tombek Dum 2	Dr/Pc	Ethnc
4185	Tombek Slap 1-2	Dr/Pc	Ethnc
4186	Tombek Slap 1	Dr/Pc	Ethnc
4187	Tombek Slap 2	Dr/Pc	Ethnc
4188	Tombek Tek 1-3	Dr/Pc	Ethnc
4189	Tombek Tek 1	Dr/Pc	Ethnc
4190	Tombek Tek 2	Dr/Pc	Ethnc
4191	Tombek Tek 3	Dr/Pc	Ethnc
4192	TombekTekeIndFng 1-3	Dr/Pc	Ethnc
4193	TombekTekeIndFng 1	Dr/Pc	Ethnc
4194	TombekTekeIndFng 2	Dr/Pc	Ethnc
4195	TombekTekeIndFng 3	Dr/Pc	Ethnc
4196	TombekTekeOthFng 1-3	Dr/Pc	Ethnc
4197	TombekTekeOthFng 1	Dr/Pc	Ethnc
4198	TombekTekeOthFng 2	Dr/Pc	Ethnc
4199	TombekTekeOthFng 3	Dr/Pc	Ethnc
4200	Tombek Tek Dead Sw	Dr/Pc	Ethnc
4201	Tombek Tek Dead	Dr/Pc	Ethnc
4202	Tombek Tek Flam	Dr/Pc	Ethnc
4203	Tombek Slap Med 1-2	Dr/Pc	Ethnc
4204	Tombek Slap Med 1	Dr/Pc	Ethnc
4205	Tombek Slap Med 2	Dr/Pc	Ethnc
4206	Tombek Teke 1-3	Dr/Pc	Ethnc
4207	Tombek Teke 1	Dr/Pc	Ethnc
4208	Tombek Teke 2	Dr/Pc	Ethnc
4209	Tombek Teke 3	Dr/Pc	Ethnc
4210	Tombak Tom1	Dr/Pc	Ethnc
4211	Tombak Tom2	Dr/Pc	Ethnc
4212	Tombak Back	Dr/Pc	Ethnc
4213	Tombak Snap	Dr/Pc	Ethnc
4214	Tombak Eshareh Left	Dr/Pc	Ethnc
4215	Tombak Eshareh Right	Dr/Pc	Ethnc
4216	Tombak Full Roll	Dr/Pc	Ethnc
4217	Tombak Timapni Roll	Dr/Pc	Ethnc
4218	Tombak Slap	Dr/Pc	Ethnc
4219	Tombak Chap1	Dr/Pc	Ethnc
4220	Tombak Chap2	Dr/Pc	Ethnc
4221	Tombak Back1	Dr/Pc	Ethnc
4222	Tombak Back2	Dr/Pc	Ethnc
4223	Tombak Pelang	Dr/Pc	Ethnc
4224	Tombak Nail Swish	Dr/Pc	Ethnc
4225	Tombak Flam1	Dr/Pc	Ethnc
4226	Tombak Flam2	Dr/Pc	Ethnc
4227	Tombak Flam & Back	Dr/Pc	Ethnc
4228	Tombak Roll 8fingers	Dr/Pc	Ethnc
4229	Tombak Tempo Tom	Dr/Pc	Ethnc
4230	Tombak Tempo Slap	Dr/Pc	Ethnc
4231	Tombak Tempo Chap	Dr/Pc	Ethnc
4232	Tombak Tempo Chap Mt	Dr/Pc	Ethnc
4233	Tombak Tempo Back	Dr/Pc	Ethnc
4234	Tombak Tempo Back Mt	Dr/Pc	Ethnc
4235	Tombak Tempo ChapFlm	Dr/Pc	Ethnc
4236	Tombak Tempo Roll	Dr/Pc	Ethnc
4237	Tempo Tom	Dr/Pc	Ethnc
4238	Tempo Tom Mute	Dr/Pc	Ethnc
4239	Tempo Tom Slap	Dr/Pc	Ethnc
4240	Tempo Chap Tom	Dr/Pc	Ethnc
4241	Tempo Chap1	Dr/Pc	Ethnc
4242	Tempo Chap2	Dr/Pc	Ethnc
4243	Tempo Chap Rim	Dr/Pc	Ethnc
4244	Tempo Chap Rim Mute	Dr/Pc	Ethnc
4245	Tempo Back1	Dr/Pc	Ethnc
4246	Tempo Back2	Dr/Pc	Ethnc
4247	Tempo Back Rim	Dr/Pc	Ethnc
4248	Tempo Snap Nail	Dr/Pc	Ethnc
4249	Tempo Flam	Dr/Pc	Ethnc
4250	Tempo Flam Tom	Dr/Pc	Ethnc
4251	Tempo Flam Bak	Dr/Pc	Ethnc
4252	Tempo Roll	Dr/Pc	Ethnc
4253	Tempo Rim Roll	Dr/Pc	Ethnc
4254	Tempo Gliss Up	Dr/Pc	Ethnc
4255	Tempo Gliss Down	Dr/Pc	Ethnc
4256	Darbuka1 Dum 1-2	Dr/Pc	Ethnc
4257	Darbuka1 Dum 1	Dr/Pc	Ethnc
4258	Darbuka1 Dum 2	Dr/Pc	Ethnc
4259	Darbuka1 Teka1 1-3	Dr/Pc	Ethnc
4260	Darbuka1 Teka1 1	Dr/Pc	Ethnc
4261	Darbuka1 Teka1 2	Dr/Pc	Ethnc
4262	Darbuka1 Teka1 3	Dr/Pc	Ethnc
4263	Darbuka1 TekB 1-3	Dr/Pc	Ethnc
4264	Darbuka1 TekB 1	Dr/Pc	Ethnc
4265	Darbuka1 TekB 2	Dr/Pc	Ethnc
4266	Darbuka1 TekB 3	Dr/Pc	Ethnc
4267	Darb1TekeIndFngA 1-3	Dr/Pc	Ethnc
4268	Darb1TekeIndFngA 1	Dr/Pc	Ethnc
4269	Darb1TekeIndFngA 2	Dr/Pc	Ethnc
4270	Darb1TekeIndFngA 3	Dr/Pc	Ethnc
4271	Darb1TekeIndFngB 1-3	Dr/Pc	Ethnc
4272	Darb1TekeIndFngB 1	Dr/Pc	Ethnc
4273	Darb1TekeIndFngB 2	Dr/Pc	Ethnc
4274	Darb1TekeIndFngB 3	Dr/Pc	Ethnc
4275	Darb1TekeOthFngA 1-3	Dr/Pc	Ethnc
4276	Darb1TekeOthFngA 1	Dr/Pc	Ethnc
4277	Darb1TekeOthFngA 2	Dr/Pc	Ethnc
4278	Darb1TekeOthFngA 3	Dr/Pc	Ethnc
4279	Darb1TekeOthFngB 1-3	Dr/Pc	Ethnc
4280	Darb1TekeOthFngB 1	Dr/Pc	Ethnc
4281	Darb1TekeOthFngB 2	Dr/Pc	Ethnc
4282	Darb1TekeOthFngB 3	Dr/Pc	Ethnc
4283	Darbuka1 Slap 1-2	Dr/Pc	Ethnc
4284	Darbuka1 Slap 1	Dr/Pc	Ethnc
4285	Darbuka1 Slap 2	Dr/Pc	Ethnc
4286	Darbuka1 SlapMed 1-2	Dr/Pc	Ethnc
4287	Darbuka1 SlapMed 1	Dr/Pc	Ethnc
4288	Darbuka1 SlapMed 2	Dr/Pc	Ethnc
4289	Darbuka1 TekeOpnFlam	Dr/Pc	Ethnc
4290	Darbuka1 RollOpen	Dr/Pc	Ethnc
4291	Darbuka1 TekeDmpFlam	Dr/Pc	Ethnc
4292	Darbuka1 Roll Close	Dr/Pc	Ethnc
4293	Darbuka1 TekDead 1-3	Dr/Pc	Ethnc
4294	Darbuka1 TekDead 1	Dr/Pc	Ethnc
4295	Darbuka1 TekDead 2	Dr/Pc	Ethnc
4296	Darbuka1 TekDead 3	Dr/Pc	Ethnc
4297	Darbuka1 TekDampd1-3	Dr/Pc	Ethnc
4298	Darbuka1 TekDamped 1	Dr/Pc	Ethnc
4299	Darbuka1 TekDamped 2	Dr/Pc	Ethnc
4300	Darbuka1 TekDamped 3	Dr/Pc	Ethnc
4301	Darbuka1 TekeOpen1-3	Dr/Pc	Ethnc
4302	Darbuka1 TekeOpen 1	Dr/Pc	Ethnc
4303	Darbuka1 TekeOpen 2	Dr/Pc	Ethnc
4304	Darbuka1 TekeOpen 3	Dr/Pc	Ethnc
4305	Darbuka2 Dom LH	Dr/Pc	Ethnc
4306	Darbuka2 Dom RH	Dr/Pc	Ethnc
4307	Darbuka2 Sak1	Dr/Pc	Ethnc
4308	Darbuka2 TakLIndxFng	Dr/Pc	Ethnc
4309	Darbuka2 TakRIndxFng	Dr/Pc	Ethnc
4310	Darbuka2 TakLRingFng	Dr/Pc	Ethnc
4311	Darbuka2 TakRRingFng	Dr/Pc	Ethnc
4312	Darbuka2 Tap1	Dr/Pc	Ethnc
4313	Darbuka2 Tap2	Dr/Pc	Ethnc
4314	Darbuka2 Flam1	Dr/Pc	Ethnc
4315	Darbuka2 Flam2	Dr/Pc	Ethnc
4316	Darbuka2 Tak Roll	Dr/Pc	Ethnc
4317	Darbuka3 Dom & Tak	Dr/Pc	Ethnc
4318	Darbuka3 Tak Finger	Dr/Pc	Ethnc
4319	Darbuka3 Tak BothHnd	Dr/Pc	Ethnc
4320	Darbuka3 Tak Close	Dr/Pc	Ethnc
4321	Darbuka3 Tak Mute	Dr/Pc	Ethnc
4322	Darbuka3 Sak1	Dr/Pc	Ethnc
4323	Darbuka3 Sak2	Dr/Pc	Ethnc
4324	Darbuka3 Sak3	Dr/Pc	Ethnc
4325	Darbuka3 Rak1	Dr/Pc	Ethnc
4326	Darbuka3 Rak2	Dr/Pc	Ethnc
4327	Darbuka3 Gliss Down	Dr/Pc	Ethnc
4328	Darbuka3 Gliss Up	Dr/Pc	Ethnc
4329	Darbuka3 Feel Heel	Dr/Pc	Ethnc
4330	Darbuka3 Noise FX1	Dr/Pc	Ethnc
4331	Darbuka3 Noise FX2	Dr/Pc	Ethnc
4332	Darbuka3 Noise FX3	Dr/Pc	Ethnc
4333	Darbuka3 Noise FX4	Dr/Pc	Ethnc
4334	Darbuka3 Noise FX5	Dr/Pc	Ethnc
4335	Darbuka3 Noise FX6	Dr/Pc	Ethnc
4336	Darbuka3 Noise FX7	Dr/Pc	Ethnc
4337	Darbuka3 Dom Roll	Dr/Pc	Ethnc
4338	Darbuka3 Sak Roll	Dr/Pc	Ethnc
4339	Darbuka3 RllTakToDom	Dr/Pc	Ethnc
4340	Darbouka Dom	Dr/Pc	Ethnc
4341	Darbouka Tak Close1	Dr/Pc	Ethnc
4342	Darbouka Tak Close2	Dr/Pc	Ethnc
4343	Darbouka Tak Close3	Dr/Pc	Ethnc
4344	Darbouka Tak Close4	Dr/Pc	Ethnc
4345	Darbouka Tak Open1	Dr/Pc	Ethnc
4346	Darbouka Tak Open2	Dr/Pc	Ethnc
4347	Darbouka Tak Open3	Dr/Pc	Ethnc
4348	Darbouka Tak Open4	Dr/Pc	Ethnc
4349	Darbouka Tak Open5	Dr/Pc	Ethnc
4350	Darbouka Tak Open6	Dr/Pc	Ethnc
4351	Darbouka Finger Roll	Dr/Pc	Ethnc
4352	Darbouka Hand Roll	Dr/Pc	Ethnc
4353	Zarb1 Slap	Dr/Pc	Ethnc
4354	Zarb1 Chap	Dr/Pc	Ethnc
4355	Zarb1 Back	Dr/Pc	Ethnc
4356	Zarb1 Flam Open	Dr/Pc	Ethnc
4357	Zarb1 Roll	Dr/Pc	Ethnc
4358	Zarb2 Tom	Dr/Pc	Ethnc
4359	Zarb2 Eshareh	Dr/Pc	Ethnc
4360	Zarb2 Chap	Dr/Pc	Ethnc
4361	Zarb2 Back	Dr/Pc	Ethnc
4362	Zarb2 Whipping	Dr/Pc	Ethnc
4363	Zarb2 Snap	Dr/Pc	Ethnc
4364	Zarb2 Full Roll	Dr/Pc	Ethnc
4365	Zarb2 Whipping Roll	Dr/Pc	Ethnc
4366	Daholla1 Dom LH	Dr/Pc	Ethnc
4367	Daholla1 Dom RH	Dr/Pc	Ethnc
4368	Daholla1 Tak1	Dr/Pc	Ethnc
4369	Daholla1 Tak2	Dr/Pc	Ethnc
4370	Daholla1 Tak3	Dr/Pc	Ethnc
4371	Daholla1 Tak4	Dr/Pc	Ethnc
4372	Daholla1 Sak	Dr/Pc	Ethnc
4373	Daholla1 Rak1	Dr/Pc	Ethnc
4374	Daholla1 Rak2	Dr/Pc	Ethnc
4375	Daholla1 Flam1	Dr/Pc	Ethnc
4376	Daholla1 Flam2	Dr/Pc	Ethnc
4377	Daholla1 Tak Roll	Dr/Pc	Ethnc
4378	Daholla2 Dom	Dr/Pc	Ethnc
4379	Daholla2 Tak 1	Dr/Pc	Ethnc
4380	Daholla2 Tak 2	Dr/Pc	Ethnc
4381	Daholla2 Sak	Dr/Pc	Ethnc
4382	Doholla1 Dom	Dr/Pc	Ethnc
4383	Doholla1 Tak	Dr/Pc	Ethnc
4384	Doholla1 Sak	Dr/Pc	Ethnc
4385	Doholla2 Dom	Dr/Pc	Ethnc
4386	Doholla2 Tak	Dr/Pc	Ethnc
4387	Doholla2 Sak	Dr/Pc	Ethnc
4388	Naghareh Tom	Dr/Pc	Ethnc
4389	Naghareh Roll	Dr/Pc	Ethnc
4390	Naghareh Chap	Dr/Pc	Ethnc
4391	Naghareh Snap	Dr/Pc	Ethnc
4392	Naghareh Back	Dr/Pc	Ethnc
4393	Naghareh Flam 3Fing	Dr/Pc	Ethnc
4394	Katem1 Dom1	Dr/Pc	Ethnc
4395	Katem1 Dom2	Dr/Pc	Ethnc
4396	Katem1 Tak Open1	Dr/Pc	Ethnc
4397	Katem1 Tak Open2	Dr/Pc	Ethnc
4398	Katem1 Sak1	Dr/Pc	Ethnc
4399	Katem1 Sak2	Dr/Pc	Ethnc
4400	Katem2 Dom1	Dr/Pc	Ethnc
4401	Katem2 Dom2	Dr/Pc	Ethnc
4402	Katem2 Tak Open1	Dr/Pc	Ethnc
4403	Katem2 Tak Open2	Dr/Pc	Ethnc
4404	Katem2 Tak Close1	Dr/Pc	Ethnc
4405	Katem2 Tak Close2	Dr/Pc	Ethnc
4406	Katem2 Sak	Dr/Pc	Ethnc
4407	Katem2 Sak Close1	Dr/Pc	Ethnc
4408	Katem2 Sak Close2	Dr/Pc	Ethnc
4409	Katem2 Flam1	Dr/Pc	Ethnc
4410	Katem2 Flam2	Dr/Pc	Ethnc
4411	Katem2 Trem Dom	Dr/Pc	Ethnc
4412	Katem2 Med Dom Opn1	Dr/Pc	Ethnc
4413	Katem2 Med Dom Opn2	Dr/Pc	Ethnc
4414	Katem2 Med Dom Opn3	Dr/Pc	Ethnc
4415	Katem2 Med Dom Close	Dr/Pc	Ethnc
4416	Katem2 Med Tak1	Dr/Pc	Ethnc
4417	Katem2 Med Tak2	Dr/Pc	Ethnc
4418	Katem2 Med Sak1	Dr/Pc	Ethnc
4419	Katem2 Med Sak2	Dr/Pc	Ethnc
4420	Katem2 Med1	Dr/Pc	Ethnc
4421	Katem2 Med2	Dr/Pc	Ethnc
4422	Katem2 Med Flam	Dr/Pc	Ethnc
4423	Katem2 Med Flam&Tak	Dr/Pc	Ethnc
4424	Katem2 Sml Dom Opn	Dr/Pc	Ethnc

No.	Name	Main Category	Sub Category
4425	Katem2 Sml Dom Cls1	Dr/Pc	Ethnc
4426	Katem2 Sml Dom Cls2	Dr/Pc	Ethnc
4427	Katem2 Sml Tak1	Dr/Pc	Ethnc
4428	Katem2 Sml Tak2	Dr/Pc	Ethnc
4429	Katem2 Sml Sak	Dr/Pc	Ethnc
4430	Katem2 Sml1	Dr/Pc	Ethnc
4431	Katem2 Sml2	Dr/Pc	Ethnc
4432	Katem2 Sml3	Dr/Pc	Ethnc
4433	Katem2 Sml Flam	Dr/Pc	Ethnc
4434	Katem2 Sml Flam&Tak	Dr/Pc	Ethnc
4435	Katem2 Sml Fing Tak	Dr/Pc	Ethnc
4436	MoroccanTaarija1 Dom	Dr/Pc	Ethnc
4437	MoroccanTaarija1 Tik	Dr/Pc	Ethnc
4438	MoroccanTaarija2 Dom	Dr/Pc	Ethnc
4439	MoroccanTaarija2 Tik	Dr/Pc	Ethnc
4440	MoroccanTaarija3 Dom	Dr/Pc	Ethnc
4441	Marad Group1 Dom	Dr/Pc	Ethnc
4442	Marad Group1 Tak	Dr/Pc	Ethnc
4443	Marad Group1 Sak	Dr/Pc	Ethnc
4444	Marad Group2 Dom	Dr/Pc	Ethnc
4445	Marad Group2 Tak	Dr/Pc	Ethnc
4446	Marad Group2 Sak	Dr/Pc	Ethnc
4447	Marad1 Dom	Dr/Pc	Ethnc
4448	Marad1 Tak	Dr/Pc	Ethnc
4449	Marad1 Sak	Dr/Pc	Ethnc
4450	Marad2 Dom	Dr/Pc	Ethnc
4451	Marad2 Tak	Dr/Pc	Ethnc
4452	Marad2 Sak	Dr/Pc	Ethnc
4453	Sigal Marad Dom	Dr/Pc	Ethnc
4454	Sigal Marad Tak	Dr/Pc	Ethnc
4455	Sigal Marad Sak	Dr/Pc	Ethnc
4456	Kasik 1-2	Dr/Pc	Ethnc
4457	Kasik 1	Dr/Pc	Ethnc
4458	Kasik 2	Dr/Pc	Ethnc
4459	Kasik Flam Dead	Dr/Pc	Ethnc
4460	Kasik Flam	Dr/Pc	Ethnc
4461	Bonges Dum 1-2	Dr/Pc	Ethnc
4462	Bonges Dum 1	Dr/Pc	Ethnc
4463	Bonges Dum 2	Dr/Pc	Ethnc
4464	Bonges Tek 1-2	Dr/Pc	Ethnc
4465	Bonges Tek 1	Dr/Pc	Ethnc
4466	Bonges Tek 2	Dr/Pc	Ethnc
4467	Bonges Slap	Dr/Pc	Ethnc
4468	Bonges Tek Flam	Dr/Pc	Ethnc
4469	Bonges Tek Roll	Dr/Pc	Ethnc
4470	Bonges Flam	Dr/Pc	Ethnc
4471	Bonges Flam Hi	Dr/Pc	Ethnc
4472	AlgrnGalal Daza	Dr/Pc	Ethnc
4473	AlgrnGalal Daza Gch	Dr/Pc	Ethnc
4474	AlgrnGalal Taka Drt	Dr/Pc	Ethnc
4475	AlgrnGalal Taka Gch	Dr/Pc	Ethnc
4476	Bones 1	Dr/Pc	Ethnc
4477	Bones 2	Dr/Pc	Ethnc
4478	Bones 3	Dr/Pc	Ethnc
4479	Bones 4	Dr/Pc	Ethnc
4480	Bones 5	Dr/Pc	Ethnc
4481	Bones 6	Dr/Pc	Ethnc
4482	Bones 7	Dr/Pc	Ethnc
4483	Bones 8	Dr/Pc	Ethnc
4484	Bones 9	Dr/Pc	Ethnc
4485	Bones 10	Dr/Pc	Ethnc
4486	Bones 11	Dr/Pc	Ethnc
4487	Bones 12	Dr/Pc	Ethnc
4488	Bones Triplet	Dr/Pc	Ethnc
4489	Spoons 1	Dr/Pc	Ethnc
4490	Spoons 2	Dr/Pc	Ethnc
4491	Spoons 3	Dr/Pc	Ethnc
4492	Spoons 4	Dr/Pc	Ethnc
4493	Spoons 5	Dr/Pc	Ethnc
4494	Spoons 6	Dr/Pc	Ethnc
4495	Spoons 7	Dr/Pc	Ethnc
4496	Spoons 8	Dr/Pc	Ethnc
4497	Spoons 9	Dr/Pc	Ethnc
4498	Spoons 10	Dr/Pc	Ethnc
4499	Spoons 11	Dr/Pc	Ethnc
4500	Spoons 12	Dr/Pc	Ethnc
4501	Spoons 13	Dr/Pc	Ethnc
4502	Spoons 14	Dr/Pc	Ethnc
4503	Spoons 15	Dr/Pc	Ethnc
4504	Spoons 16	Dr/Pc	Ethnc
4505	Spoons 17	Dr/Pc	Ethnc
4506	Spoons 18	Dr/Pc	Ethnc
4507	Spoons 19	Dr/Pc	Ethnc
4508	Spoons 20	Dr/Pc	Ethnc
4509	Spoons 21	Dr/Pc	Ethnc
4510	Spoons 22	Dr/Pc	Ethnc
4511	Spoons 23	Dr/Pc	Ethnc
4512	Spoons 24	Dr/Pc	Ethnc
4513	Spoons 25	Dr/Pc	Ethnc
4514	Spoons Roll 1	Dr/Pc	Ethnc
4515	Spoons Roll 2	Dr/Pc	Ethnc
4516	Spoons Roll 3	Dr/Pc	Ethnc
4517	Spoons Roll 4	Dr/Pc	Ethnc
4518	Manjoor Normal	Dr/Pc	Ethnc
4519	Arabic Zalgouta Opn	Dr/Pc	Ethnc
4520	Arabic Zalgouta Cls	Dr/Pc	Ethnc
4521	Clap T9-1	Dr/Pc	PC
4522	Clap T9-2	Dr/Pc	PC
4523	T9 ClapSD	Dr/Pc	PC
4524	Hard T9 Clap	Dr/Pc	PC
4525	T8 Clap Ac	Dr/Pc	PC
4526	T8 Clap NA	Dr/Pc	PC
4527	S&H T8 Clap	Dr/Pc	PC
4528	Elec T8 Clap	Dr/Pc	PC
4529	Clap AnSm	Dr/Pc	PC
4530	Electric Clap1	Dr/Pc	PC
4531	Electric Clap2	Dr/Pc	PC
4532	RX11 Clap	Dr/Pc	PC
4533	Clap Long Ambi St	Dr/Pc	PC
4534	Clap Short Ambi St	Dr/Pc	PC
4535	Clap Elec 1	Dr/Pc	PC
4536	Clap Elec 2	Dr/Pc	PC
4537	Dub Clap St	Dr/Pc	PC
4538	Trap Clap 1 St	Dr/Pc	PC
4539	Trap Clap 2 Mn	Dr/Pc	PC
4540	Trap Clap 3 St	Dr/Pc	PC
4541	Trap Clap 4 Mn	Dr/Pc	PC
4542	Trap Clap 5 Mn	Dr/Pc	PC
4543	Trap Clap Sw	Dr/Pc	PC
4544	HipHop Clap 1 St	Dr/Pc	PC
4545	HipHop Clap 2 St	Dr/Pc	PC
4546	EDM Clap St	Dr/Pc	PC
4547	House Clap 1 St	Dr/Pc	PC
4548	House Clap 2 St	Dr/Pc	PC
4549	House Clap 3 St	Dr/Pc	PC
4550	House Clap 4 St	Dr/Pc	PC
4551	Electro Clap 1 St	Dr/Pc	PC
4552	Electro Clap 2 St	Dr/Pc	PC
4553	HipHop Clap1	Dr/Pc	PC
4554	HipHop Clap2	Dr/Pc	PC
4555	HipHop Clap3	Dr/Pc	PC
4556	HipHop Clap4	Dr/Pc	PC
4557	HipHop Clap5	Dr/Pc	PC
4558	HipHop Clap6	Dr/Pc	PC
4559	HipHop Clap7	Dr/Pc	PC
4560	HipHop Clap8	Dr/Pc	PC
4561	HipHop Clap9	Dr/Pc	PC
4562	HipHop Clap10	Dr/Pc	PC
4563	HipHop Clap11	Dr/Pc	PC
4564	HipHop Clap12	Dr/Pc	PC
4565	HipHop Clap13	Dr/Pc	PC
4566	HipHop Clap14	Dr/Pc	PC
4567	Snap Digital St	Dr/Pc	PC
4568	Snap & Clap St	Dr/Pc	PC
4569	Snap Long Ambi St	Dr/Pc	PC
4570	Snap Smith Snap St	Dr/Pc	PC
4571	HipHop Snap1	Dr/Pc	PC
4572	HipHop Snap2	Dr/Pc	PC
4573	Conga T8	Dr/Pc	PC
4574	T8 Conga Ac H	Dr/Pc	PC
4575	T8 Conga Ac M	Dr/Pc	PC
4576	T8 Conga Ac L	Dr/Pc	PC
4577	T8 Conga NA H	Dr/Pc	PC
4578	T8 Conga NA M	Dr/Pc	PC
4579	T8 Conga NA L	Dr/Pc	PC
4580	S&H T8 CongaH	Dr/Pc	PC
4581	S&H T8 CongaM	Dr/Pc	PC
4582	S&H T8 CongaL	Dr/Pc	PC
4583	Analog Conga	Dr/Pc	PC
4584	Cowbell T8	Dr/Pc	PC
4585	T8 Cowbell Ac	Dr/Pc	PC
4586	T8 Cowbell NA	Dr/Pc	PC
4587	S&H T8 Cowbell	Dr/Pc	PC
4588	Elec T8 Cowbell	Dr/Pc	PC
4589	Cowbell RX11	Dr/Pc	PC
4590	Cowbell AnCR	Dr/Pc	PC
4591	Electric Cowbell	Dr/Pc	PC
4592	Analog Shaker	Dr/Pc	PC
4593	PC Shaker1	Dr/Pc	PC
4594	PC Shaker2	Dr/Pc	PC
4595	Elec Shaker1 St	Dr/Pc	PC
4596	Elec Shaker2 St	Dr/Pc	PC
4597	Elec Shaker3 St	Dr/Pc	PC
4598	Elec Shaker4 St	Dr/Pc	PC
4599	Elec Shaker5 St	Dr/Pc	PC
4600	Tambourine RX5	Dr/Pc	PC
4601	Tambourine AnCR	Dr/Pc	PC
4602	Electric Tambourine1	Dr/Pc	PC
4603	Electric Tambourine2	Dr/Pc	PC
4604	Electric Tambourine3	Dr/Pc	PC
4605	Electric Tambourine4	Dr/Pc	PC
4606	Elec Stick1 Mn	Dr/Pc	PC
4607	Elec Stick2 Mn	Dr/Pc	PC
4608	Elec Stick Sw	Dr/Pc	PC
4609	Elec Wood Block1 St	Dr/Pc	PC
4610	Elec Wood Block2 St	Dr/Pc	PC
4611	Elec Wood Block3 St	Dr/Pc	PC
4612	Elec Wood Block4 St	Dr/Pc	PC
4613	WB Fresh Elec St	Dr/Pc	PC
4614	MaracasT8-1	Dr/Pc	PC
4615	MaracasT8-2	Dr/Pc	PC
4616	MaracasT8-3	Dr/Pc	PC
4617	Electric Maracas	Dr/Pc	PC
4618	Claves T8-1	Dr/Pc	PC
4619	Claves T8-2	Dr/Pc	PC
4620	Elec T8 Claves	Dr/Pc	PC
4621	Electric Triangle	Dr/Pc	PC
4622	HipHop Triangle Mn	Dr/Pc	PC
4623	House Triangle Mn	Dr/Pc	PC
4624	Elec Cabasa1 Mn	Dr/Pc	PC
4625	Elec Cabasa2 Mn	Dr/Pc	PC
4626	House Cabasa1 Mn	Dr/Pc	PC
4627	House Cabasa2 Mn	Dr/Pc	PC
4628	Analog Click	Dr/Pc	PC
4629	HipHop Flex1	Dr/Pc	PC
4630	HipHop Flex2	Dr/Pc	PC
4631	Trap Perc 1 St	Dr/Pc	PC
4632	Trap Perc 2 St	Dr/Pc	PC
4633	EDM Perc St	Dr/Pc	PC
4634	House Perc St	Dr/Pc	PC
4635	Electro Perc 1 St	Dr/Pc	PC
4636	Electro Perc 2 St	Dr/Pc	PC
4637	Electro Perc 3 St	Dr/Pc	PC
4638	Brip 1 St	Dr/Pc	PC
4639	Brip 2 St	Dr/Pc	PC
4640	HipHop Clunk St	Dr/Pc	PC
4641	Lipp Flex 1 Mn	Dr/Pc	PC
4642	Lipp Flex 2 Mn	Dr/Pc	PC
4643	Lipp Flex 3 Mn	Dr/Pc	PC
4644	Lipp Flex 4 Mn	Dr/Pc	PC
4645	Lipp Flex Sw1	Dr/Pc	PC
4646	Lipp Flex Sw2	Dr/Pc	PC
4647	Dub Misc 01 St	Dr/Pc	PC
4648	Dub Misc 02 St	Dr/Pc	PC
4649	Dub Misc 03 St	Dr/Pc	PC
4650	Dub Misc 04 St	Dr/Pc	PC
4651	Dub Misc 05 St	Dr/Pc	PC
4652	Dub Misc 06 St	Dr/Pc	PC
4653	Dub Misc 07 St	Dr/Pc	PC
4654	Dub Misc 08 St	Dr/Pc	PC
4655	Dub Misc 09 St	Dr/Pc	PC
4656	Dub Misc 10 St	Dr/Pc	PC
4657	Trap Misc 1 St	Dr/Pc	PC
4658	Trap Misc 2 St	Dr/Pc	PC
4659	Trap Misc 3 St	Dr/Pc	PC
4660	Trap Misc 4 St	Dr/Pc	PC
4661	Trap Misc 5 St	Dr/Pc	PC
4662	Trap Misc 6 St	Dr/Pc	PC
4663	Trap Misc 7 Mn	Dr/Pc	PC
4664	Trap Misc 8 St	Dr/Pc	PC
4665	Trap Misc 9 St	Dr/Pc	PC
4666	Trap Misc Sw	Dr/Pc	PC
4667	HipHop Misc Mn	Dr/Pc	PC
4668	EDM Misc 01 St	Dr/Pc	PC
4669	EDM Misc 02 St	Dr/Pc	PC
4670	EDM Misc 03 St	Dr/Pc	PC
4671	EDM Misc 04 St	Dr/Pc	PC
4672	EDM Misc 05 St	Dr/Pc	PC
4673	EDM Misc 06 St	Dr/Pc	PC
4674	EDM Misc 07 St	Dr/Pc	PC
4675	EDM Misc 08 St	Dr/Pc	PC
4676	EDM Misc 09 St	Dr/Pc	PC
4677	EDM Misc 10 St	Dr/Pc	PC
4678	EDM Misc 11 St	Dr/Pc	PC
4679	EDM Misc 12 Mn	Dr/Pc	PC
4680	House Misc 1 St	Dr/Pc	PC
4681	House Misc 2 St	Dr/Pc	PC
4682	House Misc 3 St	Dr/Pc	PC
4683	House Misc 4 St	Dr/Pc	PC
4684	House Misc 5 St	Dr/Pc	PC
4685	House Misc 6 Mn	Dr/Pc	PC
4686	Electro Misc 01 M	Dr/Pc	PC
4687	Electro Misc 02 St	Dr/Pc	PC
4688	Electro Misc 03 St	Dr/Pc	PC
4689	Electro Misc 04 St	Dr/Pc	PC
4690	Electro Misc 05 St	Dr/Pc	PC
4691	Electro Misc 06 St	Dr/Pc	PC
4692	Electro Misc 07 St	Dr/Pc	PC
4693	Electro Misc 08 St	Dr/Pc	PC
4694	Electro Misc 09 St	Dr/Pc	PC
4695	Electro Misc 10 St	Dr/Pc	PC
4696	Electro Misc 11 St	Dr/Pc	PC
4697	Electro Misc 12 St	Dr/Pc	PC
4698	Electro Misc 13 St	Dr/Pc	PC
4699	Rattle Mn	Dr/Pc	PC
4700	HipHop Smack St	Dr/Pc	PC
4701	HipHop Thock St	Dr/Pc	PC
4702	Tick 01 St	Dr/Pc	PC
4703	Tick 02 St	Dr/Pc	PC
4704	T8 Sub-1 M	Dr/Pc	PC
4705	T8 Sub-2 M	Dr/Pc	PC
4706	T8 Sub-3 M	Dr/Pc	PC
4707	T8 Sub-4 M	Dr/Pc	PC
4708	T8 Sub-5 M	Dr/Pc	PC
4709	Bd Snap 1-2	Dr/Pc	Kick
4710	Bd Snap 1	Dr/Pc	Kick
4711	Bd Snap 2	Dr/Pc	Kick
4712	Bd Snap L1-2	Dr/Pc	Kick
4713	Bd Snap R1-2	Dr/Pc	Kick
4714	Bd Snap L1	Dr/Pc	Kick
4715	Bd Snap L2	Dr/Pc	Kick
4716	Bd Snap R1	Dr/Pc	Kick
4717	Bd Snap R2	Dr/Pc	Kick
4718	Bd Tight 1-2	Dr/Pc	Kick
4719	Bd Tight 1	Dr/Pc	Kick
4720	Bd Tight 2	Dr/Pc	Kick
4721	Bd Tight L1-2	Dr/Pc	Kick
4722	Bd Tight R1-2	Dr/Pc	Kick
4723	Bd Tight L1	Dr/Pc	Kick
4724	Bd Tight L2	Dr/Pc	Kick
4725	Bd Tight R1	Dr/Pc	Kick
4726	Bd Tight R2	Dr/Pc	Kick
4727	Bd Ambience 1-2	Dr/Pc	Kick
4728	Bd Ambience 1	Dr/Pc	Kick
4729	Bd Ambience 2	Dr/Pc	Kick
4730	Bd Ambience L1-2	Dr/Pc	Kick
4731	Bd Ambience R1-2	Dr/Pc	Kick
4732	Bd Ambience L1	Dr/Pc	Kick
4733	Bd Ambience L2	Dr/Pc	Kick
4734	Bd Ambience R1	Dr/Pc	Kick
4735	Bd Ambience R2	Dr/Pc	Kick
4736	Bd Normal St1-2	Dr/Pc	Kick
4737	Bd Normal 1St	Dr/Pc	Kick
4738	Bd Normal 2St	Dr/Pc	Kick
4739	Bd Normal L1-2	Dr/Pc	Kick
4740	Bd Normal R1-2	Dr/Pc	Kick

No.	Name	Main Category	Sub Category
4741	Bd Normal 1L	Dr/Pc	Kick
4742	Bd Normal 1R	Dr/Pc	Kick
4743	Bd Normal 2L	Dr/Pc	Kick
4744	Bd Normal 2R	Dr/Pc	Kick
4745	Bd Funk St1-2	Dr/Pc	Kick
4746	Bd Funk 1St	Dr/Pc	Kick
4747	Bd Funk 2St	Dr/Pc	Kick
4748	Bd Funk L1-2	Dr/Pc	Kick
4749	Bd Funk R1-2	Dr/Pc	Kick
4750	Bd Funk 1 L	Dr/Pc	Kick
4751	Bd Funk 1 R	Dr/Pc	Kick
4752	Bd Funk 2 L	Dr/Pc	Kick
4753	Bd Funk 2 R	Dr/Pc	Kick
4754	Bd High St	Dr/Pc	Kick
4755	Bd High L	Dr/Pc	Kick
4756	Bd High R	Dr/Pc	Kick
4757	Bd Low St	Dr/Pc	Kick
4758	Bd Low L	Dr/Pc	Kick
4759	Bd Low R	Dr/Pc	Kick
4760	Bd H Son St	Dr/Pc	Kick
4761	Bd H Son L	Dr/Pc	Kick
4762	Bd H Son R	Dr/Pc	Kick
4763	Bd L Son St	Dr/Pc	Kick
4764	Bd L Son L	Dr/Pc	Kick
4765	Bd L Son R	Dr/Pc	Kick
4766	Bd Funk Son St	Dr/Pc	Kick
4767	Bd Funk Son L	Dr/Pc	Kick
4768	Bd Funk Son R	Dr/Pc	Kick
4769	Bd Rock1 St	Dr/Pc	Kick
4770	Bd Rock1 L	Dr/Pc	Kick
4771	Bd Rock1 R	Dr/Pc	Kick
4772	Bd Rock2 St	Dr/Pc	Kick
4773	Bd Rock2 L	Dr/Pc	Kick
4774	Bd Rock2 R	Dr/Pc	Kick
4775	Bd Dry1	Dr/Pc	Kick
4776	Bd Dry2	Dr/Pc	Kick
4777	Bd Pop	Dr/Pc	Kick
4778	Bd Var1	Dr/Pc	Kick
4779	Bd Var2	Dr/Pc	Kick
4780	Bd Room1	Dr/Pc	Kick
4781	Bd Room2	Dr/Pc	Kick
4782	Bd Room3	Dr/Pc	Kick
4783	Bd Jazz1-2St	Dr/Pc	Kick
4784	Bd Jazz1-2L	Dr/Pc	Kick
4785	Bd Jazz1-2R	Dr/Pc	Kick
4786	Bd Jazz1St	Dr/Pc	Kick
4787	Bd Jazz1L	Dr/Pc	Kick
4788	Bd Jazz1R	Dr/Pc	Kick
4789	Bd Jazz2St	Dr/Pc	Kick
4790	Bd Jazz2L	Dr/Pc	Kick
4791	Bd Jazz2R	Dr/Pc	Kick
4792	Bd FK Jazz St	Dr/Pc	Kick
4793	Bd FK Jazz L	Dr/Pc	Kick
4794	Bd FK Jazz R	Dr/Pc	Kick
4795	Bd PL Jazz HiSna Sw	Dr/Pc	Kick
4796	Bd PowerA 1-2St	Dr/Pc	Kick
4797	Bd PowerA 1-2L	Dr/Pc	Kick
4798	Bd PowerA 1-2R	Dr/Pc	Kick
4799	Bd PowerA 1St	Dr/Pc	Kick
4800	Bd PowerA 1L	Dr/Pc	Kick
4801	Bd PowerA 1R	Dr/Pc	Kick
4802	Bd PowerA 2St	Dr/Pc	Kick
4803	Bd PowerA 2L	Dr/Pc	Kick
4804	Bd PowerA 2R	Dr/Pc	Kick
4805	Bd PowerB 1-2St	Dr/Pc	Kick
4806	Bd PowerB 1-2L	Dr/Pc	Kick
4807	Bd PowerB 1-2R	Dr/Pc	Kick
4808	Bd PowerB 1St	Dr/Pc	Kick
4809	Bd PowerB 1L	Dr/Pc	Kick
4810	Bd PowerB 1R	Dr/Pc	Kick
4811	Bd PowerB 2St	Dr/Pc	Kick
4812	Bd PowerB 2L	Dr/Pc	Kick
4813	Bd PowerB 2R	Dr/Pc	Kick
4814	Bd Maple Close 1-2St	Dr/Pc	Kick
4815	Bd Maple Close 1-2 L	Dr/Pc	Kick
4816	Bd Maple Close 1-2 R	Dr/Pc	Kick
4817	Bd Maple Close 1 St	Dr/Pc	Kick
4818	Bd Maple Close 1 L	Dr/Pc	Kick
4819	Bd Maple Close 1 R	Dr/Pc	Kick
4820	Bd Maple Close 2 St	Dr/Pc	Kick
4821	Bd Maple Close 2 L	Dr/Pc	Kick
4822	Bd Maple Close 2 R	Dr/Pc	Kick
4823	Bd Maple Open 1-2 St	Dr/Pc	Kick
4824	Bd Maple Open 1-2 L	Dr/Pc	Kick
4825	Bd Maple Open 1-2 R	Dr/Pc	Kick
4826	Bd Maple Open 1 St	Dr/Pc	Kick
4827	Bd Maple Open 1 L	Dr/Pc	Kick
4828	Bd Maple Open 1 R	Dr/Pc	Kick
4829	Bd Maple Open 2 St	Dr/Pc	Kick
4830	Bd Maple Open 2 L	Dr/Pc	Kick
4831	Bd Maple Open 2 R	Dr/Pc	Kick
4832	Bd Oak Open 1-2 St	Dr/Pc	Kick
4833	Bd Oak Open 1-2 L	Dr/Pc	Kick
4834	Bd Oak Open 1-2 R	Dr/Pc	Kick
4835	Bd Oak Open 1 St	Dr/Pc	Kick
4836	Bd Oak Open 1 L	Dr/Pc	Kick
4837	Bd Oak Open 1 R	Dr/Pc	Kick
4838	Bd Oak Open 2 St	Dr/Pc	Kick
4839	Bd Oak Open 2 L	Dr/Pc	Kick
4840	Bd Oak Open 2 R	Dr/Pc	Kick
4841	Bd Oak Close 1-2 St	Dr/Pc	Kick
4842	Bd Oak Close 1-2 L	Dr/Pc	Kick
4843	Bd Oak Close 1-2 R	Dr/Pc	Kick
4844	Bd Oak Close 1 St	Dr/Pc	Kick
4845	Bd Oak Close 1 L	Dr/Pc	Kick
4846	Bd Oak Close 1 R	Dr/Pc	Kick
4847	Bd Oak Close 2 St	Dr/Pc	Kick
4848	Bd Oak Close 2 L	Dr/Pc	Kick
4849	Bd Oak Close 2 R	Dr/Pc	Kick
4850	Bd NJz Closed 1-2 St	Dr/Pc	Kick
4851	Bd NJz Closed 1-2 L	Dr/Pc	Kick
4852	Bd NJz Closed 1-2 R	Dr/Pc	Kick
4853	Bd NJz Closed 1 St	Dr/Pc	Kick
4854	Bd NJz Closed 1 L	Dr/Pc	Kick
4855	Bd NJz Closed 1 R	Dr/Pc	Kick
4856	Bd NJz Closed 2 St	Dr/Pc	Kick
4857	Bd NJz Closed 2 L	Dr/Pc	Kick
4858	Bd NJz Closed 2 R	Dr/Pc	Kick
4859	Bd NJz Open 1-2 St	Dr/Pc	Kick
4860	Bd NJz Open 1-2 L	Dr/Pc	Kick
4861	Bd NJz Open 1-2 R	Dr/Pc	Kick
4862	Bd NJz Open 1 St	Dr/Pc	Kick
4863	Bd NJz Open 1 L	Dr/Pc	Kick
4864	Bd NJz Open 1 R	Dr/Pc	Kick
4865	Bd NJz Open 2 St	Dr/Pc	Kick
4866	Bd NJz Open 2 L	Dr/Pc	Kick
4867	Bd NJz Open 2 R	Dr/Pc	Kick
4868	Bd GranCasaA Open St	Dr/Pc	Kick
4869	Bd GranCasaA Open L	Dr/Pc	Kick
4870	Bd GranCasaA Open R	Dr/Pc	Kick
4871	Bd GranCasaA Mute St	Dr/Pc	Kick
4872	Bd GranCasaA Mute L	Dr/Pc	Kick
4873	Bd GranCasaA Mute R	Dr/Pc	Kick
4874	Bd GranCasaB 1-3 St	Dr/Pc	Kick
4875	Bd GranCasaB 1-3 L	Dr/Pc	Kick
4876	Bd GranCasaB 1-3 R	Dr/Pc	Kick
4877	Bd GranCasaB 1 St	Dr/Pc	Kick
4878	Bd GranCasaB 1 L	Dr/Pc	Kick
4879	Bd GranCasaB 1 R	Dr/Pc	Kick
4880	Bd GranCasaB 2 St	Dr/Pc	Kick
4881	Bd GranCasaB 2 L	Dr/Pc	Kick
4882	Bd GranCasaB 2 R	Dr/Pc	Kick
4883	Bd GranCasaB 3 St	Dr/Pc	Kick
4884	Bd GranCasaB 3 L	Dr/Pc	Kick
4885	Bd GranCasaB 3 R	Dr/Pc	Kick
4886	Bd GranCasaB Hoop St	Dr/Pc	Kick
4887	Bd GranCasaB Hoop L	Dr/Pc	Kick
4888	Bd GranCasaB Hoop R	Dr/Pc	Kick
4889	Bd GranCasaB Mfl St	Dr/Pc	Kick
4890	Bd GranCasaB Mfl L	Dr/Pc	Kick
4891	Bd GranCasaB Mfl R	Dr/Pc	Kick
4892	Bd Std Kick	Dr/Pc	Kick
4893	AT Kick Sw	Dr/Pc	Kick
4894	GT Kick1 Sw	Dr/Pc	Kick
4895	GT Kick2 Sw	Dr/Pc	Kick
4896	PL Kick1 Sw	Dr/Pc	Kick
4897	PL Kick2 Sw	Dr/Pc	Kick
4898	Bd Gate	Dr/Pc	Kick
4899	Bd FX Gate	Dr/Pc	Kick
4900	Bd DanceGate1	Dr/Pc	Kick
4901	Bd DanceGate2	Dr/Pc	Kick
4902	Bd T9-1	Dr/Pc	Kick
4903	Bd T9-2	Dr/Pc	Kick
4904	Bd T9-3	Dr/Pc	Kick
4905	Bd T9-4	Dr/Pc	Kick
4906	Bd T9 Hd1	Dr/Pc	Kick
4907	Bd T9 Hd2	Dr/Pc	Kick
4908	Bd T9 Hd3	Dr/Pc	Kick
4909	T9 BD 1-1	Dr/Pc	Kick
4910	T9 BD 1-2	Dr/Pc	Kick
4911	T9 BD 1-3	Dr/Pc	Kick
4912	T9 BD 1-4	Dr/Pc	Kick
4913	T9 BD 2-1	Dr/Pc	Kick
4914	T9 BD 2-2	Dr/Pc	Kick
4915	T9 BD 2-3	Dr/Pc	Kick
4916	T9 BD 2-4	Dr/Pc	Kick
4917	S&H T9 BD 1	Dr/Pc	Kick
4918	S&H T9 BD 2	Dr/Pc	Kick
4919	Hard T9 BD	Dr/Pc	Kick
4920	Hard T9 BD Revrese	Dr/Pc	Kick
4921	Elec T9 BD	Dr/Pc	Kick
4922	Bd T8-1	Dr/Pc	Kick
4923	Bd T8-2	Dr/Pc	Kick
4924	Bd T8-3	Dr/Pc	Kick
4925	T8 BD Ac 1	Dr/Pc	Kick
4926	T8 BD Ac 2	Dr/Pc	Kick
4927	T8 BD Ac 3	Dr/Pc	Kick
4928	T8 BD NA 1	Dr/Pc	Kick
4929	T8 BD NA 2	Dr/Pc	Kick
4930	S&H T8 BD	Dr/Pc	Kick
4931	Elec T8 BD	Dr/Pc	Kick
4932	Bd AnSm	Dr/Pc	Kick
4933	Bd AnCR	Dr/Pc	Kick
4934	Bd RX11	Dr/Pc	Kick
4935	Bd Human1	Dr/Pc	Kick
4936	Bd Human2	Dr/Pc	Kick
4937	Bd Brip	Dr/Pc	Kick
4938	Bd BlpHd	Dr/Pc	Kick
4939	Bd Jungle1	Dr/Pc	Kick
4940	Bd Jungle2	Dr/Pc	Kick
4941	Bd Jungle3	Dr/Pc	Kick
4942	Bd D&B1	Dr/Pc	Kick
4943	Bd D&B2	Dr/Pc	Kick
4944	Bd R&B1	Dr/Pc	Kick
4945	Bd R&B2	Dr/Pc	Kick
4946	Bd Hip Deep	Dr/Pc	Kick
4947	Bd Break Deep	Dr/Pc	Kick
4948	Bd Break1	Dr/Pc	Kick
4949	Bd Break2	Dr/Pc	Kick
4950	Bd Break Heavy	Dr/Pc	Kick
4951	Bd Break Hard	Dr/Pc	Kick
4952	Bd Distortion1	Dr/Pc	Kick
4953	Bd Distortion2	Dr/Pc	Kick
4954	Bd Distortion3	Dr/Pc	Kick
4955	Bd Distortion4	Dr/Pc	Kick
4956	Bd Distortion5	Dr/Pc	Kick
4957	Bd Distortion RM	Dr/Pc	Kick
4958	Bd + HH	Dr/Pc	Kick
4959	Artifact BD St	Dr/Pc	Kick
4960	Kindle BD St	Dr/Pc	Kick
4961	Biting BD	Dr/Pc	Kick
4962	Fresh BD St	Dr/Pc	Kick
4963	Smith BD St	Dr/Pc	Kick
4964	Light BD	Dr/Pc	Kick
4965	Crackle BD St	Dr/Pc	Kick
4966	Electric BD St	Dr/Pc	Kick
4967	Clink BD St	Dr/Pc	Kick
4968	Bd FxHammer	Dr/Pc	Kick
4969	Bd ZapHard	Dr/Pc	Kick
4970	Bd ZapMid	Dr/Pc	Kick
4971	Bd Sustain	Dr/Pc	Kick
4972	Bd TekPower	Dr/Pc	Kick
4973	Bd Hard Long	Dr/Pc	Kick
4974	Bd Analog Tight	Dr/Pc	Kick
4975	Bd Analog Hard	Dr/Pc	Kick
4976	Bd Lo-Fi	Dr/Pc	Kick
4977	Bd ThickSkin	Dr/Pc	Kick
4978	Bd Slimy	Dr/Pc	Kick
4979	Bd Elec1	Dr/Pc	Kick
4980	Bd Elec2	Dr/Pc	Kick
4981	Bd Elec3	Dr/Pc	Kick
4982	Bd Elec4	Dr/Pc	Kick
4983	Bd ElecComp1	Dr/Pc	Kick
4984	Bd ElecComp2	Dr/Pc	Kick
4985	Bd ElecComp3	Dr/Pc	Kick
4986	Bd ElecFX1	Dr/Pc	Kick
4987	Bd ElecFX2	Dr/Pc	Kick
4988	Bd ElecGate	Dr/Pc	Kick
4989	Bd ElecClick	Dr/Pc	Kick
4990	Bd ElecPower1	Dr/Pc	Kick
4991	Bd ElecPower2	Dr/Pc	Kick
4992	Bd Techno L	Dr/Pc	Kick
4993	Bd Techno Q	Dr/Pc	Kick
4994	Bd NeoKick	Dr/Pc	Kick
4995	Bd HrdSpecial	Dr/Pc	Kick
4996	Bd Hybrid1	Dr/Pc	Kick
4997	Bd Hybrid2	Dr/Pc	Kick
4998	Bd NewPop1	Dr/Pc	Kick
4999	Bd NewPop2	Dr/Pc	Kick
5000	Bd NewPop3	Dr/Pc	Kick
5001	Bd NewPop4	Dr/Pc	Kick
5002	Bd Stack1	Dr/Pc	Kick
5003	Bd Stack2	Dr/Pc	Kick
5004	Bd Stack3	Dr/Pc	Kick
5005	Bd Stack4	Dr/Pc	Kick
5006	Bd Stack5	Dr/Pc	Kick
5007	Bd Stack6	Dr/Pc	Kick
5008	Bd Stack7	Dr/Pc	Kick
5009	Bd TB Basic	Dr/Pc	Kick
5010	Bd TB Comp	Dr/Pc	Kick
5011	Bd TB PDist1	Dr/Pc	Kick
5012	Bd TB PDist2	Dr/Pc	Kick
5013	Bd EDM01	Dr/Pc	Kick
5014	Bd EDM02	Dr/Pc	Kick
5015	Bd EDM03	Dr/Pc	Kick
5016	Bd EDM04	Dr/Pc	Kick
5017	Bd EDM05	Dr/Pc	Kick
5018	Bd EDM06	Dr/Pc	Kick
5019	Bd EDM07	Dr/Pc	Kick
5020	Bd EDM08	Dr/Pc	Kick
5021	Bd EDM09	Dr/Pc	Kick
5022	Bd EDM10	Dr/Pc	Kick
5023	Bd EDM Gate	Dr/Pc	Kick
5024	Bd LongBass	Dr/Pc	Kick
5025	Bd Body1 Hard	Dr/Pc	Kick
5026	Bd Body1 Soft	Dr/Pc	Kick
5027	Bd Body2	Dr/Pc	Kick
5028	Bd Body3	Dr/Pc	Kick
5029	Dub BD 1 Mn	Dr/Pc	Kick
5030	Dub BD 2 St	Dr/Pc	Kick
5031	Dub BD 3 Mn	Dr/Pc	Kick
5032	Dub BD 4 Mn	Dr/Pc	Kick
5033	Dub BD 5 St	Dr/Pc	Kick
5034	Dub BD 6 St	Dr/Pc	Kick
5035	Trap BD 1 Mn	Dr/Pc	Kick
5036	Trap BD 2 Mn	Dr/Pc	Kick
5037	EDM BD 1 Mn	Dr/Pc	Kick
5038	EDM BD 2 St	Dr/Pc	Kick
5039	EDM BD 3 Mn	Dr/Pc	Kick
5040	EDM BD 4 Mn	Dr/Pc	Kick
5041	EDM BD 5 Mn	Dr/Pc	Kick
5042	House BD 1 St	Dr/Pc	Kick
5043	House BD 2 St	Dr/Pc	Kick
5044	House BD 3 St	Dr/Pc	Kick
5045	House BD 4 Mn	Dr/Pc	Kick
5046	Electro BD 1 Mn	Dr/Pc	Kick
5047	Electro BD 2 Mn	Dr/Pc	Kick
5048	Electro BD 3 Mn	Dr/Pc	Kick
5049	Electro BD 4 St	Dr/Pc	Kick
5050	Bd HipHop1	Dr/Pc	Kick
5051	Bd HipHop2	Dr/Pc	Kick
5052	Bd HipHop3	Dr/Pc	Kick
5053	Bd HipHop4	Dr/Pc	Kick
5054	Bd HipHop5	Dr/Pc	Kick
5055	Bd HipHop6	Dr/Pc	Kick
5056	Bd HipHop7	Dr/Pc	Kick

No.	Name	Main Category	Sub Category
5057	Bd HipHop8	Dr/Pc	Kick
5058	Bd HipHop9	Dr/Pc	Kick
5059	Bd HipHop10	Dr/Pc	Kick
5060	Bd HipHop11	Dr/Pc	Kick
5061	Bd HipHop12	Dr/Pc	Kick
5062	Bd HipHop13	Dr/Pc	Kick
5063	HipHop BD 1 St	Dr/Pc	Kick
5064	HipHop BD 2 Mn	Dr/Pc	Kick
5065	HipHop BD 3 Mn	Dr/Pc	Kick
5066	HipHop BD 4 Mn	Dr/Pc	Kick
5067	HipHop BD 5 Mn	Dr/Pc	Kick
5068	Sd Bld St1-4	Dr/Pc	Snare
5069	Sd Bld St1-3	Dr/Pc	Snare
5070	Sd Bld St2-4	Dr/Pc	Snare
5071	Sd Bld St1-2	Dr/Pc	Snare
5072	Sd Bld St2-3	Dr/Pc	Snare
5073	Sd Bld St3-4	Dr/Pc	Snare
5074	Sd Bld St1	Dr/Pc	Snare
5075	Sd Bld St2	Dr/Pc	Snare
5076	Sd Bld St3	Dr/Pc	Snare
5077	Sd Bld St4	Dr/Pc	Snare
5078	Sd Bld L1-4	Dr/Pc	Snare
5079	Sd Bld R1-4	Dr/Pc	Snare
5080	Sd Bld L1	Dr/Pc	Snare
5081	Sd Bld L2	Dr/Pc	Snare
5082	Sd Bld L3	Dr/Pc	Snare
5083	Sd Bld L4	Dr/Pc	Snare
5084	Sd Bld R1	Dr/Pc	Snare
5085	Sd Bld R2	Dr/Pc	Snare
5086	Sd Bld R3	Dr/Pc	Snare
5087	Sd Bld R4	Dr/Pc	Snare
5088	Sd Soul St1-4	Dr/Pc	Snare
5089	Sd Soul St1-3	Dr/Pc	Snare
5090	Sd Soul St2-4	Dr/Pc	Snare
5091	Sd Soul St1-2	Dr/Pc	Snare
5092	Sd Soul St2-3	Dr/Pc	Snare
5093	Sd Soul St3-4	Dr/Pc	Snare
5094	Sd Soul L1-4	Dr/Pc	Snare
5095	Sd Soul R1-4	Dr/Pc	Snare
5096	Sd Soul St1	Dr/Pc	Snare
5097	Sd Soul St2	Dr/Pc	Snare
5098	Sd Soul St3	Dr/Pc	Snare
5099	Sd Soul St4	Dr/Pc	Snare
5100	Sd Soul L1	Dr/Pc	Snare
5101	Sd Soul L2	Dr/Pc	Snare
5102	Sd Soul L3	Dr/Pc	Snare
5103	Sd Soul L4	Dr/Pc	Snare
5104	Sd Soul R1	Dr/Pc	Snare
5105	Sd Soul R2	Dr/Pc	Snare
5106	Sd Soul R3	Dr/Pc	Snare
5107	Sd Soul R4	Dr/Pc	Snare
5108	Sd Strong St1-4	Dr/Pc	Snare
5109	Sd Strong St1-3	Dr/Pc	Snare
5110	Sd Strong St2-4	Dr/Pc	Snare
5111	Sd Strong St1-2	Dr/Pc	Snare
5112	Sd Strong St2-3	Dr/Pc	Snare
5113	Sd Strong St3-4	Dr/Pc	Snare
5114	Sd Strong St1	Dr/Pc	Snare
5115	Sd Strong St2	Dr/Pc	Snare
5116	Sd Strong St3	Dr/Pc	Snare
5117	Sd Strong St4	Dr/Pc	Snare
5118	Sd Strong L1-4	Dr/Pc	Snare
5119	Sd Strong R1-4	Dr/Pc	Snare
5120	Sd Strong L1	Dr/Pc	Snare
5121	Sd Strong L2	Dr/Pc	Snare
5122	Sd Strong L3	Dr/Pc	Snare
5123	Sd Strong L4	Dr/Pc	Snare
5124	Sd Strong R1	Dr/Pc	Snare
5125	Sd Strong R2	Dr/Pc	Snare
5126	Sd Strong R3	Dr/Pc	Snare
5127	Sd Strong R4	Dr/Pc	Snare
5128	Sd Rng St1-4	Dr/Pc	Snare
5129	Sd Rng St1-3	Dr/Pc	Snare
5130	Sd Rng St2-4	Dr/Pc	Snare
5131	Sd Rng St1-2	Dr/Pc	Snare
5132	Sd Rng St2-3	Dr/Pc	Snare
5133	Sd Rng St3-4	Dr/Pc	Snare
5134	Sd Rng St1	Dr/Pc	Snare
5135	Sd Rng St2	Dr/Pc	Snare
5136	Sd Rng St3	Dr/Pc	Snare
5137	Sd Rng St4	Dr/Pc	Snare
5138	Sd Rng L1-4	Dr/Pc	Snare
5139	Sd Rng R1-4	Dr/Pc	Snare
5140	Sd Rng L1	Dr/Pc	Snare
5141	Sd Rng L2	Dr/Pc	Snare
5142	Sd Rng L3	Dr/Pc	Snare
5143	Sd Rng L4	Dr/Pc	Snare
5144	Sd Rng R1	Dr/Pc	Snare
5145	Sd Rng R2	Dr/Pc	Snare
5146	Sd Rng R3	Dr/Pc	Snare
5147	Sd Rng R4	Dr/Pc	Snare
5148	Sd Normal St1-4	Dr/Pc	Snare
5149	Sd Normal St1-3	Dr/Pc	Snare
5150	Sd Normal St2-4	Dr/Pc	Snare
5151	Sd Normal St1-2	Dr/Pc	Snare
5152	Sd Normal St2-3	Dr/Pc	Snare
5153	Sd Normal St3-4	Dr/Pc	Snare
5154	Sd Normal 1St	Dr/Pc	Snare
5155	Sd Normal 2St	Dr/Pc	Snare
5156	Sd Normal 3St	Dr/Pc	Snare
5157	Sd Normal 4St	Dr/Pc	Snare
5158	Sd Normal L1-4	Dr/Pc	Snare
5159	Sd Normal R1-4	Dr/Pc	Snare
5160	Sd Normal 1L	Dr/Pc	Snare
5161	Sd Normal 1R	Dr/Pc	Snare
5162	Sd Normal 2L	Dr/Pc	Snare
5163	Sd Normal 2R	Dr/Pc	Snare
5164	Sd Normal 3L	Dr/Pc	Snare
5165	Sd Normal 3R	Dr/Pc	Snare
5166	Sd Normal 4L	Dr/Pc	Snare
5167	Sd Normal 4R	Dr/Pc	Snare
5168	Sd Funk St1-3	Dr/Pc	Snare
5169	Sd Funk St1-2	Dr/Pc	Snare
5170	Sd Funk St2-3	Dr/Pc	Snare
5171	Sd Funk St13	Dr/Pc	Snare
5172	Sd Funk 1St	Dr/Pc	Snare
5173	Sd Funk 2St	Dr/Pc	Snare
5174	Sd Funk 3St	Dr/Pc	Snare
5175	Sd Funk L1-3	Dr/Pc	Snare
5176	Sd Funk R1-3	Dr/Pc	Snare
5177	Sd Funk 1L	Dr/Pc	Snare
5178	Sd Funk 1R	Dr/Pc	Snare
5179	Sd Funk 2L	Dr/Pc	Snare
5180	Sd Funk 2R	Dr/Pc	Snare
5181	Sd Funk 3L	Dr/Pc	Snare
5182	Sd Funk 3R	Dr/Pc	Snare
5183	Sd Funk Ay St	Dr/Pc	Snare
5184	Sd Funk Ay L	Dr/Pc	Snare
5185	Sd Funk Ay R	Dr/Pc	Snare
5186	Sd Basic St1-3	Dr/Pc	Snare
5187	Sd Basic St1-2	Dr/Pc	Snare
5188	Sd Basic St2-3	Dr/Pc	Snare
5189	Sd Basic St13	Dr/Pc	Snare
5190	Sd Basic 1St	Dr/Pc	Snare
5191	Sd Basic 2St	Dr/Pc	Snare
5192	Sd Basic 3St	Dr/Pc	Snare
5193	Sd Basic L1-3	Dr/Pc	Snare
5194	Sd Basic R1-3	Dr/Pc	Snare
5195	Sd Basic 1L	Dr/Pc	Snare
5196	Sd Basic 1R	Dr/Pc	Snare
5197	Sd Basic 2L	Dr/Pc	Snare
5198	Sd Basic 2R	Dr/Pc	Snare
5199	Sd Basic 3L	Dr/Pc	Snare
5200	Sd Basic 3R	Dr/Pc	Snare
5201	Sd SonA St1-4	Dr/Pc	Snare
5202	Sd SonA St1-3	Dr/Pc	Snare
5203	Sd SonA St2-4	Dr/Pc	Snare
5204	Sd SonA St1-2	Dr/Pc	Snare
5205	Sd SonA St2-3	Dr/Pc	Snare
5206	Sd SonA St3-4	Dr/Pc	Snare
5207	Sd SonA 1St	Dr/Pc	Snare
5208	Sd SonA 2St	Dr/Pc	Snare
5209	Sd SonA 3St	Dr/Pc	Snare
5210	Sd SonA 4St	Dr/Pc	Snare
5211	Sd SonA L1-4	Dr/Pc	Snare
5212	Sd SonA R1-4	Dr/Pc	Snare
5213	Sd SonA 1L	Dr/Pc	Snare
5214	Sd SonA 1R	Dr/Pc	Snare
5215	Sd SonA 2L	Dr/Pc	Snare
5216	Sd SonA 2R	Dr/Pc	Snare
5217	Sd SonA 3L	Dr/Pc	Snare
5218	Sd SonA 3R	Dr/Pc	Snare
5219	Sd SonA 4L	Dr/Pc	Snare
5220	Sd SonA 4R	Dr/Pc	Snare
5221	Sd Blues St1-3	Dr/Pc	Snare
5222	Sd Blues St1-2	Dr/Pc	Snare
5223	Sd Blues St2-3	Dr/Pc	Snare
5224	Sd Blues St13	Dr/Pc	Snare
5225	Sd Blues 1St	Dr/Pc	Snare
5226	Sd Blues 2St	Dr/Pc	Snare
5227	Sd Blues 3St	Dr/Pc	Snare
5228	Sd Blues L1-3	Dr/Pc	Snare
5229	Sd Blues R1-3	Dr/Pc	Snare
5230	Sd Blues 1L	Dr/Pc	Snare
5231	Sd Blues 1R	Dr/Pc	Snare
5232	Sd Blues 2L	Dr/Pc	Snare
5233	Sd Blues 2R	Dr/Pc	Snare
5234	Sd Blues 3L	Dr/Pc	Snare
5235	Sd Blues 3R	Dr/Pc	Snare
5236	Sd BluesHeart St1-3	Dr/Pc	Snare
5237	Sd BluesHeart St1-2	Dr/Pc	Snare
5238	Sd BluesHeart St2-3	Dr/Pc	Snare
5239	Sd BluesHeart St13	Dr/Pc	Snare
5240	Sd BluesHeart 1St	Dr/Pc	Snare
5241	Sd BluesHeart 2St	Dr/Pc	Snare
5242	Sd BluesHeart 3St	Dr/Pc	Snare
5243	Sd BluesHeart L1-3	Dr/Pc	Snare
5244	Sd BluesHeart R1-3	Dr/Pc	Snare
5245	Sd BluesHeart 1L	Dr/Pc	Snare
5246	Sd BluesHeart 1R	Dr/Pc	Snare
5247	Sd BluesHeart 2L	Dr/Pc	Snare
5248	Sd BluesHeart 2R	Dr/Pc	Snare
5249	Sd BluesHeart 3L	Dr/Pc	Snare
5250	Sd BluesHeart 3R	Dr/Pc	Snare
5251	Sd Tight St1-4	Dr/Pc	Snare
5252	Sd Tight St1-3	Dr/Pc	Snare
5253	Sd Tight St2-4	Dr/Pc	Snare
5254	Sd Tight St1-2	Dr/Pc	Snare
5255	Sd Tight St2-3	Dr/Pc	Snare
5256	Sd Tight St3-4	Dr/Pc	Snare
5257	Sd Tight 1St	Dr/Pc	Snare
5258	Sd Tight 2St	Dr/Pc	Snare
5259	Sd Tight 3St	Dr/Pc	Snare
5260	Sd Tight 4St	Dr/Pc	Snare
5261	Sd Tight L1-4	Dr/Pc	Snare
5262	Sd Tight R1-4	Dr/Pc	Snare
5263	Sd Tight 1L	Dr/Pc	Snare
5264	Sd Tight 1R	Dr/Pc	Snare
5265	Sd Tight 2L	Dr/Pc	Snare
5266	Sd Tight 2R	Dr/Pc	Snare
5267	Sd Tight 3L	Dr/Pc	Snare
5268	Sd Tight 3R	Dr/Pc	Snare
5269	Sd Tight 4L	Dr/Pc	Snare
5270	Sd Tight 4R	Dr/Pc	Snare
5271	Sd Hip St1-2	Dr/Pc	Snare
5272	Sd Hip 1St	Dr/Pc	Snare
5273	Sd Hip 2St	Dr/Pc	Snare
5274	Sd Hip L1-2	Dr/Pc	Snare
5275	Sd Hip R1-2	Dr/Pc	Snare
5276	Sd Hip 1L	Dr/Pc	Snare
5277	Sd Hip 1R	Dr/Pc	Snare
5278	Sd Hip 2L	Dr/Pc	Snare
5279	Sd Hip 2R	Dr/Pc	Snare
5280	Sd Rock Open1 St	Dr/Pc	Snare
5281	Sd Rock Open1 L	Dr/Pc	Snare
5282	Sd Rock Open1 R	Dr/Pc	Snare
5283	Sd Rock Mute1 St	Dr/Pc	Snare
5284	Sd Rock Mute1 L	Dr/Pc	Snare
5285	Sd Rock Mute1 R	Dr/Pc	Snare
5286	Sd Rock Rim1 St	Dr/Pc	Snare
5287	Sd Rock Rim1 L	Dr/Pc	Snare
5288	Sd Rock Rim1 R	Dr/Pc	Snare
5289	Sd Rock Open2 St	Dr/Pc	Snare
5290	Sd Rock Open2 L	Dr/Pc	Snare
5291	Sd Rock Open2 R	Dr/Pc	Snare
5292	Sd Rock Mute2 St	Dr/Pc	Snare
5293	Sd Rock Mute2 L	Dr/Pc	Snare
5294	Sd Rock Mute2 R	Dr/Pc	Snare
5295	Sd Rock Rim2 St	Dr/Pc	Snare
5296	Sd Rock Rim2 L	Dr/Pc	Snare
5297	Sd Rock Rim2 R	Dr/Pc	Snare
5298	Sd Rock Flam St	Dr/Pc	Snare
5299	Sd Rock Flam L	Dr/Pc	Snare
5300	Sd Rock Flam R	Dr/Pc	Snare
5301	Sd Piccolo	Dr/Pc	Snare
5302	Sd Piccolo Rim1	Dr/Pc	Snare
5303	Sd Piccolo Rim2	Dr/Pc	Snare
5304	Sd Mid	Dr/Pc	Snare
5305	Sd Mid Rim	Dr/Pc	Snare
5306	Sd Ambience	Dr/Pc	Snare
5307	Sd PowerA 1-5St	Dr/Pc	Snare
5308	Sd PowerA 1-5L	Dr/Pc	Snare
5309	Sd PowerA 1-5R	Dr/Pc	Snare
5310	Sd PowerA 1-4St	Dr/Pc	Snare
5311	Sd PowerA 1-4L	Dr/Pc	Snare
5312	Sd PowerA 1-4R	Dr/Pc	Snare
5313	Sd PowerA 1St	Dr/Pc	Snare
5314	Sd PowerA 1L	Dr/Pc	Snare
5315	Sd PowerA 1R	Dr/Pc	Snare
5316	Sd PowerA 2St	Dr/Pc	Snare
5317	Sd PowerA 2L	Dr/Pc	Snare
5318	Sd PowerA 2R	Dr/Pc	Snare
5319	Sd PowerA 3St	Dr/Pc	Snare
5320	Sd PowerA 3L	Dr/Pc	Snare
5321	Sd PowerA 3R	Dr/Pc	Snare
5322	Sd PowerA 4St	Dr/Pc	Snare
5323	Sd PowerA 4L	Dr/Pc	Snare
5324	Sd PowerA 4R	Dr/Pc	Snare
5325	Sd PowerA 5St	Dr/Pc	Snare
5326	Sd PowerA 5L	Dr/Pc	Snare
5327	Sd PowerA 5R	Dr/Pc	Snare
5328	Sd PowerB 1-5St	Dr/Pc	Snare
5329	Sd PowerB 1-5L	Dr/Pc	Snare
5330	Sd PowerB 1-5R	Dr/Pc	Snare
5331	Sd PowerB 1-4St	Dr/Pc	Snare
5332	Sd PowerB 1-4L	Dr/Pc	Snare
5333	Sd PowerB 1-4R	Dr/Pc	Snare
5334	Sd PowerB 1St	Dr/Pc	Snare
5335	Sd PowerB 1L	Dr/Pc	Snare
5336	Sd PowerB 1R	Dr/Pc	Snare
5337	Sd PowerB 2St	Dr/Pc	Snare
5338	Sd PowerB 2L	Dr/Pc	Snare
5339	Sd PowerB 2R	Dr/Pc	Snare
5340	Sd PowerB 3St	Dr/Pc	Snare
5341	Sd PowerB 3L	Dr/Pc	Snare
5342	Sd PowerB 3R	Dr/Pc	Snare
5343	Sd PowerB 4St	Dr/Pc	Snare
5344	Sd PowerB 4L	Dr/Pc	Snare
5345	Sd PowerB 4R	Dr/Pc	Snare
5346	Sd PowerB 5St	Dr/Pc	Snare
5347	Sd PowerB 5L	Dr/Pc	Snare
5348	Sd PowerB 5R	Dr/Pc	Snare
5349	Sd PowerB SSt	Dr/Pc	Snare
5350	Sd PowerB SL	Dr/Pc	Snare
5351	Sd PowerB SR	Dr/Pc	Snare
5352	Sd PowerC 1-5St	Dr/Pc	Snare
5353	Sd PowerC 1-5L	Dr/Pc	Snare
5354	Sd PowerC 1-5R	Dr/Pc	Snare
5355	Sd PowerC 1-4St	Dr/Pc	Snare
5356	Sd PowerC 1-4L	Dr/Pc	Snare
5357	Sd PowerC 1-4R	Dr/Pc	Snare
5358	Sd PowerC 1St	Dr/Pc	Snare
5359	Sd PowerC 1L	Dr/Pc	Snare
5360	Sd PowerC 1R	Dr/Pc	Snare
5361	Sd PowerC 2St	Dr/Pc	Snare
5362	Sd PowerC 2L	Dr/Pc	Snare
5363	Sd PowerC 2R	Dr/Pc	Snare
5364	Sd PowerC 3St	Dr/Pc	Snare
5365	Sd PowerC 3L	Dr/Pc	Snare
5366	Sd PowerC 3R	Dr/Pc	Snare
5367	Sd PowerC 4St	Dr/Pc	Snare
5368	Sd PowerC 4L	Dr/Pc	Snare
5369	Sd PowerC 4R	Dr/Pc	Snare
5370	Sd PowerC 5St	Dr/Pc	Snare
5371	Sd PowerC 5L	Dr/Pc	Snare
5372	Sd PowerC 5R	Dr/Pc	Snare

No.	Name	Main Category	Sub Category
5373	Sd PowerD 1-5St	Dr/Pc	Snare
5374	Sd PowerD 1-5L	Dr/Pc	Snare
5375	Sd PowerD 1-5R	Dr/Pc	Snare
5376	Sd PowerD 1-4St	Dr/Pc	Snare
5377	Sd PowerD 1-4L	Dr/Pc	Snare
5378	Sd PowerD 1-4R	Dr/Pc	Snare
5379	Sd PowerD 1St	Dr/Pc	Snare
5380	Sd PowerD 1L	Dr/Pc	Snare
5381	Sd PowerD 1R	Dr/Pc	Snare
5382	Sd PowerD 2St	Dr/Pc	Snare
5383	Sd PowerD 2L	Dr/Pc	Snare
5384	Sd PowerD 2R	Dr/Pc	Snare
5385	Sd PowerD 3St	Dr/Pc	Snare
5386	Sd PowerD 3L	Dr/Pc	Snare
5387	Sd PowerD 3R	Dr/Pc	Snare
5388	Sd PowerD 4St	Dr/Pc	Snare
5389	Sd PowerD 4L	Dr/Pc	Snare
5390	Sd PowerD 4R	Dr/Pc	Snare
5391	Sd PowerD 5St	Dr/Pc	Snare
5392	Sd PowerD 5L	Dr/Pc	Snare
5393	Sd PowerD 5R	Dr/Pc	Snare
5394	Sd Oak 1-4 St	Dr/Pc	Snare
5395	Sd Oak 1-4 L	Dr/Pc	Snare
5396	Sd Oak 1-4 R	Dr/Pc	Snare
5397	Sd Oak 1-OpRm St	Dr/Pc	Snare
5398	Sd Oak 1-OpRm L	Dr/Pc	Snare
5399	Sd Oak 1-OpRm R	Dr/Pc	Snare
5400	Sd Oak 1 St	Dr/Pc	Snare
5401	Sd Oak 1 L	Dr/Pc	Snare
5402	Sd Oak 1 R	Dr/Pc	Snare
5403	Sd Oak 2 St	Dr/Pc	Snare
5404	Sd Oak 2 L	Dr/Pc	Snare
5405	Sd Oak 2 R	Dr/Pc	Snare
5406	Sd Oak 3 St	Dr/Pc	Snare
5407	Sd Oak 3 L	Dr/Pc	Snare
5408	Sd Oak 3 R	Dr/Pc	Snare
5409	Sd Oak 4 St	Dr/Pc	Snare
5410	Sd Oak 4 L	Dr/Pc	Snare
5411	Sd Oak 4 R	Dr/Pc	Snare
5412	Sd Oak OpRm 1-2 St	Dr/Pc	Snare
5413	Sd Oak OpRm 1-2 L	Dr/Pc	Snare
5414	Sd Oak OpRm 1-2 R	Dr/Pc	Snare
5415	Sd Oak OpRm 1 St	Dr/Pc	Snare
5416	Sd Oak OpRm 1 L	Dr/Pc	Snare
5417	Sd Oak OpRm 1 R	Dr/Pc	Snare
5418	Sd Oak OpRm 2 St	Dr/Pc	Snare
5419	Sd Oak OpRm 2 L	Dr/Pc	Snare
5420	Sd Oak OpRm 2 R	Dr/Pc	Snare
5421	Sd Oak ClRm St	Dr/Pc	Snare
5422	Sd Oak ClRm L	Dr/Pc	Snare
5423	Sd Oak ClRm R	Dr/Pc	Snare
5424	Sd Beech 1-4 St	Dr/Pc	Snare
5425	Sd Beech 1-4 L	Dr/Pc	Snare
5426	Sd Beech 1-4 R	Dr/Pc	Snare
5427	Sd Beech 1-OpRm St	Dr/Pc	Snare
5428	Sd Beech 1-OpRm L	Dr/Pc	Snare
5429	Sd Beech 1-OpRm R	Dr/Pc	Snare
5430	Sd Beech 1 St	Dr/Pc	Snare
5431	Sd Beech 1 L	Dr/Pc	Snare
5432	Sd Beech 1 R	Dr/Pc	Snare
5433	Sd Beech 2 St	Dr/Pc	Snare
5434	Sd Beech 2 L	Dr/Pc	Snare
5435	Sd Beech 2 R	Dr/Pc	Snare
5436	Sd Beech 3 St	Dr/Pc	Snare
5437	Sd Beech 3 L	Dr/Pc	Snare
5438	Sd Beech 3 R	Dr/Pc	Snare
5439	Sd Beech 4 St	Dr/Pc	Snare
5440	Sd Beech 4 L	Dr/Pc	Snare
5441	Sd Beech 4 R	Dr/Pc	Snare
5442	Sd Beech OpRm 1-2 St	Dr/Pc	Snare
5443	Sd Beech OpRm 1-2 L	Dr/Pc	Snare
5444	Sd Beech OpRm 1-2 R	Dr/Pc	Snare
5445	Sd Beech OpRm 1 St	Dr/Pc	Snare
5446	Sd Beech OpRm 1 L	Dr/Pc	Snare
5447	Sd Beech OpRm 1 R	Dr/Pc	Snare
5448	Sd Beech OpRm 2 St	Dr/Pc	Snare
5449	Sd Beech OpRm 2 L	Dr/Pc	Snare
5450	Sd Beech OpRm 2 R	Dr/Pc	Snare
5451	Sd Beech ClRm St	Dr/Pc	Snare
5452	Sd Beech ClRm L	Dr/Pc	Snare
5453	Sd Beech ClRm R	Dr/Pc	Snare
5454	Sd Metal 1-4 St	Dr/Pc	Snare
5455	Sd Metal 1-4 L	Dr/Pc	Snare
5456	Sd Metal 1-4 R	Dr/Pc	Snare
5457	Sd Metal 1-OpRm St	Dr/Pc	Snare
5458	Sd Metal 1-OpRm L	Dr/Pc	Snare
5459	Sd Metal 1-OpRm R	Dr/Pc	Snare
5460	Sd Metal 1 St	Dr/Pc	Snare
5461	Sd Metal 1 L	Dr/Pc	Snare
5462	Sd Metal 1 R	Dr/Pc	Snare
5463	Sd Metal 2 St	Dr/Pc	Snare
5464	Sd Metal 2 L	Dr/Pc	Snare
5465	Sd Metal 2 R	Dr/Pc	Snare
5466	Sd Metal 3 St	Dr/Pc	Snare
5467	Sd Metal 3 L	Dr/Pc	Snare
5468	Sd Metal 3 R	Dr/Pc	Snare
5469	Sd Metal 4 St	Dr/Pc	Snare
5470	Sd Metal 4 L	Dr/Pc	Snare
5471	Sd Metal 4 R	Dr/Pc	Snare
5472	Sd Metal OpRm 1-2 St	Dr/Pc	Snare
5473	Sd Metal OpRm 1-2 L	Dr/Pc	Snare
5474	Sd Metal OpRm 1-2 R	Dr/Pc	Snare
5475	Sd Metal OpRm 1 St	Dr/Pc	Snare
5476	Sd Metal OpRm 1 L	Dr/Pc	Snare
5477	Sd Metal OpRm 1 R	Dr/Pc	Snare
5478	Sd Metal OpRm 2 St	Dr/Pc	Snare
5479	Sd Metal OpRm 2 L	Dr/Pc	Snare
5480	Sd Metal OpRm 2 R	Dr/Pc	Snare
5481	Sd Metal ClRm St	Dr/Pc	Snare
5482	Sd Metal ClRm L	Dr/Pc	Snare
5483	Sd Metal ClRm R	Dr/Pc	Snare
5484	Sd Metal SnRoll St	Dr/Pc	Snare
5485	Sd Metal SnRoll L	Dr/Pc	Snare
5486	Sd Metal SnRoll R	Dr/Pc	Snare
5487	Sd NJz 1-4 St	Dr/Pc	Snare
5488	Sd NJz 1-4 L	Dr/Pc	Snare
5489	Sd NJz 1-4 R	Dr/Pc	Snare
5490	Sd NJz 1-OpRm St	Dr/Pc	Snare
5491	Sd NJz 1-OpRm L	Dr/Pc	Snare
5492	Sd NJz 1-OpRm R	Dr/Pc	Snare
5493	Sd NJz 1 St	Dr/Pc	Snare
5494	Sd NJz 1 L	Dr/Pc	Snare
5495	Sd NJz 1 R	Dr/Pc	Snare
5496	Sd NJz 2 St	Dr/Pc	Snare
5497	Sd NJz 2 L	Dr/Pc	Snare
5498	Sd NJz 2 R	Dr/Pc	Snare
5499	Sd NJz 3 St	Dr/Pc	Snare
5500	Sd NJz 3 L	Dr/Pc	Snare
5501	Sd NJz 3 R	Dr/Pc	Snare
5502	Sd NJz 4 St	Dr/Pc	Snare
5503	Sd NJz 4 L	Dr/Pc	Snare
5504	Sd NJz 4 R	Dr/Pc	Snare
5505	Sd NJz OpRm 1-2 St	Dr/Pc	Snare
5506	Sd NJz OpRm 1-2 L	Dr/Pc	Snare
5507	Sd NJz OpRm 1-2 R	Dr/Pc	Snare
5508	Sd NJz OpRm 1 St	Dr/Pc	Snare
5509	Sd NJz OpRm 1 L	Dr/Pc	Snare
5510	Sd NJz OpRm 1 R	Dr/Pc	Snare
5511	Sd NJz OpRm 2 St	Dr/Pc	Snare
5512	Sd NJz OpRm 2 L	Dr/Pc	Snare
5513	Sd NJz OpRm 2 R	Dr/Pc	Snare
5514	Sd NJz ClRm St	Dr/Pc	Snare
5515	Sd NJz ClRm L	Dr/Pc	Snare
5516	Sd NJz ClRm R	Dr/Pc	Snare
5517	Sd Gate1	Dr/Pc	Snare
5518	Sd Gate2	Dr/Pc	Snare
5519	Sd LdwHMn	Dr/Pc	Snare
5520	Sd BreakRim	Dr/Pc	Snare
5521	Sd Dry	Dr/Pc	Snare
5522	Sd Heavy	Dr/Pc	Snare
5523	Sd GM	Dr/Pc	Snare
5524	Sd Rock Stick1 St	Dr/Pc	Snare
5525	Sd Rock Stick1 L	Dr/Pc	Snare
5526	Sd Rock Stick1 R	Dr/Pc	Snare
5527	Sd Rock Stick2 St	Dr/Pc	Snare
5528	Sd Rock Stick2 L	Dr/Pc	Snare
5529	Sd Rock Stick2 R	Dr/Pc	Snare
5530	Sd Hip Stick1	Dr/Pc	Snare
5531	Sd Hip Stick2	Dr/Pc	Snare
5532	Sd Hip Stick3	Dr/Pc	Snare
5533	Sd Hip Stick4	Dr/Pc	Snare
5534	Sd Hip Stick5	Dr/Pc	Snare
5535	Sd Hip Stick6 St	Dr/Pc	Snare
5536	Sd Hip Stick6 L	Dr/Pc	Snare
5537	Sd Hip Stick6 R	Dr/Pc	Snare
5538	Sd Hip Stick7	Dr/Pc	Snare
5539	Sd Hip Stick8	Dr/Pc	Snare
5540	Sd Closed Rim St	Dr/Pc	Snare
5541	Sd Closed Rim L	Dr/Pc	Snare
5542	Sd Closed Rim R	Dr/Pc	Snare
5543	Sd Closed Rim2	Dr/Pc	Snare
5544	Sd Closed Rim3	Dr/Pc	Snare
5545	Sd Closed Rim4	Dr/Pc	Snare
5546	Sd Closed Rim5	Dr/Pc	Snare
5547	Sd Closed Rim6	Dr/Pc	Snare
5548	Sd RockRoll St	Dr/Pc	Snare
5549	Sd RockRoll L	Dr/Pc	Snare
5550	Sd RockRoll R	Dr/Pc	Snare
5551	Sd RockRollD St	Dr/Pc	Snare
5552	Sd RockRollD L	Dr/Pc	Snare
5553	Sd RockRollD R	Dr/Pc	Snare
5554	Sd LiveRoll St	Dr/Pc	Snare
5555	Sd LiveRoll L	Dr/Pc	Snare
5556	Sd LiveRoll R	Dr/Pc	Snare
5557	Sd Roll Mn	Dr/Pc	Snare
5558	Std Snare	Dr/Pc	Snare
5559	Std Snare Tight	Dr/Pc	Snare
5560	Std Open Rimshot	Dr/Pc	Snare
5561	LW Snare Sw	Dr/Pc	Snare
5562	DG Snare1 Sw	Dr/Pc	Snare
5563	DG Snare2 Sw	Dr/Pc	Snare
5564	TM Snare Sw	Dr/Pc	Snare
5565	Bright Snare Roll	Dr/Pc	Snare
5566	Sd Brush Soft St	Dr/Pc	Snare
5567	Sd Brush Soft L	Dr/Pc	Snare
5568	Sd Brush Soft R	Dr/Pc	Snare
5569	Sd Brush Med St	Dr/Pc	Snare
5570	Sd Brush Med L	Dr/Pc	Snare
5571	Sd Brush Med R	Dr/Pc	Snare
5572	Sd Brush vari St	Dr/Pc	Snare
5573	Sd Brush vari L	Dr/Pc	Snare
5574	Sd Brush vari R	Dr/Pc	Snare
5575	Sd Closed Rim4 St	Dr/Pc	Snare
5576	Sd Closed Rim4 L	Dr/Pc	Snare
5577	Sd Closed Rim4 R	Dr/Pc	Snare
5578	Sd Brush Swir St	Dr/Pc	Snare
5579	Sd Brush Swir L	Dr/Pc	Snare
5580	Sd Brush Swir R	Dr/Pc	Snare
5581	Sd Brush SwirAtt St	Dr/Pc	Snare
5582	Sd Brush SwirAtt L	Dr/Pc	Snare
5583	Sd Brush SwirAtt R	Dr/Pc	Snare
5584	Sd LW Brush Tap1 Sw	Dr/Pc	Snare
5585	Sd LW Brush Tap2 Sw	Dr/Pc	Snare
5586	Sd LW Brush Slap Sw	Dr/Pc	Snare
5587	Sd LW Brush Combi Sw	Dr/Pc	Snare
5588	Sd LW Brush Rim1 Sw	Dr/Pc	Snare
5589	Sd LW Brush Rim2 Sw	Dr/Pc	Snare
5590	Sd LW Brush Swir1	Dr/Pc	Snare
5591	Sd LW Brush Swir2 Sw	Dr/Pc	Snare
5592	Sd LW Brush Swir3	Dr/Pc	Snare
5593	Sd LW Brush Swir4	Dr/Pc	Snare
5594	Sd LW Brush Swir5	Dr/Pc	Snare
5595	Sd LW Brush Swir6	Dr/Pc	Snare
5596	Sd OrchA 1-2 St	Dr/Pc	Snare
5597	Sd OrchA 1 St	Dr/Pc	Snare
5598	Sd OrchA 2 St	Dr/Pc	Snare
5599	Sd OrchA 1-2 L	Dr/Pc	Snare
5600	Sd OrchA 1-2 R	Dr/Pc	Snare
5601	Sd OrchA 1 L	Dr/Pc	Snare
5602	Sd OrchA 2 L	Dr/Pc	Snare
5603	Sd OrchA 1 R	Dr/Pc	Snare
5604	Sd OrchA 2 R	Dr/Pc	Snare
5605	Sd OrchB 1-2 St	Dr/Pc	Snare
5606	Sd OrchB 1 St	Dr/Pc	Snare
5607	Sd OrchB 2 St	Dr/Pc	Snare
5608	Sd OrchB 1-2 L	Dr/Pc	Snare
5609	Sd OrchB 1-2 R	Dr/Pc	Snare
5610	Sd OrchB 1 L	Dr/Pc	Snare
5611	Sd OrchB 2 L	Dr/Pc	Snare
5612	Sd OrchB 1 R	Dr/Pc	Snare
5613	Sd OrchB 2 R	Dr/Pc	Snare
5614	Sd OrchC 1-4 St	Dr/Pc	Snare
5615	Sd OrchC 1-4 L	Dr/Pc	Snare
5616	Sd OrchC 1-4 R	Dr/Pc	Snare
5617	Sd OrchC 1 St	Dr/Pc	Snare
5618	Sd OrchC 1 L	Dr/Pc	Snare
5619	Sd OrchC 1 R	Dr/Pc	Snare
5620	Sd OrchC 2 St	Dr/Pc	Snare
5621	Sd OrchC 2 L	Dr/Pc	Snare
5622	Sd OrchC 2 R	Dr/Pc	Snare
5623	Sd OrchC 3 St	Dr/Pc	Snare
5624	Sd OrchC 3 L	Dr/Pc	Snare
5625	Sd OrchC 3 R	Dr/Pc	Snare
5626	Sd OrchC 4 St	Dr/Pc	Snare
5627	Sd OrchC 4 L	Dr/Pc	Snare
5628	Sd OrchC 4 R	Dr/Pc	Snare
5629	Sd Orch Roll St	Dr/Pc	Snare
5630	Sd Orch Roll L	Dr/Pc	Snare
5631	Sd Orch Roll R	Dr/Pc	Snare
5632	Sd Field 1-4 St	Dr/Pc	Snare
5633	Sd Field 1-4 L	Dr/Pc	Snare
5634	Sd Field 1-4 R	Dr/Pc	Snare
5635	Sd Field 1 St	Dr/Pc	Snare
5636	Sd Field 1 L	Dr/Pc	Snare
5637	Sd Field 1 R	Dr/Pc	Snare
5638	Sd Field 2 St	Dr/Pc	Snare
5639	Sd Field 2 L	Dr/Pc	Snare
5640	Sd Field 2 R	Dr/Pc	Snare
5641	Sd Field 3 St	Dr/Pc	Snare
5642	Sd Field 3 L	Dr/Pc	Snare
5643	Sd Field 3 R	Dr/Pc	Snare
5644	Sd Field 4 St	Dr/Pc	Snare
5645	Sd Field 4 L	Dr/Pc	Snare
5646	Sd Field 4 R	Dr/Pc	Snare
5647	Hiland Snare	Dr/Pc	Ethnc
5648	Hiland Snare Rim	Dr/Pc	Ethnc
5649	Hiland Snare Open	Dr/Pc	Ethnc
5650	Hiland Snare Flam	Dr/Pc	Ethnc
5651	Hiland Snare ShtRll	Dr/Pc	Ethnc
5652	Hiland Snare Sfz	Dr/Pc	Ethnc
5653	Hiland Snare Roll	Dr/Pc	Ethnc
5654	Caixa1 Center	Dr/Pc	Ethnc
5655	Caixa1 RimShot	Dr/Pc	Ethnc
5656	Caixa2 Center	Dr/Pc	Ethnc
5657	Caixa2 RimShot	Dr/Pc	Ethnc
5658	Sd Elec1	Dr/Pc	Snare
5659	Sd Elec2	Dr/Pc	Snare
5660	Sd Elec3	Dr/Pc	Snare
5661	Sd Elec4	Dr/Pc	Snare
5662	Sd Elec5	Dr/Pc	Snare
5663	Sd Elec6	Dr/Pc	Snare
5664	Sd Elec7	Dr/Pc	Snare
5665	Sd Elec8	Dr/Pc	Snare
5666	Sd Elec9	Dr/Pc	Snare
5667	Sd Elec10	Dr/Pc	Snare
5668	Sd Elec11	Dr/Pc	Snare
5669	Sd Elec12	Dr/Pc	Snare
5670	Crisp Snare St	Dr/Pc	Snare
5671	Digital Snare St	Dr/Pc	Snare
5672	Elec Small Snare St	Dr/Pc	Snare
5673	Echo Snare St	Dr/Pc	Snare
5674	Biting Snare 1	Dr/Pc	Snare
5675	Biting Snare 2	Dr/Pc	Snare
5676	Fresh Snare 1	Dr/Pc	Snare
5677	Fresh Snare 2	Dr/Pc	Snare
5678	Shrill Snare St	Dr/Pc	Snare
5679	Strong Snare Wire	Dr/Pc	Snare
5680	Elec Jazz Snare St	Dr/Pc	Snare
5681	Elec Tight Snare St	Dr/Pc	Snare
5682	Electric Snare	Dr/Pc	Snare
5683	Clang Snare St	Dr/Pc	Snare
5684	Ambi Snare	Dr/Pc	Snare
5685	Snare Roll OneShot	Dr/Pc	Snare
5686	Fine Snare St	Dr/Pc	Snare
5687	Elec Light Snare St	Dr/Pc	Snare
5688	Crackle Snare St	Dr/Pc	Snare

No.	Name	Main Category	Sub Category
5689	Sd HandClap	Dr/Pc	Snare
5690	Sd Long Snare Wire	Dr/Pc	Snare
5691	Sd T9-1	Dr/Pc	Snare
5692	Sd T9-2	Dr/Pc	Snare
5693	Sd T9-3	Dr/Pc	Snare
5694	Sd T9-4	Dr/Pc	Snare
5695	Sd T9-5	Dr/Pc	Snare
5696	Sd T9Gate	Dr/Pc	Snare
5697	Sd T9Rim	Dr/Pc	Snare
5698	T9 SD 1-1	Dr/Pc	Snare
5699	T9 SD 1-2	Dr/Pc	Snare
5700	T9 SD 1-3	Dr/Pc	Snare
5701	T9 SD 2-1	Dr/Pc	Snare
5702	T9 SD 2-2	Dr/Pc	Snare
5703	T9 SD 2-3	Dr/Pc	Snare
5704	T9 SD 3-1	Dr/Pc	Snare
5705	T9 SD 3-2	Dr/Pc	Snare
5706	T9 SD 3-3	Dr/Pc	Snare
5707	T9 SD 4-1	Dr/Pc	Snare
5708	T9 SD 4-2	Dr/Pc	Snare
5709	T9 SD 4-3	Dr/Pc	Snare
5710	T9 SD 5-1	Dr/Pc	Snare
5711	T9 SD 5-2	Dr/Pc	Snare
5712	T9 SD 5-3	Dr/Pc	Snare
5713	S&H T9 SD	Dr/Pc	Snare
5714	Hard T9 SD	Dr/Pc	Snare
5715	Elec T8 SD	Dr/Pc	Snare
5716	T9 SD RimShot	Dr/Pc	Snare
5717	Elec T9 RimShot	Dr/Pc	Snare
5718	Sd T8-1	Dr/Pc	Snare
5719	Sd T8-2	Dr/Pc	Snare
5720	Sd T8-3	Dr/Pc	Snare
5721	Sd T8-4	Dr/Pc	Snare
5722	Sd T8-5	Dr/Pc	Snare
5723	Sd T8 Rim	Dr/Pc	Snare
5724	T8 SD Ac 1	Dr/Pc	Snare
5725	T8 SD Ac 2	Dr/Pc	Snare
5726	T8 SD Ac 3	Dr/Pc	Snare
5727	T8 SD NA 1	Dr/Pc	Snare
5728	T8 SD NA 2	Dr/Pc	Snare
5729	T8 SD NA 3	Dr/Pc	Snare
5730	T8 RimShot	Dr/Pc	Snare
5731	Sd RX11 A	Dr/Pc	Snare
5732	Sd RX11 B	Dr/Pc	Snare
5733	Sd AnSm	Dr/Pc	Snare
5734	Sd AnSm Rim	Dr/Pc	Snare
5735	Sd AnCR	Dr/Pc	Snare
5736	Sd AnCR Rim	Dr/Pc	Snare
5737	Sd Human1	Dr/Pc	Snare
5738	Sd Human2	Dr/Pc	Snare
5739	Sd Jungle1	Dr/Pc	Snare
5740	Sd Jungle2	Dr/Pc	Snare
5741	Sd Jungle3	Dr/Pc	Snare
5742	Sd JungleFX	Dr/Pc	Snare
5743	Sd D&B1	Dr/Pc	Snare
5744	Sd D&B2	Dr/Pc	Snare
5745	Sd D&B3	Dr/Pc	Snare
5746	Sd D&B4	Dr/Pc	Snare
5747	Sd R&B1	Dr/Pc	Snare
5748	Sd R&B1 Rim	Dr/Pc	Snare
5749	Sd R&B2	Dr/Pc	Snare
5750	Sd Hip1	Dr/Pc	Snare
5751	Sd Hip2	Dr/Pc	Snare
5752	Sd Hip3	Dr/Pc	Snare
5753	Sd Hip Gate	Dr/Pc	Snare
5754	Sd Hip Rim1	Dr/Pc	Snare
5755	Sd Hip Rim2	Dr/Pc	Snare
5756	Sd Hip Rim3	Dr/Pc	Snare
5757	Sd Hip Rim4	Dr/Pc	Snare
5758	Sd Hip Rim5	Dr/Pc	Snare
5759	Sd Break1	Dr/Pc	Snare
5760	Sd Break2	Dr/Pc	Snare
5761	Sd Break3	Dr/Pc	Snare
5762	Sd Break Heavy	Dr/Pc	Snare
5763	Sd Break Roll	Dr/Pc	Snare
5764	Sd FX1	Dr/Pc	Snare
5765	Sd FX2	Dr/Pc	Snare
5766	Sd FX3	Dr/Pc	Snare
5767	Sd FX4	Dr/Pc	Snare
5768	Sd Clap Analog	Dr/Pc	Snare
5769	Sd Dist	Dr/Pc	Snare
5770	Sd Cut	Dr/Pc	Snare
5771	Sd Garg H	Dr/Pc	Snare
5772	Sd Garg L	Dr/Pc	Snare
5773	Sd FM	Dr/Pc	Snare
5774	Sd FM Rim	Dr/Pc	Snare
5775	Sd Syn	Dr/Pc	Snare
5776	Sd Clappy	Dr/Pc	Snare
5777	Sd Timbr	Dr/Pc	Snare
5778	Sd Wood	Dr/Pc	Snare
5779	Sd Hammer	Dr/Pc	Snare
5780	Sd Lo-Fi	Dr/Pc	Snare
5781	Sd Rim SE	Dr/Pc	Snare
5782	Side Stick Analog	Dr/Pc	Snare
5783	Snare Techno	Dr/Pc	Snare
5784	NeoSnare1	Dr/Pc	Snare
5785	NeoSnare2	Dr/Pc	Snare
5786	NeoSnare3	Dr/Pc	Snare
5787	Sd Clap1	Dr/Pc	Snare
5788	Sd Clap2	Dr/Pc	Snare
5789	Sd Clap3	Dr/Pc	Snare
5790	Sd LongGate	Dr/Pc	Snare
5791	Sd NineComp	Dr/Pc	Snare
5792	Sd ShortDry1	Dr/Pc	Snare
5793	Sd ShortDry2	Dr/Pc	Snare
5794	Sd ShortGate1	Dr/Pc	Snare
5795	Sd ShortGate2	Dr/Pc	Snare
5796	Sd ShortGate3	Dr/Pc	Snare
5797	Sd TB Gate	Dr/Pc	Snare
5798	Sd TB Q	Dr/Pc	Snare
5799	Sd TB Comp1	Dr/Pc	Snare
5800	Sd TB Comp2	Dr/Pc	Snare
5801	Dub SD 1 St	Dr/Pc	Snare
5802	Dub SD 2 St	Dr/Pc	Snare
5803	Dub SD 3 Mn	Dr/Pc	Snare
5804	Dub SD 4 Mn	Dr/Pc	Snare
5805	Dub SD 5 St	Dr/Pc	Snare
5806	Trap SD 1 St	Dr/Pc	Snare
5807	Trap SD 2 Mn	Dr/Pc	Snare
5808	Trap SD 3 Mn	Dr/Pc	Snare
5809	Trap SD 4 Mn	Dr/Pc	Snare
5810	Trap SD 5 St	Dr/Pc	Snare
5811	Trap SD 6 Mn	Dr/Pc	Snare
5812	EDM SD 1 St	Dr/Pc	Snare
5813	EDM SD 2 St	Dr/Pc	Snare
5814	EDM SD 3 St	Dr/Pc	Snare
5815	EDM SD 4 St	Dr/Pc	Snare
5816	EDM SD 5 St	Dr/Pc	Snare
5817	EDM SD 6 Mn	Dr/Pc	Snare
5818	House SD 1 St	Dr/Pc	Snare
5819	House SD 2 Mn	Dr/Pc	Snare
5820	House SD 3 St	Dr/Pc	Snare
5821	House SD 4 St	Dr/Pc	Snare
5822	House SD 5 St	Dr/Pc	Snare
5823	Electro SD 1 Mn	Dr/Pc	Snare
5824	Electro SD 2 Mn	Dr/Pc	Snare
5825	Electro SD 3 Mn	Dr/Pc	Snare
5826	Electro SD 4 Mn	Dr/Pc	Snare
5827	Electro SD 5 Mn	Dr/Pc	Snare
5828	Flam Mn	Dr/Pc	Snare
5829	Electro SD Sw	Dr/Pc	Snare
5830	Trap SD Sw	Dr/Pc	Snare
5831	Sd HipHop1	Dr/Pc	Snare
5832	Sd HipHop2	Dr/Pc	Snare
5833	Sd HipHop3	Dr/Pc	Snare
5834	Sd HipHop4	Dr/Pc	Snare
5835	Sd HipHop5	Dr/Pc	Snare
5836	Sd HipHop6	Dr/Pc	Snare
5837	Sd HipHop7	Dr/Pc	Snare
5838	Sd HipHop8	Dr/Pc	Snare
5839	Sd HipHop9	Dr/Pc	Snare
5840	Sd HipHop10	Dr/Pc	Snare
5841	Sd HipHop11	Dr/Pc	Snare
5842	Sd HipHop12	Dr/Pc	Snare
5843	Sd HipHop13	Dr/Pc	Snare
5844	Sd HipHop14	Dr/Pc	Snare
5845	Sd HipHop15	Dr/Pc	Snare
5846	Sd HipHop16	Dr/Pc	Snare
5847	Sd HipHop Rim1	Dr/Pc	Snare
5848	Sd HipHop Rim2	Dr/Pc	Snare
5849	Sd HipHop Rim3	Dr/Pc	Snare
5850	Sd HipHop Rim4	Dr/Pc	Snare
5851	Sd HipHop Rim5	Dr/Pc	Snare
5852	Sd HipHop Rim6	Dr/Pc	Snare
5853	HipHop SD 1 St	Dr/Pc	Snare
5854	HipHop SD 2 Mn	Dr/Pc	Snare
5855	HipHop SD 3 Mn	Dr/Pc	Snare
5856	HipHop Rim St	Dr/Pc	Snare
5857	HH Closed 1-4St	Dr/Pc	HHat
5858	HH Closed 1St	Dr/Pc	HHat
5859	HH Closed 2St	Dr/Pc	HHat
5860	HH Closed 3St	Dr/Pc	HHat
5861	HH Closed 4St	Dr/Pc	HHat
5862	HH Closed 1-4L	Dr/Pc	HHat
5863	HH Closed 1-4R	Dr/Pc	HHat
5864	HH Closed 1L	Dr/Pc	HHat
5865	HH Closed 2L	Dr/Pc	HHat
5866	HH Closed 3L	Dr/Pc	HHat
5867	HH Closed 4L	Dr/Pc	HHat
5868	HH Closed 1R	Dr/Pc	HHat
5869	HH Closed 2R	Dr/Pc	HHat
5870	HH Closed 3R	Dr/Pc	HHat
5871	HH Closed 4R	Dr/Pc	HHat
5872	HH Closed 1-4RL	Dr/Pc	HHat
5873	HH Closed 1RL	Dr/Pc	HHat
5874	HH Closed 2RL	Dr/Pc	HHat
5875	HH Closed 3RL	Dr/Pc	HHat
5876	HH Closed 4RL	Dr/Pc	HHat
5877	HH Pedal 1-3St	Dr/Pc	HHat
5878	HH Pedal 1 St	Dr/Pc	HHat
5879	HH Pedal 2 St	Dr/Pc	HHat
5880	HH Pedal 3 St	Dr/Pc	HHat
5881	HH Pedal 1-3 L	Dr/Pc	HHat
5882	HH Pedal 1-3 R	Dr/Pc	HHat
5883	HH Pedal 1 L	Dr/Pc	HHat
5884	HH Pedal 2 L	Dr/Pc	HHat
5885	HH Pedal 3 L	Dr/Pc	HHat
5886	HH Pedal 1 R	Dr/Pc	HHat
5887	HH Pedal 2 R	Dr/Pc	HHat
5888	HH Pedal 3 R	Dr/Pc	HHat
5889	HH Pedal 1-3RL	Dr/Pc	HHat
5890	HH Pedal 1 RL	Dr/Pc	HHat
5891	HH Pedal 2 RL	Dr/Pc	HHat
5892	HH Pedal 3 RL	Dr/Pc	HHat
5893	HH Open 1-2St	Dr/Pc	HHat
5894	HH Open 1St	Dr/Pc	HHat
5895	HH Open 2St	Dr/Pc	HHat
5896	HH Open 1-2L	Dr/Pc	HHat
5897	HH Open 1-2R	Dr/Pc	HHat
5898	HH Open 1L	Dr/Pc	HHat
5899	HH Open 2L	Dr/Pc	HHat
5900	HH Open 1R	Dr/Pc	HHat
5901	HH Open 2R	Dr/Pc	HHat
5902	HH Open 1-2RL	Dr/Pc	HHat
5903	HH Open 1RL	Dr/Pc	HHat
5904	HH Open 2RL	Dr/Pc	HHat
5905	HH Closed Foot St	Dr/Pc	HHat
5906	HH Closed Foot L	Dr/Pc	HHat
5907	HH Closed Foot R	Dr/Pc	HHat
5908	HH Closed Foot RL	Dr/Pc	HHat
5909	HH Half Open2 St	Dr/Pc	HHat
5910	HH Half Open2 L	Dr/Pc	HHat
5911	HH Half Open2 R	Dr/Pc	HHat
5912	HH Half Open2 RL	Dr/Pc	HHat
5913	HH Open2 St	Dr/Pc	HHat
5914	HH Open2 L	Dr/Pc	HHat
5915	HH Open2 R	Dr/Pc	HHat
5916	HH Open2 RL	Dr/Pc	HHat
5917	HH Closed Rock Sw St	Dr/Pc	HHat
5918	HH Closed Rock Sw RL	Dr/Pc	HHat
5919	HH Closed Rock S St	Dr/Pc	HHat
5920	HH Closed Rock S RL	Dr/Pc	HHat
5921	HH Closed Rock H St	Dr/Pc	HHat
5922	HH Closed Rock H RL	Dr/Pc	HHat
5923	HH Closed Rock Sw L	Dr/Pc	HHat
5924	HH Closed Rock Sw R	Dr/Pc	HHat
5925	HH Closed Rock S L	Dr/Pc	HHat
5926	HH Closed Rock S R	Dr/Pc	HHat
5927	HH Closed Rock H L	Dr/Pc	HHat
5928	HH Closed Rock H R	Dr/Pc	HHat
5929	HH Pedal Rock Sw St	Dr/Pc	HHat
5930	HH Pedal Rock Sw RL	Dr/Pc	HHat
5931	HH Pedal Rock Sw L	Dr/Pc	HHat
5932	HH Pedal Rock Sw R	Dr/Pc	HHat
5933	HH Closed Rock 2St	Dr/Pc	HHat
5934	HH Closed Rock 2L	Dr/Pc	HHat
5935	HH Closed Rock 2R	Dr/Pc	HHat
5936	HH Closed Rock 2RL	Dr/Pc	HHat
5937	HH Pedal Rock St	Dr/Pc	HHat
5938	HH Pedal Rock L	Dr/Pc	HHat
5939	HH Pedal Rock R	Dr/Pc	HHat
5940	HH Pedal Rock RL	Dr/Pc	HHat
5941	HH Open Rock Sw St	Dr/Pc	HHat
5942	HH Open Rock Sw RL	Dr/Pc	HHat
5943	HH Open Rock St	Dr/Pc	HHat
5944	HH Open Rock RL	Dr/Pc	HHat
5945	HH Half Open Rock St	Dr/Pc	HHat
5946	HH Open Rock Sw L	Dr/Pc	HHat
5947	HH Open Rock Sw R	Dr/Pc	HHat
5948	HH Open Rock L	Dr/Pc	HHat
5949	HH Open Rock R	Dr/Pc	HHat
5950	HH Half Open Rock L	Dr/Pc	HHat
5951	HH Half Open Rock R	Dr/Pc	HHat
5952	HH Half Open Rock RL	Dr/Pc	HHat
5953	HH Closed Mn	Dr/Pc	HHat
5954	HH Open Mn	Dr/Pc	HHat
5955	HH Pedal Mn	Dr/Pc	HHat
5956	HH Power ClTip 1-4St	Dr/Pc	HHat
5957	HH Power ClTip 1-4L	Dr/Pc	HHat
5958	HH Power ClTip 1-4R	Dr/Pc	HHat
5959	HH Power ClTip 1-4RL	Dr/Pc	HHat
5960	HH Power ClTip 1St	Dr/Pc	HHat
5961	HH Power ClTip 1L	Dr/Pc	HHat
5962	HH Power ClTip 1R	Dr/Pc	HHat
5963	HH Power ClTip 1RL	Dr/Pc	HHat
5964	HH Power ClTip 2St	Dr/Pc	HHat
5965	HH Power ClTip 2L	Dr/Pc	HHat
5966	HH Power ClTip 2R	Dr/Pc	HHat
5967	HH Power ClTip 2RL	Dr/Pc	HHat
5968	HH Power ClTip 3St	Dr/Pc	HHat
5969	HH Power ClTip 3L	Dr/Pc	HHat
5970	HH Power ClTip 3R	Dr/Pc	HHat
5971	HH Power ClTip 3RL	Dr/Pc	HHat
5972	HH Power ClTip 4St	Dr/Pc	HHat
5973	HH Power ClTip 4L	Dr/Pc	HHat
5974	HH Power ClTip 4R	Dr/Pc	HHat
5975	HH Power ClTip 4RL	Dr/Pc	HHat
5976	HH Power ClEgde1-4St	Dr/Pc	HHat
5977	HH Power ClEgde1-4L	Dr/Pc	HHat
5978	HH Power ClEgde1-4R	Dr/Pc	HHat
5979	HH Power ClEgde1-4RL	Dr/Pc	HHat
5980	HH Power ClEgde 1St	Dr/Pc	HHat
5981	HH Power ClEgde 1L	Dr/Pc	HHat
5982	HH Power ClEgde 1R	Dr/Pc	HHat
5983	HH Power ClEgde 1RL	Dr/Pc	HHat
5984	HH Power ClEgde 2St	Dr/Pc	HHat
5985	HH Power ClEgde 2L	Dr/Pc	HHat
5986	HH Power ClEgde 2R	Dr/Pc	HHat
5987	HH Power ClEgde 2RL	Dr/Pc	HHat
5988	HH Power ClEgde 3St	Dr/Pc	HHat
5989	HH Power ClEgde 3L	Dr/Pc	HHat
5990	HH Power ClEgde 3R	Dr/Pc	HHat
5991	HH Power ClEgde 3RL	Dr/Pc	HHat
5992	HH Power ClEgde 4St	Dr/Pc	HHat
5993	HH Power ClEgde 4L	Dr/Pc	HHat
5994	HH Power ClEgde 4R	Dr/Pc	HHat
5995	HH Power ClEgde 4RL	Dr/Pc	HHat
5996	HH Power ClPedal St	Dr/Pc	HHat
5997	HH Power ClPedal L	Dr/Pc	HHat
5998	HH Power ClPedal R	Dr/Pc	HHat
5999	HH Power ClPedal RL	Dr/Pc	HHat
6000	HH Power Open EdgeSt	Dr/Pc	HHat
6001	HH Power Open EdgeL	Dr/Pc	HHat
6002	HH Power Open EdgeR	Dr/Pc	HHat
6003	HH Power Open EdgeRL	Dr/Pc	HHat
6004	HH Dark Closed 1-4St	Dr/Pc	HHat

No.	Name	Main Category	Sub Category
6005	HH Dark Closed 1-4 L	Dr/Pc	HHat
6006	HH Dark Closed 1-4 R	Dr/Pc	HHat
6007	HH Dark Closed 1-4RL	Dr/Pc	HHat
6008	HH Dark Closed 1 St	Dr/Pc	HHat
6009	HH Dark Closed 1 L	Dr/Pc	HHat
6010	HH Dark Closed 1 R	Dr/Pc	HHat
6011	HH Dark Closed 1 RL	Dr/Pc	HHat
6012	HH Dark Closed 2 St	Dr/Pc	HHat
6013	HH Dark Closed 2 L	Dr/Pc	HHat
6014	HH Dark Closed 2 R	Dr/Pc	HHat
6015	HH Dark Closed 2 RL	Dr/Pc	HHat
6016	HH Dark Closed 3 St	Dr/Pc	HHat
6017	HH Dark Closed 3 L	Dr/Pc	HHat
6018	HH Dark Closed 3 R	Dr/Pc	HHat
6019	HH Dark Closed 3 RL	Dr/Pc	HHat
6020	HH Dark Closed 4 St	Dr/Pc	HHat
6021	HH Dark Closed 4 L	Dr/Pc	HHat
6022	HH Dark Closed 4 R	Dr/Pc	HHat
6023	HH Dark Closed 4 RL	Dr/Pc	HHat
6024	HH Dark Pedal 1-2 St	Dr/Pc	HHat
6025	HH Dark Pedal 1-2 L	Dr/Pc	HHat
6026	HH Dark Pedal 1-2 R	Dr/Pc	HHat
6027	HH Dark Pedal 1-2 RL	Dr/Pc	HHat
6028	HH Dark Pedal 1 St	Dr/Pc	HHat
6029	HH Dark Pedal 1 L	Dr/Pc	HHat
6030	HH Dark Pedal 1 R	Dr/Pc	HHat
6031	HH Dark Pedal 1 RL	Dr/Pc	HHat
6032	HH Dark Pedal 2 St	Dr/Pc	HHat
6033	HH Dark Pedal 2 L	Dr/Pc	HHat
6034	HH Dark Pedal 2 R	Dr/Pc	HHat
6035	HH Dark Pedal 2 RL	Dr/Pc	HHat
6036	HH Dark Open 1-2 St	Dr/Pc	HHat
6037	HH Dark Open 1-2 L	Dr/Pc	HHat
6038	HH Dark Open 1-2 R	Dr/Pc	HHat
6039	HH Dark Open 1-2 RL	Dr/Pc	HHat
6040	HH Dark Open 1 St	Dr/Pc	HHat
6041	HH Dark Open 1 L	Dr/Pc	HHat
6042	HH Dark Open 1 R	Dr/Pc	HHat
6043	HH Dark Open 1 RL	Dr/Pc	HHat
6044	HH Dark Open 2 St	Dr/Pc	HHat
6045	HH Dark Open 2 L	Dr/Pc	HHat
6046	HH Dark Open 2 R	Dr/Pc	HHat
6047	HH Dark Open 2 RL	Dr/Pc	HHat
6048	HH NJz Closed 1-4 St	Dr/Pc	HHat
6049	HH NJz Closed 1-4 L	Dr/Pc	HHat
6050	HH NJz Closed 1-4 R	Dr/Pc	HHat
6051	HH NJz Closed 1-4 RL	Dr/Pc	HHat
6052	HH NJz Closed 1 St	Dr/Pc	HHat
6053	HH NJz Closed 1 L	Dr/Pc	HHat
6054	HH NJz Closed 1 R	Dr/Pc	HHat
6055	HH NJz Closed 1 RL	Dr/Pc	HHat
6056	HH NJz Closed 2 St	Dr/Pc	HHat
6057	HH NJz Closed 2 L	Dr/Pc	HHat
6058	HH NJz Closed 2 R	Dr/Pc	HHat
6059	HH NJz Closed 2 RL	Dr/Pc	HHat
6060	HH NJz Closed 3 St	Dr/Pc	HHat
6061	HH NJz Closed 3 L	Dr/Pc	HHat
6062	HH NJz Closed 3 R	Dr/Pc	HHat
6063	HH NJz Closed 3 RL	Dr/Pc	HHat
6064	HH NJz Closed 4 St	Dr/Pc	HHat
6065	HH NJz Closed 4 L	Dr/Pc	HHat
6066	HH NJz Closed 4 R	Dr/Pc	HHat
6067	HH NJz Closed 4 RL	Dr/Pc	HHat
6068	HH NJz Pedal 1-2 St	Dr/Pc	HHat
6069	HH NJz Pedal 1-2 L	Dr/Pc	HHat
6070	HH NJz Pedal 1-2 R	Dr/Pc	HHat
6071	HH NJz Pedal 1-2 RL	Dr/Pc	HHat
6072	HH NJz Pedal 1 St	Dr/Pc	HHat
6073	HH NJz Pedal 1 L	Dr/Pc	HHat
6074	HH NJz Pedal 1 R	Dr/Pc	HHat
6075	HH NJz Pedal 1 RL	Dr/Pc	HHat
6076	HH NJz Pedal 2 St	Dr/Pc	HHat
6077	HH NJz Pedal 2 L	Dr/Pc	HHat
6078	HH NJz Pedal 2 R	Dr/Pc	HHat
6079	HH NJz Pedal 2 RL	Dr/Pc	HHat
6080	HH NJz Open 1-2 St	Dr/Pc	HHat
6081	HH NJz Open 1-2 L	Dr/Pc	HHat
6082	HH NJz Open 1-2 R	Dr/Pc	HHat
6083	HH NJz Open 1-2 RL	Dr/Pc	HHat
6084	HH NJz Open 1 St	Dr/Pc	HHat
6085	HH NJz Open 1 L	Dr/Pc	HHat
6086	HH NJz Open 1 R	Dr/Pc	HHat
6087	HH NJz Open 1 RL	Dr/Pc	HHat
6088	HH NJz Open 2 St	Dr/Pc	HHat
6089	HH NJz Open 2 L	Dr/Pc	HHat
6090	HH NJz Open 2 R	Dr/Pc	HHat
6091	HH NJz Open 2 RL	Dr/Pc	HHat
6092	HH Std Closed	Dr/Pc	HHat
6093	HH Std Open	Dr/Pc	HHat
6094	HH Std Pedal	Dr/Pc	HHat
6095	Neo HiHat Closed	Dr/Pc	HHat
6096	Neo HiHat HalfOpen	Dr/Pc	HHat
6097	Neo HiHat Open	Dr/Pc	HHat
6098	Dance HiHat Open	Dr/Pc	HHat
6099	PT HiHat Closed	Dr/Pc	HHat
6100	PT HiHat Open	Dr/Pc	HHat
6101	PT HiHat Pedal	Dr/Pc	HHat
6102	HH Brush Closed	Dr/Pc	HHat
6103	HH Brush Open	Dr/Pc	HHat
6104	HH Brush Pedal	Dr/Pc	HHat
6105	HH IB Brush Cls	Dr/Pc	HHat
6106	HH IB Brush Opn	Dr/Pc	HHat
6107	HH IB Brush Pdl	Dr/Pc	HHat
6108	HH Closed T9	Dr/Pc	HHat
6109	HH Open T9	Dr/Pc	HHat
6110	T9 HHCl 1	Dr/Pc	HHat
6111	T9 HHCl 2	Dr/Pc	HHat
6112	T9 HHCl 3	Dr/Pc	HHat
6113	T9 HHCl 4	Dr/Pc	HHat
6114	T9 HHCl 5	Dr/Pc	HHat
6115	T9 HHOp 1	Dr/Pc	HHat
6116	T9 HHOp 2	Dr/Pc	HHat
6117	T9 HHOp 3	Dr/Pc	HHat
6118	T9 HHOp 4	Dr/Pc	HHat
6119	T9 HHOp 5	Dr/Pc	HHat
6120	Hard T9 HHCl	Dr/Pc	HHat
6121	Elec T9 HHOp	Dr/Pc	HHat
6122	HH Closed T8-1	Dr/Pc	HHat
6123	HH Open T8-1	Dr/Pc	HHat
6124	HH Closed T8-2	Dr/Pc	HHat
6125	HH Open T8-2	Dr/Pc	HHat
6126	T8 HHCl	Dr/Pc	HHat
6127	T8 HHClLp	Dr/Pc	HHat
6128	T8 HHOp 1	Dr/Pc	HHat
6129	T8 HHOp 2	Dr/Pc	HHat
6130	T8 HHOp 3	Dr/Pc	HHat
6131	T8 HHOp 4	Dr/Pc	HHat
6132	S&H T8 HHCl	Dr/Pc	HHat
6133	S&H T8 HHOp 1	Dr/Pc	HHat
6134	S&H T8 HHOp 2	Dr/Pc	HHat
6135	Elec T8 HHCl	Dr/Pc	HHat
6136	HH Closed RX5	Dr/Pc	HHat
6137	HH Closed RX11	Dr/Pc	HHat
6138	HH Open RX11	Dr/Pc	HHat
6139	HH Closed AnCR	Dr/Pc	HHat
6140	HH Open AnCR	Dr/Pc	HHat
6141	HH Closed Break	Dr/Pc	HHat
6142	HH Pedal Break	Dr/Pc	HHat
6143	HH Closed D&B	Dr/Pc	HHat
6144	HH Pedal D&B	Dr/Pc	HHat
6145	HH Open D&B	Dr/Pc	HHat
6146	HH Reverse D&B	Dr/Pc	HHat
6147	HH Closed Tek	Dr/Pc	HHat
6148	HH Open Tek	Dr/Pc	HHat
6149	HH Closed Hip	Dr/Pc	HHat
6150	HH Pedal Hip	Dr/Pc	HHat
6151	HH Open Hip	Dr/Pc	HHat
6152	HH Closed Lo-Fi	Dr/Pc	HHat
6153	HH Open Lo-Fi	Dr/Pc	HHat
6154	HH Closed Syn	Dr/Pc	HHat
6155	HH Open Syn	Dr/Pc	HHat
6156	HH Closed FX	Dr/Pc	HHat
6157	HH Open FX	Dr/Pc	HHat
6158	HH Open Human	Dr/Pc	HHat
6159	HH ClosedNine	Dr/Pc	HHat
6160	HH PedalNine	Dr/Pc	HHat
6161	HH OpenNine	Dr/Pc	HHat
6162	HH TecClosed1	Dr/Pc	HHat
6163	HH TecOpen1	Dr/Pc	HHat
6164	HH TecClosed2	Dr/Pc	HHat
6165	HH TecOpen2	Dr/Pc	HHat
6166	Dub HH 1 Mn	Dr/Pc	HHat
6167	Dub HH 2 Mn	Dr/Pc	HHat
6168	Dub OHH 1 St	Dr/Pc	HHat
6169	Dub OHH 2 Mn	Dr/Pc	HHat
6170	Trap HH 1 St	Dr/Pc	HHat
6171	Trap HH 2 St	Dr/Pc	HHat
6172	Trap HH 3 St	Dr/Pc	HHat
6173	Trap HH 4 St	Dr/Pc	HHat
6174	Trap HH 5 St	Dr/Pc	HHat
6175	Trap HH 6 St	Dr/Pc	HHat
6176	Trap HH 7 St	Dr/Pc	HHat
6177	Trap HH 8 St	Dr/Pc	HHat
6178	Trap HH 9 St	Dr/Pc	HHat
6179	Trap OHH 1 St	Dr/Pc	HHat
6180	Trap OHH 2 St	Dr/Pc	HHat
6181	Trap OHH 3 St	Dr/Pc	HHat
6182	HH 14inch St	Dr/Pc	HHat
6183	HipHop HH 1 Mn	Dr/Pc	HHat
6184	HipHop HH 2 Mn	Dr/Pc	HHat
6185	EDM HH 1 St	Dr/Pc	HHat
6186	EDM HH 2 Mn	Dr/Pc	HHat
6187	EDM HH 3 Mn	Dr/Pc	HHat
6188	EDM HH 4 St	Dr/Pc	HHat
6189	EDM HH 5 St	Dr/Pc	HHat
6190	EDM OHH 1 Mn	Dr/Pc	HHat
6191	EDM OHH 2 St	Dr/Pc	HHat
6192	EDM OHH 3 St	Dr/Pc	HHat
6193	EDM OHH 4 St	Dr/Pc	HHat
6194	House HH 1 St	Dr/Pc	HHat
6195	House HH 2 Mn	Dr/Pc	HHat
6196	House HH 3 Mn	Dr/Pc	HHat
6197	House OHH 1 St	Dr/Pc	HHat
6198	House OHH 2 St	Dr/Pc	HHat
6199	Electro HH 1 St	Dr/Pc	HHat
6200	Electro HH 2 St	Dr/Pc	HHat
6201	Electro HH 3 St	Dr/Pc	HHat
6202	Electro HH 4 St	Dr/Pc	HHat
6203	Electro OHH 1 St	Dr/Pc	HHat
6204	Electro OHH 2 St	Dr/Pc	HHat
6205	Electro OHH 3 Mn	Dr/Pc	HHat
6206	Open HH Oneshot	Dr/Pc	HHat
6207	Opeh HH 14inch	Dr/Pc	HHat
6208	Trap HH Sw	Dr/Pc	HHat
6209	Tight HH Closed	Dr/Pc	HHat
6210	Fresh HH Closed	Dr/Pc	HHat
6211	Elec HH 1 Closed	Dr/Pc	HHat
6212	Elec HH 1 Open	Dr/Pc	HHat
6213	Elec HH 2 Closed	Dr/Pc	HHat
6214	Powerful HH Closed	Dr/Pc	HHat
6215	Powerful HH Open	Dr/Pc	HHat
6216	Crackle HH Open	Dr/Pc	HHat
6217	Tom Hi St	Dr/Pc	Tom
6218	Tom Hi L	Dr/Pc	Tom
6219	Tom Hi R	Dr/Pc	Tom
6220	Tom Hi RL	Dr/Pc	Tom
6221	Tom Mid St	Dr/Pc	Tom
6222	Tom Mid L	Dr/Pc	Tom
6223	Tom Mid R	Dr/Pc	Tom
6224	Tom Mid RL	Dr/Pc	Tom
6225	Tom Low St	Dr/Pc	Tom
6226	Tom Low L	Dr/Pc	Tom
6227	Tom Low R	Dr/Pc	Tom
6228	Tom Low RL	Dr/Pc	Tom
6229	Tom Floor St	Dr/Pc	Tom
6230	Tom Floor L	Dr/Pc	Tom
6231	Tom Floor R	Dr/Pc	Tom
6232	Tom Floor RL	Dr/Pc	Tom
6233	Tom Rock Hi St	Dr/Pc	Tom
6234	Tom Rock Hi L	Dr/Pc	Tom
6235	Tom Rock Hi R	Dr/Pc	Tom
6236	Tom Rock Hi RL	Dr/Pc	Tom
6237	Tom Rock Mid St	Dr/Pc	Tom
6238	Tom Rock Mid L	Dr/Pc	Tom
6239	Tom Rock Mid R	Dr/Pc	Tom
6240	Tom Rock Mid RL	Dr/Pc	Tom
6241	Tom Rock Low St	Dr/Pc	Tom
6242	Tom Rock Low L	Dr/Pc	Tom
6243	Tom Rock Low R	Dr/Pc	Tom
6244	Tom Rock Low RL	Dr/Pc	Tom
6245	Tom Power01 1-2St	Dr/Pc	Tom
6246	Tom Power01 1-2L	Dr/Pc	Tom
6247	Tom Power01 1-2R	Dr/Pc	Tom
6248	Tom Power01 1-2RL	Dr/Pc	Tom
6249	Tom Power01 1St	Dr/Pc	Tom
6250	Tom Power01 1L	Dr/Pc	Tom
6251	Tom Power01 1R	Dr/Pc	Tom
6252	Tom Power01 1RL	Dr/Pc	Tom
6253	Tom Power01 2St	Dr/Pc	Tom
6254	Tom Power01 2L	Dr/Pc	Tom
6255	Tom Power01 2R	Dr/Pc	Tom
6256	Tom Power01 2RL	Dr/Pc	Tom
6257	Tom Power02 1-2St	Dr/Pc	Tom
6258	Tom Power02 1-2L	Dr/Pc	Tom
6259	Tom Power02 1-2R	Dr/Pc	Tom
6260	Tom Power02 1-2RL	Dr/Pc	Tom
6261	Tom Power02 1St	Dr/Pc	Tom
6262	Tom Power02 1L	Dr/Pc	Tom
6263	Tom Power02 1R	Dr/Pc	Tom
6264	Tom Power02 1RL	Dr/Pc	Tom
6265	Tom Power02 2St	Dr/Pc	Tom
6266	Tom Power02 2L	Dr/Pc	Tom
6267	Tom Power02 2R	Dr/Pc	Tom
6268	Tom Power02 2RL	Dr/Pc	Tom
6269	Tom Power03 1-2St	Dr/Pc	Tom
6270	Tom Power03 1-2L	Dr/Pc	Tom
6271	Tom Power03 1-2R	Dr/Pc	Tom
6272	Tom Power03 1-2RL	Dr/Pc	Tom
6273	Tom Power03 1St	Dr/Pc	Tom
6274	Tom Power03 1L	Dr/Pc	Tom
6275	Tom Power03 1R	Dr/Pc	Tom
6276	Tom Power03 1RL	Dr/Pc	Tom
6277	Tom Power03 2St	Dr/Pc	Tom
6278	Tom Power03 2L	Dr/Pc	Tom
6279	Tom Power03 2R	Dr/Pc	Tom
6280	Tom Power03 2RL	Dr/Pc	Tom
6281	Tom Power04 1-2St	Dr/Pc	Tom
6282	Tom Power04 1-2L	Dr/Pc	Tom
6283	Tom Power04 1-2R	Dr/Pc	Tom
6284	Tom Power04 1-2RL	Dr/Pc	Tom
6285	Tom Power04 1St	Dr/Pc	Tom
6286	Tom Power04 1L	Dr/Pc	Tom
6287	Tom Power04 1R	Dr/Pc	Tom
6288	Tom Power04 1RL	Dr/Pc	Tom
6289	Tom Power04 2St	Dr/Pc	Tom
6290	Tom Power04 2L	Dr/Pc	Tom
6291	Tom Power04 2R	Dr/Pc	Tom
6292	Tom Power04 2RL	Dr/Pc	Tom
6293	Tom Maple Hi 1-2 St	Dr/Pc	Tom
6294	Tom Maple Hi 1-2 L	Dr/Pc	Tom
6295	Tom Maple Hi 1-2 R	Dr/Pc	Tom
6296	Tom Maple Hi 1-2 RL	Dr/Pc	Tom
6297	Tom Maple Hi 1 St	Dr/Pc	Tom
6298	Tom Maple Hi 1 L	Dr/Pc	Tom
6299	Tom Maple Hi 1 R	Dr/Pc	Tom
6300	Tom Maple Hi 1 RL	Dr/Pc	Tom
6301	Tom Maple Hi 2 St	Dr/Pc	Tom
6302	Tom Maple Hi 2 L	Dr/Pc	Tom
6303	Tom Maple Hi 2 R	Dr/Pc	Tom
6304	Tom Maple Hi 2 RL	Dr/Pc	Tom
6305	Tom Maple Mid 1-2 St	Dr/Pc	Tom
6306	Tom Maple Mid 1-2 L	Dr/Pc	Tom
6307	Tom Maple Mid 1-2 R	Dr/Pc	Tom
6308	Tom Maple Mid 1-2 RL	Dr/Pc	Tom
6309	Tom Maple Mid 1 St	Dr/Pc	Tom
6310	Tom Maple Mid 1 L	Dr/Pc	Tom
6311	Tom Maple Mid 1 R	Dr/Pc	Tom
6312	Tom Maple Mid 1 RL	Dr/Pc	Tom
6313	Tom Maple Mid 2 St	Dr/Pc	Tom
6314	Tom Maple Mid 2 L	Dr/Pc	Tom
6315	Tom Maple Mid 2 R	Dr/Pc	Tom
6316	Tom Maple Mid 2 RL	Dr/Pc	Tom
6317	Tom Maple Flr 1-2 St	Dr/Pc	Tom
6318	Tom Maple Flr 1-2 L	Dr/Pc	Tom
6319	Tom Maple Flr 1-2 R	Dr/Pc	Tom
6320	Tom Maple Flr 1-2 RL	Dr/Pc	Tom

No.	Name	Main Category	Sub Category
6321	Tom Maple Flr 1 St	Dr/Pc	Tom
6322	Tom Maple Flr 1 L	Dr/Pc	Tom
6323	Tom Maple Flr 1 R	Dr/Pc	Tom
6324	Tom Maple Flr 1 RL	Dr/Pc	Tom
6325	Tom Maple Flr 2 St	Dr/Pc	Tom
6326	Tom Maple Flr 2 L	Dr/Pc	Tom
6327	Tom Maple Flr 2 R	Dr/Pc	Tom
6328	Tom Maple Flr 2 RL	Dr/Pc	Tom
6329	Tom Oak Hi 1-2 St	Dr/Pc	Tom
6330	Tom Oak Hi 1-2 L	Dr/Pc	Tom
6331	Tom Oak Hi 1-2 R	Dr/Pc	Tom
6332	Tom Oak Hi 1-2 RL	Dr/Pc	Tom
6333	Tom Oak Hi 1 St	Dr/Pc	Tom
6334	Tom Oak Hi 1 L	Dr/Pc	Tom
6335	Tom Oak Hi 1 R	Dr/Pc	Tom
6336	Tom Oak Hi 1 RL	Dr/Pc	Tom
6337	Tom Oak Hi 2 St	Dr/Pc	Tom
6338	Tom Oak Hi 2 L	Dr/Pc	Tom
6339	Tom Oak Hi 2 R	Dr/Pc	Tom
6340	Tom Oak Hi 2 RL	Dr/Pc	Tom
6341	Tom Oak Mid 1-2 St	Dr/Pc	Tom
6342	Tom Oak Mid 1-2 L	Dr/Pc	Tom
6343	Tom Oak Mid 1-2 R	Dr/Pc	Tom
6344	Tom Oak Mid 1-2 RL	Dr/Pc	Tom
6345	Tom Oak Mid 1 St	Dr/Pc	Tom
6346	Tom Oak Mid 1 L	Dr/Pc	Tom
6347	Tom Oak Mid 1 R	Dr/Pc	Tom
6348	Tom Oak Mid 1 RL	Dr/Pc	Tom
6349	Tom Oak Mid 2 St	Dr/Pc	Tom
6350	Tom Oak Mid 2 L	Dr/Pc	Tom
6351	Tom Oak Mid 2 R	Dr/Pc	Tom
6352	Tom Oak Mid 2 RL	Dr/Pc	Tom
6353	Tom Oak Floor 1-2 St	Dr/Pc	Tom
6354	Tom Oak Floor 1-2 L	Dr/Pc	Tom
6355	Tom Oak Floor 1-2 R	Dr/Pc	Tom
6356	Tom Oak Floor 1-2 RL	Dr/Pc	Tom
6357	Tom Oak Floor 1 St	Dr/Pc	Tom
6358	Tom Oak Floor 1 L	Dr/Pc	Tom
6359	Tom Oak Floor 1 R	Dr/Pc	Tom
6360	Tom Oak Floor 1 RL	Dr/Pc	Tom
6361	Tom Oak Floor 2 St	Dr/Pc	Tom
6362	Tom Oak Floor 2 L	Dr/Pc	Tom
6363	Tom Oak Floor 2 R	Dr/Pc	Tom
6364	Tom Oak Floor 2 RL	Dr/Pc	Tom
6365	Tom NJz Mid 1-2 St	Dr/Pc	Tom
6366	Tom NJz Mid 1-2 L	Dr/Pc	Tom
6367	Tom NJz Mid 1-2 R	Dr/Pc	Tom
6368	Tom NJz Mid 1-2 RL	Dr/Pc	Tom
6369	Tom NJz Mid 1 St	Dr/Pc	Tom
6370	Tom NJz Mid 1 L	Dr/Pc	Tom
6371	Tom NJz Mid 1 R	Dr/Pc	Tom
6372	Tom NJz Mid 1 RL	Dr/Pc	Tom
6373	Tom NJz Mid 2 St	Dr/Pc	Tom
6374	Tom NJz Mid 2 L	Dr/Pc	Tom
6375	Tom NJz Mid 2 R	Dr/Pc	Tom
6376	Tom NJz Mid 2 RL	Dr/Pc	Tom
6377	Tom NJz Low 1-2 St	Dr/Pc	Tom
6378	Tom NJz Low 1-2 L	Dr/Pc	Tom
6379	Tom NJz Low 1-2 R	Dr/Pc	Tom
6380	Tom NJz Low 1-2 RL	Dr/Pc	Tom
6381	Tom NJz Low 1 St	Dr/Pc	Tom
6382	Tom NJz Low 1 L	Dr/Pc	Tom
6383	Tom NJz Low 1 R	Dr/Pc	Tom
6384	Tom NJz Low 1 RL	Dr/Pc	Tom
6385	Tom NJz Low 2 St	Dr/Pc	Tom
6386	Tom NJz Low 2 L	Dr/Pc	Tom
6387	Tom NJz Low 2 R	Dr/Pc	Tom
6388	Tom NJz Low 2 RL	Dr/Pc	Tom
6389	Tom NJz Floor 1-2 St	Dr/Pc	Tom
6390	Tom NJz Floor 1-2 L	Dr/Pc	Tom
6391	Tom NJz Floor 1-2 R	Dr/Pc	Tom
6392	Tom NJz Floor 1-2 RL	Dr/Pc	Tom
6393	Tom NJz Floor 1 St	Dr/Pc	Tom
6394	Tom NJz Floor 1 L	Dr/Pc	Tom
6395	Tom NJz Floor 1 R	Dr/Pc	Tom
6396	Tom NJz Floor 1 RL	Dr/Pc	Tom
6397	Tom NJz Floor 2 St	Dr/Pc	Tom
6398	Tom NJz Floor 2 L	Dr/Pc	Tom
6399	Tom NJz Floor 2 R	Dr/Pc	Tom
6400	Tom NJz Floor 2 RL	Dr/Pc	Tom
6401	Std Tom High	Dr/Pc	Tom
6402	Std Tom Mid	Dr/Pc	Tom
6403	Std Tom Low H	Dr/Pc	Tom
6404	Std Tom Low L	Dr/Pc	Tom
6405	Std Tom Floor H	Dr/Pc	Tom
6406	Std Tom Floor M	Dr/Pc	Tom
6407	Std Tom Floor L	Dr/Pc	Tom
6408	CP Tom High Sw	Dr/Pc	Tom
6409	CP Tom Mid Sw	Dr/Pc	Tom
6410	CP Tom Low Sw	Dr/Pc	Tom
6411	CP Tom Floor Sw	Dr/Pc	Tom
6412	Tom Brush Hi St	Dr/Pc	Tom
6413	Tom Brush Hi L	Dr/Pc	Tom
6414	Tom Brush Hi R	Dr/Pc	Tom
6415	Tom Brush Hi RL	Dr/Pc	Tom
6416	Tom Brush Mid St	Dr/Pc	Tom
6417	Tom Brush Mid L	Dr/Pc	Tom
6418	Tom Brush Mid R	Dr/Pc	Tom
6419	Tom Brush Mid RL	Dr/Pc	Tom
6420	Tom Brush Low St	Dr/Pc	Tom
6421	Tom Brush Low L	Dr/Pc	Tom
6422	Tom Brush Low R	Dr/Pc	Tom
6423	Tom Brush Low RL	Dr/Pc	Tom
6424	Tom Brush Floor St	Dr/Pc	Tom
6425	Tom Brush Floor L	Dr/Pc	Tom
6426	Tom Brush Floor R	Dr/Pc	Tom
6427	Tom Brush Floor RL	Dr/Pc	Tom
6428	Tom Jazz H Sw	Dr/Pc	Tom
6429	Tom Jazz M Sw	Dr/Pc	Tom
6430	Tom Jazz LH Sw	Dr/Pc	Tom
6431	Tom Jazz LL Sw	Dr/Pc	Tom
6432	Tom Jazz FLR Sw	Dr/Pc	Tom
6433	Tom Mn Hi	Dr/Pc	Tom
6434	Tom Mn Lo	Dr/Pc	Tom
6435	Tom Dry Hi	Dr/Pc	Tom
6436	Tom Dry Lo	Dr/Pc	Tom
6437	Rotary Tom Hi 1-2	Dr/Pc	Tom
6438	Rotary Tom Hi 1	Dr/Pc	Tom
6439	Rotary Tom Hi 2	Dr/Pc	Tom
6440	Rotary Tom Mid 1-2	Dr/Pc	Tom
6441	Rotary Tom Mid 1	Dr/Pc	Tom
6442	Rotary Tom Mid 2	Dr/Pc	Tom
6443	Rotary Tom Lo 1-2	Dr/Pc	Tom
6444	Rotary Tom Lo 1	Dr/Pc	Tom
6445	Rotary Tom Lo 2	Dr/Pc	Tom
6446	Tom Ambience Hi	Dr/Pc	Tom
6447	Tom Ambience Lo	Dr/Pc	Tom
6448	Tom T9 Hi	Dr/Pc	Tom
6449	Tom T9 Lo	Dr/Pc	Tom
6450	T9 TomH 1 High	Dr/Pc	Tom
6451	T9 TomH 1 Mid H	Dr/Pc	Tom
6452	T9 TomH 1 Mid L	Dr/Pc	Tom
6453	T9 TomH 1 Low H	Dr/Pc	Tom
6454	T9 TomH 1 Lo L	Dr/Pc	Tom
6455	T9 TomH 2 High	Dr/Pc	Tom
6456	T9 TomH 2 Mid H	Dr/Pc	Tom
6457	T9 TomH 2 Mid L	Dr/Pc	Tom
6458	T9 TomH 2 Low H	Dr/Pc	Tom
6459	T9 TomH 2 Lo L	Dr/Pc	Tom
6460	T9 TomH 3 High	Dr/Pc	Tom
6461	T9 TomH 3 Mid H	Dr/Pc	Tom
6462	T9 TomH 3 Mid L	Dr/Pc	Tom
6463	T9 TomH 3 Low H	Dr/Pc	Tom
6464	T9 TomH 3 Lo L	Dr/Pc	Tom
6465	Tom T8	Dr/Pc	Tom
6466	T8 Tom High Ac	Dr/Pc	Tom
6467	T8 Tom High NA	Dr/Pc	Tom
6468	T8 Tom Low Ac	Dr/Pc	Tom
6469	T8 Tom Low NA	Dr/Pc	Tom
6470	Elec T8 Tom High	Dr/Pc	Tom
6471	Elec T8 Tom Mid	Dr/Pc	Tom
6472	Elec T8 Tom Low	Dr/Pc	Tom
6473	Tom Syn1	Dr/Pc	Tom
6474	Tom Syn2	Dr/Pc	Tom
6475	Tom AnSm	Dr/Pc	Tom
6476	Tom Dist Hi	Dr/Pc	Tom
6477	Tom Dist Lo	Dr/Pc	Tom
6478	Tom RX11	Dr/Pc	Tom
6479	Comp EleTom High	Dr/Pc	Tom
6480	Comp EleTom Low	Dr/Pc	Tom
6481	Dub Tom Mn	Dr/Pc	Tom
6482	EDM Tom High Mn	Dr/Pc	Tom
6483	EDM Tom Mid Mn	Dr/Pc	Tom
6484	EDM Tom Low Mn	Dr/Pc	Tom
6485	Zap Tom H Mn	Dr/Pc	Tom
6486	Zap Tom M Mn	Dr/Pc	Tom
6487	Zap Tom L Mn	Dr/Pc	Tom
6488	House Tom Hi H Mn	Dr/Pc	Tom
6489	House Tom Hi L Mn	Dr/Pc	Tom
6490	House Tom Mid H Mn	Dr/Pc	Tom
6491	House Tom Mid M Mn	Dr/Pc	Tom
6492	House Tom Mid L Mn	Dr/Pc	Tom
6493	House Tom Lo H Mn	Dr/Pc	Tom
6494	House Tom Lo L Mn	Dr/Pc	Tom
6495	Electro Tom Hi H Mn	Dr/Pc	Tom
6496	Electro Tom Hi L Mn	Dr/Pc	Tom
6497	Electro Tom Mid H Mn	Dr/Pc	Tom
6498	Electro Tom Mid L Mn	Dr/Pc	Tom
6499	Electro Tom Lo H Mn	Dr/Pc	Tom
6500	Electro Tom Lo L Mn	Dr/Pc	Tom
6501	Digital Tom High St	Dr/Pc	Tom
6502	Digital Tom Low St	Dr/Pc	Tom
6503	Light Tom High St	Dr/Pc	Tom
6504	Light Tom Low St	Dr/Pc	Tom
6505	Powerful Tom High St	Dr/Pc	Tom
6506	Powerful Tom Mid St	Dr/Pc	Tom
6507	Powerful Tom Low St	Dr/Pc	Tom
6508	Elec SE Tom St	Dr/Pc	Tom
6509	Fine Light Tom St	Dr/Pc	Tom
6510	HipHop Tom High Mn	Dr/Pc	Tom
6511	HipHop Tom Mid Mn	Dr/Pc	Tom
6512	HipHop Tom Floor Mn	Dr/Pc	Tom
6513	Crash1 St	Dr/Pc	Cymbl
6514	Crash1 L	Dr/Pc	Cymbl
6515	Crash1 R	Dr/Pc	Cymbl
6516	Crash1 RL	Dr/Pc	Cymbl
6517	Crash2 St	Dr/Pc	Cymbl
6518	Crash2 L	Dr/Pc	Cymbl
6519	Crash2 R	Dr/Pc	Cymbl
6520	Crash2 RL	Dr/Pc	Cymbl
6521	Crash3	Dr/Pc	Cymbl
6522	Crash4	Dr/Pc	Cymbl
6523	Crash Brite St	Dr/Pc	Cymbl
6524	Crash Brite L	Dr/Pc	Cymbl
6525	Crash Brite R	Dr/Pc	Cymbl
6526	Crash Brite RL	Dr/Pc	Cymbl
6527	Crash Dark St	Dr/Pc	Cymbl
6528	Crash Dark L	Dr/Pc	Cymbl
6529	Crash Dark R	Dr/Pc	Cymbl
6530	Crash Dark RL	Dr/Pc	Cymbl
6531	Crash NJzA St	Dr/Pc	Cymbl
6532	Crash NJzA L	Dr/Pc	Cymbl
6533	Crash NJzA R	Dr/Pc	Cymbl
6534	Crash NJzA RL	Dr/Pc	Cymbl
6535	Crash NJzB St	Dr/Pc	Cymbl
6536	Crash NJzB L	Dr/Pc	Cymbl
6537	Crash NJzB R	Dr/Pc	Cymbl
6538	Crash NJzB RL	Dr/Pc	Cymbl
6539	Std Crash1	Dr/Pc	Cymbl
6540	Std Crash2	Dr/Pc	Cymbl
6541	PI Crash 15	Dr/Pc	Cymbl
6542	PI Crash 16	Dr/Pc	Cymbl
6543	ZJ Crash1 Sw	Dr/Pc	Cymbl
6544	ZJ Crash2 Sw	Dr/Pc	Cymbl
6545	ZJ Crash3 Sw	Dr/Pc	Cymbl
6546	Jazz Crash1 Sw	Dr/Pc	Cymbl
6547	Jazz Crash2 Sw	Dr/Pc	Cymbl
6548	Crash Brush1 St	Dr/Pc	Cymbl
6549	Crash Brush1 L	Dr/Pc	Cymbl
6550	Crash Brush1 R	Dr/Pc	Cymbl
6551	Crash Brush1 RL	Dr/Pc	Cymbl
6552	Crash Brush Cup St	Dr/Pc	Cymbl
6553	Crash Brush Cup L	Dr/Pc	Cymbl
6554	Crash Brush Cup R	Dr/Pc	Cymbl
6555	Crash Brush Cup RL	Dr/Pc	Cymbl
6556	Crash Brush2 St	Dr/Pc	Cymbl
6557	Crash Brush2 L	Dr/Pc	Cymbl
6558	Crash Brush2 R	Dr/Pc	Cymbl
6559	Crash Brush2 RL	Dr/Pc	Cymbl
6560	ZJ Crash Brush Sw	Dr/Pc	Cymbl
6561	Hand Cymbal Open St	Dr/Pc	Cymbl
6562	Hand Cymbal Open L	Dr/Pc	Cymbl
6563	Hand Cymbal Open R	Dr/Pc	Cymbl
6564	Hand Cymbal Mute St	Dr/Pc	Cymbl
6565	Hand Cymbal Mute L	Dr/Pc	Cymbl
6566	Hand Cymbal Mute R	Dr/Pc	Cymbl
6567	Ride1 St	Dr/Pc	Cymbl
6568	Ride1 L	Dr/Pc	Cymbl
6569	Ride1 R	Dr/Pc	Cymbl
6570	Ride1 RL	Dr/Pc	Cymbl
6571	Ride2 St	Dr/Pc	Cymbl
6572	Ride2 L	Dr/Pc	Cymbl
6573	Ride2 R	Dr/Pc	Cymbl
6574	Ride2 RL	Dr/Pc	Cymbl
6575	Ride Brite St	Dr/Pc	Cymbl
6576	Ride Brite L	Dr/Pc	Cymbl
6577	Ride Brite R	Dr/Pc	Cymbl
6578	Ride Brite RL	Dr/Pc	Cymbl
6579	Ride Brite Cup St	Dr/Pc	Cymbl
6580	Ride Brite Cup L	Dr/Pc	Cymbl
6581	Ride Brite Cup R	Dr/Pc	Cymbl
6582	Ride Brite Cup RL	Dr/Pc	Cymbl
6583	Ride Warm St	Dr/Pc	Cymbl
6584	Ride Warm L	Dr/Pc	Cymbl
6585	Ride Warm R	Dr/Pc	Cymbl
6586	Ride Warm RL	Dr/Pc	Cymbl
6587	Ride NJz St	Dr/Pc	Cymbl
6588	Ride NJz L	Dr/Pc	Cymbl
6589	Ride NJz R	Dr/Pc	Cymbl
6590	Ride NJz RL	Dr/Pc	Cymbl
6591	Ride NJz Cup St	Dr/Pc	Cymbl
6592	Ride NJz Cup L	Dr/Pc	Cymbl
6593	Ride NJz Cup R	Dr/Pc	Cymbl
6594	Ride NJz Cup RL	Dr/Pc	Cymbl
6595	Ride Cup1 St	Dr/Pc	Cymbl
6596	Ride Cup1 L	Dr/Pc	Cymbl
6597	Ride Cup1 R	Dr/Pc	Cymbl
6598	Ride Cup1 RL	Dr/Pc	Cymbl
6599	Dynamic Ride	Dr/Pc	Cymbl
6600	ZJ Ride1 Tip Sw	Dr/Pc	Cymbl
6601	ZJ Ride1 Cup Sw	Dr/Pc	Cymbl
6602	ZJ Ride2 Tip Sw	Dr/Pc	Cymbl
6603	Std Ride	Dr/Pc	Cymbl
6604	Fine Ride Bow	Dr/Pc	Cymbl
6605	Fine Ride Edge	Dr/Pc	Cymbl
6606	Fine Ride Cup	Dr/Pc	Cymbl
6607	Ride Brush1 St	Dr/Pc	Cymbl
6608	Ride Brush1 L	Dr/Pc	Cymbl
6609	Ride Brush1 R	Dr/Pc	Cymbl
6610	Ride Brush1 RL	Dr/Pc	Cymbl
6611	Ride Brush2 St	Dr/Pc	Cymbl
6612	Ride Brush2 L	Dr/Pc	Cymbl
6613	Ride Brush2 R	Dr/Pc	Cymbl
6614	Ride Brush2 RL	Dr/Pc	Cymbl
6615	Ride Brush3 Tip Sw	Dr/Pc	Cymbl
6616	Ride Brush3 Cup Sw	Dr/Pc	Cymbl
6617	Ride Brush4 Cup Sw	Dr/Pc	Cymbl
6618	Ride Cup2 St	Dr/Pc	Cymbl
6619	Ride Cup2 L	Dr/Pc	Cymbl
6620	Ride Cup2 R	Dr/Pc	Cymbl
6621	Ride Cup2 RL	Dr/Pc	Cymbl
6622	Ride Mn	Dr/Pc	Cymbl
6623	Ride Cup Mn	Dr/Pc	Cymbl
6624	Ride Cup Mn2	Dr/Pc	Cymbl
6625	China1 St	Dr/Pc	Cymbl
6626	China1 L	Dr/Pc	Cymbl
6627	China1 R	Dr/Pc	Cymbl
6628	China1 RL	Dr/Pc	Cymbl
6629	China2	Dr/Pc	Cymbl
6630	China3 St	Dr/Pc	Cymbl
6631	China3 L	Dr/Pc	Cymbl
6632	China3 R	Dr/Pc	Cymbl
6633	China3 RL	Dr/Pc	Cymbl
6634	China4	Dr/Pc	Cymbl
6635	Splash1 St	Dr/Pc	Cymbl
6636	Splash1 L	Dr/Pc	Cymbl

No.	Name	Main Category	Sub Category
6637	Splash1 R	Dr/Pc	Cymbl
6638	Splash1 RL	Dr/Pc	Cymbl
6639	Splash2 St	Dr/Pc	Cymbl
6640	Splash2 L	Dr/Pc	Cymbl
6641	Splash2 R	Dr/Pc	Cymbl
6642	Splash2 RL	Dr/Pc	Cymbl
6643	ZJ Splash1	Dr/Pc	Cymbl
6644	ZJ Splash2 Sw	Dr/Pc	Cymbl
6645	Crash T9-1	Dr/Pc	Cymbl
6646	Crash T9-2	Dr/Pc	Cymbl
6647	Crash T8-1	Dr/Pc	Cymbl
6648	Crash T8-2-1	Dr/Pc	Cymbl
6649	Crash T8-2-2	Dr/Pc	Cymbl
6650	Crash T8-2-3	Dr/Pc	Cymbl
6651	S&H T8 Crash	Dr/Pc	Cymbl
6652	Crash Syn	Dr/Pc	Cymbl
6653	Crash RX11	Dr/Pc	Cymbl
6654	Dub Crash Mn	Dr/Pc	Cymbl
6655	Trap Crash 1 Mn	Dr/Pc	Cymbl
6656	Trap Crash 2 St	Dr/Pc	Cymbl
6657	HipHop Crash 1 St	Dr/Pc	Cymbl
6658	HipHop Crash 2 St	Dr/Pc	Cymbl
6659	HipHop Crash 3 St	Dr/Pc	Cymbl
6660	HipHop Crash 4 Mn	Dr/Pc	Cymbl
6661	House Crash St	Dr/Pc	Cymbl
6662	Electro Crash 1 St	Dr/Pc	Cymbl
6663	Electro Crash 2 St	Dr/Pc	Cymbl
6664	EDM Crash St	Dr/Pc	Cymbl
6665	Novelty Crash	Dr/Pc	Cymbl
6666	Flange Crash St	Dr/Pc	Cymbl
6667	Crackle Crash St	Dr/Pc	Cymbl
6668	Electric Crash St	Dr/Pc	Cymbl
6669	FX Crash St	Dr/Pc	Cymbl
6670	Phase Crash St	Dr/Pc	Cymbl
6671	Ride T9-1	Dr/Pc	Cymbl
6672	Ride T9-2	Dr/Pc	Cymbl
6673	Hard T9 CymRide	Dr/Pc	Cymbl
6674	Elec T9 CymRide	Dr/Pc	Cymbl
6675	Ride RX11	Dr/Pc	Cymbl
6676	Dub Ride St	Dr/Pc	Cymbl
6677	Trap Ride St	Dr/Pc	Cymbl
6678	EDM Ride St	Dr/Pc	Cymbl
6679	House Ride St	Dr/Pc	Cymbl
6680	Electro Ride Mn	Dr/Pc	Cymbl
6681	Live Ride St	Dr/Pc	Cymbl
6682	Fresh Ride St	Dr/Pc	Cymbl
6683	Fine Ride St	Dr/Pc	Cymbl
6684	Clang Ride St	Dr/Pc	Cymbl
6685	Smith Ride St	Dr/Pc	Cymbl
6686	HipHop Ride St	Dr/Pc	Cymbl
6687	Ride Hip Hop St	Dr/Pc	Cymbl
6688	Reverse Cymbal1	Dr/Pc	Cymbl
6689	Reverse Cymbal2	Dr/Pc	Cymbl
6690	Bd Trendy 1 Mn	Dr/Pc	Kick
6691	Bd Trendy 2 Mn	Dr/Pc	Kick
6692	Bd Trendy 3 St	Dr/Pc	Kick
6693	Bd Trendy 4 St	Dr/Pc	Kick
6694	Bd Trendy 5 St	Dr/Pc	Kick
6695	Bd Trendy 6 St	Dr/Pc	Kick
6696	Bd Trendy 7 Mn	Dr/Pc	Kick
6697	Bd Trendy 8 Mn	Dr/Pc	Kick
6698	Bd Trendy 9 Mn	Dr/Pc	Kick
6699	Bd Trendy 10 Mn	Dr/Pc	Kick
6700	Bd Trendy 11 Mn	Dr/Pc	Kick
6701	Bd Trendy 12 Mn	Dr/Pc	Kick
6702	Bd Trendy 13 Mn	Dr/Pc	Kick
6703	Bd Trendy 14 Mn	Dr/Pc	Kick
6704	Bd Trendy 15 Mn	Dr/Pc	Kick
6705	Bd Trendy 16 Mn	Dr/Pc	Kick
6706	Bd Trendy 17 St	Dr/Pc	Kick
6707	Bd Trendy 18 St	Dr/Pc	Kick
6708	Bd Trendy 19 St	Dr/Pc	Kick
6709	Bd Trendy 20 St	Dr/Pc	Kick
6710	Bd Trendy 21 St	Dr/Pc	Kick
6711	Bd Trendy 22 St	Dr/Pc	Kick
6712	Bd Trendy 23 St	Dr/Pc	Kick
6713	Bd Trendy 24 St	Dr/Pc	Kick
6714	Bd Trendy 25 St	Dr/Pc	Kick
6715	Bd Trendy 26 St	Dr/Pc	Kick
6716	Bd Trendy 27 St	Dr/Pc	Kick
6717	Bd Trendy 28 St	Dr/Pc	Kick
6718	Bd Trendy 29 Mn	Dr/Pc	Kick
6719	Bd Trendy 30 St	Dr/Pc	Kick
6720	Bd Trendy 31 St	Dr/Pc	Kick
6721	Bd Trendy 32 Mn	Dr/Pc	Kick
6722	Bd Trendy 33 St	Dr/Pc	Kick
6723	Bd Trendy 34 St	Dr/Pc	Kick
6724	Bd Trendy 35 St	Dr/Pc	Kick
6725	Bd Trendy 36 St	Dr/Pc	Kick
6726	Bd Trendy 37 St	Dr/Pc	Kick
6727	Bd Trendy 38 St	Dr/Pc	Kick
6728	Bd Trendy 39 St	Dr/Pc	Kick
6729	Bd Trendy 40 St	Dr/Pc	Kick
6730	Bd Trendy 41 St	Dr/Pc	Kick
6731	Bd Trendy 42 St	Dr/Pc	Kick
6732	Bd Trendy 43 St	Dr/Pc	Kick
6733	Bd Trendy 44 St	Dr/Pc	Kick
6734	Bd Trendy 45 Mn	Dr/Pc	Kick
6735	Bd Trendy 46 St	Dr/Pc	Kick
6736	Bd Trendy 47 St	Dr/Pc	Kick
6737	Bd Trendy 48 St	Dr/Pc	Kick
6738	Bd Trendy 49 St	Dr/Pc	Kick
6739	Bd Trendy 50 St	Dr/Pc	Kick
6740	Bd Trendy 51 St	Dr/Pc	Kick
6741	Bd Trendy 52 Mn	Dr/Pc	Kick
6742	Bd Trendy 53 Mn	Dr/Pc	Kick
6743	Bd Trendy 54 St	Dr/Pc	Kick
6744	Bd Trendy 55 Mn	Dr/Pc	Kick
6745	Bd Trendy 56 Mn	Dr/Pc	Kick
6746	Bd Trendy 57 Mn	Dr/Pc	Kick
6747	Bd Trendy 58 St	Dr/Pc	Kick
6748	Bd Trendy 59 St	Dr/Pc	Kick
6749	Bd Trendy 60 Mn	Dr/Pc	Kick
6750	Bd Trendy 61 St	Dr/Pc	Kick
6751	Bd Trendy 62 Mn	Dr/Pc	Kick
6752	Bd Trendy 63 Mn	Dr/Pc	Kick
6753	Bd Trendy 64 Mn	Dr/Pc	Kick
6754	Bd Trendy 65 Mn	Dr/Pc	Kick
6755	Bd Trendy 66 Mn	Dr/Pc	Kick
6756	Bd Trendy 67 St	Dr/Pc	Kick
6757	Bd Trendy 68 St	Dr/Pc	Kick
6758	Bd Trendy 69 St	Dr/Pc	Kick
6759	Bd Trendy 70 St	Dr/Pc	Kick
6760	Bd Trendy 71 St	Dr/Pc	Kick
6761	Bd Trendy 72 St	Dr/Pc	Kick
6762	Bd Trendy 73 St	Dr/Pc	Kick
6763	Bd Trendy 74 St	Dr/Pc	Kick
6764	Bd Trendy 75 St	Dr/Pc	Kick
6765	Bd Trendy 76 Mn	Dr/Pc	Kick
6766	Bd Trendy 77 Mn	Dr/Pc	Kick
6767	Bd Trendy 78 Mn	Dr/Pc	Kick
6768	Bd Trendy 79 St	Dr/Pc	Kick
6769	Bd Trendy 80 St	Dr/Pc	Kick
6770	Bd Trendy 81 St	Dr/Pc	Kick
6771	Bd Trendy 82 St	Dr/Pc	Kick
6772	Bd Trendy 83 St	Dr/Pc	Kick
6773	Bd Trendy 84 St	Dr/Pc	Kick
6774	Bd Trendy 85 St	Dr/Pc	Kick
6775	Bd Trendy 86 Mn	Dr/Pc	Kick
6776	Bd Trendy 87 St	Dr/Pc	Kick
6777	Bd Trendy 88 Mn	Dr/Pc	Kick
6778	Bd Trendy 89 St	Dr/Pc	Kick
6779	Bd Trendy 90 St	Dr/Pc	Kick
6780	Bd Trendy 91 St	Dr/Pc	Kick
6781	Bd Trendy 92 St	Dr/Pc	Kick
6782	Bd Trendy 93 St	Dr/Pc	Kick
6783	Bd Trendy 94 St	Dr/Pc	Kick
6784	Bd Trendy 95 St	Dr/Pc	Kick
6785	Bd Trendy 96 St	Dr/Pc	Kick
6786	Bd Trendy 97 St	Dr/Pc	Kick
6787	Bd Trendy 98 St	Dr/Pc	Kick
6788	Bd Trendy 99 St	Dr/Pc	Kick
6789	Bd Trendy 100 St	Dr/Pc	Kick
6790	Bd Trendy 101 St	Dr/Pc	Kick
6791	Bd Trendy 102 St	Dr/Pc	Kick
6792	Bd Trendy 103 St	Dr/Pc	Kick
6793	Bd Trendy 104 St	Dr/Pc	Kick
6794	Bd Trendy 105 St	Dr/Pc	Kick
6795	Bd Trendy 106 St	Dr/Pc	Kick
6796	Bd Trendy 107 St	Dr/Pc	Kick
6797	Bd Trendy 108 St	Dr/Pc	Kick
6798	Bd Trendy 109 St	Dr/Pc	Kick
6799	Bd Trendy 110 Mn	Dr/Pc	Kick
6800	Bd Trendy 111 St	Dr/Pc	Kick
6801	Bd Trendy 112 St	Dr/Pc	Kick
6802	Bd Trendy 113 St	Dr/Pc	Kick
6803	Bd Trendy 114 St	Dr/Pc	Kick
6804	Bd Trendy 115 St	Dr/Pc	Kick
6805	Bd Trendy 116 St	Dr/Pc	Kick
6806	Bd Trendy 117 St	Dr/Pc	Kick
6807	Bd Trendy 118 St	Dr/Pc	Kick
6808	Bd Trendy 119 St	Dr/Pc	Kick
6809	Bd Trendy 120 St	Dr/Pc	Kick
6810	Bd Trendy 121 St	Dr/Pc	Kick
6811	Bd Trendy 122 Mn	Dr/Pc	Kick
6812	Bd Trendy 123 St	Dr/Pc	Kick
6813	Bd Trendy 124 St	Dr/Pc	Kick
6814	Bd Trendy 125 St	Dr/Pc	Kick
6815	Bd Trendy 126 St	Dr/Pc	Kick
6816	Bd Trendy 127 St	Dr/Pc	Kick
6817	Bd Trendy 128 St	Dr/Pc	Kick
6818	Bd Trendy 129 St	Dr/Pc	Kick
6819	Bd Trendy 130 Mn	Dr/Pc	Kick
6820	Bd Trendy 131 Mn	Dr/Pc	Kick
6821	Bd Trendy 132 Mn	Dr/Pc	Kick
6822	Bd Trendy 133 St	Dr/Pc	Kick
6823	Bd Trendy 134 Mn	Dr/Pc	Kick
6824	Bd Trendy 135 Mn	Dr/Pc	Kick
6825	Bd Trendy 136 St	Dr/Pc	Kick
6826	Bd Trendy 137 Mn	Dr/Pc	Kick
6827	Bd Trendy 138 Mn	Dr/Pc	Kick
6828	Bd Trendy 139 St	Dr/Pc	Kick
6829	Bd Trendy 140 Mn	Dr/Pc	Kick
6830	Bd Trendy 141 Mn	Dr/Pc	Kick
6831	Bd Trendy 142 Mn	Dr/Pc	Kick
6832	Bd Trendy 143 Mn	Dr/Pc	Kick
6833	Sd Trendy 1 Mn	Dr/Pc	Snare
6834	Sd Trendy 2 Mn	Dr/Pc	Snare
6835	Sd Trendy 3 St	Dr/Pc	Snare
6836	Sd Trendy 4 St	Dr/Pc	Snare
6837	Sd Trendy 5 St	Dr/Pc	Snare
6838	Sd Trendy 6 St	Dr/Pc	Snare
6839	Sd Trendy 7 St	Dr/Pc	Snare
6840	Sd Trendy 8 St	Dr/Pc	Snare
6841	Sd Trendy 9 St	Dr/Pc	Snare
6842	Sd Trendy 10 St	Dr/Pc	Snare
6843	Sd Trendy 11 St	Dr/Pc	Snare
6844	Sd Trendy 12 St	Dr/Pc	Snare
6845	Sd Trendy 13 St	Dr/Pc	Snare
6846	Sd Trendy 14 St	Dr/Pc	Snare
6847	Sd Trendy 15 St	Dr/Pc	Snare
6848	Sd Trendy 16 St	Dr/Pc	Snare
6849	Sd Trendy 17 St	Dr/Pc	Snare
6850	Sd Trendy 18 St	Dr/Pc	Snare
6851	Sd Trendy 19 St	Dr/Pc	Snare
6852	Sd Trendy 20 St	Dr/Pc	Snare
6853	Sd Trendy 21 St	Dr/Pc	Snare
6854	Sd Trendy 22 St	Dr/Pc	Snare
6855	Sd Trendy 23 St	Dr/Pc	Snare
6856	Sd Trendy 24 St	Dr/Pc	Snare
6857	Sd Trendy 25 St	Dr/Pc	Snare
6858	Sd Trendy 26 St	Dr/Pc	Snare
6859	Sd Trendy 27 St	Dr/Pc	Snare
6860	Sd Trendy 28 St	Dr/Pc	Snare
6861	Sd Trendy 29 St	Dr/Pc	Snare
6862	Sd Trendy 30 St	Dr/Pc	Snare
6863	Sd Trendy 31 St	Dr/Pc	Snare
6864	Sd Trendy 32 St	Dr/Pc	Snare
6865	Sd Trendy 33 St	Dr/Pc	Snare
6866	Sd Trendy 34 St	Dr/Pc	Snare
6867	Sd Trendy 35 St	Dr/Pc	Snare
6868	Sd Trendy 36 St	Dr/Pc	Snare
6869	Sd Trendy 37 St	Dr/Pc	Snare
6870	Sd Trendy 38 St	Dr/Pc	Snare
6871	Sd Trendy 39 St	Dr/Pc	Snare
6872	Sd Trendy 40 St	Dr/Pc	Snare
6873	Sd Trendy 41 Mn	Dr/Pc	Snare
6874	Sd Trendy 42 Mn	Dr/Pc	Snare
6875	Sd Trendy 43 St	Dr/Pc	Snare
6876	Sd Trendy 44 Mn	Dr/Pc	Snare
6877	Sd Trendy 45 Mn	Dr/Pc	Snare
6878	Sd Trendy 46 Mn	Dr/Pc	Snare
6879	Sd Trendy 47 St	Dr/Pc	Snare
6880	Sd Trendy 48 St	Dr/Pc	Snare
6881	Sd Trendy 49 St	Dr/Pc	Snare
6882	Sd Trendy 50 St	Dr/Pc	Snare
6883	Sd Trendy 51 St	Dr/Pc	Snare
6884	Sd Trendy 52 St	Dr/Pc	Snare
6885	Sd Trendy 53 St	Dr/Pc	Snare
6886	Sd Trendy 54 St	Dr/Pc	Snare
6887	Sd Trendy 55 St	Dr/Pc	Snare
6888	Sd Trendy 56 Mn	Dr/Pc	Snare
6889	Sd Trendy 57 St	Dr/Pc	Snare
6890	Sd Trendy 58 St	Dr/Pc	Snare
6891	Sd Trendy 59 St	Dr/Pc	Snare
6892	Sd Trendy 60 St	Dr/Pc	Snare
6893	Sd Trendy 61 St	Dr/Pc	Snare
6894	Sd Trendy 62 St	Dr/Pc	Snare
6895	Sd Trendy 63 St	Dr/Pc	Snare
6896	Sd Trendy 64 Mn	Dr/Pc	Snare
6897	Sd Trendy 65 Mn	Dr/Pc	Snare
6898	Sd Trendy 66 Mn	Dr/Pc	Snare
6899	Sd Trendy 67 Mn	Dr/Pc	Snare
6900	Sd Trendy 68 St	Dr/Pc	Snare
6901	Sd Trendy 69 Mn	Dr/Pc	Snare
6902	Sd Trendy 70 Mn	Dr/Pc	Snare
6903	Sd Trendy 71 Mn	Dr/Pc	Snare
6904	Sd Trendy 72 St	Dr/Pc	Snare
6905	Sd Trendy 73 Mn	Dr/Pc	Snare
6906	Sd Trendy 74 St	Dr/Pc	Snare
6907	Sd Trendy 75 St	Dr/Pc	Snare
6908	Sd Trendy 76 St	Dr/Pc	Snare
6909	Sd Trendy 77 St	Dr/Pc	Snare
6910	Sd Trendy 78 St	Dr/Pc	Snare
6911	Sd Trendy 79 St	Dr/Pc	Snare
6912	Sd Trendy 80 St	Dr/Pc	Snare
6913	Sd Trendy 81 St	Dr/Pc	Snare
6914	Sd Trendy 82 St	Dr/Pc	Snare
6915	Sd Trendy 83 St	Dr/Pc	Snare
6916	Sd Trendy 84 St	Dr/Pc	Snare
6917	Sd Trendy 85 St	Dr/Pc	Snare
6918	Sd Trendy 86 Mn	Dr/Pc	Snare
6919	Sd Trendy 87 St	Dr/Pc	Snare
6920	Sd Trendy 88 St	Dr/Pc	Snare
6921	Sd Trendy 89 St	Dr/Pc	Snare
6922	Sd Trendy 90 St	Dr/Pc	Snare
6923	Sd Trendy 91 Mn	Dr/Pc	Snare
6924	Sd Trendy 92 St	Dr/Pc	Snare
6925	Sd Trendy 93 St	Dr/Pc	Snare
6926	Sd Trendy 94 St	Dr/Pc	Snare
6927	Sd Trendy 95 St	Dr/Pc	Snare
6928	Sd Trendy 96 St	Dr/Pc	Snare
6929	Sd Trendy 97 Mn	Dr/Pc	Snare
6930	Sd Trendy 98 Mn	Dr/Pc	Snare
6931	Sd Trendy 99 St	Dr/Pc	Snare
6932	Sd Trendy 100 Mn	Dr/Pc	Snare
6933	Sd Trendy 101 St	Dr/Pc	Snare
6934	Sd Trendy 102 St	Dr/Pc	Snare
6935	Sd Trendy 103 St	Dr/Pc	Snare
6936	Sd Trendy 104 St	Dr/Pc	Snare
6937	Sd Trendy 105 St	Dr/Pc	Snare
6938	Sd Trendy 106 St	Dr/Pc	Snare
6939	Sd Trendy 107 St	Dr/Pc	Snare
6940	Sd Trendy 108 St	Dr/Pc	Snare
6941	Sd Trendy 109 St	Dr/Pc	Snare
6942	Sd Trendy 110 St	Dr/Pc	Snare
6943	Sd Trendy 111 St	Dr/Pc	Snare
6944	Sd Trendy 112 St	Dr/Pc	Snare
6945	Sd Trendy 113 St	Dr/Pc	Snare
6946	Sd Trendy 114 St	Dr/Pc	Snare
6947	Sd Trendy 115 St	Dr/Pc	Snare
6948	Sd Trendy 116 St	Dr/Pc	Snare
6949	Sd Trendy 117 Mn	Dr/Pc	Snare
6950	Sd Trendy 118 St	Dr/Pc	Snare
6951	Sd Trendy 119 St	Dr/Pc	Snare
6952	Sd Trendy 120 St	Dr/Pc	Snare

No.	Name	Main Category	Sub Category
6953	Sd Trendy 121 St	Dr/Pc	Snare
6954	Sd Trendy 122 St	Dr/Pc	Snare
6955	Sd Trendy 123 St	Dr/Pc	Snare
6956	Sd Trendy 124 St	Dr/Pc	Snare
6957	Sd Trendy 125 St	Dr/Pc	Snare
6958	Sd Trendy 126 Mn	Dr/Pc	Snare
6959	Sd Trendy 127 St	Dr/Pc	Snare
6960	Sd Trendy 128 Mn	Dr/Pc	Snare
6961	Sd Trendy 129 St	Dr/Pc	Snare
6962	Sd Trendy 130 St	Dr/Pc	Snare
6963	Sd Trendy 131 St	Dr/Pc	Snare
6964	Sd Trendy 132 Mn	Dr/Pc	Snare
6965	Sd Trendy 133 Mn	Dr/Pc	Snare
6966	Sd Trendy 134 Mn	Dr/Pc	Snare
6967	Sd Trendy 135 Mn	Dr/Pc	Snare
6968	Sd Trendy 136 St	Dr/Pc	Snare
6969	Sd Trendy 137 St	Dr/Pc	Snare
6970	Sd Trendy 138 St	Dr/Pc	Snare
6971	Sd Trendy 139 St	Dr/Pc	Snare
6972	Sd Trendy 140 St	Dr/Pc	Snare
6973	Sd Trendy 141 Mn	Dr/Pc	Snare
6974	Sd Trendy 142 St	Dr/Pc	Snare
6975	Sd Trendy 143 Mn	Dr/Pc	Snare
6976	Sd Trendy 144 Mn	Dr/Pc	Snare
6977	Sd Trendy 145 St	Dr/Pc	Snare
6978	Sd Trendy 146 Mn	Dr/Pc	Snare
6979	Sd Trendy 147 St	Dr/Pc	Snare
6980	Sd Trendy 148 St	Dr/Pc	Snare
6981	Sd Trendy 149 St	Dr/Pc	Snare
6982	Sd Trendy 150 Mn	Dr/Pc	Snare
6983	Sd Trendy 151 St	Dr/Pc	Snare
6984	Sd Trendy 152 Mn	Dr/Pc	Snare
6985	Sd Trendy 153 St	Dr/Pc	Snare
6986	Sd Trendy 154 St	Dr/Pc	Snare
6987	Sd Trendy 155 Mn	Dr/Pc	Snare
6988	Sd Trendy 156 St	Dr/Pc	Snare
6989	Sd Trendy 157 St	Dr/Pc	Snare
6990	HH Trendy 1 St	Dr/Pc	HHat
6991	HH Trendy 2 St	Dr/Pc	HHat
6992	HH Trendy 3 St	Dr/Pc	HHat
6993	HH Trendy 4 St	Dr/Pc	HHat
6994	HH Trendy 5 St	Dr/Pc	HHat
6995	HH Trendy 6 St	Dr/Pc	HHat
6996	HH Trendy 7 St	Dr/Pc	HHat
6997	HH Trendy 8 St	Dr/Pc	HHat
6998	HH Trendy 9 St	Dr/Pc	HHat
6999	HH Trendy 10 Mn	Dr/Pc	HHat
7000	HH Trendy 11 Mn	Dr/Pc	HHat
7001	HH Trendy 12 St	Dr/Pc	HHat
7002	HH Trendy 13 St	Dr/Pc	HHat
7003	HH Trendy 14 St	Dr/Pc	HHat
7004	HH Trendy 15 St	Dr/Pc	HHat
7005	HH Trendy 16 St	Dr/Pc	HHat
7006	HH Trendy 17 St	Dr/Pc	HHat
7007	HH Trendy 18 St	Dr/Pc	HHat
7008	HH Trendy 19 St	Dr/Pc	HHat
7009	HH Trendy 20 St	Dr/Pc	HHat
7010	HH Trendy 21 St	Dr/Pc	HHat
7011	HH Trendy 22 St	Dr/Pc	HHat
7012	HH Trendy 23 St	Dr/Pc	HHat
7013	HH Trendy 24 St	Dr/Pc	HHat
7014	HH Trendy 25 St	Dr/Pc	HHat
7015	HH Trendy 26 Mn	Dr/Pc	HHat
7016	HH Trendy 27 St	Dr/Pc	HHat
7017	HH Trendy 28 St	Dr/Pc	HHat
7018	HH Trendy 29 St	Dr/Pc	HHat
7019	HH Trendy 30 St	Dr/Pc	HHat
7020	HH Trendy 31 St	Dr/Pc	HHat
7021	HH Trendy 32 St	Dr/Pc	HHat
7022	HH Trendy 33 St	Dr/Pc	HHat
7023	HH Trendy 34 St	Dr/Pc	HHat
7024	HH Trendy 35 St	Dr/Pc	HHat
7025	HH Trendy 36 St	Dr/Pc	HHat
7026	HH Trendy 37 St	Dr/Pc	HHat
7027	HH Trendy 38 St	Dr/Pc	HHat
7028	HH Trendy 39 Mn	Dr/Pc	HHat
7029	HH Trendy 40 Mn	Dr/Pc	HHat
7030	HH Trendy 41 Mn	Dr/Pc	HHat
7031	HH Trendy 42 St	Dr/Pc	HHat

No.	Name	Main Category	Sub Category
7032	HH Trendy 43 Mn	Dr/Pc	HHat
7033	HH Trendy 44 Mn	Dr/Pc	HHat
7034	HH Trendy 45 St	Dr/Pc	HHat
7035	HH Trendy 46 Mn	Dr/Pc	HHat
7036	HH Trendy 47 St	Dr/Pc	HHat
7037	HH Trendy 48 St	Dr/Pc	HHat
7038	HH Trendy 49 St	Dr/Pc	HHat
7039	HH Trendy 50 St	Dr/Pc	HHat
7040	HH Trendy 51 St	Dr/Pc	HHat
7041	HH Trendy 52 St	Dr/Pc	HHat
7042	HH Trendy 53 St	Dr/Pc	HHat
7043	HH Trendy 54 St	Dr/Pc	HHat
7044	HH Trendy 55 St	Dr/Pc	HHat
7045	HH Trendy 56 St	Dr/Pc	HHat
7046	HH Trendy 57 Mn	Dr/Pc	HHat
7047	HH Trendy 58 Mn	Dr/Pc	HHat
7048	HH Trendy 59 St	Dr/Pc	HHat
7049	HH Trendy 60 St	Dr/Pc	HHat
7050	HH Trendy 61 St	Dr/Pc	HHat
7051	HH Trendy 62 St	Dr/Pc	HHat
7052	HH Trendy 63 St	Dr/Pc	HHat
7053	HH Trendy 64 St	Dr/Pc	HHat
7054	HH Trendy 65 St	Dr/Pc	HHat
7055	HH Trendy 66 St	Dr/Pc	HHat
7056	HH Trendy 67 St	Dr/Pc	HHat
7057	HH Trendy 68 St	Dr/Pc	HHat
7058	HH Trendy 69 St	Dr/Pc	HHat
7059	Tom Trendy 1 Hi Mn	Dr/Pc	Tom
7060	Tom Trendy 1 Mid Mn	Dr/Pc	Tom
7061	Tom Trendy 1 Lo Mn	Dr/Pc	Tom
7062	Tom Trendy 2 Mn	Dr/Pc	Tom
7063	Tom Trendy 3 Mn	Dr/Pc	Tom
7064	Tom Trendy 4 St	Dr/Pc	Tom
7065	Tom Trendy 5 St	Dr/Pc	Tom
7066	Tom Trendy 6 Mn	Dr/Pc	Tom
7067	Tom Trendy 7 Mn	Dr/Pc	Tom
7068	Tom Trendy 8 St	Dr/Pc	Tom
7069	Tom Trendy 9 St	Dr/Pc	Tom
7070	Tom Trendy 10 Hi H St	Dr/Pc	Tom
7071	Tom Trendy 10 Hi L St	Dr/Pc	Tom
7072	Tom Trendy 10 Mid St	Dr/Pc	Tom
7073	Tom Trendy 10 Lo H St	Dr/Pc	Tom
7074	Tom Trendy 10 Lo L St	Dr/Pc	Tom
7075	Tom Trendy 11 St	Dr/Pc	Tom
7076	Tom Trendy 11 Loop St	Dr/Pc	Tom
7077	Tom Trendy 12 St	Dr/Pc	Tom
7078	Tom Trendy 13 Hi St	Dr/Pc	Tom
7079	Tom Trendy 13 Mid St	Dr/Pc	Tom
7080	Tom Trendy 13 Lo St	Dr/Pc	Tom
7081	Tom Trendy 14 Hi Mn	Dr/Pc	Tom
7082	Tom Trendy 14 Mid Mn	Dr/Pc	Tom
7083	Tom Trendy 14 Lo Mn	Dr/Pc	Tom
7084	Tom Trendy 15 Hi St	Dr/Pc	Tom
7085	Tom Trendy 15 Mid St	Dr/Pc	Tom
7086	Tom Trendy 15 Lo St	Dr/Pc	Tom
7087	Tom Trendy 16 Mn	Dr/Pc	Tom
7088	Tom Trendy 17 Hi Mn	Dr/Pc	Tom
7089	Tom Trendy 17 Lo Mn	Dr/Pc	Tom
7090	Tom Trendy 18 Lo L Mn	Dr/Pc	Tom
7091	Tom Trendy 18 Lo H Mn	Dr/Pc	Tom
7092	Tom Trendy 18 Mid L Mn	Dr/Pc	Tom
7093	Tom Trendy 18 Mid H Mn	Dr/Pc	Tom
7094	Tom Trendy 18 Hi L Mn	Dr/Pc	Tom
7095	Tom Trendy 18 Hi H Mn	Dr/Pc	Tom
7096	Tom Trendy 19 Hi St	Dr/Pc	Tom
7097	Tom Trendy 19 Lo St	Dr/Pc	Tom
7098	Tom Trendy 20 St	Dr/Pc	Tom
7099	Tom Trendy 21 Hi St	Dr/Pc	Tom
7100	Tom Trendy 21 Mid St	Dr/Pc	Tom
7101	Tom Trendy 21 Lo St	Dr/Pc	Tom
7102	Tom Trendy 22 Mn	Dr/Pc	Tom
7103	Tom Trendy 23 St	Dr/Pc	Tom
7104	Tom Trendy 24 St	Dr/Pc	Tom
7105	Tom Trendy 25 St	Dr/Pc	Tom
7106	Tom Trendy 26 St	Dr/Pc	Tom
7107	Tom Trendy 27 Mn	Dr/Pc	Tom
7108	Tom Trendy 28 Mn	Dr/Pc	Tom
7109	Tom Trendy 29 St	Dr/Pc	Tom
7110	Tom Trendy 30 St	Dr/Pc	Tom

No.	Name	Main Category	Sub Category
7111	Tom Trendy 31 Mn	Dr/Pc	Tom
7112	Tom Trendy 32 St	Dr/Pc	Tom
7113	Cym Trendy 1 Mn	Dr/Pc	Cymbl
7114	Cym Trendy 2 Mn	Dr/Pc	Cymbl
7115	Cym Trendy 3 St	Dr/Pc	Cymbl
7116	Cym Trendy 4 St	Dr/Pc	Cymbl
7117	Cym Trendy 5 Mn	Dr/Pc	Cymbl
7118	Cym Trendy 6 Mn	Dr/Pc	Cymbl
7119	Cym Trendy 7 Mn	Dr/Pc	Cymbl
7120	Cym Trendy 8 Mn	Dr/Pc	Cymbl
7121	Cym Trendy 9 Mn	Dr/Pc	Cymbl
7122	Cym Trendy 10 Mn	Dr/Pc	Cymbl
7123	Cym Trendy 11 St	Dr/Pc	Cymbl
7124	Cym Trendy 12 St	Dr/Pc	Cymbl
7125	Cym Trendy 13 St	Dr/Pc	Cymbl
7126	Cym Trendy 14 St	Dr/Pc	Cymbl
7127	Cym Trendy 15 St	Dr/Pc	Cymbl
7128	Cym Trendy 16 St	Dr/Pc	Cymbl
7129	Cym Trendy 17 St	Dr/Pc	Cymbl
7130	Cym Trendy 18 St	Dr/Pc	Cymbl
7131	Cym Trendy 19 Mn	Dr/Pc	Cymbl
7132	Cym Trendy 20 St	Dr/Pc	Cymbl
7133	Cym Trendy 21 St	Dr/Pc	Cymbl
7134	Cym Trendy 22 St	Dr/Pc	Cymbl
7135	Cym Trendy 23 St	Dr/Pc	Cymbl
7136	Cym Trendy 24 St	Dr/Pc	Cymbl
7137	Cym Trendy 25 St	Dr/Pc	Cymbl
7138	Cym Trendy 26 St	Dr/Pc	Cymbl
7139	Cym Trendy 27 St	Dr/Pc	Cymbl
7140	Cym Trendy 28 St	Dr/Pc	Cymbl
7141	Cym Trendy 29 St	Dr/Pc	Cymbl
7142	Cym Trendy 30 St	Dr/Pc	Cymbl
7143	Cym Trendy 31 Mn	Dr/Pc	Cymbl
7144	Cym Trendy 32 Mn	Dr/Pc	Cymbl
7145	Cym Trendy 33 Mn	Dr/Pc	Cymbl
7146	Cym Trendy 34 Mn	Dr/Pc	Cymbl
7147	Cym Trendy 35 St	Dr/Pc	Cymbl
7148	Cym Trendy 36 St	Dr/Pc	Cymbl
7149	Cym Trendy 37 St	Dr/Pc	Cymbl
7150	Cym Trendy 38 St	Dr/Pc	Cymbl
7151	Cym Trendy 39 Mn	Dr/Pc	Cymbl
7152	Cym Trendy 40 Mn	Dr/Pc	Cymbl
7153	Cym Trendy 41 St	Dr/Pc	Cymbl
7154	Cym Trendy 42 Mn	Dr/Pc	Cymbl
7155	Cym Trendy 43 Mn	Dr/Pc	Cymbl
7156	Cym Trendy 44 Mn	Dr/Pc	Cymbl
7157	Cym Trendy 45 St	Dr/Pc	Cymbl
7158	Cym Trendy 46 St	Dr/Pc	Cymbl
7159	Cym Trendy 47 St	Dr/Pc	Cymbl
7160	Cym Trendy 48 St	Dr/Pc	Cymbl
7161	Cym Trendy 49 St	Dr/Pc	Cymbl
7162	Cym Trendy 50 St	Dr/Pc	Cymbl
7163	Cym Trendy 51 St	Dr/Pc	Cymbl
7164	Cym Trendy 52 St	Dr/Pc	Cymbl
7165	Cym Trendy 53 St	Dr/Pc	Cymbl
7166	Cym Trendy 54 St	Dr/Pc	Cymbl
7167	Cym Trendy 55 St	Dr/Pc	Cymbl
7168	Cym Trendy 56 St	Dr/Pc	Cymbl
7169	Cym Trendy 57 Mn	Dr/Pc	Cymbl
7170	Cym Trendy 58 Mn	Dr/Pc	Cymbl
7171	Cym Trendy 59 St	Dr/Pc	Cymbl
7172	Cym Trendy 60 St	Dr/Pc	Cymbl
7173	Cym Trendy 61 Mn	Dr/Pc	Cymbl
7174	Cym Trendy 62 St	Dr/Pc	Cymbl
7175	Cym Trendy 63 St	Dr/Pc	Cymbl
7176	Cym Trendy 64 St	Dr/Pc	Cymbl
7177	Cym Trendy 65 St	Dr/Pc	Cymbl
7178	Cym Trendy 66 St	Dr/Pc	Cymbl
7179	Cym Trendy 67 St	Dr/Pc	Cymbl
7180	Cym Trendy 68 St	Dr/Pc	Cymbl
7181	Clap Trendy 1 St	Dr/Pc	PC
7182	Clap Trendy 2 St	Dr/Pc	PC
7183	Clap Trendy 3 St	Dr/Pc	PC
7184	Clap Trendy 4 St	Dr/Pc	PC
7185	Clap Trendy 5 St	Dr/Pc	PC
7186	Clap Trendy 6 St	Dr/Pc	PC
7187	Clap Trendy 7 St	Dr/Pc	PC
7188	Clap Trendy 8 St	Dr/Pc	PC
7189	Clap Trendy 9 Mn	Dr/Pc	PC

No.	Name	Main Category	Sub Category
7190	Clap Trendy 10 St	Dr/Pc	PC
7191	Clap Trendy 11 St	Dr/Pc	PC
7192	Clap Trendy 12 Mn	Dr/Pc	PC
7193	Clap Trendy 13 Mn	Dr/Pc	PC
7194	Clap Trendy 14 St	Dr/Pc	PC
7195	Clap Trendy 15 Mn	Dr/Pc	PC
7196	Clap Trendy 16 St	Dr/Pc	PC
7197	Clap Trendy 17 St	Dr/Pc	PC
7198	Clap Trendy 18 Mn	Dr/Pc	PC
7199	Clap Trendy 19 St	Dr/Pc	PC
7200	Clap Trendy 20 St	Dr/Pc	PC
7201	Clap Trendy 21 St	Dr/Pc	PC
7202	Clap Trendy 22 Mn	Dr/Pc	PC
7203	Clap Trendy 23 St	Dr/Pc	PC
7204	Clap Trendy 24 St	Dr/Pc	PC
7205	Clap Trendy 25 St	Dr/Pc	PC
7206	Clap Trendy 26 Mn	Dr/Pc	PC
7207	Clap Trendy 27 St	Dr/Pc	PC
7208	Clap Trendy 28 St	Dr/Pc	PC
7209	Clap Trendy 29 Mn	Dr/Pc	PC
7210	Clap Trendy 30 St	Dr/Pc	PC
7211	Clap Trendy 31 St	Dr/Pc	PC
7212	Clap Trendy 32 St	Dr/Pc	PC
7213	Clap Trendy 33 St	Dr/Pc	PC
7214	Clap Trendy 34 St	Dr/Pc	PC
7215	Clap Trendy 35 St	Dr/Pc	PC
7216	Clap Trendy 36 St	Dr/Pc	PC
7217	Clap Trendy 37 St	Dr/Pc	PC
7218	Clap Trendy 38 St	Dr/Pc	PC
7219	Clap Trendy 39 St	Dr/Pc	PC
7220	Clap Trendy 40 St	Dr/Pc	PC
7221	Clap Trendy 41 St	Dr/Pc	PC
7222	Clap Trendy 42 Mn	Dr/Pc	PC
7223	Clap Trendy 43 St	Dr/Pc	PC
7224	Clap Trendy 44 St	Dr/Pc	PC
7225	Clap Trendy 45 St	Dr/Pc	PC
7226	Clap Trendy 46 St	Dr/Pc	PC
7227	Clap Trendy 47 St	Dr/Pc	PC
7228	Snap Trendy 1 St	Dr/Pc	PC
7229	Snap Trendy 2 St	Dr/Pc	PC
7230	Snap Trendy 3 St	Dr/Pc	PC
7231	Snap Trendy 4 St	Dr/Pc	PC
7232	Snap Trendy 5 St	Dr/Pc	PC
7233	Snap Trendy 6 St	Dr/Pc	PC
7234	Snap Trendy 7 St	Dr/Pc	PC
7235	Snap Trendy 8 St	Dr/Pc	PC
7236	Snap Trendy 9 St	Dr/Pc	PC
7237	Snap Trendy 10 St	Dr/Pc	PC
7238	Snap Trendy 11 St	Dr/Pc	PC
7239	Snap Trendy 12 St	Dr/Pc	PC
7240	Snap Trendy 13 St	Dr/Pc	PC
7241	Snap Trendy 14 St	Dr/Pc	PC
7242	Snap Trendy 15 St	Dr/Pc	PC
7243	Snap Trendy 16 St	Dr/Pc	PC
7244	Snap Trendy 17 St	Dr/Pc	PC
7245	Snap Trendy 18 St	Dr/Pc	PC
7246	Snap Trendy 19 St	Dr/Pc	PC
7247	Snap Trendy 20 St	Dr/Pc	PC
7248	Snap Trendy 21 St	Dr/Pc	PC
7249	PC Trendy 1 St	Dr/Pc	PC
7250	PC Trendy 2 St	Dr/Pc	PC
7251	PC Trendy 3 St	Dr/Pc	PC
7252	PC Trendy 4 Mn	Dr/Pc	PC
7253	PC Trendy 5 St	Dr/Pc	PC
7254	PC Trendy 6 Mn	Dr/Pc	PC
7255	PC Trendy 7 St	Dr/Pc	PC
7256	PC Trendy 8 St	Dr/Pc	PC
7257	PC Trendy 9 Mn	Dr/Pc	PC
7258	PC Trendy 10 St	Dr/Pc	PC
7259	PC Trendy 11 St	Dr/Pc	PC
7260	PC Trendy 12 St	Dr/Pc	PC
7261	PC Trendy 13 St	Dr/Pc	PC
7262	PC Trendy 14 St	Dr/Pc	PC
7263	PC Trendy 15 St	Dr/Pc	PC
7264	PC Trendy 16 St	Dr/Pc	PC
7265	PC Trendy 17 St	Dr/Pc	PC
7266	PC Trendy 18 Mn	Dr/Pc	PC
7267	PC Trendy 19 St	Dr/Pc	PC
7268	PC Trendy 20 Mn	Dr/Pc	PC

No.	Name	Main Category	Sub Category
7269	PC Trendy 21 St	Dr/Pc	PC
7270	PC Trendy 22 St	Dr/Pc	PC
7271	PC Trendy 23 St	Dr/Pc	PC
7272	PC Trendy 24 St	Dr/Pc	PC
7273	PC Trendy 25 Mn	Dr/Pc	PC
7274	PC Trendy 26 St	Dr/Pc	PC
7275	PC Trendy 27 St	Dr/Pc	PC
7276	PC Trendy 28 St	Dr/Pc	PC
7277	PC Trendy 29 St	Dr/Pc	PC
7278	PC Trendy 30 St	Dr/Pc	PC
7279	PC Trendy 31 St	Dr/Pc	PC
7280	PC Trendy 32 St	Dr/Pc	PC
7281	PC Trendy 33 St	Dr/Pc	PC
7282	PC Trendy 34 St	Dr/Pc	PC
7283	PC Trendy 35 Mn	Dr/Pc	PC
7284	PC Trendy 36 St	Dr/Pc	PC
7285	PC Trendy 37 St	Dr/Pc	PC
7286	PC Trendy 38 St	Dr/Pc	PC
7287	PC Trendy 39 St	Dr/Pc	PC
7288	PC Trendy 40 St	Dr/Pc	PC
7289	PC Trendy 41 St	Dr/Pc	PC
7290	PC Trendy 42 St	Dr/Pc	PC
7291	PC Trendy 43 St	Dr/Pc	PC
7292	PC Trendy 44 St	Dr/Pc	PC
7293	PC Trendy 45 St	Dr/Pc	PC
7294	PC Trendy 46 St	Dr/Pc	PC
7295	PC Trendy 47 St	Dr/Pc	PC
7296	PC Trendy 48 St	Dr/Pc	PC
7297	PC Trendy 49 Mn	Dr/Pc	PC
7298	PC Trendy 50 St	Dr/Pc	PC
7299	PC Trendy 51 St	Dr/Pc	PC
7300	PC Trendy 52 St	Dr/Pc	PC
7301	PC Trendy 53 St	Dr/Pc	PC
7302	PC Trendy 54 Mn	Dr/Pc	PC
7303	PC Trendy 55 St	Dr/Pc	PC
7304	PC Trendy 56 St	Dr/Pc	PC
7305	PC Trendy 57 St	Dr/Pc	PC
7306	PC Trendy 58 St	Dr/Pc	PC
7307	PC Trendy 59 Mn	Dr/Pc	PC
7308	PC Trendy 60 St	Dr/Pc	PC
7309	PC Trendy 61 St	Dr/Pc	PC
7310	PC Trendy 62 St	Dr/Pc	PC
7311	PC Trendy 63 St	Dr/Pc	PC
7312	PC Trendy 64 St	Dr/Pc	PC
7313	PC Trendy 65 Mn	Dr/Pc	PC
7314	PC Trendy 66 St	Dr/Pc	PC
7315	PC Trendy 67 St	Dr/Pc	PC
7316	PC Trendy 68 St	Dr/Pc	PC
7317	PC Trendy 69 St	Dr/Pc	PC
7318	PC Trendy 70 Mn	Dr/Pc	PC
7319	PC Trendy 71 St	Dr/Pc	PC
7320	PC Trendy 72 St	Dr/Pc	PC
7321	PC Trendy 73 St	Dr/Pc	PC
7322	PC Trendy 74 Mn	Dr/Pc	PC
7323	PC Trendy 75 St	Dr/Pc	PC
7324	PC Trendy 76 St	Dr/Pc	PC
7325	PC Trendy 77 St	Dr/Pc	PC
7326	PC Trendy 78 St	Dr/Pc	PC
7327	PC Trendy 79 St	Dr/Pc	PC
7328	PC Trendy 80 Mn	Dr/Pc	PC
7329	PC Trendy 81 St	Dr/Pc	PC
7330	PC Trendy 82 St	Dr/Pc	PC
7331	PC Trendy 83 Mn	Dr/Pc	PC
7332	PC Trendy 84 St	Dr/Pc	PC
7333	PC Trendy 85 St	Dr/Pc	PC
7334	PC Trendy 86 St	Dr/Pc	PC
7335	PC Trendy 87 St	Dr/Pc	PC
7336	PC Trendy 88 St	Dr/Pc	PC
7337	PC Trendy 89 Mn	Dr/Pc	PC
7338	PC Trendy 90 St	Dr/Pc	PC
7339	PC Trendy 91 St	Dr/Pc	PC
7340	PC Trendy 92 St	Dr/Pc	PC
7341	PC Trendy 93 Mn	Dr/Pc	PC
7342	PC Trendy 94 St	Dr/Pc	PC
7343	PC Trendy 95 St	Dr/Pc	PC
7344	PC Trendy 96 St	Dr/Pc	PC
7345	PC Trendy 97 St	Dr/Pc	PC
7346	PC Trendy 98 St	Dr/Pc	PC
7347	PC Trendy 99 St	Dr/Pc	PC
7348	PC Trendy 100 St	Dr/Pc	PC
7349	PC Trendy 101 St	Dr/Pc	PC
7350	PC Trendy 102 St	Dr/Pc	PC
7351	PC Trendy 103 Mn	Dr/Pc	PC
7352	PC Trendy 104 St	Dr/Pc	PC
7353	PC Trendy 105 Mn	Dr/Pc	PC
7354	PC Trendy 106 St	Dr/Pc	PC
7355	PC Trendy 107 St	Dr/Pc	PC
7356	PC Trendy 108 St	Dr/Pc	PC
7357	PC Trendy 109 St	Dr/Pc	PC
7358	PC Trendy 110 Mn	Dr/Pc	PC
7359	PC Trendy 111 Mn	Dr/Pc	PC
7360	PC Trendy 112 St	Dr/Pc	PC
7361	PC Trendy 113 St	Dr/Pc	PC
7362	PC Trendy 114 St	Dr/Pc	PC
7363	PC Trendy 115 Mn	Dr/Pc	PC
7364	PC Trendy 116 Mn	Dr/Pc	PC
7365	PC Trendy 117 St	Dr/Pc	PC
7366	PC Trendy 118 St	Dr/Pc	PC
7367	PC Trendy 119 St	Dr/Pc	PC
7368	PC Trendy 120 St	Dr/Pc	PC
7369	PC Trendy 121 St	Dr/Pc	PC
7370	PC Trendy 122 St	Dr/Pc	PC
7371	PC Trendy 123 St	Dr/Pc	PC
7372	PC Trendy 124 Mn	Dr/Pc	PC
7373	PC Trendy 125 St	Dr/Pc	PC
7374	PC Trendy 126 St	Dr/Pc	PC
7375	PC Trendy 127 St	Dr/Pc	PC
7376	PC Trendy 128 St	Dr/Pc	PC
7377	PC Trendy 129 St	Dr/Pc	PC
7378	PC Trendy 130 St	Dr/Pc	PC
7379	PC Trendy 131 St	Dr/Pc	PC
7380	PC Trendy 132 St	Dr/Pc	PC
7381	PC Trendy 133 St	Dr/Pc	PC
7382	PC Trendy 134 St	Dr/Pc	PC
7383	PC Trendy 135 St	Dr/Pc	PC
7384	PC Trendy 136 St	Dr/Pc	PC
7385	PC Trendy 137 St	Dr/Pc	PC
7386	PC Trendy 138 St	Dr/Pc	PC
7387	PC Trendy 139 St	Dr/Pc	PC
7388	PC Trendy 140 St	Dr/Pc	PC
7389	PC Trendy 141 St	Dr/Pc	PC
7390	PC Trendy 142 St	Dr/Pc	PC
7391	PC Trendy 143 St	Dr/Pc	PC
7392	PC Trendy 144 St	Dr/Pc	PC
7393	PC Trendy 145 St	Dr/Pc	PC
7394	PC Trendy 146 St	Dr/Pc	PC
7395	PC Trendy 147 Mn	Dr/Pc	PC
7396	PC Trendy 148 St	Dr/Pc	PC
7397	PC Trendy 149 St	Dr/Pc	PC
7398	PC Trendy 150 St	Dr/Pc	PC
7399	PC Trendy 151 St	Dr/Pc	PC
7400	PC Trendy 152 St	Dr/Pc	PC
7401	PC Trendy 153 St	Dr/Pc	PC
7402	PC Trendy 154 St	Dr/Pc	PC
7403	PC Trendy 155 St	Dr/Pc	PC
7404	PC Trendy 156 St	Dr/Pc	PC
7405	PC Trendy 157 St	Dr/Pc	PC
7406	PC Trendy 158 Mn	Dr/Pc	PC
7407	PC Trendy 159 Mn	Dr/Pc	PC
7408	PC Trendy 160 St	Dr/Pc	PC
7409	PC Trendy 161 Mn	Dr/Pc	PC
7410	PC Trendy 162 St	Dr/Pc	PC
7411	PC Trendy 163 St	Dr/Pc	PC
7412	PC Trendy 164 Mn	Dr/Pc	PC
7413	PC Trendy 165 St	Dr/Pc	PC
7414	PC Trendy 166 St	Dr/Pc	PC
7415	PC Trendy 167 Mn	Dr/Pc	PC
7416	PC Trendy 168 St	Dr/Pc	PC
7417	PC Trendy 169 St	Dr/Pc	PC
7418	PC Trendy 170 St	Dr/Pc	PC
7419	PC Trendy 171 St	Dr/Pc	PC
7420	PC Trendy 172 St	Dr/Pc	PC
7421	PC Trendy 173 St	Dr/Pc	PC
7422	PC Trendy 174 St	Dr/Pc	PC
7423	PC Trendy 175 St	Dr/Pc	PC
7424	PC Trendy 176 St	Dr/Pc	PC
7425	PC Trendy 177 St	Dr/Pc	PC
7426	PC Trendy 178 St	Dr/Pc	PC
7427	PC Trendy 179 St	Dr/Pc	PC
7428	PC Trendy 180 St	Dr/Pc	PC
7429	PC Trendy 181 St	Dr/Pc	PC
7430	PC Trendy 182 St	Dr/Pc	PC
7431	PC Trendy 183 Mn	Dr/Pc	PC
7432	PC Trendy 184 St	Dr/Pc	PC
7433	PC Trendy 185 St	Dr/Pc	PC
7434	PC Trendy 186 St	Dr/Pc	PC
7435	PC Trendy 187 St	Dr/Pc	PC
7436	PC Trendy 188 St	Dr/Pc	PC
7437	PC Trendy 189 St	Dr/Pc	PC
7438	PC Trendy 190 St	Dr/Pc	PC
7439	PC Trendy 191 St	Dr/Pc	PC
7440	PC Trendy 192 St	Dr/Pc	PC
7441	PC Trendy 193 St	Dr/Pc	PC
7442	PC Trendy 194 St	Dr/Pc	PC
7443	PC Trendy 195 St	Dr/Pc	PC
7444	PC Trendy 196 St	Dr/Pc	PC
7445	PC Trendy 197 St	Dr/Pc	PC
7446	PC Trendy 198 St	Dr/Pc	PC
7447	PC Trendy 199 Mn	Dr/Pc	PC
7448	FX Trendy 1 St	S.EFX	SE
7449	FX Trendy 2 Mn	S.EFX	SE
7450	FX Trendy 3 Mn	S.EFX	SE
7451	FX Trendy 4 Mn	S.EFX	SE
7452	FX Trendy 5 Mn	S.EFX	SE
7453	FX Trendy 6 Mn	S.EFX	SE
7454	FX Trendy 7 Mn	S.EFX	SE
7455	FX Trendy 8 Mn	S.EFX	SE
7456	FX Trendy 9 Mn	S.EFX	SE
7457	FX Trendy 10 St	S.EFX	SE
7458	FX Trendy 11 St	S.EFX	SE
7459	FX Trendy 12 St	S.EFX	SE
7460	FX Trendy 13 Mn	S.EFX	SE
7461	FX Trendy 14 St	S.EFX	SE
7462	FX Trendy 15 Mn	S.EFX	SE
7463	FX Trendy 16 Mn	S.EFX	SE
7464	FX Trendy 17 Mn	S.EFX	SE
7465	FX Trendy 18 Mn	S.EFX	SE
7466	FX Trendy 19 Mn	S.EFX	SE
7467	FX Trendy 20 Mn	S.EFX	SE
7468	FX Trendy 21 Mn	S.EFX	SE
7469	FX Trendy 22 Mn	S.EFX	SE
7470	FX Trendy 23 Mn	S.EFX	SE
7471	FX Trendy 24 Mn	S.EFX	SE
7472	FX Trendy 25 St	S.EFX	SE
7473	FX Trendy 26 Mn	S.EFX	SE
7474	FX Trendy 27 St	S.EFX	SE
7475	FX Trendy 28 St	S.EFX	SE
7476	FX Trendy 29 St	S.EFX	SE
7477	FX Trendy 30 St	S.EFX	SE
7478	FX Trendy 31 St	S.EFX	SE
7479	FX Trendy 32 St	S.EFX	SE
7480	FX Trendy 33 St	S.EFX	SE
7481	FX Trendy 34 St	S.EFX	SE
7482	FX Trendy 35 St	S.EFX	SE
7483	FX Trendy 36 St	S.EFX	SE
7484	FX Trendy 37 St	S.EFX	SE
7485	FX Trendy 38 St	S.EFX	SE
7486	FX Trendy 39 St	S.EFX	SE
7487	FX Trendy 40 St	S.EFX	SE
7488	FX Trendy 41 St	S.EFX	SE
7489	FX Trendy 42 St	S.EFX	SE
7490	FX Trendy 43 St	S.EFX	SE
7491	FX Trendy 44 Mn	S.EFX	SE
7492	FX Trendy 45 Mn	S.EFX	SE
7493	FX Trendy 46 Mn	S.EFX	SE
7494	FX Trendy 47 Mn	S.EFX	SE
7495	FX Trendy 48 St	S.EFX	SE
7496	FX Trendy 49 Mn	S.EFX	SE
7497	FX Trendy 50 St	S.EFX	SE
7498	FX Trendy 51 St	S.EFX	SE
7499	FX Trendy 52 St	S.EFX	SE
7500	FX Trendy 53 Mn	S.EFX	SE
7501	FX Trendy 54 Mn	S.EFX	SE
7502	FX Trendy 55 Mn	S.EFX	SE
7503	FX Trendy 56 Mn	S.EFX	SE
7504	FX Trendy 57 Mn	S.EFX	SE
7505	FX Trendy 58 Mn	S.EFX	SE
7506	FX Trendy 59 Mn	S.EFX	SE
7507	FX Trendy 60 St	S.EFX	SE
7508	FX Trendy 61 St	S.EFX	SE
7509	FX Trendy 62 St	S.EFX	SE
7510	FX Trendy 63 St	S.EFX	SE
7511	FX Trendy 64 St	S.EFX	SE
7512	FX Trendy 65 St	S.EFX	SE
7513	FX Trendy 66 St	S.EFX	SE
7514	FX Trendy 67 St	S.EFX	SE
7515	FX Trendy 68 St	S.EFX	SE
7516	FX Trendy 69 St	S.EFX	SE
7517	FX Trendy 70 St	S.EFX	SE
7518	FX Trendy 71 St	S.EFX	SE
7519	FX Trendy 72 St	S.EFX	SE
7520	FX Trendy 73 St	S.EFX	SE
7521	FX Trendy 74 St	S.EFX	SE
7522	FX Trendy 75 St	S.EFX	SE
7523	FX Trendy 76 St	S.EFX	SE
7524	FX Trendy 77 St	S.EFX	SE
7525	FX Trendy 78 St	S.EFX	SE
7526	FX Trendy 79 St	S.EFX	SE
7527	FX Trendy 80 St	S.EFX	SE
7528	FX Trendy 81 St	S.EFX	SE
7529	FX Trendy 82 St	S.EFX	SE
7530	FX Trendy 83 St	S.EFX	SE
7531	FX Trendy 84 St	S.EFX	SE
7532	FX Trendy 85 Mn	S.EFX	SE
7533	FX Trendy 86 St	S.EFX	SE
7534	FX Trendy 87 Mn	S.EFX	SE
7535	FX Trendy 88 Mn	S.EFX	SE
7536	FX Trendy 89 Mn	S.EFX	SE
7537	FX Trendy 90 Mn	S.EFX	SE
7538	FX Trendy 91 Mn	S.EFX	SE
7539	FX Trendy 92 St	S.EFX	SE
7540	FX Trendy 93 St	S.EFX	SE
7541	FX Trendy 94 Mn	S.EFX	SE
7542	FX Trendy 95 Mn	S.EFX	SE
7543	FX Trendy 96 St	S.EFX	SE
7544	FX Trendy 97 Mn	S.EFX	SE
7545	FX Trendy 98 Mn	S.EFX	SE
7546	FX Trendy 99 Mn	S.EFX	SE
7547	FX Trendy 100 St	S.EFX	SE
7548	FX Trendy 101 St	S.EFX	SE
7549	FX Trendy 102 St	S.EFX	SE
7550	FX Trendy 103 St	S.EFX	SE
7551	FX Trendy 104 St	S.EFX	SE
7552	FX Trendy 105 St	S.EFX	SE
7553	FX Trendy 106 St	S.EFX	SE
7554	FX Trendy 107 St	S.EFX	SE
7555	FX Trendy 108 St	S.EFX	SE
7556	FX Trendy 109 St	S.EFX	SE
7557	FX Trendy 110 St	S.EFX	SE
7558	FX Trendy 111 St	S.EFX	SE
7559	FX Trendy 112 St	S.EFX	SE
7560	FX Trendy 113 St	S.EFX	SE
7561	FX Trendy 114 St	S.EFX	SE
7562	FX Trendy 115 St	S.EFX	SE
7563	FX Trendy 116 St	S.EFX	SE
7564	FX Trendy 117 St	S.EFX	SE
7565	FX Trendy 118 St	S.EFX	SE
7566	FX Trendy 119 Mn	S.EFX	SE
7567	FX Trendy 120 St	S.EFX	SE
7568	FX Trendy 121 St	S.EFX	SE
7569	FX Trendy 122 St	S.EFX	SE
7570	FX Trendy 123 Mn	S.EFX	SE
7571	FX Trendy 124 St	S.EFX	SE
7572	FX Trendy 125 St	S.EFX	SE
7573	FX Trendy 126 St	S.EFX	SE
7574	FX Trendy 127 St	S.EFX	SE
7575	FX Trendy 128 St	S.EFX	SE
7576	FX Trendy 129 St	S.EFX	SE
7577	FX Trendy 130 St	S.EFX	SE
7578	FX Trendy 131 St	S.EFX	SE
7579	FX Trendy 132 St	S.EFX	SE
7580	FX Trendy 133 Mn	S.EFX	SE
7581	FX Trendy 134 St	S.EFX	SE
7582	FX Trendy 135 St	S.EFX	SE
7583	FX Trendy 136 St	S.EFX	SE
7584	FX Trendy 137 St	S.EFX	SE

No.	Name	Main Category	Sub Category
7585	FX Trendy 138 Mn	S.EFX	SE
7586	FX Trendy 139 Mn	S.EFX	SE
7587	FX Trendy 140 St	S.EFX	SE
7588	FX Trendy 141 Mn	S.EFX	SE
7589	FX Trendy 142 St	S.EFX	SE
7590	FX Trendy 143 St	S.EFX	SE
7591	FX Trendy 144 St	S.EFX	SE
7592	FX Trendy 145 St	S.EFX	SE
7593	FX Trendy 146 St	S.EFX	SE
7594	FX Trendy 147 Mn	S.EFX	SE
7595	FX Trendy 148 Mn	S.EFX	SE
7596	FX Trendy 149 Mn	S.EFX	SE
7597	FX Trendy 150 St	S.EFX	SE
7598	FX Trendy 151 St	S.EFX	SE
7599	FX Trendy 152 St	S.EFX	SE
7600	FX Trendy 153 St	S.EFX	SE
7601	FX Trendy 154 St	S.EFX	SE
7602	FX Trendy 155 St	S.EFX	SE
7603	FX Trendy 156 St	S.EFX	SE
7604	FX Trendy 157 St	S.EFX	SE
7605	FX Trendy 158 St	S.EFX	SE
7606	FX Trendy 159 St	S.EFX	SE
7607	FX Trendy 160 St	S.EFX	SE
7608	FX Trendy 161 St	S.EFX	SE
7609	FX Trendy 162 Mn	S.EFX	SE
7610	FX Trendy 163 St	S.EFX	SE
7611	FX Trendy 164 St	S.EFX	SE
7612	FX Trendy 165 St	S.EFX	SE
7613	FX Trendy 166 St	S.EFX	SE
7614	FX Trendy 167 St	S.EFX	SE
7615	FX Trendy 168 St	S.EFX	SE
7616	FX Trendy 169 St	S.EFX	SE
7617	FX Trendy 170 St	S.EFX	SE
7618	FX Trendy 171 St	S.EFX	SE
7619	FX Trendy 172 St	S.EFX	SE
7620	FX Trendy 173 St	S.EFX	SE
7621	CFX 2022 v01	Piano	Piano
7622	CFX 2022 v02	Piano	Piano
7623	CFX 2022 v03	Piano	Piano
7624	CFX 2022 v04	Piano	Piano
7625	CFX 2022 v05	Piano	Piano
7626	CFX 2022 v06	Piano	Piano
7627	CFX 2022 v07	Piano	Piano
7628	CFX 2022 v08	Piano	Piano
7629	CFX 2022 KeyOff	Piano	Piano
7630	CP80 Stage 1	Keys	Other
7631	CP80 Stage 2	Keys	Other
7632	CP80 Stage 3	Keys	Other
7633	CP80 Stage 4	Keys	Other
7634	CP80 Stage 5	Keys	Other
7635	CP80 Stage KeyOff	Keys	Other
7636	ClavD6 CA Red KOn 1	Keys	Clavi
7637	ClavD6 CA Red KOn 2	Keys	Clavi
7638	ClavD6 CA Red KOn 3	Keys	Clavi
7639	ClavD6 CA Red KOn 4	Keys	Clavi
7640	ClavD6 CA Red KOn 5	Keys	Clavi
7641	ClavD6 CA Red KOff	Keys	Clavi
7642	ClavD6 DA Red KOn 1	Keys	Clavi
7643	ClavD6 DA Red KOn 2	Keys	Clavi
7644	ClavD6 DA Red KOn 3	Keys	Clavi
7645	ClavD6 DA Red KOn 4	Keys	Clavi
7646	ClavD6 DA Red KOn 5	Keys	Clavi
7647	ClavD6 DA Red KOff	Keys	Clavi

Live Set List

Best of MODX M 1

		Perf Name	Slot Name	Color
1		CFX Concert	A.PIANO CFX	Blue
2		Warm Soft SynStr PAT	STRINGS Ensemble	Lime
3		Ostinato Stacc MW/SK	STRINGS Ensemble	Lime
4		Cinema Action Riser	SOUND FX	Cream
5		CFX2	A.PIANO CFX2 ShimRv	Blue
6		Huge Analogue Bass	SYN BASS	Beige
7		Dystopian Brass	BRASS Ensemble	Sakura
8		Wave Folder Sync	SYN LEAD AN-X	Yellow
9		Hamburg Grand	A.PIANO HamburgGrand	Blue
10		CS80+Spectra	SYN PAD	Pink
11		Theme 1982	A.GUITAR + SYN PAD	Azure
12		Warm Me Up	BRASS Ensemble	Sakura
13		Imperial	A.PIANO Imperial	Blue
14		Turn Up	SYN LEAD w/ ARP	Yellow
15		Analog String Ensemb	STRINGS Ensemble	Lime
16		Arpy Dreams	SYN COMP w/ ARP	Purple

Best of MODX M 2

		Perf Name	Slot Name	Color
1		Rd 78 Natural Drive	E.PIANO RD	Blue
2		Sweet Synths	BRASS Ensemble	Sakura
3		Cinematic Flutes	WOODWIND + SYN PAD	Sakura
4		Is this a Pad?	SYN PAD AN-X	Pink
5		Warm CP80 SySpLA	E.PIANO CP80 SySpLA	Blue
6		TouchFilter Lead PAT	SYN LEAD	Yellow
7		Apollo 2022 X PAT	SYN PAD	Pink
8		SK Sync Ripper	SYN LEAD SmartMorph	Yellow
9		Soft Compin Organ	ORGAN	Orange
10		B*A*PWM MultiPad	SYN PAD AN-X	Pink
11		North Station	MUSICAL FX	Cream
12		Liberty Shine	M.EFX SmartMorph	Cream
13		First Four Drive	ORGAN	Orange
14		Warmy AN SmtMophPAD	SYN PAD SmartMorph	Pink
15		Nefarious SW1 & 2	SOUND FX	Cream
16		AN-X Circular Minds	MUSICAL FX w/ M.SEQ	Cream

Best of V3.0

		Perf Name	Slot Name	Color
1		CS80 Ring Mod Pad	SYN PAD	Pink
2		Clavi DA Amp	CLAVI	Blue
3		GS1 Vibraphones	C.PERC FM	Mint
4		Voyage 1982	SYN COMP w/ ARP	Purple
5		Dystopian CS80 Drone	SYN COMP w/ ARP	Purple
6		CFX Wide Spreaded	A.PIANO CFX	Blue
7		GS1 ElectricPiano M	E.PIANO FM	Blue
8		RichAnStr A.Touch DA	STRINGS Ensemble	Lime
9		CsRingMod Choir DA	SYN PAD Choir	Pink
10		Soft Mover	SYN PAD	Pink
11		GS1 MM-Piano	E.PIANO FM	Blue
12		AutoChillMachine DA	SOUND FX w/ M.SEQ	Cream
13		Ring Tines	E.PIANO RD	Blue
14		Vintage GS Guitar	E.GUITAR FM	Azure
15		GS Brass Gallery XL	BRASS FM SmartMorph	Sakura
16		Synths for Ludwig	SYN COMP	Purple

Piano

		Perf Name	Slot Name	Color
1		Imperial	A.PIANO Imperial	Blue
2		Mellow Hamburg Grand	A.PIANO HamburgGrand	Blue
3		CFX + FM EP	A.PIANO CFX + FM EP	Blue
4		C7 Grand	A.PIANO C7	Blue
5		S700 for Montage	A.PIANO S700	Blue
6		Piano Rock S6	A.PIANO S6	Blue
7		Nashville C3	A.PIANO C3	Blue
8		U1 Upright	A.PIANO Upright	Blue
9		Felt Piano	A.PIANO Upright	Blue
10		Fairy Tale Piano	A.PIANO + STRINGS	Blue
11		Kings Tea	A.PIANO + STRINGS	Blue
12		CFX & Orch 2	A.PIANO CFX+STRINGS	Blue
13		Dream Grand	A.PIANO + SYN PAD	Blue
14		ARP Piano Concerto	A.PIANO w/ ARP	Blue
15		GrandPf & AN-X SynPd	A.PIANO + SYN PAD	Blue
16		Dystopian Piano	A.PIANO w/ M.SEQ	Blue

Keyboard 1

		Perf Name	Slot Name	Color
1		Sparkles EP	E.PIANO RD	Blue
2		73 Tine EP	E.PIANO RD	Blue
3		74 Phase	E.PIANO RD	Blue
4		Rd 78 & Pad	E.PIANO RD+SYN PAD	Blue
5		Tines 78	E.PIANO RD	Blue
6		80s Boosted	E.PIANO RD	Blue
7		Musky EP	E.PIANO RD	Blue
8		Golden EP	E.PIANO RD	Blue
9		Wr Wide	E.PIANO WR	Blue
10		Wr Warm Funk	E.PIANO WR	Blue
11		70s Rock Wr	E.PIANO WR	Blue
12		AhrAml	E.PIANO	Blue
13		Chordz 2 Chill 2	E.PIANO	Blue
14		Trippy Steps Split	CHILL OUT Style ARP	Lilac
15		EP-onymous	CHILL OUT Style ARP	Lilac
16		Schmusin'	R&B Style ARP	Lilac

Keyboard 2

		Perf Name	Slot Name	Color
1		AN-X Syn E.Piano PAT	SYN PIANO AN-X	Blue
2		French Tines	E.PIANO FM	Blue
3		FM - What else	E.PIANO FM w/ M.SEQ	Blue
4		FM Heavens Harp	E.PIANO FM	Blue
5		Clavi Amp Gallery	CLAVI	Blue
6		Glavinet	E.PIANO FM	Blue
7		AN-X<>FM Clavi	CLAVI AN-X<>FM	Blue
8		AN-X Pulse Designer	E.PIANO AN-X	Blue
9		The Basics +	ORGAN	Orange
10		Lead Drawbars	ORGAN	Orange
11		Cool Drawbar Setting	ORGAN	Orange
12		AN-X Synth Organ PAT	ORGAN AN-X	Orange
13		Overdriven Organ +	ORGAN	Orange
14		Gospel to Reggae +	ORGAN	Orange
15		Cathedral	ORGAN	Orange
16		Tempo Bars	ORGAN w/ M.SEQ	Orange

AN-X

	Perf Name	Slot Name	Color
1	Slow Vintage Brass	BRASS AN-X	Sakura
2	Warming Pads	SYN PAD AN-X	Pink
3	Good Boy	SYN BASS AN-X	Beige
4	Dual Super SAW PAT	SYN COMP AN-X	Purple
5	OB Power Syn Brass	BRASS AN-X	Sakura
6	One Of Those PAT	SYN PAD AN-X	Pink
7	Funky Wet Bass	SYN BASS AN-X	Beige
8	Dance Supersaw	SYN COMP AN-X	Purple
9	Past Virtuosos	SYN LEAD AN-X	Yellow
10	Con Artists	SYN COMP w/ ARP	Purple
11	British Wah	SYN LEAD AN-X	Yellow
12	Dyno Dance	SYN LEAD AN-X	Yellow
13	Ravemaster	SYN LEAD AN-X	Yellow
14	Monster Sub	SYN BASS AN-X	Beige
15	Play The Release	SYN LEAD AN-X	Yellow
16	Autumn	SYN COMP AN-X	Purple

Motion Control

	Perf Name	Slot Name	Color
1	CS80 Dystopian	SYN PAD AN-X	Pink
2	Swirly Q	SYN PAD w/ Auto SK	Pink
3	DX1 Full Synth Brass	BRASS FM	Sakura
4	B*A*PWM MultiPad	SYN PAD AN-X	Pink
5	Breaking Point	MUSICAL FX	Cream
6	Switcher	M.EFX w/ Auto SK	Cream
7	Whale Runner	SYN PAD	Pink
8	Stereo Pumping	SYN PAD w/ ARP	Pink
9	Cycles	AN-X PAD w/ M.SEQ	Pink
10	The Doom Is Near	MUSICAL FX AN-X	Cream
11	24 OP Organism	M.EFX FM w/ M.SEQ	Cream
12	SuperGlider MW DA	M.EFX FM w/ Auto SK	Cream
13	Hardware Vox	CHOIR	Pink
14	FM Meditator	MUSICAL FX FM	Cream
15	Gong Pad	SYN PAD FM	Pink
16	Big Loud Sky	M.EFX w/ M.SEQ+ARP	Cream

FM-X

	Perf Name	Slot Name	Color
1	DX1 Synth Brass PAT	BRASS FM	Sakura
2	FM Piano DA	E.PIANO FM	Blue
3	Morphalux	SYN PAD FM w/ M.SEQ	Pink
4	West Bass	SYN BASS FM	Beige
5	Super Bass Clav	CLAVI FM	Blue
6	Colder Pad	SYN PAD FM	Pink
7	Vintage Keys	E.PIANO FM	Blue
8	Harmonix Helix	SYN PAD FM w/ M.SEQ	Pink
9	FM Perc Organ 1 +	ORGAN FM	Orange
10	Yes, ummm... FM !	SYN PAD FM w/ AutoSK	Pink
11	DX1 Double Horn Sect	BRASS FM	Sakura
12	FM Sweet Pad	SYN PAD FM	Pink
13	DX1 African Mallets	SYN COMP FM	Purple
14	Ahh	SYN LEAD FM	Yellow
15	Silverboxx	SYN BASS FM	Beige
16	Shred Bass	SYN BASS FM w/ ARP	Beige

Lo-Fi

	Perf Name	Slot Name	Color
1	Atebits Kit Showcase	ELECTRO Style ARP	Red
2	CFX Old Tapes	A.PIANO CFX + PAD	Blue
3	Video Game Octaves	MUSICAL FX AN-X	Cream
4	T Strings	STRINGS Ensemble	Lime
5	SciFi Pad	SYN PAD AN-X	Pink
6	LoFi Tines	E.PIANO RD	Blue
7	Bubble Arps	SYNCOMP w/ M.SEQ+ARP	Purple
8	Switcher	MUSICAL FX w/ AutoSK	Cream
9	LoFi Basement Piano	A.PIANO	Blue
10	Press Start	SYN COMP AN-X	Purple
11	Harp Hop	HIP HOP Style ARP	Red
12	Tracker Showcase	D&B Style ARP	Red
13	Wr Tapedeck	E.PIANO WR	Blue
14	C-Tonix	SYN PAD	Pink
15	Icecream	MUSICAL FX w/ AutoSK	Cream
16	Popcorn	SYN COMP w/ Auto SK	Purple

Hybrid Synth

	Perf Name	Slot Name	Color
1	Beauty Full	SYN COMP	Purple
2	AN-X/FM MetalAtkBass	SYN BASS	Beige
3	Breathe In	MUSICAL FX w/ M.SEQ	Cream
4	AN-X<>FM Clavi	CLAVI AN-X<>FM	Blue
5	Warm Soft SynStr PAT	STRINGS Ensemble	Lime
6	GnarLeed AT+MW FdBak	SYN LEAD AN-X	Yellow
7	Subtle XMods	C.PERC w/ AutoSK	Cream
8	Sunset Colors	SYN PAD w/ M.SEQ	Pink
9	SY Dreaming	SYN PAD w/ AutoSK	Pink
10	AN-X/FM NoiseAtkBass	SYN BASS	Beige
11	Complete Syn Organ	ORGAN	Orange
12	Soul Pad	SYN PAD	Pink
13	Ascension	SYN PAD w/ M.SEQ	Pink
14	Cinema Action Riser	SOUND FX	Cream
15	Smoothed Mosaic PAT	SYN PAD w/ M.SEQ	Pink
16	Open Bass	GARAGE Style ARP	Red

Cinematic

	Perf Name	Slot Name	Color
1	CS80+Spectra	SYN PAD	Pink
2	AN-X Opening SFX PAT	SOUND FX AN-X	Cream
3	Cinema Action Riser	SOUND FX	Cream
4	Trailer Toys	MUSICAL FX w/ ARP	Cream
5	Elysion	MUSICAL FX w/ ARP	Cream
6	Cinematic Flutes	WOODWIND + SYN PAD	Sakura
7	Spiral Feedbacker	SOUND FX	Cream
8	Hi/Mid/Lo Rototoms	DRUM/PERC	Green
9	Danger Zone	SYN PAD AN-X	Pink
10	Gong Pad	SYN PAD FM	Pink
11	InsideTheWormhole	SOUND FX	Cream
12	Bell Tree & Chimes	DRUM/PERC	Green
13	24 OP Organism	MUSICAL FX FM	Cream
14	Growing Spirals	MUSICAL FX AN-X	Cream
15	Cosmoklavier	M.EFX w/ M.SEQ+ARP	Cream
16	Thunderous Rotos	DRUM/PERC	Green

Orchestra

	Perf Name	Slot Name	Color
1	Cinema Str & Brass	STRINGS Ensemble	Lime
2	More Chester	BRASS Ensemble	Sakura
3	Semi Finale	BRASS Ensemble	Sakura
4	Light-Hearted Orch	STRINGS Ensemble	Lime
5	Cinema Str MW Oct	STRINGS Ensemble	Lime
6	Cinema Seattle Str	STRINGS Ensemble	Lime
7	Cinema Str Trem MW	STRINGS Ensemble	Lime
8	Cinema Str Spic MW	STRINGS Ensemble	Lime
9	Pizzicato Strings	STRINGS Ensemble	Lime
10	Fiery Spiccato	STRINGS Ensemble	Lime
11	Romantico	STRINGS Ensemble	Lime
12	Concert Harp	STRINGS	Lime
13	Bach o' Roll	STRINGS Ens w/ ARP	Lime
14	Pastoral	STRINGS Ens w/ ARP	Lime
15	13 Orch. Cymbals	DRUM/PERC	Green
16	Requiem	STRINGS Ens w/ ARP	Lime

Drum

	Perf Name	Slot Name	Color
1	Straight Dance Kit	DRUM/PERC	Green
2	Airy Chill Kit	DRUM/PERC	Green
3	Tricky Hip Hop Kit	DRUM/PERC	Green
4	Round Robin Timps	DRUM/PERC	Green
5	Output	DANCE Style ARP	Red
6	80s Drum Machine Kit	DANCE Style ARP	Red
7	Trap City Kit	CHILL OUT Style ARP	Lilac
8	Gran Cassas & Drums	DRUM/PERC	Green
9	Analogue Drum Machin	DANCE Style ARP	Red
10	Neo Disco Kit	FUNK Style ARP	Red
11	Goliath Trap Kit	HIP HOP Style ARP	Lilac
12	Orchestral Snares +	DRUM/PERC	Green
13	Rytmobox	CHILL OUT Style ARP	Lilac
14	AN-X Syn Multi-Drum	DRUM/PERC AN-X	Green
15	The Flashbulb Kit	DRUM/PERC	Green
16	More Trailer Toys	SOUND FX w/ M.SEQ	Cream

Brass

	Perf Name	Slot Name	Color
1	Dystopian Brass	BRASS Ensemble	Sakura
2	PopHorns Dyn Shake	BRASS Ensemble	Sakura
3	Big Band Ballad	BRASS Ensemble	Sakura
4	Section Brass	BRASS Ensemble	Sakura
5	Gothic Choir & Brass	BRASS + CHOIR	Sakura
6	Inauguration	WOODWIND Ensemble	Sakura
7	Big Band Section	BRASS Ensemble	Sakura
8	Fugue in D Minor	BAROQUE Style ARP	Lilac
9	Sweet Synths	BRASS AN-X	Sakura
10	Vampire Brass	BRASS AN-X	Sakura
11	AN-X Fat Vintage	BRASS AN-X	Sakura
12	AN-X PW Brass PAT	BRASS AN-X	Sakura
13	CS80 Structure PAT	BRASS AN-X	Sakura
14	OB Power Syn Brass	BRASS AN-X	Sakura
15	DX1 Full Synth Brass	BRASS FM	Sakura
16	Hiriser	BRASS AN-X	Sakura

Guitar/Bass

	Perf Name	Slot Name	Color
1	American Steel Duo	A.GUITAR	Azure
2	Hip-HopNylonGuitar	A.GUITAR	Azure
3	Nylon Dreams	A.GUITAR + SYN PAD	Azure
4	Strummin'&Hummin'	POP Style ARP	Red
5	8 Amps and a TC	E.GUITAR	Azure
6	Mondo Distorto AT	E.GUITAR FM	Azure
7	Comp Hero	E.GUITAR	Azure
8	Faux Fretless	E.BASS	Beige
9	AN-X/FM MetalAtkBass	SYN BASS	Beige
10	AN-X/FM NoiseAtkBass	SYN BASS	Beige
11	FM Bass Gallery XL	SYN BASS FM	Beige
12	Modeled	SYN BASS FM	Beige
13	AN-X 3 Osc Attack	SYN BASS AN-X	Beige
14	AN-X Gritty Osc	SYN BASS AN-X	Beige
15	Super AN-X Arp Bass	SYN BASS AN-X w/ARP	Beige
16	AN-X Sync Bass	SYN BASS AN-X	Beige

Arpeggio Type List

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Piano	Rock	1	MA_70s Rock _N	4 / 4	2	130			Acoustic Piano
Piano	Rock	2	MB_70s Rock _N	4 / 4	1	130			:
Piano	Rock	3	MC_70s Rock	4 / 4	2	130			:
Piano	Rock	4	MD_70s Rock	4 / 4	4	130			:
Piano	Rock	5	FA_70s Rock	4 / 4	1	130			:
Piano	Rock	6	FB_70s Rock _N	4 / 4	1	130			:
Piano	Rock	7	FC_70s Rock _N	4 / 4	2	130			:
Piano	Rock	8	MA_Rockn Pf	4 / 4	4	130			:
Piano	Rock	9	MA_Rock & Roll _C	4 / 4	4	172			:
Piano	Rock	10	MB_Rock & Roll _C	4 / 4	4	172			:
Piano	Rock	11	MC_Rock & Roll _C	4 / 4	4	172			:
Piano	Rock	12	FA_Rock & Roll _C	4 / 4	1	172			:
Piano	Rock	13	FB_Rock & Roll _C	4 / 4	1	172			:
Piano	Rock	14	FC_Rock & Roll _C	4 / 4	1	172			:
Piano	Rock	15	BA_Rock & Roll _C	4 / 4	1	172			:
Piano	Rock	16	EA_Rock & Roll _C	4 / 4	5	172			:
Piano	Rock	17	EB_Rock & Roll _C	4 / 4	6	172			:
Piano	Pop Rock	18	MA_Row Boat _N	4 / 4	1	130			:
Piano	Pop Rock	19	MA_Pop Shuffle1 _C	4 / 4	4	180			:
Piano	Pop Rock	20	MB_Pop Shuffle1 _C	4 / 4	4	180			:
Piano	Pop Rock	21	MC_Pop Shuffle1 _C	4 / 4	4	180			:
Piano	Pop Rock	22	MD_Pop Shuffle1 _C	4 / 4	4	180			:
Piano	Pop Rock	23	FA_Pop Shuffle1 _C	4 / 4	1	180			:
Piano	Pop Rock	24	FB_Pop Shuffle1 _C	4 / 4	1	180			:
Piano	Pop Rock	25	FC_Pop Shuffle1 _C	4 / 4	1	180			:
Piano	Pop Rock	26	FD_Pop Shuffle1 _C	4 / 4	1	180			:
Piano	Pop Rock	27	EA_Pop Shuffle1 _C	4 / 4	5	180			:
Piano	Pop Rock	28	MA_Swing MOR Pop _C	4 / 4	4	94			:
Piano	Pop Rock	29	MB_Swing MOR Pop _C	4 / 4	4	94			:
Piano	Pop Rock	30	MC_Swing MOR Pop _C	4 / 4	4	94			:
Piano	Pop Rock	31	MD_Swing MOR Pop _C	4 / 4	4	94			:
Piano	Pop Rock	32	FA_Swing MOR Pop _C	4 / 4	1	94			:
Piano	Pop Rock	33	FB_Swing MOR Pop _C	4 / 4	1	94			:
Piano	Pop Rock	34	FC_Swing MOR Pop _C	4 / 4	1	94			:
Piano	Pop Rock	35	FD_Swing MOR Pop _C	4 / 4	1	94			:
Piano	Pop Rock	36	EA_Swing MOR Pop _C	4 / 4	3	94			:
Piano	Pop Rock	37	MA_12/8 Pop _C	6 / 4	4	90			:
Piano	Pop Rock	38	MB_12/8 Pop _C	6 / 4	4	90			:
Piano	Pop Rock	39	MC_12/8 Pop _C	6 / 4	4	90			:
Piano	Pop Rock	40	MD_12/8 Pop _C	6 / 4	4	90			:
Piano	Pop Rock	41	FA_12/8 Pop _C	6 / 4	1	90			:
Piano	Pop Rock	42	FB_12/8 Pop _C	6 / 4	1	90			:
Piano	Pop Rock	43	FC_12/8 Pop _C	6 / 4	1	90			:
Piano	Pop Rock	44	FD_12/8 Pop _C	6 / 4	1	90			:
Piano	Pop Rock	45	EA_12/8 Pop _C	6 / 4	4	90			:
Piano	Pop Rock	46	MA_BritRockPop _C	4 / 4	4	123			:
Piano	Pop Rock	47	MB_BritRockPop _C	4 / 4	4	123			:
Piano	Pop Rock	48	MC_BritRockPop _C	4 / 4	4	123			:
Piano	Pop Rock	49	FA_BritRockPop _C	4 / 4	1	123			:
Piano	Pop Rock	50	FB_BritRockPop _C	4 / 4	1	123			:
Piano	Pop Rock	51	FC_BritRockPop _C	4 / 4	1	123			:
Piano	Pop Rock	52	BA_BritRockPop _C	4 / 4	1	123			:
Piano	Pop Rock	53	EA_BritRockPop _C	4 / 4	6	123			:
Piano	Pop Rock	54	MA_60sVintagePop _C	4 / 4	4	132			:
Piano	Pop Rock	55	MB_60sVintagePop _C	4 / 4	4	132			:
Piano	Pop Rock	56	MC_60sVintagePop _C	4 / 4	4	132			:
Piano	Pop Rock	57	FA_60sVintagePop _C	4 / 4	1	132			:
Piano	Pop Rock	58	FB_60sVintagePop _C	4 / 4	1	132			:
Piano	Pop Rock	59	FC_60sVintagePop _C	4 / 4	1	132			:
Piano	Pop Rock	60	BA_60sVintagePop _C	4 / 4	1	132			:
Piano	Pop Rock	61	EA_60sVintagePop _C	4 / 4	2	132			:
Piano	Pop Rock	62	MA_60sChartSwing _C	4 / 4	4	123			:
Piano	Pop Rock	63	MB_60sChartSwing _C	4 / 4	4	123			:
Piano	Pop Rock	64	MC_60sChartSwing _C	4 / 4	4	123			:
Piano	Pop Rock	65	FA_60sChartSwing _C	4 / 4	1	123			:
Piano	Pop Rock	66	FB_60sChartSwing _C	4 / 4	1	123			:
Piano	Pop Rock	67	FC_60sChartSwing _C	4 / 4	1	123			:
Piano	Pop Rock	68	BA_60sChartSwing _C	4 / 4	1	123			:
Piano	Pop Rock	69	EA_60sChartSwing _C	4 / 4	4	123			:
Piano	Pop Rock	70	MA_16Beat Pop 2 _C	4 / 4	4	94			:
Piano	Pop Rock	71	MB_16Beat Pop 2 _C	4 / 4	4	94			:
Piano	Pop Rock	72	MC_16Beat Pop 2 _C	4 / 4	4	94			:
Piano	Pop Rock	73	FA_16Beat Pop 2 _C	4 / 4	1	94			:
Piano	Pop Rock	74	FB_16Beat Pop 2 _C	4 / 4	1	94			:
Piano	Pop Rock	75	FC_16Beat Pop 2 _C	4 / 4	1	94			:
Piano	Pop Rock	76	BA_16Beat Pop 2 _C	4 / 4	1	94			:
Piano	Pop Rock	77	MA_16Beat Pop 2 _N	4 / 4	4	94			:
Piano	Pop Rock	78	MB_16Beat Pop 2 _N	4 / 4	4	94			:
Piano	Pop Rock	79	MC_16Beat Pop 2 _N	4 / 4	4	94			:
Piano	Pop Rock	80	FA_16Beat Pop 2 _N	4 / 4	1	94			:
Piano	Pop Rock	81	FB_16Beat Pop 2 _N	4 / 4	1	94			:
Piano	Pop Rock	82	FC_16Beat Pop 2 _N	4 / 4	1	94			:
Piano	Pop Rock	83	BA_16Beat Pop 2 _N	4 / 4	1	94			:
Piano	Pop Rock	84	MC1_Piano Club	4 / 4	1	96			:
Piano	Pop Rock	85	MD1_Piano Club	4 / 4	1	96			:
Piano	Pop Rock	86	IA1_Piano Club	4 / 4	1	96			:
Piano	Pop Rock	87	MD2_Piano Club	4 / 4	2	96			:
Piano	Pop Rock	88	IA2_Piano Club	4 / 4	2	96			:
Piano	Pop Rock	89	MC3_Piano Club	4 / 4	2	96			:
Piano	Pop Rock	90	IA3_Piano Club	4 / 4	2	96			:
Piano	Ballad	91	MA_12/8 Ballad _C	4 / 4	4	60			:
Piano	Ballad	92	MB_12/8 Ballad _C	4 / 4	4	60			:
Piano	Ballad	93	MC_12/8 Ballad _C	4 / 4	4	60			:
Piano	Ballad	94	MD_12/8 Ballad _C	4 / 4	4	60			:
Piano	Ballad	95	FA_12/8 Ballad _C	4 / 4	1	60			:
Piano	Ballad	96	FB_12/8 Ballad _C	4 / 4	1	60			:
Piano	Ballad	97	FC_12/8 Ballad _C	4 / 4	1	60			:
Piano	Ballad	98	FD_12/8 Ballad _C	4 / 4	1	60			:
Piano	Ballad	99	EA_12/8 Ballad _C	4 / 4	3	60			:
Piano	Ballad	100	MA_Unplugged 1 _C	4 / 4	4	120			:
Piano	Ballad	101	MB_Unplugged 1 _C	4 / 4	4	120			:
Piano	Ballad	102	MC_Unplugged 1 _C	4 / 4	4	120			:
Piano	Ballad	103	FA_Unplugged 1 _C	4 / 4	1	120			:
Piano	Ballad	104	FB_Unplugged 1 _C	4 / 4	1	120			:
Piano	Ballad	105	FC_Unplugged 1 _C	4 / 4	1	120			:
Piano	Ballad	106	BA_Unplugged 1 _C	4 / 4	1	120			:
Piano	Ballad	107	MA_Unplugged 3 _C	4 / 4	4	113			:
Piano	Ballad	108	MB_Unplugged 3 _C	4 / 4	4	113			:
Piano	Ballad	109	MC_Unplugged 3 _C	4 / 4	4	113			:
Piano	Ballad	110	FA_Unplugged 3 _C	4 / 4	1	113			:
Piano	Ballad	111	FB_Unplugged 3 _C	4 / 4	1	113			:
Piano	Ballad	112	FC_Unplugged 3 _C	4 / 4	1	113			:
Piano	Ballad	113	BA_Unplugged 3 _C	4 / 4	1	113			:
Piano	Ballad	114	MA_Unplugged 3 _N	4 / 4	4	113			:
Piano	Ballad	115	MB_Unplugged 3 _N	4 / 4	4	113			:
Piano	Ballad	116	MC_Unplugged 3 _N	4 / 4	4	113			:
Piano	Ballad	117	FA_Unplugged 3 _N	4 / 4	1	113			:
Piano	Ballad	118	FB_Unplugged 3 _N	4 / 4	1	113			:
Piano	Ballad	119	FC_Unplugged 3 _N	4 / 4	1	113			:
Piano	Ballad	120	BA_Unplugged 3 _N	4 / 4	1	113			:
Piano	Ballad	121	MA1_8Beat Slow _C	4 / 4	4	78			:
Piano	Ballad	122	MB1_8Beat Slow _C	4 / 4	4	78			:
Piano	Ballad	123	MC1_8Beat Slow _C	4 / 4	4	78			:
Piano	Ballad	124	FA1_8Beat Slow _C	4 / 4	1	78			:
Piano	Ballad	125	FB1_8Beat Slow _C	4 / 4	1	78			:
Piano	Ballad	126	FC1_8Beat Slow _C	4 / 4	1	78			:
Piano	Ballad	127	BA1_8Beat Slow _C	4 / 4	1	78			:
Piano	Ballad	128	MA1_8Beat Slow _N	4 / 4	4	78			:
Piano	Ballad	129	MB1_8Beat Slow _N	4 / 4	4	78			:
Piano	Ballad	130	MC1_8Beat Slow _N	4 / 4	4	78			:
Piano	Ballad	131	FA1_8Beat Slow _N	4 / 4	1	78			:
Piano	Ballad	132	FB1_8Beat Slow _N	4 / 4	1	78			:
Piano	Ballad	133	FC1_8Beat Slow _N	4 / 4	1	78			:
Piano	Ballad	134	BA1_8Beat Slow _N	4 / 4	1	78			:
Piano	Hip Hop	135	MA_Synth Piano01	4 / 4	2	148			:
Piano	Hip Hop	136	MA_Synth Piano02	4 / 4	2	115			:
Piano	Hip Hop	137	MA_Bklyn	4 / 4	2	89			:
Piano	Hip Hop	138	MB_Bklyn	4 / 4	2	89			:
Piano	Hip Hop	139	MC_Bklyn _N	4 / 4	2	89			:
Piano	Hip Hop	140	MD_Bklyn	4 / 4	2	89			:
Piano	Hip Hop	141	ME_Bklyn _N	4 / 4	2	89			:
Piano	Hip Hop	142	MA_HipHopEpic	4 / 4	2	85			:
Piano	Hip Hop	143	MB_HipHopEpic	4 / 4	2	85			:
Piano	Hip Hop	144	MA_Hip Reggae _C	4 / 4	4	92			:
Piano	Hip Hop	145	MB_Hip Reggae _C	4 / 4	4	92			:
Piano	Hip Hop	146	MC_Hip Reggae _C	4 / 4	4	92			:
Piano	Hip Hop	147	FB_Hip Reggae _C	4 / 4	1	92			:
Piano	Hip Hop	148	MA1_ClasicHipHop	4 / 4	1	90			:
Piano	Hip Hop	149	MB1_ClasicHipHop	4 / 4	1	90			:
Piano	Modern R&B	150	MA_Synth Piano03	4 / 4	4	120			:
Piano	Modern R&B	151	MA_Pop Shuffle2 _C	4 / 4	4	94			:
Piano	Modern R&B	152	MB_Pop Shuffle2 _C	4 / 4	4	94			:
Piano	Modern R&B	153	MC_Pop Shuffle2 _C	4 / 4	4	94			:
Piano	Modern R&B	154	FA_Pop Shuffle2 _C	4 / 4	1	94			:
Piano	Modern R&B	155	FB_Pop Shuffle2 _C	4 / 4	1	94			:
Piano	Modern R&B	156	FC_Pop Shuffle2 _C	4 / 4	1	94			:
Piano	Modern R&B	157	BA_Pop Shuffle2 _C	4 / 4	1	94			:
Piano	Modern R&B	158	MA_Pop Shuffle2 _N	4 / 4	4	94			:
Piano	Modern R&B	159	MB_Pop Shuffle2 _N	4 / 4	4	94			:
Piano	Modern R&B	160	MC_Pop Shuffle2 _N	4 / 4	4	94			:
Piano	Modern R&B	161	FA_Pop Shuffle2 _N	4 / 4	1	94			:
Piano	Modern R&B	162	FB_Pop Shuffle2 _N	4 / 4	1	94			:
Piano	Modern R&B	163	FC_Pop Shuffle2 _N	4 / 4	1	94			:
Piano	Modern R&B	164	BA_Pop Shuffle2 _N	4 / 4	1	94			:
Piano	Modern R&B	165	MA_Pop Shuffle3 _C	4 / 4	4	80			:
Piano	Modern R&B	166	MB_Pop Shuffle3 _C	4 / 4	4	80			:
Piano	Modern R&B	167	MC_Pop Shuffle3 _C	4 / 4	4	80			:
Piano	Modern R&B	168	FA_Pop Shuffle3 _C	4 / 4	1	80			:
Piano	Modern R&B	169	FB_Pop Shuffle3 _C	4 / 4	1	80			:
Piano	Modern R&B	170	FC_Pop Shuffle3 _C	4 / 4	1	80			:
Piano	Modern R&B	171	BA_Pop Shuffle3 _C	4 / 4	1	80			:
Piano	Modern R&B	172	MA_Pop Shuffle3 _N	4 / 4	4	80			:
Piano	Modern R&B	173	MB_Pop Shuffle3 _N	4 / 4	4	80			:
Piano	Modern R&B	174	MC_Pop Shuffle3 _N	4 / 4	4	80			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Piano	Modern R&B	175	FA_Pop Shuffle3 _N	4 / 4	1	80			:
Piano	Modern R&B	176	FB_Pop Shuffle3 _N	4 / 4	1	80			:
Piano	Modern R&B	177	FC_Pop Shuffle3 _N	4 / 4	1	80			:
Piano	Modern R&B	178	BA_Pop Shuffle3 _N	4 / 4	1	80			:
Piano	Modern R&B	179	MA1_6/8 R&B	4 / 4	2	61			:
Piano	Modern R&B	180	MB1_6/8 R&B	4 / 4	2	61			:
Piano	Modern R&B	181	MC1_6/8 R&B	4 / 4	2	61			:
Piano	Modern R&B	182	MD1_6/8 R&B	4 / 4	2	61			:
Piano	Modern R&B	183	IA1_6/8 R&B	4 / 4	2	61			:
Piano	Modern R&B	184	FA1_6/8 R&B	4 / 4	1	61			:
Piano	Modern R&B	185	FB1_6/8 R&B	4 / 4	1	61			:
Piano	Classic R&B	186	MA_Philly _C	4 / 4	2	100			:
Piano	Classic R&B	187	MB_Philly _C	4 / 4	2	100			:
Piano	Classic R&B	188	MC_Philly _C	4 / 4	2	100			:
Piano	Classic R&B	189	FA_Philly _C	4 / 4	1	100			:
Piano	Classic R&B	190	FB_Philly _C	4 / 4	1	100			:
Piano	Classic R&B	191	FC_Philly _C	4 / 4	1	100			:
Piano	Classic R&B	192	BA_Philly _C	4 / 4	1	100			:
Piano	Classic R&B	193	EA_Philly _C	4 / 4	4	100			:
Piano	Classic R&B	194	EB_Philly _C	4 / 4	3	100			:
Piano	Classic R&B	195	MA_Soul 2 _N	4 / 4	2	120			:
Piano	Classic R&B	196	MB_Soul 2 _N	4 / 4	1	120			:
Piano	Classic R&B	197	MC_Soul 2 _N	4 / 4	4	120			:
Piano	Classic R&B	198	MD_Soul 2 _N	4 / 4	4	120			:
Piano	Classic R&B	199	FC_Soul 2 _N	4 / 4	4	120			:
Piano	Classic R&B	200	MA_Frankly Soul _C	4 / 4	4	120			:
Piano	Classic R&B	201	MB_Frankly Soul _C	4 / 4	4	120			:
Piano	Classic R&B	202	MC_Frankly Soul _C	4 / 4	4	120			:
Piano	Classic R&B	203	FA_Frankly Soul _C	4 / 4	1	120			:
Piano	Classic R&B	204	FB_Frankly Soul _C	4 / 4	1	120			:
Piano	Classic R&B	205	FC_Frankly Soul _C	4 / 4	1	120			:
Piano	Classic R&B	206	BA_Frankly Soul _C	4 / 4	1	120			:
Piano	Classic R&B	207	EA_Frankly Soul _C	4 / 4	3	120			:
Piano	Classic R&B	208	EB_Frankly Soul _C	4 / 4	4	120			:
Piano	Classic R&B	209	MA_Soul Beat _C	4 / 4	4	124			:
Piano	Classic R&B	210	MB_Soul Beat _C	4 / 4	4	124			:
Piano	Classic R&B	211	MC_Soul Beat _C	4 / 4	4	124			:
Piano	Classic R&B	212	FA_Soul Beat _C	4 / 4	1	124			:
Piano	Classic R&B	213	FB_Soul Beat _C	4 / 4	1	124			:
Piano	Classic R&B	214	FC_Soul Beat _C	4 / 4	1	124			:
Piano	Classic R&B	215	BA_Soul Beat _C	4 / 4	1	124			:
Piano	Classic R&B	216	EA_Soul Beat _C	4 / 4	3	123			:
Piano	Classic R&B	217	EB_Soul Beat _C	4 / 4	3	123			:
Piano	Classic R&B	218	MA_Soul Swing _C	4 / 4	4	124			:
Piano	Classic R&B	219	MB_Soul Swing _C	4 / 4	4	124			:
Piano	Classic R&B	220	MC_Soul Swing _C	4 / 4	4	124			:
Piano	Classic R&B	221	FA_Soul Swing _C	4 / 4	1	124			:
Piano	Classic R&B	222	FB_Soul Swing _C	4 / 4	1	124			:
Piano	Classic R&B	223	FC_Soul Swing _C	4 / 4	1	124			:
Piano	Classic R&B	224	BA_Soul Swing _C	4 / 4	1	124			:
Piano	Classic R&B	225	EA_Soul Swing _C	4 / 4	3	123			:
Piano	Classic R&B	226	EB_Soul Swing _C	4 / 4	5	123			:
Piano	Classic R&B	227	MA_GospelBrothr _C	4 / 4	4	108			:
Piano	Classic R&B	228	MB_GospelBrothr _C	4 / 4	4	108			:
Piano	Classic R&B	229	MC_GospelBrothr _C	4 / 4	4	108			:
Piano	Classic R&B	230	FA_GospelBrothr _C	4 / 4	1	108			:
Piano	Classic R&B	231	FB_GospelBrothr _C	4 / 4	1	108			:
Piano	Classic R&B	232	FC_GospelBrothr _C	4 / 4	1	108			:
Piano	Classic R&B	233	BA_GospelBrothr _C	4 / 4	1	108			:
Piano	Classic R&B	234	EA_GospelBrothr _C	4 / 4	4	108			:
Piano	Classic R&B	235	EB_GospelBrothr _C	4 / 4	3	108			:
Piano	Funk	236	MA_Modern Funk Piano 1	4 / 4	2	124			:
Piano	Funk	237	MA_Modern Funk Piano 2	4 / 4	4	123			:
Piano	Funk	238	MA_Modern Funk Piano 3	4 / 4	2	124			:
Piano	Funk	239	MA_Modern Funk Piano 4	4 / 4	2	123			:
Piano	Funk	240	MA_Modern Funk Piano 5	4 / 4	4	124			:
Piano	Funk	241	MA_Club Jazz 1 _C	4 / 4	4	125			:
Piano	Funk	242	MB_Club Jazz 1 _C	4 / 4	4	125			:
Piano	Funk	243	MC_Club Jazz 1 _C	4 / 4	4	125			:
Piano	Funk	244	FA_Club Jazz 1 _C	4 / 4	1	125			:
Piano	Funk	245	FB_Club Jazz 1 _C	4 / 4	1	125			:
Piano	Funk	246	FC_Club Jazz 1 _C	4 / 4	1	125			:
Piano	Funk	247	BA_Club Jazz 1 _C	4 / 4	1	125			:
Piano	Funk	248	MA_Club Jazz 1 _N	4 / 4	4	125			:
Piano	Funk	249	MB_Club Jazz 1 _N	4 / 4	4	125			:
Piano	Funk	250	MC_Club Jazz 1 _N	4 / 4	4	125			:
Piano	Funk	251	FA_Club Jazz 1 _N	4 / 4	1	125			:
Piano	Funk	252	FB_Club Jazz 1 _N	4 / 4	1	125			:
Piano	Funk	253	FC_Club Jazz 1 _N	4 / 4	1	125			:
Piano	Funk	254	BA_Club Jazz 1 _N	4 / 4	1	125			:
Piano	Funk	255	MA_Club Jazz 2 _C	4 / 4	4	92			:
Piano	Funk	256	MB_Club Jazz 2 _C	4 / 4	4	92			:
Piano	Funk	257	MC_Club Jazz 2 _C	4 / 4	4	92			:
Piano	Funk	258	FA_Club Jazz 2 _C	4 / 4	1	92			:
Piano	Funk	259	FB_Club Jazz 2 _C	4 / 4	1	92			:
Piano	Funk	260	FC_Club Jazz 2 _C	4 / 4	1	92			:
Piano	Funk	261	BA_Club Jazz 2 _C	4 / 4	1	92			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Piano	Funk	262	MA_Club Jazz 2 _N	4 / 4	4	92			:
Piano	Funk	263	MB_Club Jazz 2 _N	4 / 4	4	92			:
Piano	Funk	264	MC_Club Jazz 2 _N	4 / 4	4	92			:
Piano	Funk	265	FA_Club Jazz 2 _N	4 / 4	1	92			:
Piano	Funk	266	FB_Club Jazz 2 _N	4 / 4	1	92			:
Piano	Funk	267	FC_Club Jazz 2 _N	4 / 4	1	92			:
Piano	Funk	268	BA_Club Jazz 2 _N	4 / 4	1	92			:
Piano	Funk	269	MA_Gospel Funk _C	4 / 4	4	106			:
Piano	Funk	270	MB_Gospel Funk _C	4 / 4	4	106			:
Piano	Funk	271	MC_Gospel Funk _C	4 / 4	4	106			:
Piano	Funk	272	FA_Gospel Funk _C	4 / 4	1	106			:
Piano	Funk	273	FB_Gospel Funk _C	4 / 4	1	106			:
Piano	Funk	274	FC_Gospel Funk _C	4 / 4	1	106			:
Piano	Funk	275	BA_Gospel Funk _C	4 / 4	1	106			:
Piano	Funk	276	EA_Gospel Funk _C	4 / 4	4	106			:
Piano	Funk	277	EB_Gospel Funk _C	4 / 4	3	106			:
Piano	Funk	278	MA_70sDiscoFunk _C	4 / 4	4	112			:
Piano	Funk	279	MB_70sDiscoFunk _C	4 / 4	4	112			:
Piano	Funk	280	MC_70sDiscoFunk _C	4 / 4	4	112			:
Piano	Funk	281	FA_70sDiscoFunk _C	4 / 4	1	112			:
Piano	Funk	282	FB_70sDiscoFunk _C	4 / 4	1	112			:
Piano	Funk	283	FC_70sDiscoFunk _C	4 / 4	1	112			:
Piano	Funk	284	BA_70sDiscoFunk _C	4 / 4	1	112			:
Piano	Funk	285	EA_70sDiscoFunk _C	4 / 4	4	112			:
Piano	Funk	286	EB_70sDiscoFunk _C	4 / 4	3	112			:
Piano	House	287	MA_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	288	MB_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	289	MC_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	290	MD_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	291	ME_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	292	MF_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	293	MG_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	294	MH_TropicalHouse1 Piano	4 / 4	4	110			:
Piano	House	295	MA_Synth Piano04 _N	4 / 4	2	128			:
Piano	House	296	MA_Synth Piano04	4 / 4	2	128			:
Piano	House	297	MA_Synth Piano05 _N	4 / 4	2	128			:
Piano	House	298	MA_Synth Piano05	4 / 4	2	128			:
Piano	House	299	MA_Synth Piano06 _N	4 / 4	4	128			:
Piano	House	300	MA_Synth Piano06	4 / 4	4	128			:
Piano	House	301	MA_Synth Piano07 _N	4 / 4	2	128			:
Piano	House	302	MA_Synth Piano07	4 / 4	2	128			:
Piano	House	303	MA_Synth Piano08 _N	4 / 4	2	128			:
Piano	House	304	MA_Synth Piano08	4 / 4	2	128			:
Piano	House	305	MA_House Pf1	4 / 4	2	130			:
Piano	House	306	MA_House Pf2	4 / 4	1	130			:
Piano	House	307	MA_House Pf3	4 / 4	1	130			:
Piano	House	308	MA_House Pf4	4 / 4	1	130			:
Piano	House	309	MA_House Pf5	4 / 4	1	130			:
Piano	House	310	MA_DA House	4 / 4	2	120			:
Piano	Chill	311	MA_EDM BldKeys _N	4 / 4	4	120			:
Piano	Jazz	312	MA_AcousticJazz _N	4 / 4	4	204			:
Piano	Jazz	313	MB_AcousticJazz _N	4 / 4	4	204			:
Piano	Jazz	314	MC_AcousticJazz _N	4 / 4	4	204			:
Piano	Jazz	315	MD_AcousticJazz _N	4 / 4	4	204			:
Piano	Jazz	316	FA_AcousticJazz _N	4 / 4	1	204			:
Piano	Jazz	317	MA_JazzWaltzMed _C	3 / 4	8	180			:
Piano	Jazz	318	MB_JazzWaltzMed _C	3 / 4	8	180			:
Piano	Jazz	319	MC_JazzWaltzMed _C	3 / 4	8	180			:
Piano	Jazz	320	FA_JazzWaltzMed _C	3 / 4	1	180			:
Piano	Jazz	321	FB_JazzWaltzMed _C	3 / 4	1	180			:
Piano	Jazz	322	FC_JazzWaltzMed _C	3 / 4	1	180			:
Piano	Jazz	323	BA_JazzWaltzMed _C	3 / 4	1	180			:
Piano	Jazz	324	EA_JazzWaltzMed _C	3 / 4	7	180			:
Piano	Jazz	325	MA_R&R Shuffle _C	4 / 4	4	192			:
Piano	Jazz	326	MB_R&R Shuffle _C	4 / 4	4	192			:
Piano	Jazz	327	MC_R&R Shuffle _C	4 / 4	4	192			:
Piano	Jazz	328	FA_R&R Shuffle _C	4 / 4	1	192			:
Piano	Jazz	329	FB_R&R Shuffle _C	4 / 4	1	192			:
Piano	Jazz	330	FC_R&R Shuffle _C	4 / 4	1	192			:
Piano	Jazz	331	BA_R&R Shuffle _C	4 / 4	1	192			:
Piano	Jazz	332	EA_R&R Shuffle _C	4 / 4	5	192			:
Piano	Jazz	333	EB_R&R Shuffle _C	4 / 4	5	192			:
Piano	Jazz	334	MA_ShuffleBlues _C	4 / 4	4	115			:
Piano	Jazz	335	MB_ShuffleBlues _C	4 / 4	4	115			:
Piano	Jazz	336	MC_ShuffleBlues _C	4 / 4	4	115			:
Piano	Jazz	337	FA_ShuffleBlues _C	4 / 4	1	115			:
Piano	Jazz	338	FB_ShuffleBlues _C	4 / 4	1	115			:
Piano	Jazz	339	FC_ShuffleBlues _C	4 / 4	1	115			:
Piano	Jazz	340	BA_ShuffleBlues _C	4 / 4	1	115			:
Piano	Jazz	341	EA_ShuffleBlues _C	4 / 4	5	115			:
Piano	Jazz	342	EB_ShuffleBlues _C	4 / 4	6	115			:
Piano	Jazz	343	MA_Slow Blues 1 _C	4 / 4	2	49			:
Piano	Jazz	344	MB_Slow Blues 1 _C	4 / 4	2	49			:
Piano	Jazz	345	MC_Slow Blues 1 _C	4 / 4	2	49			:
Piano	Jazz	346	FA_Slow Blues 1 _C	4 / 4	1	49			:
Piano	Jazz	347	FB_Slow Blues 1 _C	4 / 4	1	49			:
Piano	Jazz	348	FC_Slow Blues 1 _C	4 / 4	1	49			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Piano	Jazz	349	BA_Slow Blues 1 _C	4 / 4	1	49			:
Piano	Jazz	350	EA_Slow Blues 1 _C	4 / 4	3	49			:
Piano	Jazz	351	EB_Slow Blues 1 _C	4 / 4	3	49			:
Piano	Jazz	352	MA_Piano Boogie _C	4 / 4	8	160			:
Piano	Jazz	353	MB_Piano Boogie _C	4 / 4	4	160			:
Piano	Jazz	354	MC_Piano Boogie _C	4 / 4	4	160			:
Piano	Jazz	355	FA_Piano Boogie _C	4 / 4	1	160			:
Piano	Jazz	356	FB_Piano Boogie _C	4 / 4	1	160			:
Piano	Jazz	357	FC_Piano Boogie _C	4 / 4	1	160			:
Piano	Jazz	358	BA_Piano Boogie _C	4 / 4	1	160			:
Piano	Jazz	359	EA_Piano Boogie _C	4 / 4	5	160			:
Piano	Jazz	360	EB_Piano Boogie _C	4 / 4	5	160			:
Piano	Latin	361	MA_Salsa 1 _C	4 / 4	4	177			:
Piano	Latin	362	MB_Salsa 1 _C	4 / 4	4	177			:
Piano	Latin	363	MC_Salsa 1 _C	4 / 4	4	177			:
Piano	Latin	364	FA_Salsa 1 _C	4 / 4	1	177			:
Piano	Latin	365	FB_Salsa 1 _C	4 / 4	1	177			:
Piano	Latin	366	FC_Salsa 1 _C	4 / 4	1	177			:
Piano	Latin	367	BA_Salsa 1 _C	4 / 4	1	177			:
Piano	Latin	368	EA_Salsa 1 _C	4 / 4	5	177			:
Piano	Latin	369	EB_Salsa 1 _C	4 / 4	5	177			:
Piano	Latin	370	MA_Salsa 2 _N	4 / 4	1	123			:
Piano	Latin	371	MB_Salsa 2 _N	4 / 4	1	123			:
Piano	Latin	372	MC_Salsa 2	4 / 4	2	123			:
Piano	Latin	373	MD_Salsa 2 _N	4 / 4	4	123			:
Piano	Latin	374	FC_Salsa 2	4 / 4	2	123			:
Piano	Latin	375	MA_AfroCuban _C	4 / 4	4	200			:
Piano	Latin	376	MB_AfroCuban _C	4 / 4	4	200			:
Piano	Latin	377	MC_AfroCuban _C	4 / 4	4	200			:
Piano	Latin	378	FA_AfroCuban _C	4 / 4	1	200			:
Piano	Latin	379	FB_AfroCuban _C	4 / 4	1	200			:
Piano	Latin	380	FC_AfroCuban _C	4 / 4	1	200			:
Piano	Latin	381	BA_AfroCuban _C	4 / 4	1	200			:
Piano	Latin	382	EA_AfroCuban _C	4 / 4	6	200			:
Piano	Latin	383	EB_AfroCuban _C	4 / 4	5	200			:
Piano	Latin	384	MA_Montuno _N	4 / 4	1	100			:
Piano	Latin	385	MC_Montuno _N	4 / 4	2	100			:
Piano	Latin	386	MD_Montuno _N	4 / 4	2	100			:
Piano	Latin	387	FA_Montuno _N	4 / 4	1	100			:
Piano	Latin	388	FC_Montuno _N	4 / 4	1	100			:
Piano	Latin	389	MA_Samba	4 / 4	1	120			:
Piano	Latin	390	MB_Samba	4 / 4	4	120			:
Piano	Latin	391	MC_Samba	4 / 4	4	120			:
Piano	Latin	392	MA_Bomba _C	4 / 4	4	99			:
Piano	Latin	393	MB_Bomba _C	4 / 4	4	99			:
Piano	Latin	394	MC_Bomba _C	4 / 4	4	99			:
Piano	Latin	395	FA_Bomba _C	4 / 4	1	99			:
Piano	Latin	396	FB_Bomba _C	4 / 4	1	99			:
Piano	Latin	397	FC_Bomba _C	4 / 4	1	99			:
Piano	Latin	398	BA_Bomba _C	4 / 4	1	99			:
Piano	Latin	399	EA_Bomba _C	4 / 4	3	99			:
Piano	Latin	400	EB_Bomba _C	4 / 4	3	99			:
Piano	Latin	401	MA_Merengue _C	4 / 4	4	130			:
Piano	Latin	402	MB_Merengue _C	4 / 4	4	130			:
Piano	Latin	403	MC_Merengue _C	4 / 4	4	130			:
Piano	Latin	404	FA_Merengue _C	4 / 4	1	130			:
Piano	Latin	405	FB_Merengue _C	4 / 4	1	130			:
Piano	Latin	406	FC_Merengue _C	4 / 4	1	130			:
Piano	Latin	407	BA_Merengue _C	4 / 4	1	130			:
Piano	Latin	408	EA_Merengue _C	4 / 4	3	130			:
Piano	Latin	409	EB_Merengue _C	4 / 4	3	130			:
Piano	Latin	410	MA_Guaguanco _C	4 / 4	4	120			:
Piano	Latin	411	MB_Guaguanco _C	4 / 4	4	120			:
Piano	Latin	412	MC_Guaguanco _C	4 / 4	4	120			:
Piano	Latin	413	FA_Guaguanco _C	4 / 4	1	120			:
Piano	Latin	414	FB_Guaguanco _C	4 / 4	1	120			:
Piano	Latin	415	FC_Guaguanco _C	4 / 4	1	120			:
Piano	Latin	416	BA_Guaguanco _C	4 / 4	1	120			:
Piano	Latin	417	EA_Guaguanco _C	4 / 4	3	120			:
Piano	Latin	418	EB_Guaguanco _C	4 / 4	3	120			:
Piano	Latin	419	MA1_Latin Rock	4 / 4	2	120			:
Piano	Latin	420	MD1_Latin Rock	4 / 4	4	120			:
Piano	Latin	421	FB1_Latin Rock	4 / 4	1	120			:
Piano	Latin	422	MC2_Latin Rock	4 / 4	2	120			:
Piano	Latin	423	FA2_Latin Rock	4 / 4	1	120			:
Piano	Latin	424	MA_Disco Latin _C	4 / 4	4	100			:
Piano	Latin	425	MB_Disco Latin _C	4 / 4	4	100			:
Piano	Latin	426	MC_Disco Latin _C	4 / 4	4	100			:
Piano	Latin	427	FA_Disco Latin _C	4 / 4	1	100			:
Piano	Latin	428	FB_Disco Latin _C	4 / 4	1	100			:
Piano	Latin	429	FC_Disco Latin _C	4 / 4	1	100			:
Piano	Latin	430	BA_Disco Latin _C	4 / 4	1	100			:
Piano	Latin	431	IA_Latin House _N	4 / 4	2	138			:
Piano	Latin	432	FA_Latin House _N	4 / 4	2	138			:
Piano	Latin	433	FC_Latin House _N	4 / 4	2	138			:
Piano	Latin	434	MA_Piano Latin	4 / 4	2	120			:
Piano	World	435	MA_Jumbo Reggae _C	4 / 4	4	100			:
Piano	World	436	MB_Jumbo Reggae _C	4 / 4	4	100			:
Piano	World	437	MC_Jumbo Reggae _C	4 / 4	4	100			:
Piano	World	438	FA_Jumbo Reggae _C	4 / 4	1	100			:
Piano	World	439	FB_Jumbo Reggae _C	4 / 4	1	100			:
Piano	World	440	FC_Jumbo Reggae _C	4 / 4	1	100			:
Piano	World	441	BA_Jumbo Reggae _C	4 / 4	1	100			:
Piano	World	442	EA_Jumbo Reggae _C	4 / 4	3	100			:
Piano	World	443	EB_Jumbo Reggae _C	4 / 4	3	100			:
Piano	General	444	MA_Pf Arp1	4 / 4	2	64			:
Piano	General	445	MA_Pf Arp2	4 / 4	2	74			:
Piano	General	446	MA_Pf Arp3	4 / 4	2	124			:
Piano	General	447	MA_Pf Arp4	4 / 4	2	130			:
Piano	General	448	MA_Pf Arp5	4 / 4	2	130			:
Piano	General	449	MA_Pf Arp6	4 / 4	2	130			:
Piano	General	450	MA_Pf Arp7	4 / 4	2	130			:
Piano	General	451	MA_Pf Arp8	4 / 4	2	65			:
Piano	General	452	MA_Pf Arp9	4 / 4	1	116			:
Piano	General	453	MA_Pf Arp10	4 / 4	1	96			:
Piano	General	454	MA_Pf Arp11	4 / 4	1	82			:
Piano	General	455	MA_Pf Arp12	4 / 4	1	90			:
Piano	General	456	MA_Pf Arp13	4 / 4	1	90			:
Piano	General	457	MA_Pf Arp14	4 / 4	1	90			:
Piano	General	458	MA_Pf Arp15	4 / 4	1	90			:
Piano	General	459	MA_Pf Arp16	4 / 4	1	90			:
Piano	General	460	MA_Pf Arp17	4 / 4	1	100			:
Piano	General	461	MA_Pf Arp18	4 / 4	1	90			:
Piano	General	462	MA_Pf Arp19	4 / 4	1	84			:
Piano	General	463	MA_Pf Arp20	4 / 4	1	90			:
Piano	General	464	MA_Pf Arp21	4 / 4	1	86			:
Piano	General	465	MA_Pf Arp22	4 / 4	1	90			:
Piano	General	466	MA_Pf Arp23	4 / 4	1	90			:
Piano	General	467	MA_Pf Arp24	4 / 4	2	130			:
Piano	General	468	MA_Pf Arp25	4 / 4	2	130			:
Piano	General	469	MA_Pf Arp26	4 / 4	2	130			:
Piano	General	470	MA_Pf Arp27	4 / 4	2	130			:
Piano	General	471	MA_Pf Arp28	4 / 4	2	120			:
Piano	General	472	MA_Pf Arp29	4 / 4	1	74			:
Piano	General	473	Classical ToRoot _N	4 / 4	1	120			:
Piano	General	474	Classical To3rd _N	4 / 4	1	120			:
Piano	General	475	Classical To5th _N	4 / 4	1	120			:
Keys	Rock	476	MA_ProgresRock2 _C	4 / 4	4	120			Electric Piano
Keys	Rock	477	MB_ProgresRock2 _C	4 / 4	4	120			:
Keys	Rock	478	MC_ProgresRock2 _C	4 / 4	4	120			:
Keys	Rock	479	FA_ProgresRock2 _C	4 / 4	1	120			:
Keys	Rock	480	FB_ProgresRock2 _C	4 / 4	1	120			:
Keys	Rock	481	FC_ProgresRock2 _C	4 / 4	1	120			:
Keys	Rock	482	BA_ProgresRock2 _C	4 / 4	1	120			:
Keys	Rock	483	MA_ProgresRock2 _N	4 / 4	4	120			:
Keys	Rock	484	MB_ProgresRock2 _N	4 / 4	4	120			:
Keys	Rock	485	MC_ProgresRock2 _N	4 / 4	4	120			:
Keys	Rock	486	FA_ProgresRock2 _N	4 / 4	1	120			:
Keys	Rock	487	FB_ProgresRock2 _N	4 / 4	1	120			:
Keys	Rock	488	FC_ProgresRock2 _N	4 / 4	1	120			:
Keys	Rock	489	BA_ProgresRock2 _N	4 / 4	1	120			:
Keys	Pop Rock	490	MA_There 2 Here _N	4 / 4	1	135			:
Keys	Pop Rock	491	MA_8Beat Medium _C	4 / 4	4	105			:
Keys	Pop Rock	492	MB_8Beat Medium _C	4 / 4	4	105			:
Keys	Pop Rock	493	MC_8Beat Medium _C	4 / 4	4	105			:
Keys	Pop Rock	494	MD_8Beat Medium _C	4 / 4	4	105			:
Keys	Pop Rock	495	FA_8Beat Medium _C	4 / 4	1	105			:
Keys	Pop Rock	496	FB_8Beat Medium _C	4 / 4	1	105			:
Keys	Pop Rock	497	FC_8Beat Medium _C	4 / 4	1	105			:
Keys	Pop Rock	498	FD_8Beat Medium _C	4 / 4	1	105			:
Keys	Pop Rock	499	EA_8Beat Medium _C	4 / 4	4	105			:
Keys	Pop Rock	500	MA_16Beat Medium _C	4 / 4	4	96			:
Keys	Pop Rock	501	MB_16Beat Medium _C	4 / 4	4	96			:
Keys	Pop Rock	502	MC_16Beat Medium _C	4 / 4	4	96			:
Keys	Pop Rock	503	MD_16Beat Medium _C	4 / 4	4	96			:
Keys	Pop Rock	504	FA_16Beat Medium _C	4 / 4	1	96			:
Keys	Pop Rock	505	FB_16Beat Medium _C	4 / 4	1	96			:
Keys	Pop Rock	506	FC_16Beat Medium _C	4 / 4	1	96			:
Keys	Pop Rock	507	FD_16Beat Medium _C	4 / 4	1	96			:
Keys	Pop Rock	508	EA_16Beat Medium _C	4 / 4	4	96			:
Keys	Pop Rock	509	MA_Country Waltz _C	3 / 4	4	144			:
Keys	Pop Rock	510	MB_Country Waltz _C	3 / 4	4	144			:
Keys	Pop Rock	511	MC_Country Waltz _C	3 / 4	4	144			:
Keys	Pop Rock	512	MD_Country Waltz _C	3 / 4	4	144			:
Keys	Pop Rock	513	FA_Country Waltz _C	3 / 4	1	144			:
Keys	Pop Rock	514	FB_Country Waltz _C	3 / 4	1	144			:
Keys	Pop Rock	515	FC_Country Waltz _C	3 / 4	1	144			:
Keys	Pop Rock	516	FD_Country Waltz _C	3 / 4	1	144			:
Keys	Pop Rock	517	EA_Country Waltz _C	3 / 4	5	144			:
Keys	Pop Rock	518	MA_Cool 8Beat _C	4 / 4	2	100			:
Keys	Pop Rock	519	MB_Cool 8Beat _C	4 / 4	2	100			:
Keys	Pop Rock	520	MC_Cool 8Beat _C	4 / 4	2	100			:
Keys	Pop Rock	521	FA_Cool 8Beat _C	4 / 4	1	100			:
Keys	Pop Rock	522	FB_Cool 8Beat _C	4 / 4	1	100			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Keys	Pop Rock	523	FC_Cool 8Beat _C	4 / 4	1	100			:
Keys	Pop Rock	524	BA_Cool 8Beat _C	4 / 4	1	100			:
Keys	Pop Rock	525	EA_Cool 8Beat _C	4 / 4	4	100			:
Keys	Pop Rock	526	EB_Cool 8Beat _C	4 / 4	4	100			:
Keys	Pop Rock	527	MA_8Beat Basic _C	4 / 4	4	120			:
Keys	Pop Rock	528	MB_8Beat Basic _C	4 / 4	4	120			:
Keys	Pop Rock	529	MC_8Beat Basic _C	4 / 4	4	120			:
Keys	Pop Rock	530	FA_8Beat Basic _C	4 / 4	1	120			:
Keys	Pop Rock	531	FB_8Beat Basic _C	4 / 4	1	120			:
Keys	Pop Rock	532	FC_8Beat Basic _C	4 / 4	1	120			:
Keys	Pop Rock	533	BA_8Beat Basic _C	4 / 4	1	120			:
Keys	Pop Rock	534	MA_8Beat Basic _N	4 / 4	4	120			:
Keys	Pop Rock	535	MB_8Beat Basic _N	4 / 4	4	120			:
Keys	Pop Rock	536	MC_8Beat Basic _N	4 / 4	4	120			:
Keys	Pop Rock	537	FA_8Beat Basic _N	4 / 4	1	120			:
Keys	Pop Rock	538	FB_8Beat Basic _N	4 / 4	1	120			:
Keys	Pop Rock	539	FC_8Beat Basic _N	4 / 4	1	120			:
Keys	Pop Rock	540	BA_8Beat Basic _N	4 / 4	1	120			:
Keys	Pop Rock	541	MA_16BeatBasic1 _C	4 / 4	4	90			:
Keys	Pop Rock	542	MB_16BeatBasic1 _C	4 / 4	4	90			:
Keys	Pop Rock	543	MC_16BeatBasic1 _C	4 / 4	4	90			:
Keys	Pop Rock	544	FA_16BeatBasic1 _C	4 / 4	1	90			:
Keys	Pop Rock	545	FB_16BeatBasic1 _C	4 / 4	1	90			:
Keys	Pop Rock	546	FC_16BeatBasic1 _C	4 / 4	1	90			:
Keys	Pop Rock	547	BA_16BeatBasic1 _C	4 / 4	1	90			:
Keys	Pop Rock	548	MA_16BeatBasic1 _N	4 / 4	4	90			:
Keys	Pop Rock	549	MB_16BeatBasic1 _N	4 / 4	4	90			:
Keys	Pop Rock	550	MC_16BeatBasic1 _N	4 / 4	4	90			:
Keys	Pop Rock	551	FA_16BeatBasic1 _N	4 / 4	1	90			:
Keys	Pop Rock	552	FB_16BeatBasic1 _N	4 / 4	1	90			:
Keys	Pop Rock	553	FC_16BeatBasic1 _N	4 / 4	1	90			:
Keys	Pop Rock	554	BA_16BeatBasic1 _N	4 / 4	1	90			:
Keys	Pop Rock	555	MA_16BeatBasic2 _C	4 / 4	4	77			:
Keys	Pop Rock	556	MB_16BeatBasic2 _C	4 / 4	4	77			:
Keys	Pop Rock	557	MC_16BeatBasic2 _C	4 / 4	4	77			:
Keys	Pop Rock	558	FA_16BeatBasic2 _C	4 / 4	1	77			:
Keys	Pop Rock	559	FB_16BeatBasic2 _C	4 / 4	1	77			:
Keys	Pop Rock	560	FC_16BeatBasic2 _C	4 / 4	1	77			:
Keys	Pop Rock	561	BA_16BeatBasic2 _C	4 / 4	1	77			:
Keys	Pop Rock	562	MA_16BeatBasic2 _N	4 / 4	4	77			:
Keys	Pop Rock	563	MB_16BeatBasic2 _N	4 / 4	4	77			:
Keys	Pop Rock	564	MC_16BeatBasic2 _N	4 / 4	4	77			:
Keys	Pop Rock	565	FA_16BeatBasic2 _N	4 / 4	1	77			:
Keys	Pop Rock	566	FB_16BeatBasic2 _N	4 / 4	1	77			:
Keys	Pop Rock	567	FC_16BeatBasic2 _N	4 / 4	1	77			:
Keys	Pop Rock	568	BA_16BeatBasic2 _N	4 / 4	1	77			:
Keys	Pop Rock	569	MA_16Beat Pop 1 _C	4 / 4	4	103			:
Keys	Pop Rock	570	MB_16Beat Pop 1 _C	4 / 4	4	103			:
Keys	Pop Rock	571	MC_16Beat Pop 1 _C	4 / 4	4	103			:
Keys	Pop Rock	572	FA_16Beat Pop 1 _C	4 / 4	1	103			:
Keys	Pop Rock	573	FB_16Beat Pop 1 _C	4 / 4	1	103			:
Keys	Pop Rock	574	FC_16Beat Pop 1 _C	4 / 4	1	103			:
Keys	Pop Rock	575	BA_16Beat Pop 1 _C	4 / 4	1	103			:
Keys	Pop Rock	576	MA_16Beat Pop 1 _N	4 / 4	4	103			:
Keys	Pop Rock	577	MB_16Beat Pop 1 _N	4 / 4	4	103			:
Keys	Pop Rock	578	MC_16Beat Pop 1 _N	4 / 4	4	103			:
Keys	Pop Rock	579	FA_16Beat Pop 1 _N	4 / 4	1	103			:
Keys	Pop Rock	580	FB_16Beat Pop 1 _N	4 / 4	1	103			:
Keys	Pop Rock	581	FC_16Beat Pop 1 _N	4 / 4	1	103			:
Keys	Pop Rock	582	BA_16Beat Pop 1 _N	4 / 4	1	103			:
Keys	Pop Rock	583	MB1_Analog Pop	4 / 4	2	93			:
Keys	Pop Rock	584	MC2_Analog Pop	4 / 4	2	93			:
Keys	Pop Rock	585	IA2_Analog Pop	4 / 4	1	93			:
Keys	Pop Rock	586	MA_6/8 Pop _C	4 / 4	4	100			:
Keys	Pop Rock	587	MB_6/8 Pop _C	4 / 4	4	100			:
Keys	Pop Rock	588	MC_6/8 Pop _C	4 / 4	4	100			:
Keys	Pop Rock	589	FA_6/8 Pop _C	4 / 4	1	100			:
Keys	Pop Rock	590	FB_6/8 Pop _C	4 / 4	1	100			:
Keys	Pop Rock	591	FC_6/8 Pop _C	4 / 4	1	100			:
Keys	Pop Rock	592	BA_6/8 Pop _C	4 / 4	1	100			:
Keys	Pop Rock	593	MA_6/8 Pop _N	4 / 4	4	100			:
Keys	Pop Rock	594	MB_6/8 Pop _N	4 / 4	4	100			:
Keys	Pop Rock	595	MC_6/8 Pop _N	4 / 4	4	100			:
Keys	Pop Rock	596	FA_6/8 Pop _N	4 / 4	1	100			:
Keys	Pop Rock	597	FB_6/8 Pop _N	4 / 4	1	100			:
Keys	Pop Rock	598	FC_6/8 Pop _N	4 / 4	1	100			:
Keys	Pop Rock	599	BA_6/8 Pop _N	4 / 4	1	100			:
Keys	Ballad	600	MA_16Bt Ballad1 _C	4 / 4	4	59			:
Keys	Ballad	601	MB_16Bt Ballad1 _C	4 / 4	4	59			:
Keys	Ballad	602	MC_16Bt Ballad1 _C	4 / 4	4	59			:
Keys	Ballad	603	MD_16Bt Ballad1 _C	4 / 4	4	59			:
Keys	Ballad	604	FA_16Bt Ballad1 _C	4 / 4	1	59			:
Keys	Ballad	605	FB_16Bt Ballad1 _C	4 / 4	1	59			:
Keys	Ballad	606	FC_16Bt Ballad1 _C	4 / 4	1	59			:
Keys	Ballad	607	FD_16Bt Ballad1 _C	4 / 4	1	59			:
Keys	Ballad	608	EA_16Bt Ballad1 _C	4 / 4	3	59			:
Keys	Ballad	609	MA_Eclectic Bld _C	4 / 4	4	84			:
Keys	Ballad	610	MB_Eclectic Bld _C	4 / 4	4	84			:
Keys	Ballad	611	MC_Eclectic Bld _C	4 / 4	4	84			:
Keys	Ballad	612	MD_Eclectic Bld _C	4 / 4	4	84			:
Keys	Ballad	613	FA_Eclectic Bld _C	4 / 4	1	84			:
Keys	Ballad	614	FB_Eclectic Bld _C	4 / 4	1	84			:
Keys	Ballad	615	FC_Eclectic Bld _C	4 / 4	1	84			:
Keys	Ballad	616	FD_Eclectic Bld _C	4 / 4	1	84			:
Keys	Ballad	617	EA_Eclectic Bld _C	4 / 4	4	84			:
Keys	Ballad	618	MA_EP Ballad _C	4 / 4	2	60			:
Keys	Ballad	619	MB_EP Ballad _C	4 / 4	2	60			:
Keys	Ballad	620	MC_EP Ballad _C	4 / 4	2	60			:
Keys	Ballad	621	FA_EP Ballad _C	4 / 4	1	60			:
Keys	Ballad	622	FB_EP Ballad _C	4 / 4	1	60			:
Keys	Ballad	623	FC_EP Ballad _C	4 / 4	1	60			:
Keys	Ballad	624	BA_EP Ballad _C	4 / 4	1	60			:
Keys	Ballad	625	EA_EP Ballad _C	4 / 4	4	60			:
Keys	Ballad	626	EB_EP Ballad _C	4 / 4	4	60			:
Keys	Ballad	627	MA2_8Beat Slow _C	4 / 4	4	78			:
Keys	Ballad	628	MB2_8Beat Slow _C	4 / 4	4	78			:
Keys	Ballad	629	MC2_8Beat Slow _C	4 / 4	4	78			:
Keys	Ballad	630	FA2_8Beat Slow _C	4 / 4	1	78			:
Keys	Ballad	631	FB2_8Beat Slow _C	4 / 4	1	78			:
Keys	Ballad	632	FC2_8Beat Slow _C	4 / 4	1	78			:
Keys	Ballad	633	BA2_8Beat Slow _C	4 / 4	1	78			:
Keys	Ballad	634	MA2_8Beat Slow _N	4 / 4	4	78			:
Keys	Ballad	635	MB2_8Beat Slow _N	4 / 4	4	78			:
Keys	Ballad	636	MC2_8Beat Slow _N	4 / 4	4	78			:
Keys	Ballad	637	FA2_8Beat Slow _N	4 / 4	1	78			:
Keys	Ballad	638	FB2_8Beat Slow _N	4 / 4	1	78			:
Keys	Ballad	639	FC2_8Beat Slow _N	4 / 4	1	78			:
Keys	Ballad	640	BA2_8Beat Slow _N	4 / 4	1	78			:
Keys	Ballad	641	MA_8Beat Soft _C	4 / 4	4	100			:
Keys	Ballad	642	MB_8Beat Soft _C	4 / 4	4	100			:
Keys	Ballad	643	MC_8Beat Soft _C	4 / 4	4	100			:
Keys	Ballad	644	FA_8Beat Soft _C	4 / 4	1	100			:
Keys	Ballad	645	FB_8Beat Soft _C	4 / 4	1	100			:
Keys	Ballad	646	FC_8Beat Soft _C	4 / 4	1	100			:
Keys	Ballad	647	BA_8Beat Soft _C	4 / 4	1	100			:
Keys	Ballad	648	MA_8Beat Soft _N	4 / 4	4	100			:
Keys	Ballad	649	MB_8Beat Soft _N	4 / 4	4	100			:
Keys	Ballad	650	MC_8Beat Soft _N	4 / 4	4	100			:
Keys	Ballad	651	FA_8Beat Soft _N	4 / 4	1	100			:
Keys	Ballad	652	FB_8Beat Soft _N	4 / 4	1	100			:
Keys	Ballad	653	FC_8Beat Soft _N	4 / 4	1	100			:
Keys	Ballad	654	BA_8Beat Soft _N	4 / 4	1	100			:
Keys	Ballad	655	MA_Slowfeel	4 / 4	1	74			:
Keys	Ballad	656	MB_Slowfeel	4 / 4	1	74			:
Keys	Ballad	657	MC_Slowfeel	4 / 4	1	74			:
Keys	Ballad	658	MD_Slowfeel	4 / 4	1	74			:
Keys	Ballad	659	FB_Slowfeel	4 / 4	1	74			:
Keys	Ballad	660	FC_Slowfeel	4 / 4	1	74			:
Keys	Ballad	661	MA_16Bt Ballad2 _C	4 / 4	4	75			:
Keys	Ballad	662	MB_16Bt Ballad2 _C	4 / 4	4	75			:
Keys	Ballad	663	MC_16Bt Ballad2 _C	4 / 4	4	75			:
Keys	Ballad	664	FA_16Bt Ballad2 _C	4 / 4	1	75			:
Keys	Ballad	665	FB_16Bt Ballad2 _C	4 / 4	1	75			:
Keys	Ballad	666	FC_16Bt Ballad2 _C	4 / 4	1	75			:
Keys	Ballad	667	BA_16Bt Ballad2 _C	4 / 4	1	75			:
Keys	Ballad	668	MA_16Bt Ballad2 _N	4 / 4	4	75			:
Keys	Ballad	669	MB_16Bt Ballad2 _N	4 / 4	4	75			:
Keys	Ballad	670	MC_16Bt Ballad2 _N	4 / 4	4	75			:
Keys	Ballad	671	FA_16Bt Ballad2 _N	4 / 4	1	75			:
Keys	Ballad	672	FB_16Bt Ballad2 _N	4 / 4	1	75			:
Keys	Ballad	673	FC_16Bt Ballad2 _N	4 / 4	1	75			:
Keys	Ballad	674	BA_16Bt Ballad2 _N	4 / 4	1	75			:
Keys	Hip Hop	675	MA_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	676	MB_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	677	MC_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	678	MD_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	679	ME_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	680	MF_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	681	MG_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	682	MH_Sweetness _N	4 / 4	4	76			:
Keys	Hip Hop	683	MA_Synth Piano09	4 / 4	2	120			:
Keys	Hip Hop	684	MA_New Hip Hop _C	4 / 4	2	85			:
Keys	Hip Hop	685	MB_New Hip Hop _C	4 / 4	2	85			:
Keys	Hip Hop	686	MC_New Hip Hop _C	4 / 4	2	85			:
Keys	Hip Hop	687	FA_New Hip Hop _C	4 / 4	1	85			:
Keys	Hip Hop	688	FB_New Hip Hop _C	4 / 4	1	85			:
Keys	Hip Hop	689	FC_New Hip Hop _C	4 / 4	1	85			:
Keys	Hip Hop	690	BA_New Hip Hop _C	4 / 4	1	85			:
Keys	Hip Hop	691	EA_New Hip Hop _C	4 / 4	3	85			:
Keys	Hip Hop	692	EB_New Hip Hop _C	4 / 4	3	85			:
Keys	Hip Hop	693	MA1_Hip Hop 1 _N	4 / 4	2	105			:
Keys	Hip Hop	694	MB1_Hip Hop 1 _N	4 / 4	2	105			:
Keys	Hip Hop	695	MC1_Hip Hop 1 _N	4 / 4	2	105			:
Keys	Hip Hop	696	FB1_Hip Hop 1 _N	4 / 4	1	105			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Keys	Hip Hop	697	MA2_Hip Hop 1 _N	4 / 4	2	105			Harpsichord
Keys	Hip Hop	698	MB2_Hip Hop 1 _N	4 / 4	2	105			:
Keys	Hip Hop	699	MC2_Hip Hop 1 _N	4 / 4	2	105			:
Keys	Hip Hop	700	FB2_Hip Hop 1 _N	4 / 4	1	105			:
Keys	Hip Hop	701	FC_Hip Hop 2	4 / 4	2	94			Electric Piano
Keys	Hip Hop	702	IA2_ClasicHipHop _N	4 / 4	2	90			:
Keys	Modern R&B	703	MA_Neo UK Soul _C	4 / 4	4	79			:
Keys	Modern R&B	704	MB_Neo UK Soul _C	4 / 4	4	79			:
Keys	Modern R&B	705	MC_Neo UK Soul _C	4 / 4	4	79			:
Keys	Modern R&B	706	MD_Neo UK Soul _C	4 / 4	4	79			:
Keys	Modern R&B	707	FA_Neo UK Soul _C	4 / 4	1	79			:
Keys	Modern R&B	708	FB_Neo UK Soul _C	4 / 4	1	79			:
Keys	Modern R&B	709	FC_Neo UK Soul _C	4 / 4	1	79			:
Keys	Modern R&B	710	FD_Neo UK Soul _C	4 / 4	1	79			:
Keys	Modern R&B	711	EA_Neo UK Soul _C	4 / 4	3	79			:
Keys	Modern R&B	712	MA_Slow & Easy _C	4 / 4	4	72			:
Keys	Modern R&B	713	MB_Slow & Easy _C	4 / 4	4	72			:
Keys	Modern R&B	714	MC_Slow & Easy _C	4 / 4	4	72			:
Keys	Modern R&B	715	FA_Slow & Easy _C	4 / 4	1	72			:
Keys	Modern R&B	716	FB_Slow & Easy _C	4 / 4	1	72			:
Keys	Modern R&B	717	FC_Slow & Easy _C	4 / 4	1	72			:
Keys	Modern R&B	718	BA_Slow & Easy _C	4 / 4	1	72			:
Keys	Modern R&B	719	EA_Slow & Easy _C	4 / 4	3	72			:
Keys	Modern R&B	720	EB_Slow & Easy _C	4 / 4	4	72			:
Keys	Modern R&B	721	MA_R&B Disco	4 / 4	2	110			:
Keys	Modern R&B	722	MD_R&B Disco	4 / 4	2	110			:
Keys	Modern R&B	723	FB_R&B Disco	4 / 4	1	110			:
Keys	Modern R&B	724	FC_R&B Disco	4 / 4	2	110			:
Keys	Modern R&B	725	MA_ChartPop1 _C	4 / 4	4	92			:
Keys	Modern R&B	726	MB_ChartPop1 _C	4 / 4	4	92			:
Keys	Modern R&B	727	MC_ChartPop1 _C	4 / 4	4	92			:
Keys	Modern R&B	728	FA_ChartPop1 _C	4 / 4	1	92			:
Keys	Modern R&B	729	FB_ChartPop1 _C	4 / 4	1	92			:
Keys	Modern R&B	730	FC_ChartPop1 _C	4 / 4	1	92			:
Keys	Modern R&B	731	BA_ChartPop1 _C	4 / 4	1	92			:
Keys	Modern R&B	732	EA_ChartPop1 _C	4 / 4	3	92			:
Keys	Modern R&B	733	EB_ChartPop1 _C	4 / 4	3	92			:
Keys	Modern R&B	734	MA_H-R&B Pop _C	4 / 4	4	140			:
Keys	Modern R&B	735	MB_H-R&B Pop _C	4 / 4	4	140			:
Keys	Modern R&B	736	MC_H-R&B Pop _C	4 / 4	4	140			:
Keys	Modern R&B	737	FA_H-R&B Pop _C	4 / 4	1	140			:
Keys	Modern R&B	738	FB_H-R&B Pop _C	4 / 4	1	140			:
Keys	Modern R&B	739	FC_H-R&B Pop _C	4 / 4	1	140			:
Keys	Modern R&B	740	BA_H-R&B Pop _C	4 / 4	1	140			:
Keys	Modern R&B	741	MA_J-R&B Pop _C	4 / 4	4	100			:
Keys	Modern R&B	742	MB_J-R&B Pop _C	4 / 4	4	100			:
Keys	Modern R&B	743	MC_J-R&B Pop _C	4 / 4	4	100			:
Keys	Modern R&B	744	FA_J-R&B Pop _C	4 / 4	1	100			:
Keys	Modern R&B	745	FB_J-R&B Pop _C	4 / 4	1	100			:
Keys	Modern R&B	746	FC_J-R&B Pop _C	4 / 4	1	100			:
Keys	Modern R&B	747	MA_R&B Ballad 1 _C	4 / 4	4	70			:
Keys	Modern R&B	748	MB_R&B Ballad 1 _C	4 / 4	4	70			:
Keys	Modern R&B	749	MC_R&B Ballad 1 _C	4 / 4	4	70			:
Keys	Modern R&B	750	FA_R&B Ballad 1 _C	4 / 4	1	70			:
Keys	Modern R&B	751	FB_R&B Ballad 1 _C	4 / 4	1	70			:
Keys	Modern R&B	752	FC_R&B Ballad 1 _C	4 / 4	1	70			:
Keys	Modern R&B	753	BA_R&B Ballad 1 _C	4 / 4	1	70			:
Keys	Modern R&B	754	MA_R&B Ballad 3 _C	4 / 4	4	113			:
Keys	Modern R&B	755	MB_R&B Ballad 3 _C	4 / 4	4	113			:
Keys	Modern R&B	756	MC_R&B Ballad 3 _C	4 / 4	4	113			:
Keys	Modern R&B	757	FA_R&B Ballad 3 _C	4 / 4	1	113			:
Keys	Modern R&B	758	FB_R&B Ballad 3 _C	4 / 4	1	113			:
Keys	Modern R&B	759	FC_R&B Ballad 3 _C	4 / 4	1	113			:
Keys	Modern R&B	760	MA_Ballad EP1	4 / 4	2	74			:
Keys	Modern R&B	761	MA_Ballad EP2	4 / 4	2	74			:
Keys	Modern R&B	762	MA_Ballad EP3	4 / 4	2	74			:
Keys	Modern R&B	763	MA_Swing EP	4 / 4	1	101			:
Keys	Modern R&B	764	MA_EP Chords	4 / 4	2	101			:
Keys	Modern R&B	765	MA2_6/8 R&B	4 / 4	2	61			:
Keys	Modern R&B	766	MB2_6/8 R&B	4 / 4	2	61			:
Keys	Modern R&B	767	MC2_6/8 R&B	4 / 4	2	61			:
Keys	Modern R&B	768	MD2_6/8 R&B	4 / 4	2	61			:
Keys	Modern R&B	769	IA2_6/8 R&B	4 / 4	2	61			:
Keys	Modern R&B	770	FA2_6/8 R&B _N	4 / 4	1	61			:
Keys	Modern R&B	771	FB2_6/8 R&B _N	4 / 4	1	61			:
Keys	Modern R&B	772	MB_Smooth 1	4 / 4	2	115			:
Keys	Modern R&B	773	MC_Smooth 1	4 / 4	2	115			:
Keys	Modern R&B	774	MA_New Gospel	4 / 4	2	90			:
Keys	Modern R&B	775	MB_New Gospel	4 / 4	2	90			:
Keys	Modern R&B	776	MC_New Gospel	4 / 4	2	90			:
Keys	Modern R&B	777	MD_New Gospel	4 / 4	2	90			:
Keys	Modern R&B	778	FA_New Gospel	4 / 4	1	90			:
Keys	Modern R&B	779	FC_New Gospel	4 / 4	2	90			:
Keys	Modern R&B	780	MA_Synth Piano10	4 / 4	4	97			:
Keys	Classic R&B	781	MA_Soul Shuffle _C	4 / 4	4	98			:
Keys	Classic R&B	782	MB_Soul Shuffle _C	4 / 4	4	98			:
Keys	Classic R&B	783	MC_Soul Shuffle _C	4 / 4	4	98			:
Keys	Classic R&B	784	FA_Soul Shuffle _C	4 / 4	1	98			:
Keys	Classic R&B	785	FB_Soul Shuffle _C	4 / 4	1	98			:
Keys	Classic R&B	786	FC_Soul Shuffle _C	4 / 4	1	98			:
Keys	Classic R&B	787	BA_Soul Shuffle _C	4 / 4	1	98			:
Keys	Classic R&B	788	EA_Soul Shuffle _C	4 / 4	3	98			:
Keys	Classic R&B	789	EB_Soul Shuffle _C	4 / 4	3	98			:
Keys	Funk	790	MA_Funk 1 _C	4 / 4	8	104			:
Keys	Funk	791	MB_Funk 1 _C	4 / 4	8	104			:
Keys	Funk	792	MC_Funk 1 _C	4 / 4	8	104			:
Keys	Funk	793	FA_Funk 1 _C	4 / 4	1	104			:
Keys	Funk	794	FB_Funk 1 _C	4 / 4	1	104			:
Keys	Funk	795	FC_Funk 1 _C	4 / 4	1	104			:
Keys	Funk	796	BA_Funk 1 _C	4 / 4	1	104			:
Keys	Funk	797	EA_Funk 1 _C	4 / 4	9	104			:
Keys	Funk	798	EB_Funk 1 _C	4 / 4	4	104			:
Keys	Funk	799	MD_Cool Funk	4 / 4	2	96			:
Keys	Funk	800	IA_Cool Funk	4 / 4	2	96			:
Keys	Funk	801	FA_Cool Funk	4 / 4	1	96			:
Keys	Funk	802	FB_Cool Funk	4 / 4	1	96			:
Keys	Funk	803	MA_Jazz Pop _C	4 / 4	2	102			:
Keys	Funk	804	MB_Jazz Pop _C	4 / 4	2	102			:
Keys	Funk	805	MC_Jazz Pop _C	4 / 4	2	102			:
Keys	Funk	806	FA_Jazz Pop _C	4 / 4	1	102			:
Keys	Funk	807	FB_Jazz Pop _C	4 / 4	1	102			:
Keys	Funk	808	FC_Jazz Pop _C	4 / 4	1	102			:
Keys	Funk	809	BA_Jazz Pop _C	4 / 4	1	102			:
Keys	Funk	810	MA_Funk Disco _C	4 / 4	2	126			:
Keys	Funk	811	MB_Funk Disco _C	4 / 4	2	126			:
Keys	Funk	812	MC_Funk Disco _C	4 / 4	2	126			:
Keys	Funk	813	FA_Funk Disco _C	4 / 4	1	126			:
Keys	Funk	814	FB_Funk Disco _C	4 / 4	1	126			:
Keys	Funk	815	FC_Funk Disco _C	4 / 4	1	126			:
Keys	Funk	816	BA_Funk Disco _C	4 / 4	1	126			:
Keys	Funk	817	EA_Funk Disco _C	4 / 4	4	126			:
Keys	Funk	818	EB_Funk Disco _C	4 / 4	3	126			:
Keys	Funk	819	MA_Clavi1	4 / 4	1	110			Clavi
Keys	Funk	820	MA_Clavi2	4 / 4	1	110			:
Keys	Funk	821	MA_Clavi3	4 / 4	1	110			:
Keys	Funk	822	MA_Clavi4	4 / 4	1	124			:
Keys	Funk	823	MA_Clavi5	4 / 4	1	124			:
Keys	Funk	824	MA_Clavi6	4 / 4	1	124			:
Keys	Funk	825	MA_Clavi7	4 / 4	1	124			:
Keys	Funk	826	MA_Super Clavi	4 / 4	4	101			:
Keys	Funk	827	MA_Touch Clavi	4 / 4	1	101			:
Keys	House	828	MA_Reggaeton1 EP	4 / 4	2	90			Electric Piano
Keys	House	829	MB_Reggaeton1 EP	4 / 4	4	90			:
Keys	House	830	MC_Reggaeton1 EP	4 / 4	2	90			:
Keys	House	831	MD_Reggaeton1 EP	4 / 4	4	90			:
Keys	House	832	ME_Reggaeton1 EP	4 / 4	2	90			:
Keys	House	833	MF_Reggaeton1 EP	4 / 4	4	90			:
Keys	House	834	MG_Reggaeton1 EP	4 / 4	4	90			:
Keys	House	835	MH_Reggaeton1 EP	4 / 4	4	90			:
Keys	House	836	MA_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	837	MB_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	838	MC_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	839	MF_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	840	MG_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	841	MH_TropicalHouse1 EP	4 / 4	4	110			:
Keys	House	842	MA_UK Garage1 EP _N	4 / 4	8	132			:
Keys	House	843	MC_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	844	MD_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	845	ME_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	846	MF_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	847	MG_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	848	MH_UK Garage1 EP _N	4 / 4	4	132			:
Keys	House	849	MA_Synth Piano11 _N	4 / 4	2	128			:
Keys	House	850	MA_Synth Piano11	4 / 4	2	128			:
Keys	House	851	MA_Synth Piano12 _N	4 / 4	4	120			:
Keys	House	852	MA_Synth Piano12	4 / 4	4	120			:
Keys	House	853	MA_Synth Piano13 _N	4 / 4	2	128			:
Keys	House	854	MA_Synth Piano13	4 / 4	2	128			:
Keys	House	855	MA_Synth Piano14 _N	4 / 4	2	128			:
Keys	House	856	MA_Synth Piano14	4 / 4	2	128			:
Keys	House	857	MA_Synth Piano15 _N	4 / 4	2	128			:
Keys	House	858	MA_Synth Piano15	4 / 4	2	128			:
Keys	House	859	MA_Epoque Keys	4 / 4	2	122			:
Keys	House	860	MA_Rodeo Keys	4 / 4	2	120			:
Keys	House	861	MA_Disco House _C	4 / 4	4	126			:
Keys	House	862	MB_Disco House _C	4 / 4	4	126			:
Keys	House	863	MC_Disco House _C	4 / 4	4	126			:
Keys	House	864	FA_Disco House _C	4 / 4	1	126			:
Keys	House	865	FB_Disco House _C	4 / 4	1	126			:
Keys	House	866	FC_Disco House _C	4 / 4	1	126			:
Keys	House	867	BA_Disco House _C	4 / 4	1	126			:
Keys	House	868	MD_Club House	4 / 4	1	128			:
Keys	House	869	FC_Club House _N	4 / 4	2	128			:
Keys	House	870	MA_Garage 2	4 / 4	2	127			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Keys	House	871	MA_Deep House1 _N	4 / 4	1	127			:
Keys	House	872	MA_Deep House2 _N	4 / 4	1	130			:
Keys	House	873	MA_Deep House3 _N	4 / 4	1	127			:
Keys	House	874	MA_Deep House4 _N	4 / 4	2	130			:
Keys	House	875	MA_Syn Clavi	4 / 4	1	126			Clavi
Keys	Pop Rock	876	MD_Vinyl EP _N	4 / 4	4	148			Electric Piano
Keys	Pop Rock	877	MA_BreakLoop1 EP _N	4 / 4	2	85			:
Keys	Pop Rock	878	MA_BreakLoop2 Keys _N	4 / 4	2	85			:
Keys	Pop Rock	879	MA_BreakLoop3 Keys _N	4 / 4	2	85			:
Keys	Pop Rock	880	MA_BreakLoop10 Keys _N	4 / 4	4	100			:
Keys	Pop Rock	881	MA_BreakLoop11 Keys _N	4 / 4	1	118			Clavi
Keys	Chill	882	MA_Vintage Chill _N	4 / 4	4	130			Electric Piano
Keys	Chill	883	MA_Vintage Chill	4 / 4	4	130			:
Keys	Chill	884	MA_Ambient 3 _N	4 / 4	4	88			:
Keys	Chill	885	MB_Ambient 3 _N	4 / 4	4	88			:
Keys	Chill	886	MC_Ambient 3 _N	4 / 4	4	88			:
Keys	Chill	887	FA_Ambient 3 _N	4 / 4	1	88			:
Keys	Chill	888	FB_Ambient 3 _N	4 / 4	1	88			:
Keys	Chill	889	FC_Ambient 3 _N	4 / 4	1	88			:
Keys	Chill	890	BA_Ambient 3 _N	4 / 4	1	88			:
Keys	World	891	MB1_Reggae 2	4 / 4	2	92			:
Keys	World	892	MD1_Reggae 2	4 / 4	2	92			:
Keys	World	893	FA1_Reggae 2	4 / 4	1	92			:
Keys	World	894	FB1_Reggae 2	4 / 4	1	92			:
Keys	World	895	MA2_Reggae 2	4 / 4	2	92			Clavi
Keys	World	896	MB2_Reggae 2	4 / 4	2	92			:
Keys	World	897	MD2_Reggae 2	4 / 4	2	92			:
Keys	World	898	IA2_Reggae 2	4 / 4	2	92			:
Keys	World	899	FA2_Reggae 2	4 / 4	1	92			:
Keys	World	900	MA_Saeidy 1 _C	4 / 4	2	120			:
Keys	World	901	MB_Saeidy 1 _C	4 / 4	2	120			:
Keys	World	902	MC_Saeidy 1 _C	4 / 4	4	120			:
Keys	World	903	FA_Saeidy 1 _C	4 / 4	1	120			:
Keys	World	904	FB_Saeidy 1 _C	4 / 4	1	120			:
Keys	World	905	FC_Saeidy 1 _C	4 / 4	1	120			:
Keys	World	906	BA_Saeidy 1 _C	4 / 4	1	120			:
Keys	World	907	EA_Saeidy 1 _C	4 / 4	4	120			:
Keys	General	908	MA_Baroque _C	4 / 4	4	88			Harpsichord
Keys	General	909	MB_Baroque _C	4 / 4	4	88			:
Keys	General	910	MC_Baroque _C	4 / 4	4	88			:
Keys	General	911	MD_Baroque _C	4 / 4	4	88			:
Keys	General	912	FA_Baroque _C	4 / 4	1	88			:
Keys	General	913	FB_Baroque _C	4 / 4	1	88			:
Keys	General	914	FC_Baroque _C	4 / 4	1	88			:
Keys	General	915	FD_Baroque _C	4 / 4	1	88			:
Organ	Rock	916	MA_ProgresRock1 _C	4 / 4	4	110			Organ
Organ	Rock	917	MB_ProgresRock1 _C	4 / 4	3	110			:
Organ	Rock	918	MC_ProgresRock1 _C	4 / 4	4	110			:
Organ	Rock	919	FA_ProgresRock1 _C	4 / 4	1	110			:
Organ	Rock	920	FB_ProgresRock1 _C	4 / 4	1	110			:
Organ	Rock	921	FC_ProgresRock1 _C	4 / 4	1	110			:
Organ	Rock	922	BA_ProgresRock1 _C	4 / 4	1	110			:
Organ	Rock	923	MA_ProgresRock1 _N	4 / 4	4	110			:
Organ	Rock	924	MB_ProgresRock1 _N	4 / 4	3	110			:
Organ	Rock	925	MC_ProgresRock1 _N	4 / 4	4	110			:
Organ	Rock	926	FA_ProgresRock1 _N	4 / 4	1	110			:
Organ	Rock	927	FB_ProgresRock1 _N	4 / 4	1	110			:
Organ	Rock	928	FC_ProgresRock1 _N	4 / 4	1	110			:
Organ	Rock	929	BA_ProgresRock1 _N	4 / 4	1	110			:
Organ	Ballad	930	MA_6/8 Ballad _C	6 / 8	4	87			:
Organ	Ballad	931	MB_6/8 Ballad _C	6 / 8	4	87			:
Organ	Ballad	932	MC_6/8 Ballad _C	6 / 8	4	87			:
Organ	Ballad	933	FA_6/8 Ballad _C	6 / 8	1	87			:
Organ	Ballad	934	FB_6/8 Ballad _C	6 / 8	1	87			:
Organ	Ballad	935	FC_6/8 Ballad _C	6 / 8	1	87			:
Organ	Ballad	936	BA_6/8 Ballad _C	6 / 8	1	87			:
Organ	Ballad	937	MA_6/8 Ballad _N	6 / 8	4	87			:
Organ	Ballad	938	MB_6/8 Ballad _N	6 / 8	4	87			:
Organ	Ballad	939	MC_6/8 Ballad _N	6 / 8	4	87			:
Organ	Ballad	940	FA_6/8 Ballad _N	6 / 8	1	87			:
Organ	Ballad	941	FB_6/8 Ballad _N	6 / 8	1	87			:
Organ	Ballad	942	FC_6/8 Ballad _N	6 / 8	1	87			:
Organ	Ballad	943	BA_6/8 Ballad _N	6 / 8	1	87			:
Organ	Hip Hop	944	MD_Hip Hop 1 _N	4 / 4	2	105			:
Organ	Hip Hop	945	FC_Hip Hop 1 _N	4 / 4	2	105			:
Organ	Classic R&B	946	MA_Soul 1 _C	4 / 4	2	116			:
Organ	Classic R&B	947	MB_Soul 1 _C	4 / 4	2	116			:
Organ	Classic R&B	948	MC_Soul 1 _C	4 / 4	2	116			:
Organ	Classic R&B	949	FA_Soul 1 _C	4 / 4	1	116			:
Organ	Classic R&B	950	FB_Soul 1 _C	4 / 4	1	116			:
Organ	Classic R&B	951	FC_Soul 1 _C	4 / 4	1	116			:
Organ	Classic R&B	952	BA_Soul 1 _C	4 / 4	1	116			:
Organ	Classic R&B	953	EA_Soul 1 _C	4 / 4	4	116			:
Organ	Classic R&B	954	EB_Soul 1 _C	4 / 4	3	116			:
Organ	Classic R&B	955	MA_Soul 2	4 / 4	1	120			:
Organ	Classic R&B	956	MB_Soul 2	4 / 4	4	120			:
Organ	Classic R&B	957	FB_Soul 2 _N	4 / 4	1	120			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Organ	Funk	958	MA_Jazz Funk 1 _C	4 / 4	4	120			:
Organ	Funk	959	MB_Jazz Funk 1 _C	4 / 4	4	120			:
Organ	Funk	960	MC_Jazz Funk 1 _C	4 / 4	4	120			:
Organ	Funk	961	FA_Jazz Funk 1 _C	4 / 4	1	120			:
Organ	Funk	962	FB_Jazz Funk 1 _C	4 / 4	1	120			:
Organ	Funk	963	FC_Jazz Funk 1 _C	4 / 4	1	120			:
Organ	Funk	964	BA_Jazz Funk 1 _C	4 / 4	1	120			:
Organ	Funk	965	EA_Jazz Funk 1 _C	4 / 4	3	120			:
Organ	Funk	966	EB_Jazz Funk 1 _C	4 / 4	3	120			:
Organ	Funk	967	MB_Jazz Funk 2	4 / 4	4	120			:
Organ	Funk	968	MA_Funk Organ1	4 / 4	2	110			:
Organ	Funk	969	MA_Funk Organ2	4 / 4	2	110			:
Organ	House	970	MB_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	971	MC_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	972	MD_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	973	ME_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	974	MF_UK Garage1 Organ	4 / 4	4	132			:
Organ	House	975	MG_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	976	MH_UK Garage1 Organ _N	4 / 4	4	132			:
Organ	House	977	MA_Dance Organ01 _N	4 / 4	4	135			:
Organ	House	978	MA_Dance Organ01	4 / 4	4	135			:
Organ	House	979	MA_Dance Organ02 _N	4 / 4	4	135			:
Organ	House	980	MA_Dance Organ02	4 / 4	4	135			:
Organ	House	981	MA_Dance Organ03 _N	4 / 4	4	135			:
Organ	House	982	MA_Dance Organ03	4 / 4	4	135			:
Organ	House	983	MA_Dance Organ04 _N	4 / 4	4	135			:
Organ	House	984	MA_Dance Organ04	4 / 4	4	135			:
Organ	House	985	MA_Dance Organ05 _N	4 / 4	4	135			:
Organ	House	986	MA_Dance Organ05	4 / 4	4	135			:
Organ	House	987	MA_Dance Organ06 _N	4 / 4	2	135			:
Organ	House	988	MA_Dance Organ06	4 / 4	2	135			:
Organ	House	989	MA_Dance Organ07 _N	4 / 4	4	135			:
Organ	House	990	MA_Dance Organ07	4 / 4	4	135			:
Organ	House	991	MA_Dance Organ08 _N	4 / 4	4	135			:
Organ	House	992	MA_Dance Organ08	4 / 4	4	135			:
Organ	House	993	MA_Dance Organ09 _N	4 / 4	2	135			:
Organ	House	994	MA_Dance Organ09	4 / 4	2	135			:
Organ	House	995	MA_Dance Organ10 _N	4 / 4	4	135			:
Organ	House	996	MA_Dance Organ10	4 / 4	4	135			:
Organ	House	997	MA_House Organ1	4 / 4	1	130			:
Organ	House	998	MA_House Organ2	4 / 4	1	130			:
Organ	House	999	MA_House Organ3	4 / 4	1	130			:
Organ	House	1000	MA_House Organ4	4 / 4	1	130			:
Organ	House	1001	MA_House Organ5	4 / 4	2	126			:
Organ	Jazz	1002	MA_Slow Blues 2 _C	4 / 4	4	72			:
Organ	Jazz	1003	MB_Slow Blues 2 _C	4 / 4	4	72			:
Organ	Jazz	1004	MC_Slow Blues 2 _C	4 / 4	4	72			:
Organ	Jazz	1005	FA_Slow Blues 2 _C	4 / 4	1	72			:
Organ	Jazz	1006	FB_Slow Blues 2 _C	4 / 4	1	72			:
Organ	Jazz	1007	FC_Slow Blues 2 _C	4 / 4	1	72			:
Organ	Jazz	1008	BA_Slow Blues 2 _C	4 / 4	1	72			:
Organ	Jazz	1009	MA_Slow Blues 2 _N	4 / 4	4	72			:
Organ	Jazz	1010	MB_Slow Blues 2 _N	4 / 4	4	72			:
Organ	Jazz	1011	MC_Slow Blues 2 _N	4 / 4	4	72			:
Organ	Jazz	1012	FA_Slow Blues 2 _N	4 / 4	1	72			:
Organ	Jazz	1013	FB_Slow Blues 2 _N	4 / 4	1	72			:
Organ	Jazz	1014	FC_Slow Blues 2 _N	4 / 4	1	72			:
Organ	Jazz	1015	BA_Slow Blues 2 _N	4 / 4	1	72			:
Organ	Latin	1016	MA_Latin Rock	4 / 4	2	120			:
Organ	Latin	1017	MB_Latin Rock	4 / 4	2	120			:
Organ	Latin	1018	MA_Latin Organ	4 / 4	1	110			:
Organ	World	1019	MA_Reggae 1	4 / 4	4	102			:
Organ	World	1020	MB_Reggae 1	4 / 4	4	102			:
Organ	World	1021	MD_Reggae 1	4 / 4	4	90			:
Organ	World	1022	FB_Reggae 1	4 / 4	1	102			:
Organ	World	1023	MA_Reggae 2	4 / 4	1	92			:
Organ	World	1024	MB_Reggae 2	4 / 4	2	92			:
Organ	World	1025	MC_Reggae 2	4 / 4	2	92			:
Organ	World	1026	MD_Reggae 2	4 / 4	1	92			:
Organ	World	1027	IA_Reggae 2	4 / 4	2	92			:
Organ	World	1028	FB_Reggae 2	4 / 4	1	92			:
Organ	World	1029	MA_ReggaeOrgan1	4 / 4	2	120			:
Organ	World	1030	MA_ReggaeOrgan2	4 / 4	1	120			:
Gtr	Rock	1031	MA_OverdriveGt1	4 / 4	4	120			Od/Dist Guitar
Gtr	Rock	1032	MA_OverdriveGt2 _N	4 / 4	4	120			:
Gtr	Rock	1033	MA_OverdriveGt3 _N	4 / 4	4	120			:
Gtr	Rock	1034	MA_OverdriveGt4 _N	4 / 4	4	120			:
Gtr	Rock	1035	MA_OverdriveGt5 _N	4 / 4	4	120			:
Gtr	Rock	1036	MA_Guitar Over1	1 / 4	4	180			:
Gtr	Rock	1037	MA_Guitar Over2	1 / 4	4	120			:
Gtr	Rock	1038	MA_ContempRock _C	4 / 4	4	126			:
Gtr	Rock	1039	MB_ContempRock _C	4 / 4	4	126			:
Gtr	Rock	1040	MC_ContempRock _C	4 / 4	4	126			:
Gtr	Rock	1041	FA_ContempRock _C	4 / 4	1	126			:
Gtr	Rock	1042	FB_ContempRock _C	4 / 4	1	126			:
Gtr	Rock	1043	FC_ContempRock _C	4 / 4	1	126			:
Gtr	Rock	1044	BA_ContempRock _C	4 / 4	1	126			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Rock	1045	EA_ContempRock _C	4 / 4	4	126			:
Gtr	Rock	1046	EB_ContempRock _C	4 / 4	4	126			:
Gtr	Rock	1047	MA1_70s Rock	4 / 4	2	130			Clean Guitar
Gtr	Rock	1048	MB1_70s Rock	4 / 4	2	130			:
Gtr	Rock	1049	MC1_70s Rock	4 / 4	4	130			:
Gtr	Rock	1050	MD1_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1051	MB2_70s Rock _N	4 / 4	4	130			Od/Dist Guitar
Gtr	Rock	1052	MC2_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1053	MD2_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1054	FC2_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1055	MA3_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1056	MB3_70s Rock _N	4 / 4	2	130			:
Gtr	Rock	1057	MC3_70s Rock _N	4 / 4	1	130			:
Gtr	Rock	1058	MD3_70s Rock _N	4 / 4	4	130			:
Gtr	Rock	1059	MA_OverTheTop1	4 / 4	2	120			Over The Top
Gtr	Rock	1060	MA_OverTheTop2	4 / 4	2	120			:
Gtr	Rock	1061	MA_OverTheTop3	4 / 4	2	120			:
Gtr	Rock	1062	MA_OverTheTop4	4 / 4	4	120			:
Gtr	Rock	1063	MA_OverTheTop5	4 / 4	4	120			:
Gtr	Rock	1064	MA_AlternaRock1 _N	4 / 4	4	97			Od/Dist Guitar
Gtr	Rock	1065	MB_AlternaRock1 _N	4 / 4	4	97			:
Gtr	Rock	1066	MC_AlternaRock1 _N	4 / 4	4	97			:
Gtr	Rock	1067	FA_AlternaRock1 _N	4 / 4	1	97			:
Gtr	Rock	1068	FB_AlternaRock1 _N	4 / 4	1	97			:
Gtr	Rock	1069	FC_AlternaRock1 _N	4 / 4	1	97			:
Gtr	Rock	1070	BA_AlternaRock1 _N	4 / 4	1	97			:
Gtr	Rock	1071	MA_AlternaRock2 _N	4 / 4	4	100			:
Gtr	Rock	1072	MB_AlternaRock2 _N	4 / 4	4	100			:
Gtr	Rock	1073	MC_AlternaRock2 _N	4 / 4	4	100			:
Gtr	Rock	1074	FA_AlternaRock2 _N	4 / 4	1	100			:
Gtr	Rock	1075	FB_AlternaRock2 _N	4 / 4	1	100			:
Gtr	Rock	1076	FC_AlternaRock2 _N	4 / 4	1	100			:
Gtr	Rock	1077	BA_AlternaRock2 _N	4 / 4	2	100			:
Gtr	Rock	1078	MC1_Xover Rock _N	4 / 4	2	100			:
Gtr	Rock	1079	MD1_Xover Rock _N	4 / 4	2	100			:
Gtr	Rock	1080	FB1_Xover Rock _N	4 / 4	1	100			:
Gtr	Rock	1081	FC1_Xover Rock _N	4 / 4	2	100			:
Gtr	Rock	1082	MA2_Xover Rock _N	4 / 4	2	100			:
Gtr	Rock	1083	MB2_Xover Rock _N	4 / 4	1	100			:
Gtr	Rock	1084	IA2_Xover Rock _N	4 / 4	2	100			Clean Guitar
Gtr	Rock	1085	FA2_Xover Rock _N	4 / 4	1	100			:
Gtr	Rock	1086	MA1_8Beat Rock _C	4 / 4	4	75			:
Gtr	Rock	1087	MB1_8Beat Rock _C	4 / 4	4	75			:
Gtr	Rock	1088	MC1_8Beat Rock _C	4 / 4	4	75			:
Gtr	Rock	1089	FA1_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1090	FB1_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1091	FC1_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1092	BA1_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1093	MA1_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1094	MB1_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1095	MC1_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1096	FA1_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1097	FB1_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1098	FC1_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1099	BA1_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1100	MA2_8Beat Rock _C	4 / 4	4	75			Od/Dist Guitar
Gtr	Rock	1101	MB2_8Beat Rock _C	4 / 4	4	75			:
Gtr	Rock	1102	MC2_8Beat Rock _C	4 / 4	4	75			:
Gtr	Rock	1103	FA2_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1104	FB2_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1105	FC2_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1106	BA2_8Beat Rock _C	4 / 4	1	75			:
Gtr	Rock	1107	MA2_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1108	MB2_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1109	MC2_8Beat Rock _N	4 / 4	4	75			:
Gtr	Rock	1110	FA2_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1111	FB2_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1112	FC2_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1113	BA2_8Beat Rock _N	4 / 4	1	75			:
Gtr	Rock	1114	MA_16Beat Rock _C	4 / 4	4	86			Over The Top
Gtr	Rock	1115	MB_16Beat Rock _C	4 / 4	4	86			:
Gtr	Rock	1116	MC_16Beat Rock _C	4 / 4	4	86			:
Gtr	Rock	1117	FA_16Beat Rock _C	4 / 4	1	86			:
Gtr	Rock	1118	FB_16Beat Rock _C	4 / 4	1	86			:
Gtr	Rock	1119	FC_16Beat Rock _C	4 / 4	1	86			:
Gtr	Rock	1120	BA_16Beat Rock _C	4 / 4	1	86			:
Gtr	Rock	1121	MA_16Beat Rock	4 / 4	4	86			:
Gtr	Rock	1122	MB_16Beat Rock	4 / 4	4	86			:
Gtr	Rock	1123	MC_16Beat Rock	4 / 4	4	86			:
Gtr	Rock	1124	FA_16Beat Rock	4 / 4	1	86			:
Gtr	Rock	1125	FB_16Beat Rock	4 / 4	1	86			:
Gtr	Rock	1126	FC_16Beat Rock	4 / 4	1	86			:
Gtr	Rock	1127	BA_16Beat Rock	4 / 4	1	86			:
Gtr	Rock	1128	MA_ProgresRock1 _C	4 / 4	4	110			DriveWah (2handGtr)
Gtr	Rock	1129	MB_ProgresRock1 _C	4 / 4	3	110			:
Gtr	Rock	1130	MC_ProgresRock1 _C	4 / 4	4	110			:
Gtr	Rock	1131	FA_ProgresRock1 _C	4 / 4	1	110			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Rock	1132	FB_ProgresRock1 _C	4 / 4	1	110			:
Gtr	Rock	1133	FC_ProgresRock1 _C	4 / 4	1	110			:
Gtr	Rock	1134	BA_ProgresRock1 _C	4 / 4	1	110			:
Gtr	Rock	1135	MA_ProgresRock1 _N	4 / 4	4	110			:
Gtr	Rock	1136	MB_ProgresRock1 _N	4 / 4	3	110			:
Gtr	Rock	1137	MC_ProgresRock1	4 / 4	4	110			:
Gtr	Rock	1138	FA_ProgresRock1 _N	4 / 4	1	110			:
Gtr	Rock	1139	FB_ProgresRock1	4 / 4	1	110			:
Gtr	Rock	1140	FC_ProgresRock1	4 / 4	1	110			:
Gtr	Rock	1141	BA_ProgresRock1	4 / 4	1	110			:
Gtr	Rock	1142	MA_ProgresRock2 _C	4 / 4	4	120			Clean Guitar
Gtr	Rock	1143	MB_ProgresRock2 _C	4 / 4	4	120			:
Gtr	Rock	1144	MC_ProgresRock2 _C	4 / 4	4	120			:
Gtr	Rock	1145	FA_ProgresRock2 _C	4 / 4	1	120			:
Gtr	Rock	1146	FB_ProgresRock2 _C	4 / 4	1	120			:
Gtr	Rock	1147	FC_ProgresRock2 _C	4 / 4	1	120			:
Gtr	Rock	1148	BA_ProgresRock2 _C	4 / 4	1	120			:
Gtr	Rock	1149	MA_ProgresRock2	4 / 4	4	120			:
Gtr	Rock	1150	MB_ProgresRock2 _N	4 / 4	4	120			:
Gtr	Rock	1151	MC_ProgresRock2 _N	4 / 4	4	120			:
Gtr	Rock	1152	FA_ProgresRock2 _N	4 / 4	1	120			:
Gtr	Rock	1153	FB_ProgresRock2 _N	4 / 4	1	120			:
Gtr	Rock	1154	FC_ProgresRock2 _N	4 / 4	1	120			:
Gtr	Rock	1155	BA_ProgresRock2 _N	4 / 4	1	120			:
Gtr	Rock	1156	MA_Rock Guitar1	4 / 4	1	120			Od/Dist Guitar
Gtr	Rock	1157	MA_Rock Guitar2	4 / 4	1	120			:
Gtr	Rock	1158	MA_Rock Guitar3	4 / 4	1	120			:
Gtr	Pop Rock	1159	MA_Guitar Pop 1 _C	4 / 4	4	100			Acoustic Guitar
Gtr	Pop Rock	1160	MB_Guitar Pop 1 _C	4 / 4	4	100			:
Gtr	Pop Rock	1161	MC_Guitar Pop 1 _C	4 / 4	4	100			:
Gtr	Pop Rock	1162	FA_Guitar Pop 1 _C	4 / 4	1	100			:
Gtr	Pop Rock	1163	FB_Guitar Pop 1 _C	4 / 4	1	100			:
Gtr	Pop Rock	1164	FC_Guitar Pop 1 _C	4 / 4	1	100			:
Gtr	Pop Rock	1165	BA_Guitar Pop 1 _C	4 / 4	1	100			:
Gtr	Pop Rock	1166	EA_Guitar Pop 1 _C	4 / 4	3	100			:
Gtr	Pop Rock	1167	EB_Guitar Pop 1 _C	4 / 4	3	100			:
Gtr	Pop Rock	1168	MA1_Guitar Pop 2	4 / 4	2	90			:
Gtr	Pop Rock	1169	MA1_Guitar Pop2 AF2	4 / 4	2	90			Aco Guitar / Syn Pad
Gtr	Pop Rock	1170	MB1_Guitar Pop 2	4 / 4	1	90			Acoustic Guitar
Gtr	Pop Rock	1171	MC1_Guitar Pop 2	4 / 4	2	90			:
Gtr	Pop Rock	1172	IA1_Guitar Pop 2	4 / 4	1	90			:
Gtr	Pop Rock	1173	MA2_Guitar Pop 2	4 / 4	1	90			:
Gtr	Pop Rock	1174	IA2_Guitar Pop 2	4 / 4	1	90			Clean Guitar
Gtr	Pop Rock	1175	MA1_FingerPickin _N	4 / 4	2	120			Acoustic Guitar
Gtr	Pop Rock	1176	MB1_FingerPickin _N	4 / 4	2	120			:
Gtr	Pop Rock	1177	MC1_FingerPickin _N	4 / 4	2	120			:
Gtr	Pop Rock	1178	MD1_FingerPickin _N	4 / 4	3	120			:
Gtr	Pop Rock	1179	IA1_FingerPickin	4 / 4	1	120			:
Gtr	Pop Rock	1180	FA1_FingerPickin _N	4 / 4	1	120			:
Gtr	Pop Rock	1181	FB1_FingerPickin _N	4 / 4	1	120			:
Gtr	Pop Rock	1182	MA2_FingerPickin	4 / 4	2	120			:
Gtr	Pop Rock	1183	MB2_FingerPickin	4 / 4	2	120			:
Gtr	Pop Rock	1184	MC2_FingerPickin	4 / 4	2	120			:
Gtr	Pop Rock	1185	MD2_FingerPickin	4 / 4	2	120			:
Gtr	Pop Rock	1186	IA2_FingerPickin	4 / 4	2	120			:
Gtr	Pop Rock	1187	FA2_FingerPickin	4 / 4	1	120			:
Gtr	Pop Rock	1188	FB2_FingerPickin	4 / 4	1	120			:
Gtr	Pop Rock	1189	MA_Pickin1	4 / 4	3	120			:
Gtr	Pop Rock	1190	MA_Pickin2	4 / 4	2	120			:
Gtr	Pop Rock	1191	MA_Pickin3	4 / 4	2	120			:
Gtr	Pop Rock	1192	MA1_Folk Rock _N	4 / 4	2	120			:
Gtr	Pop Rock	1193	MB1_Folk Rock _N	4 / 4	2	120			:
Gtr	Pop Rock	1194	IA1_Folk Rock _N	4 / 4	1	120			:
Gtr	Pop Rock	1195	IA1_FolkRock AF1 _N	4 / 4	1	80			:
Gtr	Pop Rock	1196	IA1_FolkRk AF1&2 _N	4 / 4	1	80			:
Gtr	Pop Rock	1197	MA2_Folk Rock	4 / 4	2	120			:
Gtr	Pop Rock	1198	MB2_Folk Rock	4 / 4	2	120			:
Gtr	Pop Rock	1199	MC2_Folk Rock	4 / 4	2	120			:
Gtr	Pop Rock	1200	IA2_Folk Rock	4 / 4	1	120			:
Gtr	Pop Rock	1201	IA2_FolkRck AF1	4 / 4	1	80			:
Gtr	Pop Rock	1202	MC3_Folk Rock _N	4 / 4	2	120			Clean Guitar
Gtr	Pop Rock	1203	MD3_Folk Rock _N	4 / 4	2	120			:
Gtr	Pop Rock	1204	FA3_Folk Rock _N	4 / 4	1	120			:
Gtr	Pop Rock	1205	MA_12 GuitarA1 _N	4 / 4	4	120			Acoustic Guitar
Gtr	Pop Rock	1206	MA_12 GuitarA2 _N	4 / 4	4	120			:
Gtr	Pop Rock	1207	MA_12 GuitarA3 _N	4 / 4	4	120			:
Gtr	Pop Rock	1208	MA_12 GuitarA4 _N	4 / 4	4	120			:
Gtr	Pop Rock	1209	MA_12 GuitarA5 _N	4 / 4	4	120			:
Gtr	Pop Rock	1210	MA_12 GuitarB1	4 / 4	1	97			:
Gtr	Pop Rock	1211	MA_12 GuitarB2	4 / 4	1	100			:
Gtr	Pop Rock	1212	MA_Worship Fast _C	4 / 4	8	114			:
Gtr	Pop Rock	1213	MB_Worship Fast _C	4 / 4	4	114			:
Gtr	Pop Rock	1214	MC_Worship Fast _C	4 / 4	4	114			:
Gtr	Pop Rock	1215	FA_Worship Fast _C	4 / 4	1	114			:
Gtr	Pop Rock	1216	FB_Worship Fast _C	4 / 4	1	114			:
Gtr	Pop Rock	1217	FC_Worship Fast _C	4 / 4	1	114			:
Gtr	Pop Rock	1218	BA_Worship Fast _C	4 / 4	1	114			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	1219	EA_Worship Fast _C	4 / 4	4	114			:
Gtr	Pop Rock	1220	EB_Worship Fast _C	4 / 4	2	114			:
Gtr	Pop Rock	1221	MA_New Country _C	4 / 4	2	118			:
Gtr	Pop Rock	1222	MB_New Country _C	4 / 4	4	118			:
Gtr	Pop Rock	1223	MC_New Country _C	4 / 4	2	118			:
Gtr	Pop Rock	1224	FA_New Country _C	4 / 4	1	118			:
Gtr	Pop Rock	1225	FB_New Country _C	4 / 4	1	118			:
Gtr	Pop Rock	1226	FC_New Country _C	4 / 4	1	118			:
Gtr	Pop Rock	1227	BA_New Country _C	4 / 4	1	118			:
Gtr	Pop Rock	1228	EA_New Country _C	4 / 4	4	118			:
Gtr	Pop Rock	1229	EB_New Country _C	4 / 4	4	118			:
Gtr	Pop Rock	1230	MA_New Country	4 / 4	2	118			:
Gtr	Pop Rock	1231	MB_New Country	4 / 4	4	118			:
Gtr	Pop Rock	1232	MC_New Country	4 / 4	2	118			:
Gtr	Pop Rock	1233	FA_New Country	4 / 4	1	118			:
Gtr	Pop Rock	1234	FB_New Country	4 / 4	1	118			:
Gtr	Pop Rock	1235	FC_New Country	4 / 4	1	118			:
Gtr	Pop Rock	1236	BA_New Country	4 / 4	1	118			:
Gtr	Pop Rock	1237	MA_BritPopSwing _C	4 / 4	2	110			Clean Guitar
Gtr	Pop Rock	1238	MB_BritPopSwing _C	4 / 4	2	110			:
Gtr	Pop Rock	1239	MC_BritPopSwing _C	4 / 4	2	110			:
Gtr	Pop Rock	1240	FA_BritPopSwing _C	4 / 4	1	110			:
Gtr	Pop Rock	1241	FB_BritPopSwing _C	4 / 4	1	110			:
Gtr	Pop Rock	1242	FC_BritPopSwing _C	4 / 4	1	110			:
Gtr	Pop Rock	1243	BA_BritPopSwing _C	4 / 4	1	110			:
Gtr	Pop Rock	1244	EA_BritPopSwing _C	4 / 4	4	110			:
Gtr	Pop Rock	1245	EB_BritPopSwing _C	4 / 4	4	110			:
Gtr	Pop Rock	1246	MA_8Beat Basic _C	4 / 4	4	120			:
Gtr	Pop Rock	1247	MB_8Beat Basic _C	4 / 4	4	120			:
Gtr	Pop Rock	1248	MC_8Beat Basic _C	4 / 4	4	120			:
Gtr	Pop Rock	1249	FA_8Beat Basic _C	4 / 4	1	120			:
Gtr	Pop Rock	1250	FB_8Beat Basic _C	4 / 4	1	120			:
Gtr	Pop Rock	1251	FC_8Beat Basic _C	4 / 4	1	120			:
Gtr	Pop Rock	1252	BA_8Beat Basic _C	4 / 4	1	120			:
Gtr	Pop Rock	1253	MA_8Beat Basic _N	4 / 4	4	120			:
Gtr	Pop Rock	1254	MB_8Beat Basic _N	4 / 4	4	120			:
Gtr	Pop Rock	1255	MC_8Beat Basic _N	4 / 4	4	120			:
Gtr	Pop Rock	1256	FA_8Beat Basic _N	4 / 4	1	120			:
Gtr	Pop Rock	1257	FB_8Beat Basic _N	4 / 4	1	120			:
Gtr	Pop Rock	1258	FC_8Beat Basic _N	4 / 4	1	120			:
Gtr	Pop Rock	1259	BA_8Beat Basic _N	4 / 4	1	120			:
Gtr	Pop Rock	1260	MA_8Beat Soft _C	4 / 4	4	100			Acoustic Guitar
Gtr	Pop Rock	1261	MB_8Beat Soft _C	4 / 4	4	100			:
Gtr	Pop Rock	1262	MC_8Beat Soft _C	4 / 4	4	100			:
Gtr	Pop Rock	1263	FA_8Beat Soft _C	4 / 4	1	100			:
Gtr	Pop Rock	1264	FB_8Beat Soft _C	4 / 4	1	100			:
Gtr	Pop Rock	1265	FC_8Beat Soft _C	4 / 4	1	100			:
Gtr	Pop Rock	1266	BA_8Beat Soft _C	4 / 4	1	100			:
Gtr	Pop Rock	1267	MA_8Beat Soft _N	4 / 4	4	100			:
Gtr	Pop Rock	1268	MB_8Beat Soft _N	4 / 4	4	100			:
Gtr	Pop Rock	1269	MC_8Beat Soft _N	4 / 4	4	100			:
Gtr	Pop Rock	1270	FA_8Beat Soft _N	4 / 4	1	100			:
Gtr	Pop Rock	1271	FB_8Beat Soft _N	4 / 4	1	100			:
Gtr	Pop Rock	1272	FC_8Beat Soft _N	4 / 4	1	100			:
Gtr	Pop Rock	1273	BA_8Beat Soft _N	4 / 4	1	100			:
Gtr	Pop Rock	1274	MA1_Soft Rock	4 / 4	4	120			:
Gtr	Pop Rock	1275	MB1_Soft Rock	4 / 4	4	120			:
Gtr	Pop Rock	1276	MC1_Soft Rock	4 / 4	2	120			:
Gtr	Pop Rock	1277	MD1_Soft Rock	4 / 4	2	120			:
Gtr	Pop Rock	1278	IA1_Soft Rock	4 / 4	1	120			:
Gtr	Pop Rock	1279	FA1_Soft Rock _N	4 / 4	1	120			:
Gtr	Pop Rock	1280	FB1_Soft Rock	4 / 4	1	120			:
Gtr	Pop Rock	1281	MD2_Soft Rock _N	4 / 4	2	120			Od/Dist Guitar
Gtr	Pop Rock	1282	FB2_Soft Rock _N	4 / 4	1	120			:
Gtr	Pop Rock	1283	MA_16BeatBasic1 _C	4 / 4	4	90			Clean Guitar
Gtr	Pop Rock	1284	MB_16BeatBasic1 _C	4 / 4	4	90			:
Gtr	Pop Rock	1285	MC_16BeatBasic1 _C	4 / 4	4	90			:
Gtr	Pop Rock	1286	FA_16BeatBasic1 _C	4 / 4	1	90			:
Gtr	Pop Rock	1287	FB_16BeatBasic1 _C	4 / 4	1	90			:
Gtr	Pop Rock	1288	FC_16BeatBasic1 _C	4 / 4	1	90			:
Gtr	Pop Rock	1289	BA_16BeatBasic1 _C	4 / 4	1	90			:
Gtr	Pop Rock	1290	MA_16BeatBasic1 _N	4 / 4	4	90			:
Gtr	Pop Rock	1291	MB_16BeatBasic1 _N	4 / 4	4	90			:
Gtr	Pop Rock	1292	MC_16BeatBasic1 _N	4 / 4	4	90			:
Gtr	Pop Rock	1293	FA_16BeatBasic1 _N	4 / 4	1	90			:
Gtr	Pop Rock	1294	FB_16BeatBasic1 _N	4 / 4	1	90			:
Gtr	Pop Rock	1295	FC_16BeatBasic1 _N	4 / 4	1	90			:
Gtr	Pop Rock	1296	BA_16BeatBasic1 _N	4 / 4	1	90			:
Gtr	Pop Rock	1297	MA_Analog Pop	4 / 4	2	93			:
Gtr	Pop Rock	1298	MC_Analog Pop	4 / 4	1	93			:
Gtr	Pop Rock	1299	IA_Analog Pop	4 / 4	1	93			:
Gtr	Pop Rock	1300	MA_6/8 Pop _C	4 / 4	4	100			Od/Dist Guitar
Gtr	Pop Rock	1301	MB_6/8 Pop _C	4 / 4	4	100			:
Gtr	Pop Rock	1302	MC_6/8 Pop _C	4 / 4	4	100			:
Gtr	Pop Rock	1303	FA_6/8 Pop _C	4 / 4	1	100			:
Gtr	Pop Rock	1304	FB_6/8 Pop _C	4 / 4	1	100			:
Gtr	Pop Rock	1305	FC_6/8 Pop _C	4 / 4	1	100			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	1306	BA_6/8 Pop _C	4 / 4	1	100			:
Gtr	Pop Rock	1307	EA_6/8 Pop _C	4 / 4	3	123			:
Gtr	Pop Rock	1308	MA_6/8 Pop _N	4 / 4	4	100			:
Gtr	Pop Rock	1309	MB_6/8 Pop _N	4 / 4	4	100			:
Gtr	Pop Rock	1310	MC_6/8 Pop _N	4 / 4	4	100			:
Gtr	Pop Rock	1311	FA_6/8 Pop _N	4 / 4	1	100			:
Gtr	Pop Rock	1312	FB_6/8 Pop _N	4 / 4	1	100			:
Gtr	Pop Rock	1313	FC_6/8 Pop _N	4 / 4	1	100			:
Gtr	Pop Rock	1314	BA_6/8 Pop _N	4 / 4	1	100			:
Gtr	Ballad	1315	MA_Unplugged 3 _C	4 / 4	4	113			Acoustic Guitar
Gtr	Ballad	1316	MB_Unplugged 3 _C	4 / 4	4	113			:
Gtr	Ballad	1317	MC_Unplugged 3 _C	4 / 4	4	113			:
Gtr	Ballad	1318	FA_Unplugged 3 _C	4 / 4	1	113			:
Gtr	Ballad	1319	FB_Unplugged 3 _C	4 / 4	1	113			:
Gtr	Ballad	1320	FC_Unplugged 3 _C	4 / 4	1	113			:
Gtr	Ballad	1321	BA_Unplugged 3 _C	4 / 4	1	113			:
Gtr	Ballad	1322	MA_Unplugged 3 _N	4 / 4	4	113			:
Gtr	Ballad	1323	MB_Unplugged 3 _N	4 / 4	4	113			:
Gtr	Ballad	1324	MC_Unplugged 3 _N	4 / 4	4	113			:
Gtr	Ballad	1325	FA_Unplugged 3 _N	4 / 4	1	113			:
Gtr	Ballad	1326	FB_Unplugged 3 _N	4 / 4	1	113			:
Gtr	Ballad	1327	FC_Unplugged 3 _N	4 / 4	1	113			:
Gtr	Ballad	1328	BA_Unplugged 3 _N	4 / 4	1	113			:
Gtr	Ballad	1329	MA_Unplugged 4	4 / 4	4	120			:
Gtr	Ballad	1330	MB_Unplugged 4	4 / 4	2	120			:
Gtr	Ballad	1331	MC_Unplugged 4	4 / 4	2	120			:
Gtr	Ballad	1332	MD_Unplugged 4	4 / 4	2	120			:
Gtr	Ballad	1333	FA_Unplugged 4	4 / 4	1	120			:
Gtr	Ballad	1334	FB_Unplugged 4	4 / 4	1	120			:
Gtr	Ballad	1335	EA_Unplugged 4	4 / 4	4	120			:
Gtr	Ballad	1336	EB_Unplugged 4	4 / 4	3	120			:
Gtr	Ballad	1337	MA_8Beat Ballad2 _C	4 / 4	4	101			:
Gtr	Ballad	1338	MB_8Beat Ballad2 _C	4 / 4	4	101			:
Gtr	Ballad	1339	MC_8Beat Ballad2 _C	4 / 4	4	101			:
Gtr	Ballad	1340	FA_8Beat Ballad2 _C	4 / 4	1	101			:
Gtr	Ballad	1341	FB_8Beat Ballad2 _C	4 / 4	1	101			:
Gtr	Ballad	1342	FC_8Beat Ballad2 _C	4 / 4	1	101			:
Gtr	Ballad	1343	BA_8Beat Ballad2 _C	4 / 4	1	101			:
Gtr	Ballad	1344	EA_8Beat Ballad2 _C	4 / 4	5	101			:
Gtr	Ballad	1345	EB_8Beat Ballad2 _C	4 / 4	5	101			:
Gtr	Ballad	1346	MA_8Beat Ballad2	4 / 4	4	101			:
Gtr	Ballad	1347	MB_8Beat Ballad2	4 / 4	4	101			:
Gtr	Ballad	1348	MC_8Beat Ballad2	4 / 4	4	101			:
Gtr	Ballad	1349	FA_8Beat Ballad2	4 / 4	1	101			:
Gtr	Ballad	1350	FB_8Beat Ballad2	4 / 4	1	101			:
Gtr	Ballad	1351	FC_8Beat Ballad2	4 / 4	1	101			:
Gtr	Ballad	1352	BA_8Beat Ballad2	4 / 4	1	101			:
Gtr	Ballad	1353	MA_Slowfeel	4 / 4	1	74			:
Gtr	Ballad	1354	MB_Slowfeel	4 / 4	1	74			:
Gtr	Ballad	1355	MC_Slowfeel	4 / 4	1	74			Clean Guitar
Gtr	Ballad	1356	MA_16Bt Ballad2 _C	4 / 4	4	75			:
Gtr	Ballad	1357	MB_16Bt Ballad2 _C	4 / 4	4	75			:
Gtr	Ballad	1358	MC_16Bt Ballad2 _C	4 / 4	4	75			:
Gtr	Ballad	1359	FA_16Bt Ballad2 _C	4 / 4	1	75			:
Gtr	Ballad	1360	FB_16Bt Ballad2 _C	4 / 4	1	75			:
Gtr	Ballad	1361	FC_16Bt Ballad2 _C	4 / 4	1	75			:
Gtr	Ballad	1362	BA_16Bt Ballad2 _C	4 / 4	1	75			:
Gtr	Ballad	1363	MA_16Bt Ballad2 _N	4 / 4	4	75			:
Gtr	Ballad	1364	MB_16Bt Ballad2 _N	4 / 4	4	75			:
Gtr	Ballad	1365	MC_16Bt Ballad2 _N	4 / 4	4	75			:
Gtr	Ballad	1366	FA_16Bt Ballad2 _N	4 / 4	1	75			:
Gtr	Ballad	1367	FB_16Bt Ballad2 _N	4 / 4	1	75			:
Gtr	Ballad	1368	FC_16Bt Ballad2 _N	4 / 4	1	75			:
Gtr	Ballad	1369	BA_16Bt Ballad2 _N	4 / 4	1	75			:
Gtr	Ballad	1370	MA_6/8 Ballad _C	6 / 8	4	87			Od/Dist Guitar
Gtr	Ballad	1371	MB_6/8 Ballad _C	6 / 8	4	87			:
Gtr	Ballad	1372	MC_6/8 Ballad _C	6 / 8	4	87			:
Gtr	Ballad	1373	FA_6/8 Ballad _C	6 / 8	1	87			:
Gtr	Ballad	1374	FB_6/8 Ballad _C	6 / 8	1	87			:
Gtr	Ballad	1375	FC_6/8 Ballad _C	6 / 8	1	87			:
Gtr	Ballad	1376	BA_6/8 Ballad _C	6 / 8	1	87			:
Gtr	Ballad	1377	EA_6/8 Ballad _C	6 / 8	6	87			:
Gtr	Ballad	1378	EB_6/8 Ballad _C	6 / 8	6	87			:
Gtr	Ballad	1379	MA_6/8 Ballad _N	6 / 8	4	87			:
Gtr	Ballad	1380	MB_6/8 Ballad _N	6 / 8	4	87			:
Gtr	Ballad	1381	MC_6/8 Ballad _N	6 / 8	4	87			:
Gtr	Ballad	1382	FA_6/8 Ballad _N	6 / 8	1	87			:
Gtr	Ballad	1383	FB_6/8 Ballad _N	6 / 8	1	87			:
Gtr	Ballad	1384	FC_6/8 Ballad _N	6 / 8	1	87			:
Gtr	Ballad	1385	BA_6/8 Ballad _N	6 / 8	1	87			:
Gtr	Hip Hop	1386	MA_PepRally _N	4 / 4	1	75			Clean Guitar
Gtr	Hip Hop	1387	MB_PepRally _N	4 / 4	1	75			:
Gtr	Hip Hop	1388	MC_PepRally _N	4 / 4	1	75			:
Gtr	Hip Hop	1389	MD_PepRally _N	4 / 4	1	75			:
Gtr	Hip Hop	1390	MA_Hip Hop 2 _N	4 / 4	2	94			Mute Guitar
Gtr	Hip Hop	1391	MC_Hip Hop 2 _N	4 / 4	2	94			:
Gtr	Hip Hop	1392	MD_Hip Hop 2 _N	4 / 4	2	94			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Hip Hop	1393	IA_Hip Hop 2 _N	4 / 4	2	94			:
Gtr	Hip Hop	1394	MA1_Hip Hop 3	4 / 4	2	104			Acoustic Guitar
Gtr	Hip Hop	1395	MB1_Hip Hop 3	4 / 4	2	104			:
Gtr	Hip Hop	1396	MC1_Hip Hop 3	4 / 4	2	104			:
Gtr	Hip Hop	1397	MD1_Hip Hop 3	4 / 4	2	104			:
Gtr	Hip Hop	1398	FC1_Hip Hop 3	4 / 4	2	104			:
Gtr	Hip Hop	1399	MA2_Hip Hop 3 _N	4 / 4	2	104			Mute Guitar
Gtr	Hip Hop	1400	MB2_Hip Hop 3 _N	4 / 4	2	104			:
Gtr	Hip Hop	1401	MD2_Hip Hop 3 _N	4 / 4	2	104			:
Gtr	Hip Hop	1402	FA2_Hip Hop 3 _N	4 / 4	1	104			:
Gtr	Hip Hop	1403	FC2_Hip Hop 3 _N	4 / 4	2	104			:
Gtr	Hip Hop	1404	MA1_Hip Hop 6 _C	4 / 4	4	96			Acoustic Guitar
Gtr	Hip Hop	1405	MB1_Hip Hop 6 _C	4 / 4	4	96			:
Gtr	Hip Hop	1406	MC1_Hip Hop 6 _C	4 / 4	4	96			:
Gtr	Hip Hop	1407	FA1_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1408	FB1_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1409	FC1_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1410	BA1_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1411	MA2_Hip Hop 6 _C	4 / 4	4	96			Od/Dist Guitar
Gtr	Hip Hop	1412	MB2_Hip Hop 6 _C	4 / 4	4	96			:
Gtr	Hip Hop	1413	MC2_Hip Hop 6 _C	4 / 4	4	96			:
Gtr	Hip Hop	1414	FA2_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1415	FB2_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1416	FC2_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1417	BA2_Hip Hop 6 _C	4 / 4	1	96			:
Gtr	Hip Hop	1418	MA_Hip Rock 1 _C	4 / 4	4	90			:
Gtr	Hip Hop	1419	MB_Hip Rock 1 _C	4 / 4	4	90			:
Gtr	Hip Hop	1420	MC_Hip Rock 1 _C	4 / 4	4	90			:
Gtr	Hip Hop	1421	FA_Hip Rock 1 _C	4 / 4	1	90			:
Gtr	Hip Hop	1422	FB_Hip Rock 1 _C	4 / 4	1	90			:
Gtr	Hip Hop	1423	FC_Hip Rock 1 _C	4 / 4	1	90			:
Gtr	Hip Hop	1424	MA_Hip Rock 2 _C	4 / 4	4	132			:
Gtr	Hip Hop	1425	MB_Hip Rock 2 _C	4 / 4	4	132			:
Gtr	Hip Hop	1426	MC_Hip Rock 2 _C	4 / 4	4	132			:
Gtr	Hip Hop	1427	FA_Hip Rock 2 _C	4 / 4	1	132			:
Gtr	Hip Hop	1428	FB_Hip Rock 2 _C	4 / 4	1	132			:
Gtr	Hip Hop	1429	FC_Hip Rock 2 _C	4 / 4	1	132			:
Gtr	Hip Hop	1430	BA_Hip Rock 2 _C	4 / 4	1	132			:
Gtr	Hip Hop	1431	MB1_ClasicHipHop _N	4 / 4	2	90			Clean Guitar
Gtr	Hip Hop	1432	MC1_ClasicHipHop _N	4 / 4	2	90			:
Gtr	Hip Hop	1433	MA2_ClasicHipHop	4 / 4	2	90			:
Gtr	Hip Hop	1434	MB2_ClasicHipHop	4 / 4	2	90			:
Gtr	Hip Hop	1435	MC2_ClasicHipHop	4 / 4	2	90			:
Gtr	Hip Hop	1436	IA2_ClasicHipHop	4 / 4	4	90			:
Gtr	Hip Hop	1437	MD3_ClasicHipHop	4 / 4	2	90			:
Gtr	Hip Hop	1438	FC3_ClasicHipHop	4 / 4	2	90			:
Gtr	Modern R&B	1439	MA_Pop Shuffle2 _C	4 / 4	4	94			:
Gtr	Modern R&B	1440	MB_Pop Shuffle2 _C	4 / 4	4	94			:
Gtr	Modern R&B	1441	MC_Pop Shuffle2 _C	4 / 4	4	94			:
Gtr	Modern R&B	1442	FA_Pop Shuffle2 _C	4 / 4	1	94			:
Gtr	Modern R&B	1443	FB_Pop Shuffle2 _C	4 / 4	1	94			:
Gtr	Modern R&B	1444	FC_Pop Shuffle2 _C	4 / 4	1	94			:
Gtr	Modern R&B	1445	BA_Pop Shuffle2 _C	4 / 4	1	94			:
Gtr	Modern R&B	1446	MA_Pop Shuffle2 _N	4 / 4	4	94			:
Gtr	Modern R&B	1447	MB_Pop Shuffle2 _N	4 / 4	4	94			:
Gtr	Modern R&B	1448	MC_Pop Shuffle2 _N	4 / 4	4	94			:
Gtr	Modern R&B	1449	FA_Pop Shuffle2 _N	4 / 4	1	94			:
Gtr	Modern R&B	1450	FB_Pop Shuffle2 _N	4 / 4	1	94			:
Gtr	Modern R&B	1451	FC_Pop Shuffle2 _N	4 / 4	1	94			:
Gtr	Modern R&B	1452	BA_Pop Shuffle2 _N	4 / 4	1	94			:
Gtr	Modern R&B	1453	MB_R&B Disco _N	4 / 4	2	110			Mute Guitar
Gtr	Modern R&B	1454	MC_R&B Disco _N	4 / 4	2	110			:
Gtr	Modern R&B	1455	MD_R&B Disco _N	4 / 4	2	110			:
Gtr	Modern R&B	1456	FB_R&B Disco _N	4 / 4	1	110			:
Gtr	Modern R&B	1457	FC_R&B Disco _N	4 / 4	2	110			:
Gtr	Modern R&B	1458	MA_New R&B 2	4 / 4	1	97			Acoustic Guitar
Gtr	Modern R&B	1459	MB_New R&B 2	4 / 4	1	123			:
Gtr	Modern R&B	1460	MC_New R&B 2	4 / 4	1	97			:
Gtr	Modern R&B	1461	IA_New R&B 2 _N	4 / 4	2	97			:
Gtr	Modern R&B	1462	FA_New R&B 2	4 / 4	1	97			:
Gtr	Modern R&B	1463	FB_New R&B 2	4 / 4	1	97			:
Gtr	Modern R&B	1464	MA_New R&B 3	4 / 4	2	90			:
Gtr	Modern R&B	1465	MB_New R&B 3	4 / 4	2	90			:
Gtr	Modern R&B	1466	MC_New R&B 3 _N	4 / 4	2	90			:
Gtr	Modern R&B	1467	MD_New R&B 3	4 / 4	2	90			:
Gtr	Modern R&B	1468	MA_Pop R&B _C	4 / 4	4	67			Hip-Hop Nylon Guitar
Gtr	Modern R&B	1469	MB_Pop R&B _C	4 / 4	4	67			:
Gtr	Modern R&B	1470	MC_Pop R&B _C	4 / 4	4	67			:
Gtr	Modern R&B	1471	FA_Pop R&B _C	4 / 4	1	67			:
Gtr	Modern R&B	1472	FB_Pop R&B _C	4 / 4	1	67			:
Gtr	Modern R&B	1473	FC_Pop R&B _C	4 / 4	1	67			:
Gtr	Modern R&B	1474	MA_H-R&B Pop _C	4 / 4	4	140			Acoustic Guitar
Gtr	Modern R&B	1475	MB_H-R&B Pop _C	4 / 4	4	140			:
Gtr	Modern R&B	1476	MC_H-R&B Pop _C	4 / 4	4	140			:
Gtr	Modern R&B	1477	FC_H-R&B Pop _C	4 / 4	1	140			:
Gtr	Modern R&B	1478	MD_6/8 R&B	4 / 4	2	61			Clean Guitar
Gtr	Modern R&B	1479	FA_6/8 R&B	4 / 4	1	61			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Modern R&B	1480	FB_6/8 R&B	4 / 4	1	61			:
Gtr	Modern R&B	1481	FC_6/8 R&B	4 / 4	2	61			:
Gtr	Modern R&B	1482	MA_Smooth 1	4 / 4	2	115			Acoustic Guitar
Gtr	Modern R&B	1483	MB_Smooth 1	4 / 4	2	115			:
Gtr	Modern R&B	1484	MC_Smooth 1	4 / 4	2	115			:
Gtr	Modern R&B	1485	MD_Smooth 1	4 / 4	2	115			:
Gtr	Modern R&B	1486	IA_Smooth 1	4 / 4	1	115			:
Gtr	Modern R&B	1487	FA_Smooth 1	4 / 4	1	115			:
Gtr	Modern R&B	1488	FB_Smooth 1	4 / 4	1	115			:
Gtr	Modern R&B	1489	FC_Smooth 1	4 / 4	2	115			:
Gtr	Modern R&B	1490	MA1_Flip Hop 1	4 / 4	1	132			Clean Guitar
Gtr	Modern R&B	1491	MB1_Flip Hop 1	4 / 4	2	132			:
Gtr	Modern R&B	1492	MC1_Flip Hop 1	4 / 4	2	132			Mute Guitar
Gtr	Modern R&B	1493	MD1_Flip Hop 1	4 / 4	2	132			:
Gtr	Modern R&B	1494	FA1_Flip Hop 1	4 / 4	1	132			:
Gtr	Modern R&B	1495	FC1_Flip Hop 1	4 / 4	1	132			:
Gtr	Modern R&B	1496	FA2_Flip Hop 1	4 / 4	1	132			Acoustic Guitar
Gtr	Modern R&B	1497	FB2_Flip Hop 1 _N	4 / 4	1	132			:
Gtr	Modern R&B	1498	FC2_Flip Hop 1	4 / 4	2	132			:
Gtr	Modern R&B	1499	MA_New Gospel _N	4 / 4	2	90			Mute Guitar
Gtr	Modern R&B	1500	MB_New Gospel _N	4 / 4	2	90			:
Gtr	Modern R&B	1501	MC_New Gospel _N	4 / 4	2	90			:
Gtr	Modern R&B	1502	MD_New Gospel _N	4 / 4	2	90			:
Gtr	Modern R&B	1503	IA_New Gospel _N	4 / 4	1	90			:
Gtr	Modern R&B	1504	FA_New Gospel _N	4 / 4	1	90			:
Gtr	Modern R&B	1505	FB_New Gospel	4 / 4	1	90			:
Gtr	Modern R&B	1506	FC_New Gospel _N	4 / 4	2	90			:
Gtr	Classic R&B	1507	MA_Soul 2	4 / 4	1	120			Clean Guitar
Gtr	Classic R&B	1508	MB_Soul 2	4 / 4	1	120			:
Gtr	Classic R&B	1509	MC_Soul 2	4 / 4	1	120			:
Gtr	Classic R&B	1510	MD_Soul 2	4 / 4	4	120			:
Gtr	Classic R&B	1511	FC_Soul 2	4 / 4	4	120			:
Gtr	Funk	1512	MA_Funk 3	4 / 4	2	132			:
Gtr	Funk	1513	MB_Funk 3	4 / 4	1	132			:
Gtr	Funk	1514	MC_Funk 3	4 / 4	1	132			:
Gtr	Funk	1515	MD_Funk 3	4 / 4	4	132			:
Gtr	Funk	1516	IA_Funk 3	4 / 4	1	132			:
Gtr	Funk	1517	FB_Funk 3	4 / 4	1	132			:
Gtr	Funk	1518	FC_Funk 3	4 / 4	2	132			:
Gtr	Funk	1519	MA_Cool Funk _N	4 / 4	2	96			:
Gtr	Funk	1520	MB_Cool Funk	4 / 4	1	96			:
Gtr	Funk	1521	MD_Cool Funk	4 / 4	2	96			:
Gtr	Funk	1522	IA_Cool Funk	4 / 4	2	96			:
Gtr	Funk	1523	FC_Cool Funk	4 / 4	1	96			:
Gtr	Funk	1524	MA_Jazz Funk 2	4 / 4	2	120			:
Gtr	Funk	1525	MB_Jazz Funk 2	4 / 4	2	120			:
Gtr	Funk	1526	MC_Jazz Funk 2	4 / 4	1	120			:
Gtr	Funk	1527	MD_Jazz Funk 2	4 / 4	2	120			:
Gtr	Funk	1528	IA_Jazz Funk 2	4 / 4	2	120			:
Gtr	Funk	1529	FB_Jazz Funk 2	4 / 4	1	120			:
Gtr	Funk	1530	FC_Jazz Funk 2	4 / 4	1	120			:
Gtr	Funk	1531	MA_Funky1	4 / 4	2	120			:
Gtr	Funk	1532	MA_Funky2	4 / 4	2	120			:
Gtr	Funk	1533	MA_Funky3	4 / 4	2	120			:
Gtr	Funk	1534	MA_Funky4	4 / 4	1	120			:
Gtr	Funk	1535	MA_Funk Guitar	4 / 4	2	116			Mute Guitar
Gtr	Funk	1536	MA_CleanGuitrA1	4 / 4	2	120			Clean Guitar
Gtr	Funk	1537	MA_CleanGuitrA2	4 / 4	2	120			:
Gtr	Funk	1538	MA_CleanGuitrA3	4 / 4	2	120			:
Gtr	Funk	1539	MA_CleanGuitrA4	4 / 4	2	120			:
Gtr	Funk	1540	MA_CleanGuitrB1 _N	4 / 4	4	127			:
Gtr	Funk	1541	MA_CleanGuitrB2 _N	4 / 4	4	107			:
Gtr	Funk	1542	MA_CleanGuitrB3 _N	4 / 4	4	107			:
Gtr	Funk	1543	MA_CleanGuitrB4 _N	4 / 4	4	107			:
Gtr	Funk	1544	MA_CleanGuitrB5	4 / 4	4	107			:
Gtr	Funk	1545	MA_News1	4 / 4	2	120			:
Gtr	Funk	1546	MA_News2	4 / 4	2	120			Mute Guitar
Gtr	Funk	1547	MA_Spanky	4 / 4	2	105			Clean Guitar
Gtr	Techno	1548	MA_Electric 12Strings 1	4 / 4	2	140			:
Gtr	Techno	1549	MA_Electric 12Strings 2	4 / 4	4	140			:
Gtr	Techno	1550	MA_Electric 12Strings 3	4 / 4	2	140			:
Gtr	Techno	1551	MA_Electric 12Strings 4	4 / 4	4	140			:
Gtr	Techno	1552	MA_Electric 12Strings 5	4 / 4	2	140			:
Gtr	Techno	1553	MA_Electric 12Strings 6	4 / 4	2	140			:
Gtr	Techno	1554	MA_Electric 12Strings 7	4 / 4	4	140			:
Gtr	House	1555	MA_Reggaeton1 Mute Gtr _N	4 / 4	2	90			Mute Guitar
Gtr	House	1556	MB_Reggaeton1 Mute Gtr _N	4 / 4	4	90			:
Gtr	House	1557	MC_Reggaeton1 Mute Gtr _N	4 / 4	2	90			:
Gtr	House	1558	MD_Reggaeton1 Mute Gtr _N	4 / 4	4	90			:
Gtr	House	1559	ME_Reggaeton1 Mute Gtr _N	4 / 4	2	90			:
Gtr	House	1560	MF_Reggaeton1 Mute Gtr _N	4 / 4	4	90			:
Gtr	House	1561	MG_Reggaeton1 Mute Gtr _N	4 / 4	4	90			:
Gtr	House	1562	MH_Reggaeton1 Mute Gtr _N	4 / 4	4	90			:
Gtr	House	1563	MB_Reggaeton1 Nylon Gtr	4 / 4	4	90			Acoustic Guitar
Gtr	House	1564	MC_Reggaeton1 Nylon Gtr	4 / 4	2	90			:
Gtr	House	1565	MD_Reggaeton1 Nylon Gtr	4 / 4	4	90			:
Gtr	House	1566	ME_Reggaeton1 Nylon Gtr	4 / 4	2	90			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	House	1567	MF_Reggaeton1 Nylon Gtr	4 / 4	4	90			:
Gtr	House	1568	MG_Reggaeton1 Nylon Gtr	4 / 4	4	90			:
Gtr	House	1569	MH_Reggaeton1 Nylon Gtr	4 / 4	4	90			:
Gtr	House	1570	MA1_Retro Pop _N	4 / 4	2	126			Acoustic Guitar
Gtr	House	1571	MA2_Retro Pop	4 / 4	2	126			Clean Guitar
Gtr	House	1572	MA_Disco House	4 / 4	2	128			:
Gtr	House	1573	MB_Disco House	4 / 4	2	128			:
Gtr	House	1574	MC_Disco House	4 / 4	2	128			:
Gtr	House	1575	MD_Disco House	4 / 4	2	128			:
Gtr	House	1576	IA_Disco House	4 / 4	4	128			:
Gtr	House	1577	FA_Disco House	4 / 4	1	128			:
Gtr	House	1578	FB_Disco House	4 / 4	1	128			:
Gtr	House	1579	FC_Disco House	4 / 4	4	128			:
Gtr	Pop Rock	1580	MA_BreakLoop1 Guitar _N	4 / 4	2	85			:
Gtr	D&B	1581	MA_Big Beat 1 _N	4 / 4	4	115			Od/Dist Guitar
Gtr	D&B	1582	MB_Big Beat 1 _N	4 / 4	4	115			:
Gtr	D&B	1583	MC_Big Beat 1 _N	4 / 4	4	115			:
Gtr	D&B	1584	FA_Big Beat 1	4 / 4	1	115			:
Gtr	D&B	1585	FB_Big Beat 1	4 / 4	1	115			:
Gtr	D&B	1586	FC_Big Beat 1 _N	4 / 4	1	115			:
Gtr	D&B	1587	BA_Big Beat 1 _N	4 / 4	1	115			:
Gtr	D&B	1588	MA_Big Beat 2 _N	4 / 4	4	145			:
Gtr	D&B	1589	MB_Big Beat 2 _N	4 / 4	8	145			:
Gtr	D&B	1590	MC_Big Beat 2 _N	4 / 4	4	145			:
Gtr	D&B	1591	FA_Big Beat 2	4 / 4	1	145			:
Gtr	D&B	1592	FB_Big Beat 2 _N	4 / 4	1	145			:
Gtr	D&B	1593	FC_Big Beat 2 _N	4 / 4	1	145			:
Gtr	D&B	1594	BA_Big Beat 2 _N	4 / 4	2	145			:
Gtr	Chill	1595	MA1_Chill Out	4 / 4	2	79			Clean Guitar
Gtr	Chill	1596	MA2_Chill Out	4 / 4	1	79			Acoustic Guitar
Gtr	Chill	1597	MB2_Chill Out	4 / 4	2	79			:
Gtr	Chill	1598	MC2_Chill Out	4 / 4	2	79			:
Gtr	Chill	1599	MD2_Chill Out	4 / 4	2	79			:
Gtr	Jazz	1600	MA_AcousticJazz _N	4 / 4	4	204			Clean Guitar
Gtr	Jazz	1601	MB_AcousticJazz _N	4 / 4	4	204			:
Gtr	Jazz	1602	MC_AcousticJazz _N	4 / 4	4	204			:
Gtr	Jazz	1603	MD_AcousticJazz _N	4 / 4	4	204			:
Gtr	Jazz	1604	IA_AcousticJazz _N	4 / 4	4	204			:
Gtr	Jazz	1605	FA_AcousticJazz _N	4 / 4	1	204			:
Gtr	Jazz	1606	FB_AcousticJazz _N	4 / 4	1	204			:
Gtr	Jazz	1607	FC_AcousticJazz _N	4 / 4	4	204			:
Gtr	Jazz	1608	MA_Modern Jazz _C	4 / 4	16	218			:
Gtr	Jazz	1609	MB_Modern Jazz _C	4 / 4	16	218			:
Gtr	Jazz	1610	MC_Modern Jazz _C	4 / 4	16	218			:
Gtr	Jazz	1611	FA_Modern Jazz _C	4 / 4	1	218			:
Gtr	Jazz	1612	FB_Modern Jazz _C	4 / 4	1	218			:
Gtr	Jazz	1613	FC_Modern Jazz _C	4 / 4	1	218			:
Gtr	Jazz	1614	BA_Modern Jazz _C	4 / 4	1	218			:
Gtr	Jazz	1615	EA_Modern Jazz _C	4 / 4	6	218			:
Gtr	Jazz	1616	EB_Modern Jazz _C	4 / 4	7	218			:
Gtr	Jazz	1617	MA_R&R Shuffle _C	4 / 4	4	192			:
Gtr	Jazz	1618	MB_R&R Shuffle _C	4 / 4	4	192			:
Gtr	Jazz	1619	MC_R&R Shuffle _C	4 / 4	4	192			:
Gtr	Jazz	1620	FA_R&R Shuffle _C	4 / 4	1	192			:
Gtr	Jazz	1621	FB_R&R Shuffle _C	4 / 4	1	192			:
Gtr	Jazz	1622	FC_R&R Shuffle _C	4 / 4	1	192			:
Gtr	Jazz	1623	BA_R&R Shuffle _C	4 / 4	1	192			:
Gtr	Jazz	1624	EA_R&R Shuffle _C	4 / 4	5	192			:
Gtr	Jazz	1625	EB_R&R Shuffle _C	4 / 4	5	192			:
Gtr	Jazz	1626	MA_Slow Blues 2 _C	4 / 4	4	72			Mid Drive (2handGtr)
Gtr	Jazz	1627	MB_Slow Blues 2 _C	4 / 4	4	72			:
Gtr	Jazz	1628	MC_Slow Blues 2 _C	4 / 4	4	72			:
Gtr	Jazz	1629	FA_Slow Blues 2 _C	4 / 4	1	72			:
Gtr	Jazz	1630	FB_Slow Blues 2 _C	4 / 4	1	72			:
Gtr	Jazz	1631	FC_Slow Blues 2 _C	4 / 4	1	72			:
Gtr	Jazz	1632	BA_Slow Blues 2 _C	4 / 4	1	72			:
Gtr	Jazz	1633	MA_Slow Blues 2 _N	4 / 4	4	72			:
Gtr	Jazz	1634	MB_Slow Blues 2 _N	4 / 4	4	72			:
Gtr	Jazz	1635	MC_Slow Blues 2	4 / 4	4	72			:
Gtr	Jazz	1636	FA_Slow Blues 2 _N	4 / 4	1	72			:
Gtr	Jazz	1637	FB_Slow Blues 2	4 / 4	1	72			:
Gtr	Jazz	1638	FC_Slow Blues 2	4 / 4	1	72			:
Gtr	Jazz	1639	BA_Slow Blues 2	4 / 4	1	72			:
Gtr	Latin	1640	MA_Montuno _N	4 / 4	2	100			Acoustic Guitar
Gtr	Latin	1641	MB_Montuno _N	4 / 4	2	100			:
Gtr	Latin	1642	MC_Montuno/1 _N	4 / 4	2	100			:
Gtr	Latin	1643	MC_Montuno/2 _N	4 / 4	4	100			:
Gtr	Latin	1644	MD_Montuno/1 _N	4 / 4	2	100			:
Gtr	Latin	1645	MD_Montuno/2 _N	4 / 4	2	100			:
Gtr	Latin	1646	IA_Montuno _N	4 / 4	2	100			:
Gtr	Latin	1647	FA_Montuno _N	4 / 4	1	100			:
Gtr	Latin	1648	FC_Montuno _N	4 / 4	1	100			:
Gtr	Latin	1649	MA_Samba	4 / 4	4	120			:
Gtr	Latin	1650	MB_Samba	4 / 4	4	120			:
Gtr	Latin	1651	MD_Samba	4 / 4	4	120			:
Gtr	Latin	1652	IA_Samba	4 / 4	2	120			:
Gtr	Latin	1653	MA_Bomba _C	4 / 4	4	99			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Latin	1654	MB_Bomba _C	4 / 4	4	99			:
Gtr	Latin	1655	MC_Bomba _C	4 / 4	4	99			:
Gtr	Latin	1656	FA_Bomba _C	4 / 4	1	99			:
Gtr	Latin	1657	FB_Bomba _C	4 / 4	1	99			:
Gtr	Latin	1658	FC_Bomba _C	4 / 4	1	99			:
Gtr	Latin	1659	BA_Bomba _C	4 / 4	1	99			:
Gtr	Latin	1660	EA_Bomba _C	4 / 4	3	99			:
Gtr	Latin	1661	EB_Bomba _C	4 / 4	3	99			:
Gtr	Latin	1662	MA_Bomba _N	4 / 4	4	99			:
Gtr	Latin	1663	MB_Bomba	4 / 4	4	99			:
Gtr	Latin	1664	MC_Bomba _N	4 / 4	4	99			:
Gtr	Latin	1665	FA_Bomba	4 / 4	1	99			:
Gtr	Latin	1666	FB_Bomba	4 / 4	1	99			:
Gtr	Latin	1667	FC_Bomba _N	4 / 4	1	99			:
Gtr	Latin	1668	BA_Bomba	4 / 4	1	99			:
Gtr	Latin	1669	MA_Guaguanco _C	4 / 4	4	120			:
Gtr	Latin	1670	MB_Guaguanco _C	4 / 4	4	120			:
Gtr	Latin	1671	MC_Guaguanco _C	4 / 4	4	120			:
Gtr	Latin	1672	FA_Guaguanco _C	4 / 4	1	120			:
Gtr	Latin	1673	FB_Guaguanco _C	4 / 4	1	120			:
Gtr	Latin	1674	FC_Guaguanco _C	4 / 4	1	120			:
Gtr	Latin	1675	BA_Guaguanco _C	4 / 4	1	120			:
Gtr	Latin	1676	EA_Guaguanco _C	4 / 4	3	120			:
Gtr	Latin	1677	EB_Guaguanco _C	4 / 4	3	120			:
Gtr	Latin	1678	MC1_Latin Rock	4 / 4	2	120			Clean Guitar
Gtr	Latin	1679	FB1_Latin Rock	4 / 4	1	120			:
Gtr	Latin	1680	MB2_Latin Rock	4 / 4	1	120			Acoustic Guitar
Gtr	Latin	1681	MC2_Latin Rock	4 / 4	2	120			:
Gtr	Latin	1682	MA_LatinPhrase1	4 / 4	2	120			:
Gtr	Latin	1683	MA_LatinPhrase2	4 / 4	2	120			:
Gtr	Latin	1684	MA_LatinPhrase3	4 / 4	1	120			:
Gtr	Latin	1685	MA_SteelGuitar1 _N	4 / 4	4	120			:
Gtr	Latin	1686	MA_SteelGuitar2 _N	4 / 4	4	120			:
Gtr	Latin	1687	MA_SteelGuitar3 _N	4 / 4	4	120			:
Gtr	Latin	1688	MA_SteelGuitar4 _N	4 / 4	4	120			:
Gtr	World	1689	MA1_Reggae 1	4 / 4	1	102			Clean Guitar
Gtr	World	1690	MB1_Reggae 1	4 / 4	2	102			:
Gtr	World	1691	MD1_Reggae 1	4 / 4	2	90			:
Gtr	World	1692	IA1_Reggae 1	4 / 4	1	102			:
Gtr	World	1693	FC1_Reggae 1	4 / 4	2	96			:
Gtr	World	1694	MA2_Reggae 1	4 / 4	4	102			Mute Guitar
Gtr	World	1695	MB2_Reggae 1	4 / 4	4	102			:
Gtr	World	1696	MA_Reggae 2	4 / 4	2	92			Clean Guitar
Gtr	World	1697	MB_Reggae 2	4 / 4	1	92			:
Gtr	World	1698	IA_Reggae 2	4 / 4	2	92			:
Gtr	World	1699	MA1_Spanish Pop	4 / 4	2	120			Acoustic Guitar
Gtr	World	1700	MB1_Spanish Pop	4 / 4	2	120			:
Gtr	World	1701	MD1_Spanish Pop	4 / 4	2	120			:
Gtr	World	1702	FA1_Spanish Pop	4 / 4	1	120			:
Gtr	World	1703	FB1_Spanish Pop	4 / 4	1	120			:
Gtr	World	1704	IA2_Spanish Pop	4 / 4	4	120			:
Gtr	World	1705	FC2_Spanish Pop	4 / 4	3	120			:
Gtr	World	1706	MA3_Spanish Pop	4 / 4	2	120			:
Gtr	World	1707	MB3_Spanish Pop	4 / 4	2	120			:
Gtr	World	1708	MC3_Spanish Pop	4 / 4	2	120			:
Gtr	World	1709	MD3_Spanish Pop	4 / 4	2	120			:
Gtr	World	1710	IA3_Spanish Pop	4 / 4	4	120			:
Gtr	World	1711	FA3_Spanish Pop	4 / 4	1	120			:
Gtr	World	1712	FB3_Spanish Pop	4 / 4	1	120			:
Gtr	General	1713	MA_Strum1	4 / 4	1	120			:
Gtr	General	1714	MA_Strum2	4 / 4	2	120			:
Gtr	General	1715	MA_Strum3	4 / 4	4	120			:
Gtr	General	1716	MA_Strum4	4 / 4	2	120			:
Gtr	General	1717	MA_Strum5	4 / 4	2	120			:
Gtr	General	1718	MA_Strum6	4 / 4	2	120			:
Gtr	General	1719	MA_Strum7	4 / 4	2	120			:
Gtr	General	1720	MA_Strum8	4 / 4	2	120			:
Gtr	General	1721	MA_Strum9	4 / 4	2	120			:
Gtr	General	1722	MA_Strum10	4 / 4	2	120			:
Gtr	General	1723	MA_Guitar Arp1	4 / 4	1	120			:
Gtr	General	1724	MA_Guitar Arp2	4 / 4	1	120			:
Gtr	General	1725	MA_Guitar Arp3	4 / 4	1	120			:
Gtr	General	1726	MA_Guitar Arp4	4 / 4	1	120			:
Gtr	General	1727	MA_RolliArp	4 / 4	4	60			:
Gtr	General	1728	Tremolo	4 / 4	1	100			:
Gtr	General	1729	Lick1	4 / 4	4	120			Od/Dist Guitar
Gtr	General	1730	Lick2	4 / 4	4	120			:
Gtr	General	1731	Lick3	4 / 4	4	120			:
Gtr	General	1732	Lick4	4 / 4	2	120			:
Gtr	General	1733	Lick5	4 / 4	4	120			:
Gtr	General	1734	Lick6	4 / 4	1	120			:
Gtr	Rock	1735	[Mg]MA1_StndrdRk _C	4 / 4	4	131		O	Mega 60s Tube Tone
Gtr	Rock	1736	[Mg]MB1_StndrdRk _C	4 / 4	4	131		O	:
Gtr	Rock	1737	[Mg]MC1_StndrdRk _C	4 / 4	4	131		O	:
Gtr	Rock	1738	[Mg]FA1_StndrdRk _C	4 / 4	1	131		O	:
Gtr	Rock	1739	[Mg]FB1_StndrdRk _C	4 / 4	1	131		O	:
Gtr	Rock	1740	[Mg]FC1_StndrdRk _C	4 / 4	1	131		O	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Rock	1741	[Mg]BA1_StndrdRk _C	4 / 4	1	131		○	:
Gtr	Rock	1742	[Mg]EA1_StndrdRk _C	4 / 4	4	131		○	:
Gtr	Rock	1743	[Mg]EB1_StndrdRk _C	4 / 4	6	131		○	:
Gtr	Rock	1744	[Mg]MA2_StndrdRk _C	4 / 4	4	131		○	Mega 1coil Slap Dist
Gtr	Rock	1745	[Mg]MB2_StndrdRk _C	4 / 4	4	131		○	:
Gtr	Rock	1746	[Mg]MC2_StndrdRk _C	4 / 4	4	131		○	:
Gtr	Rock	1747	[Mg]FA2_StndrdRk _C	4 / 4	1	131		○	:
Gtr	Rock	1748	[Mg]FB2_StndrdRk _C	4 / 4	1	131		○	:
Gtr	Rock	1749	[Mg]FC2_StndrdRk _C	4 / 4	1	131		○	:
Gtr	Rock	1750	[Mg]BA2_StndrdRk _C	4 / 4	1	131		○	:
Gtr	Rock	1751	[Mg]EA2_StndrdRk _C	4 / 4	4	131		○	:
Gtr	Rock	1752	[Mg]EB2_StndrdRk _C	4 / 4	6	131		○	:
Gtr	Rock	1753	[Mg]MA1_OvdrPwRk _C	4 / 4	4	120		○	Mega Ovdr Distortion
Gtr	Rock	1754	[Mg]MB1_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1755	[Mg]MC1_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1756	[Mg]FA1_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1757	[Mg]FB1_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1758	[Mg]FC1_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1759	[Mg]BA1_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1760	[Mg]EA1_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1761	[Mg]EB1_OvdrPwRk _C	4 / 4	7	120		○	:
Gtr	Rock	1762	[Mg]MA1_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1763	[Mg]MB1_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1764	[Mg]MC1_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1765	[Mg]FA1_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1766	[Mg]FB1_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1767	[Mg]FC1_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1768	[Mg]BA1_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1769	[Mg]MA2_OvdrPwRk _C	4 / 4	4	120		○	Mega Ovdr Fuzz
Gtr	Rock	1770	[Mg]MB2_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1771	[Mg]MC2_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1772	[Mg]FA2_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1773	[Mg]FB2_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1774	[Mg]FC2_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1775	[Mg]BA2_OvdrPwRk _C	4 / 4	1	120		○	:
Gtr	Rock	1776	[Mg]EA2_OvdrPwRk _C	4 / 4	4	120		○	:
Gtr	Rock	1777	[Mg]EB2_OvdrPwRk _C	4 / 4	7	120		○	:
Gtr	Rock	1778	[Mg]MA2_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1779	[Mg]MB2_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1780	[Mg]MC2_OvdrPwrRk	4 / 4	4	120		○	:
Gtr	Rock	1781	[Mg]FA2_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1782	[Mg]FB2_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1783	[Mg]FC2_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1784	[Mg]BA2_OvdrPwrRk	4 / 4	1	120		○	:
Gtr	Rock	1785	[Mg]MA_CntmpRock _C	4 / 4	4	126		○	Mega 1coil Slap Dist
Gtr	Rock	1786	[Mg]MB_CntmpRock _C	4 / 4	4	126		○	:
Gtr	Rock	1787	[Mg]MC_CntmpRock _C	4 / 4	4	126		○	:
Gtr	Rock	1788	[Mg]FA_CntmpRock _C	4 / 4	1	126		○	:
Gtr	Rock	1789	[Mg]FB_CntmpRock _C	4 / 4	1	126		○	:
Gtr	Rock	1790	[Mg]FC_CntmpRock _C	4 / 4	1	126		○	:
Gtr	Rock	1791	[Mg]BA_CntmpRock _C	4 / 4	1	126		○	:
Gtr	Rock	1792	[Mg]EA_CntmpRock _C	4 / 4	4	126		○	:
Gtr	Rock	1793	[Mg]EB_CntmpRock _C	4 / 4	4	126		○	:
Gtr	Rock	1794	[Mg]MA1_HardRock _C	4 / 4	4	120		○	Mega 60s Tube Tone
Gtr	Rock	1795	[Mg]MB1_HardRock _C	4 / 4	4	120		○	:
Gtr	Rock	1796	[Mg]MC1_HardRock _C	4 / 4	4	120		○	:
Gtr	Rock	1797	[Mg]FA1_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1798	[Mg]FB1_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1799	[Mg]FC1_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1800	[Mg]BA1_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1801	[Mg]EA1_HardRock _C	4 / 4	3	120		○	:
Gtr	Rock	1802	[Mg]EB1_HardRock _C	4 / 4	6	120		○	:
Gtr	Rock	1803	[Mg]MA2_HardRock _C	4 / 4	4	120		○	:
Gtr	Rock	1804	[Mg]MB2_HardRock _C	4 / 4	4	120		○	:
Gtr	Rock	1805	[Mg]MC2_HardRock _C	4 / 4	4	120		○	:
Gtr	Rock	1806	[Mg]FA2_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1807	[Mg]FB2_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1808	[Mg]FC2_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1809	[Mg]BA2_HardRock _C	4 / 4	1	120		○	:
Gtr	Rock	1810	[Mg]EA2_HardRock _C	4 / 4	3	120		○	:
Gtr	Rock	1811	[Mg]EB2_HardRock _C	4 / 4	6	120		○	:
Gtr	Rock	1812	[Mg]MA1_BluesRck _C	4 / 4	4	120		○	Mega 60s Dist Stack
Gtr	Rock	1813	[Mg]MB1_BluesRck _C	4 / 4	4	120		○	:
Gtr	Rock	1814	[Mg]MC1_BluesRck _C	4 / 4	4	120		○	:
Gtr	Rock	1815	[Mg]FA1_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1816	[Mg]FB1_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1817	[Mg]FC1_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1818	[Mg]BA1_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1819	[Mg]EA1_BluesRck _C	4 / 4	3	120		○	:
Gtr	Rock	1820	[Mg]EB1_BluesRck _C	4 / 4	5	120		○	:
Gtr	Rock	1821	[Mg]MA2_BluesRck _C	4 / 4	4	120		○	Mega 60s Tube Tone
Gtr	Rock	1822	[Mg]MB2_BluesRck _C	4 / 4	4	120		○	:
Gtr	Rock	1823	[Mg]MC2_BluesRck _C	4 / 4	4	120		○	:
Gtr	Rock	1824	[Mg]FA2_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1825	[Mg]FB2_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1826	[Mg]FC2_BluesRck _C	4 / 4	1	120		○	:
Gtr	Rock	1827	[Mg]BA2_BluesRck _C	4 / 4	1	120		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Rock	1828	[Mg]EA2_BluesRck _C	4 / 4	3	120		○	:
Gtr	Rock	1829	[Mg]EB2_BluesRck _C	4 / 4	5	120		○	:
Gtr	Rock	1830	[Mg]MA1_RkShffle _C	4 / 4	4	121		○	Mega 1coil Old R&R
Gtr	Rock	1831	[Mg]MB1_RkShffle _C	4 / 4	4	121		○	:
Gtr	Rock	1832	[Mg]MC1_RkShffle _C	4 / 4	4	121		○	:
Gtr	Rock	1833	[Mg]FA1_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1834	[Mg]FB1_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1835	[Mg]FC1_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1836	[Mg]BA1_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1837	[Mg]EA1_RkShffle _C	4 / 4	6	121		○	:
Gtr	Rock	1838	[Mg]MA2_RkShffle _C	4 / 4	4	121		○	Mega 60s Blues Tone
Gtr	Rock	1839	[Mg]MB2_RkShffle _C	4 / 4	4	121		○	:
Gtr	Rock	1840	[Mg]MC2_RkShffle _C	4 / 4	4	121		○	:
Gtr	Rock	1841	[Mg]FA2_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1842	[Mg]FB2_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1843	[Mg]FC2_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1844	[Mg]BA2_RkShffle _C	4 / 4	1	121		○	:
Gtr	Rock	1845	[Mg]EA2_RkShffle _C	4 / 4	6	121		○	:
Gtr	Rock	1846	[Mg]MA_Rock&Roll _C	4 / 4	4	172		○	Mega 60s Clean
Gtr	Rock	1847	[Mg]MB_Rock&Roll _C	4 / 4	4	172		○	:
Gtr	Rock	1848	[Mg]MC_Rock&Roll _C	4 / 4	4	172		○	:
Gtr	Rock	1849	[Mg]FA_Rock&Roll _C	4 / 4	1	172		○	:
Gtr	Rock	1850	[Mg]FB_Rock&Roll _C	4 / 4	1	172		○	:
Gtr	Rock	1851	[Mg]FC_Rock&Roll _C	4 / 4	1	172		○	:
Gtr	Rock	1852	[Mg]BA_Rock&Roll _C	4 / 4	1	172		○	:
Gtr	Rock	1853	[Mg]EA_Rock&Roll _C	4 / 4	5	172		○	:
Gtr	Rock	1854	[Mg]EB_Rock&Roll _C	4 / 4	6	172		○	:
Gtr	Pop Rock	1855	[Mg]MA_8Beat Med _C	4 / 4	4	105		○	Mega 60s Tremolo
Gtr	Pop Rock	1856	[Mg]MB_8Beat Med _C	4 / 4	4	105		○	:
Gtr	Pop Rock	1857	[Mg]MC_8Beat Med _C	4 / 4	4	105		○	:
Gtr	Pop Rock	1858	[Mg]MD_8Beat Med _C	4 / 4	4	105		○	:
Gtr	Pop Rock	1859	[Mg]FA_8Beat Med _C	4 / 4	1	105		○	:
Gtr	Pop Rock	1860	[Mg]FB_8Beat Med _C	4 / 4	1	105		○	:
Gtr	Pop Rock	1861	[Mg]FC_8Beat Med _C	4 / 4	1	105		○	:
Gtr	Pop Rock	1862	[Mg]FD_8Beat Med _C	4 / 4	1	105		○	:
Gtr	Pop Rock	1863	[Mg]EA_8Beat Med _C	4 / 4	4	105		○	:
Gtr	Pop Rock	1864	[Mg]MA1_8Bt Fast _C	4 / 4	4	140		○	Mega Steel
Gtr	Pop Rock	1865	[Mg]MB1_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1866	[Mg]MC1_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1867	[Mg]MD1_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1868	[Mg]FA1_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1869	[Mg]FB1_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1870	[Mg]FC1_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1871	[Mg]FD1_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1872	[Mg]EA1_8Bt Fast _C	4 / 4	5	140		○	:
Gtr	Pop Rock	1873	[Mg]MA2_8Bt Fast _C	4 / 4	4	140		○	Mega 60s Clean
Gtr	Pop Rock	1874	[Mg]MB2_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1875	[Mg]MC2_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1876	[Mg]MD2_8Bt Fast _C	4 / 4	4	140		○	:
Gtr	Pop Rock	1877	[Mg]FA2_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1878	[Mg]FB2_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1879	[Mg]FC2_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1880	[Mg]FD2_8Bt Fast _C	4 / 4	1	140		○	:
Gtr	Pop Rock	1881	[Mg]EA2_8Bt Fast _C	4 / 4	5	140		○	:
Gtr	Pop Rock	1882	[Mg]MA_16Bt Med _C	4 / 4	4	96		○	Mega 60s ChorusCombo
Gtr	Pop Rock	1883	[Mg]MB_16Bt Med _C	4 / 4	4	96		○	:
Gtr	Pop Rock	1884	[Mg]MC_16Bt Med _C	4 / 4	4	96		○	:
Gtr	Pop Rock	1885	[Mg]MD_16Bt Med _C	4 / 4	4	96		○	:
Gtr	Pop Rock	1886	[Mg]FA_16Bt Med _C	4 / 4	1	96		○	:
Gtr	Pop Rock	1887	[Mg]FB_16Bt Med _C	4 / 4	1	96		○	:
Gtr	Pop Rock	1888	[Mg]FC_16Bt Med _C	4 / 4	1	96		○	:
Gtr	Pop Rock	1889	[Mg]FD_16Bt Med _C	4 / 4	1	96		○	:
Gtr	Pop Rock	1890	[Mg]EA_16Bt Med _C	4 / 4	4	96		○	:
Gtr	Pop Rock	1891	[Mg]MA1_GtPopMed _C	4 / 4	4	98		○	Mega Steel
Gtr	Pop Rock	1892	[Mg]MB1_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1893	[Mg]MC1_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1894	[Mg]MD1_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1895	[Mg]FA1_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1896	[Mg]FB1_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1897	[Mg]FC1_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1898	[Mg]FD1_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1899	[Mg]EA1_GtPopMed _C	4 / 4	3	98		○	:
Gtr	Pop Rock	1900	[Mg]MA2_GtPopMed _C	4 / 4	4	98		○	Mega 60s Tremolo
Gtr	Pop Rock	1901	[Mg]MB2_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1902	[Mg]MC2_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1903	[Mg]MD2_GtPopMed _C	4 / 4	4	98		○	:
Gtr	Pop Rock	1904	[Mg]FA2_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1905	[Mg]FB2_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1906	[Mg]FC2_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1907	[Mg]FD2_GtPopMed _C	4 / 4	1	98		○	:
Gtr	Pop Rock	1908	[Mg]EA2_GtPopMed _C	4 / 4	3	98		○	:
Gtr	Pop Rock	1909	[Mg]MA_PopShff1 _C	4 / 4	4	180		○	Mega 60s Clean
Gtr	Pop Rock	1910	[Mg]MB_PopShff1 _C	4 / 4	4	180		○	:
Gtr	Pop Rock	1911	[Mg]MC_PopShff1 _C	4 / 4	4	180		○	:
Gtr	Pop Rock	1912	[Mg]MD_PopShff1 _C	4 / 4	4	180		○	:
Gtr	Pop Rock	1913	[Mg]FA_PopShff1 _C	4 / 4	1	180		○	:
Gtr	Pop Rock	1914	[Mg]FB_PopShff1 _C	4 / 4	1	180		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	1915	[Mg]FC_PopShff1 _C	4 / 4	1	180		○	:
Gtr	Pop Rock	1916	[Mg]FD_PopShff1 _C	4 / 4	1	180		○	:
Gtr	Pop Rock	1917	[Mg]EA_PopShff1 _C	4 / 4	5	180		○	:
Gtr	Pop Rock	1918	[Mg]MA_SwMOR Pp _C	4 / 4	4	94		○	Mega Nylon
Gtr	Pop Rock	1919	[Mg]MB_SwMOR Pp _C	4 / 4	4	94		○	:
Gtr	Pop Rock	1920	[Mg]MC_SwMOR Pp _C	4 / 4	4	94		○	:
Gtr	Pop Rock	1921	[Mg]MD_SwMOR Pp _C	4 / 4	4	94		○	:
Gtr	Pop Rock	1922	[Mg]FA_SwMOR Pp _C	4 / 4	1	94		○	:
Gtr	Pop Rock	1923	[Mg]FB_SwMOR Pp _C	4 / 4	1	94		○	:
Gtr	Pop Rock	1924	[Mg]FC_SwMOR Pp _C	4 / 4	1	94		○	:
Gtr	Pop Rock	1925	[Mg]FD_SwMOR Pp _C	4 / 4	1	94		○	:
Gtr	Pop Rock	1926	[Mg]EA_SwMOR Pp _C	4 / 4	3	94		○	:
Gtr	Pop Rock	1927	[Mg]MA_12/8 Pop _C	6 / 4	4	90		○	Mega Steel
Gtr	Pop Rock	1928	[Mg]MB_12/8 Pop _C	6 / 4	4	90		○	:
Gtr	Pop Rock	1929	[Mg]MC_12/8 Pop _C	6 / 4	4	90		○	:
Gtr	Pop Rock	1930	[Mg]MD_12/8 Pop _C	6 / 4	4	90		○	:
Gtr	Pop Rock	1931	[Mg]FA_12/8 Pop _C	6 / 4	1	90		○	:
Gtr	Pop Rock	1932	[Mg]FB_12/8 Pop _C	6 / 4	1	90		○	:
Gtr	Pop Rock	1933	[Mg]FC_12/8 Pop _C	6 / 4	1	90		○	:
Gtr	Pop Rock	1934	[Mg]FD_12/8 Pop _C	6 / 4	1	90		○	:
Gtr	Pop Rock	1935	[Mg]EA_12/8 Pop _C	6 / 4	4	90		○	:
Gtr	Pop Rock	1936	[Mg]MA1_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1937	[Mg]MB1_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1938	[Mg]MC1_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1939	[Mg]MD1_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1940	[Mg]FA1_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1941	[Mg]FB1_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1942	[Mg]FC1_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1943	[Mg]FD1_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1944	[Mg]EA1_Cntry8Bt _C	4 / 4	3	82		○	:
Gtr	Pop Rock	1945	[Mg]MA2_Cntry8Bt _C	4 / 4	4	82		○	Mega 12 Steel
Gtr	Pop Rock	1946	[Mg]MB2_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1947	[Mg]MC2_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1948	[Mg]MD2_Cntry8Bt _C	4 / 4	4	82		○	:
Gtr	Pop Rock	1949	[Mg]FA2_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1950	[Mg]FB2_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1951	[Mg]FC2_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1952	[Mg]FD2_Cntry8Bt _C	4 / 4	1	82		○	:
Gtr	Pop Rock	1953	[Mg]EA2_Cntry8Bt _C	4 / 4	3	82		○	:
Gtr	Pop Rock	1954	[Mg]MA1_CntrySwg _C	4 / 4	4	182		○	Mega Steel
Gtr	Pop Rock	1955	[Mg]MB1_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1956	[Mg]MC1_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1957	[Mg]MD1_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1958	[Mg]FA1_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1959	[Mg]FB1_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1960	[Mg]FC1_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1961	[Mg]FD1_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1962	[Mg]EA1_CntrySwg _C	4 / 4	5	182		○	:
Gtr	Pop Rock	1963	[Mg]MA2_CntrySwg _C	4 / 4	4	182		○	Mega 60s Blues Tone
Gtr	Pop Rock	1964	[Mg]MB2_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1965	[Mg]MC2_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1966	[Mg]MD2_CntrySwg _C	4 / 4	4	182		○	:
Gtr	Pop Rock	1967	[Mg]FA2_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1968	[Mg]FB2_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1969	[Mg]FC2_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1970	[Mg]FD2_CntrySwg _C	4 / 4	1	182		○	:
Gtr	Pop Rock	1971	[Mg]EA2_CntrySwg _C	4 / 4	5	182		○	:
Gtr	Pop Rock	1972	[Mg]MA_CntryWlz _C	3 / 4	4	144		○	Mega 12 Steel
Gtr	Pop Rock	1973	[Mg]MB_CntryWlz _C	3 / 4	4	144		○	:
Gtr	Pop Rock	1974	[Mg]MC_CntryWlz _C	3 / 4	4	144		○	:
Gtr	Pop Rock	1975	[Mg]MD_CntryWlz _C	3 / 4	4	144		○	:
Gtr	Pop Rock	1976	[Mg]FA_CntryWlz _C	3 / 4	1	144		○	:
Gtr	Pop Rock	1977	[Mg]FB_CntryWlz _C	3 / 4	1	144		○	:
Gtr	Pop Rock	1978	[Mg]FC_CntryWlz _C	3 / 4	1	144		○	:
Gtr	Pop Rock	1979	[Mg]FD_CntryWlz _C	3 / 4	1	144		○	:
Gtr	Pop Rock	1980	[Mg]EA_CntryWlz _C	3 / 4	5	144		○	:
Gtr	Pop Rock	1981	[Mg]MA_Gtr Pop1 _C	4 / 4	4	100		○	Mega 60s ChorusCombo
Gtr	Pop Rock	1982	[Mg]MB_Gtr Pop1 _C	4 / 4	4	100		○	:
Gtr	Pop Rock	1983	[Mg]MC_Gtr Pop1 _C	4 / 4	4	100		○	:
Gtr	Pop Rock	1984	[Mg]FA_Gtr Pop1 _C	4 / 4	1	100		○	:
Gtr	Pop Rock	1985	[Mg]FB_Gtr Pop1 _C	4 / 4	1	100		○	:
Gtr	Pop Rock	1986	[Mg]FC_Gtr Pop1 _C	4 / 4	1	100		○	:
Gtr	Pop Rock	1987	[Mg]BA_Gtr Pop1 _C	4 / 4	1	100		○	:
Gtr	Pop Rock	1988	[Mg]EA_Gtr Pop1 _C	4 / 4	3	100		○	:
Gtr	Pop Rock	1989	[Mg]EB_Gtr Pop1 _C	4 / 4	3	100		○	:
Gtr	Pop Rock	1990	[Mg]MA1_AcoustPp _C	4 / 4	4	110		○	Mega Steel
Gtr	Pop Rock	1991	[Mg]MB1_AcoustPp _C	4 / 4	4	110		○	:
Gtr	Pop Rock	1992	[Mg]MC1_AcoustPp _C	4 / 4	4	110		○	:
Gtr	Pop Rock	1993	[Mg]FA1_AcoustPp _C	4 / 4	1	110		○	:
Gtr	Pop Rock	1994	[Mg]FB1_AcoustPp _C	4 / 4	1	110		○	:
Gtr	Pop Rock	1995	[Mg]FC1_AcoustPp _C	4 / 4	1	110		○	:
Gtr	Pop Rock	1996	[Mg]MA2_AcoustPp _C	4 / 4	4	110		○	Mega 60s Clean
Gtr	Pop Rock	1997	[Mg]MB2_AcoustPp _C	4 / 4	4	110		○	:
Gtr	Pop Rock	1998	[Mg]MC2_AcoustPp _C	4 / 4	4	110		○	:
Gtr	Pop Rock	1999	[Mg]FA2_AcoustPp _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2000	[Mg]FB2_AcoustPp _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2001	[Mg]FC2_AcoustPp _C	4 / 4	1	110		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	2002	[Mg]MA1_WrshpSlw _C	4 / 4	4	75		○	Mega Steel
Gtr	Pop Rock	2003	[Mg]MB1_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2004	[Mg]MC1_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2005	[Mg]FA1_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2006	[Mg]FB1_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2007	[Mg]FC1_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2008	[Mg]BA1_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2009	[Mg]EA1_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2010	[Mg]EB1_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2011	[Mg]MA2_WrshpSlw _C	4 / 4	4	75		○	Mega Nylon
Gtr	Pop Rock	2012	[Mg]MB2_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2013	[Mg]MC2_WrshpSlw _C	4 / 4	4	75		○	:
Gtr	Pop Rock	2014	[Mg]FA2_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2015	[Mg]FB2_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2016	[Mg]FC2_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2017	[Mg]BA2_WrshpSlw _C	4 / 4	1	75		○	:
Gtr	Pop Rock	2018	[Mg]MA1_WrshpMed _C	4 / 4	8	140		○	Mega Steel
Gtr	Pop Rock	2019	[Mg]MB1_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2020	[Mg]MC1_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2021	[Mg]FA1_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2022	[Mg]FB1_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2023	[Mg]FC1_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2024	[Mg]BA1_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2025	[Mg]EA1_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2026	[Mg]EB1_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2027	[Mg]MA2_WrshpMed _C	4 / 4	8	140		○	Mega Nylon
Gtr	Pop Rock	2028	[Mg]MB2_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2029	[Mg]MC2_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2030	[Mg]FA2_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2031	[Mg]FB2_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2032	[Mg]FC2_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2033	[Mg]BA2_WrshpMed _C	4 / 4	1	140		○	:
Gtr	Pop Rock	2034	[Mg]EA2_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2035	[Mg]EB2_WrshpMed _C	4 / 4	4	140		○	:
Gtr	Pop Rock	2036	[Mg]MA_WrshpFast _C	4 / 4	8	114		○	Mega Steel
Gtr	Pop Rock	2037	[Mg]MB_WrshpFast _C	4 / 4	4	114		○	:
Gtr	Pop Rock	2038	[Mg]MC_WrshpFast _C	4 / 4	4	114		○	:
Gtr	Pop Rock	2039	[Mg]FA_WrshpFast _C	4 / 4	1	114		○	:
Gtr	Pop Rock	2040	[Mg]FB_WrshpFast _C	4 / 4	1	114		○	:
Gtr	Pop Rock	2041	[Mg]FC_WrshpFast _C	4 / 4	1	114		○	:
Gtr	Pop Rock	2042	[Mg]BA_WrshpFast _C	4 / 4	1	114		○	:
Gtr	Pop Rock	2043	[Mg]EA_WrshpFast _C	4 / 4	4	114		○	:
Gtr	Pop Rock	2044	[Mg]EB_WrshpFast _C	4 / 4	2	114		○	:
Gtr	Pop Rock	2045	[Mg]MA_New Cntry _C	4 / 4	2	118		○	Mega 60s Clean
Gtr	Pop Rock	2046	[Mg]MB_New Cntry _C	4 / 4	4	118		○	:
Gtr	Pop Rock	2047	[Mg]MC_New Cntry _C	4 / 4	2	118		○	:
Gtr	Pop Rock	2048	[Mg]FA_New Cntry _C	4 / 4	1	118		○	:
Gtr	Pop Rock	2049	[Mg]FB_New Cntry _C	4 / 4	1	118		○	:
Gtr	Pop Rock	2050	[Mg]FC_New Cntry _C	4 / 4	1	118		○	:
Gtr	Pop Rock	2051	[Mg]BA_New Cntry _C	4 / 4	1	118		○	:
Gtr	Pop Rock	2052	[Mg]EA_New Cntry _C	4 / 4	4	118		○	:
Gtr	Pop Rock	2053	[Mg]EB_New Cntry _C	4 / 4	4	118		○	:
Gtr	Pop Rock	2054	[Mg]MA_New Country	4 / 4	2	118		○	:
Gtr	Pop Rock	2055	[Mg]MB_New Country	4 / 4	4	118		○	:
Gtr	Pop Rock	2056	[Mg]MC_New Country	4 / 4	2	118		○	:
Gtr	Pop Rock	2057	[Mg]FA_New Country	4 / 4	1	118		○	:
Gtr	Pop Rock	2058	[Mg]FB_New Country	4 / 4	1	118		○	:
Gtr	Pop Rock	2059	[Mg]FC_New Country	4 / 4	1	118		○	:
Gtr	Pop Rock	2060	[Mg]BA_New Country	4 / 4	1	118		○	:
Gtr	Pop Rock	2061	[Mg]MA1_VintgGPp _C	4 / 4	4	148		○	Mega Steel
Gtr	Pop Rock	2062	[Mg]MB1_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2063	[Mg]MC1_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2064	[Mg]FA1_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2065	[Mg]FB1_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2066	[Mg]FC1_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2067	[Mg]BA1_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2068	[Mg]EA1_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2069	[Mg]EB1_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2070	[Mg]MA2_VintgGPp _C	4 / 4	4	148		○	Mega 60s Clean
Gtr	Pop Rock	2071	[Mg]MB2_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2072	[Mg]MC2_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2073	[Mg]FA2_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2074	[Mg]FB2_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2075	[Mg]FC2_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2076	[Mg]BA2_VintgGPp _C	4 / 4	1	148		○	:
Gtr	Pop Rock	2077	[Mg]EA2_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2078	[Mg]EB2_VintgGPp _C	4 / 4	4	148		○	:
Gtr	Pop Rock	2079	[Mg]MA1_WestC.Pp _C	4 / 4	4	100		○	Mega Steel
Gtr	Pop Rock	2080	[Mg]MB1_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2081	[Mg]MC1_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2082	[Mg]FA1_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2083	[Mg]FB1_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2084	[Mg]FC1_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2085	[Mg]BA1_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2086	[Mg]EA1_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2087	[Mg]EB1_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2088	[Mg]MA2_WestC.Pp _C	4 / 4	4	100		○	Mega 60s Tube Tone

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	2089	[Mg]MB2_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2090	[Mg]MC2_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2091	[Mg]FA2_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2092	[Mg]FB2_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2093	[Mg]FC2_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2094	[Mg]BA2_WestC.Pp _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2095	[Mg]EA2_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2096	[Mg]EB2_WestC.Pp _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2097	[Mg]MA1_Brit Pop _C	4 / 4	2	86		○	Mega Steel
Gtr	Pop Rock	2098	[Mg]MB1_Brit Pop _C	4 / 4	2	86		○	:
Gtr	Pop Rock	2099	[Mg]MC1_Brit Pop _C	4 / 4	2	86		○	:
Gtr	Pop Rock	2100	[Mg]FA1_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2101	[Mg]FB1_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2102	[Mg]FC1_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2103	[Mg]BA1_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2104	[Mg]EA1_Brit Pop _C	4 / 4	4	86		○	:
Gtr	Pop Rock	2105	[Mg]EB1_Brit Pop _C	4 / 4	4	86		○	:
Gtr	Pop Rock	2106	[Mg]MA1_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2107	[Mg]MB1_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2108	[Mg]MC1_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2109	[Mg]FA1_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2110	[Mg]FB1_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2111	[Mg]FC1_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2112	[Mg]BA1_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2113	[Mg]MA2_Brit Pop _C	4 / 4	2	86		○	Mega 1coil SlapClean
Gtr	Pop Rock	2114	[Mg]MB2_Brit Pop _C	4 / 4	2	86		○	:
Gtr	Pop Rock	2115	[Mg]MC2_Brit Pop _C	4 / 4	2	86		○	:
Gtr	Pop Rock	2116	[Mg]FA2_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2117	[Mg]FB2_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2118	[Mg]FC2_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2119	[Mg]BA2_Brit Pop _C	4 / 4	1	86		○	:
Gtr	Pop Rock	2120	[Mg]EA2_Brit Pop _C	4 / 4	4	86		○	:
Gtr	Pop Rock	2121	[Mg]EB2_Brit Pop _C	4 / 4	4	86		○	:
Gtr	Pop Rock	2122	[Mg]MA2_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2123	[Mg]MB2_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2124	[Mg]MC2_Brit Pop	4 / 4	2	86		○	:
Gtr	Pop Rock	2125	[Mg]FA2_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2126	[Mg]FB2_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2127	[Mg]FC2_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2128	[Mg]BA2_Brit Pop	4 / 4	1	86		○	:
Gtr	Pop Rock	2129	[Mg]MA_BritPpSwg _C	4 / 4	2	110		○	Mega Steel
Gtr	Pop Rock	2130	[Mg]MB_BritPpSwg _C	4 / 4	2	110		○	:
Gtr	Pop Rock	2131	[Mg]MC_BritPpSwg _C	4 / 4	2	110		○	:
Gtr	Pop Rock	2132	[Mg]FA_BritPpSwg _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2133	[Mg]FB_BritPpSwg _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2134	[Mg]FC_BritPpSwg _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2135	[Mg]BA_BritPpSwg _C	4 / 4	1	110		○	:
Gtr	Pop Rock	2136	[Mg]EA_BritPpSwg _C	4 / 4	4	110		○	:
Gtr	Pop Rock	2137	[Mg]EB_BritPpSwg _C	4 / 4	4	110		○	:
Gtr	Pop Rock	2138	[Mg]MA_BritPopSwing	4 / 4	2	110		○	:
Gtr	Pop Rock	2139	[Mg]MB_BritPopSwing	4 / 4	2	110		○	:
Gtr	Pop Rock	2140	[Mg]MC_BritPopSwing	4 / 4	2	110		○	:
Gtr	Pop Rock	2141	[Mg]FA_BritPopSwing	4 / 4	1	110		○	:
Gtr	Pop Rock	2142	[Mg]FB_BritPopSwing	4 / 4	1	110		○	:
Gtr	Pop Rock	2143	[Mg]FC_BritPopSwing	4 / 4	1	110		○	:
Gtr	Pop Rock	2144	[Mg]BA_BritPopSwing	4 / 4	1	110		○	:
Gtr	Pop Rock	2145	[Mg]MA_Cool 8Bt _C	4 / 4	2	100		○	Mega 60s ChorusCombo
Gtr	Pop Rock	2146	[Mg]MB_Cool 8Bt _C	4 / 4	2	100		○	:
Gtr	Pop Rock	2147	[Mg]MC_Cool 8Bt _C	4 / 4	2	100		○	:
Gtr	Pop Rock	2148	[Mg]FA_Cool 8Bt _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2149	[Mg]FB_Cool 8Bt _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2150	[Mg]FC_Cool 8Bt _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2151	[Mg]BA_Cool 8Bt _C	4 / 4	1	100		○	:
Gtr	Pop Rock	2152	[Mg]EA_Cool 8Bt _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2153	[Mg]EB_Cool 8Bt _C	4 / 4	4	100		○	:
Gtr	Pop Rock	2154	[Mg]MA1_BritRkPp _C	4 / 4	4	123		○	Mega 1coil Old R&R
Gtr	Pop Rock	2155	[Mg]MB1_BritRkPp _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2156	[Mg]MC1_BritRkPp _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2157	[Mg]FA1_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2158	[Mg]FB1_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2159	[Mg]FC1_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2160	[Mg]BA1_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2161	[Mg]EA1_BritRkPp _C	4 / 4	6	123		○	:
Gtr	Pop Rock	2162	[Mg]MA2_BritRkPp _C	4 / 4	4	123		○	Mega 60s Clean
Gtr	Pop Rock	2163	[Mg]MB2_BritRkPp _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2164	[Mg]MC2_BritRkPp _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2165	[Mg]FA2_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2166	[Mg]FB2_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2167	[Mg]FC2_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2168	[Mg]BA2_BritRkPp _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2169	[Mg]EA2_BritRkPp _C	4 / 4	6	123		○	:
Gtr	Pop Rock	2170	[Mg]MA1_80sPopRk _C	4 / 4	4	111		○	Mega 1coil Old R&R
Gtr	Pop Rock	2171	[Mg]MB1_80sPopRk _C	4 / 4	4	111		○	:
Gtr	Pop Rock	2172	[Mg]MC1_80sPopRk _C	4 / 4	4	111		○	:
Gtr	Pop Rock	2173	[Mg]FA1_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2174	[Mg]FB1_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2175	[Mg]FC1_80sPopRk _C	4 / 4	1	111		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Pop Rock	2176	[Mg]BA1_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2177	[Mg]EA1_80sPopRk _C	4 / 4	7	111		○	:
Gtr	Pop Rock	2178	[Mg]MA2_80sPopRk _C	4 / 4	4	111		○	Mega 60s Clean
Gtr	Pop Rock	2179	[Mg]MB2_80sPopRk _C	4 / 4	4	111		○	:
Gtr	Pop Rock	2180	[Mg]MC2_80sPopRk _C	4 / 4	4	111		○	:
Gtr	Pop Rock	2181	[Mg]FA2_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2182	[Mg]FB2_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2183	[Mg]FC2_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2184	[Mg]BA2_80sPopRk _C	4 / 4	1	111		○	:
Gtr	Pop Rock	2185	[Mg]EA2_80sPopRk _C	4 / 4	7	111		○	:
Gtr	Pop Rock	2186	[Mg]MA_80SynthRk _C	4 / 4	4	96		○	Mega 1coil Old R&R
Gtr	Pop Rock	2187	[Mg]MB_80SynthRk _C	4 / 4	4	96		○	:
Gtr	Pop Rock	2188	[Mg]MC_80SynthRk _C	4 / 4	8	96		○	:
Gtr	Pop Rock	2189	[Mg]FA_80SynthRk _C	4 / 4	1	96		○	:
Gtr	Pop Rock	2190	[Mg]FB_80SynthRk _C	4 / 4	1	96		○	:
Gtr	Pop Rock	2191	[Mg]FC_80SynthRk _C	4 / 4	1	96		○	:
Gtr	Pop Rock	2192	[Mg]BA_80SynthRk _C	4 / 4	1	96		○	:
Gtr	Pop Rock	2193	[Mg]EA_80SynthRk _C	4 / 4	3	96		○	:
Gtr	Pop Rock	2194	[Mg]MA_60VintgPp _C	4 / 4	4	132		○	:
Gtr	Pop Rock	2195	[Mg]MB_60VintgPp _C	4 / 4	4	132		○	:
Gtr	Pop Rock	2196	[Mg]MC_60VintgPp _C	4 / 4	4	132		○	:
Gtr	Pop Rock	2197	[Mg]FA_60VintgPp _C	4 / 4	1	132		○	:
Gtr	Pop Rock	2198	[Mg]FB_60VintgPp _C	4 / 4	1	132		○	:
Gtr	Pop Rock	2199	[Mg]FC_60VintgPp _C	4 / 4	1	132		○	:
Gtr	Pop Rock	2200	[Mg]BA_60VintgPp _C	4 / 4	1	132		○	:
Gtr	Pop Rock	2201	[Mg]EA_60VintgPp _C	4 / 4	2	132		○	:
Gtr	Pop Rock	2202	[Mg]MA_60ChartSw _C	4 / 4	4	123		○	Mega 12 Steel
Gtr	Pop Rock	2203	[Mg]MB_60ChartSw _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2204	[Mg]MC_60ChartSw _C	4 / 4	4	123		○	:
Gtr	Pop Rock	2205	[Mg]FA_60ChartSw _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2206	[Mg]FB_60ChartSw _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2207	[Mg]FC_60ChartSw _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2208	[Mg]BA_60ChartSw _C	4 / 4	1	123		○	:
Gtr	Pop Rock	2209	[Mg]EA_60ChartSw _C	4 / 4	4	123		○	:
Gtr	Ballad	2210	[Mg]MA1_8Bt Bld1 _C	4 / 4	4	103		○	Mega 60s Clean
Gtr	Ballad	2211	[Mg]MB1_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2212	[Mg]MC1_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2213	[Mg]MD1_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2214	[Mg]FA1_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2215	[Mg]FB1_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2216	[Mg]FC1_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2217	[Mg]FD1_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2218	[Mg]EA1_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2219	[Mg]MA2_8Bt Bld1 _C	4 / 4	4	103		○	Mega Nylon
Gtr	Ballad	2220	[Mg]MB2_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2221	[Mg]MC2_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2222	[Mg]MD2_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2223	[Mg]FA2_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2224	[Mg]FB2_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2225	[Mg]FC2_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2226	[Mg]FD2_8Bt Bld1 _C	4 / 4	1	103		○	:
Gtr	Ballad	2227	[Mg]EA2_8Bt Bld1 _C	4 / 4	4	103		○	:
Gtr	Ballad	2228	[Mg]MA_16Bt Bld1 _C	4 / 4	4	59		○	:
Gtr	Ballad	2229	[Mg]MB_16Bt Bld1 _C	4 / 4	4	59		○	:
Gtr	Ballad	2230	[Mg]MC_16Bt Bld1 _C	4 / 4	4	59		○	:
Gtr	Ballad	2231	[Mg]MD_16Bt Bld1 _C	4 / 4	4	59		○	:
Gtr	Ballad	2232	[Mg]FA_16Bt Bld1 _C	4 / 4	1	59		○	:
Gtr	Ballad	2233	[Mg]FB_16Bt Bld1 _C	4 / 4	1	59		○	:
Gtr	Ballad	2234	[Mg]FC_16Bt Bld1 _C	4 / 4	1	59		○	:
Gtr	Ballad	2235	[Mg]FD_16Bt Bld1 _C	4 / 4	1	59		○	:
Gtr	Ballad	2236	[Mg]EA_16Bt Bld1 _C	4 / 4	3	59		○	:
Gtr	Ballad	2237	[Mg]MA_12/8 Bld _C	4 / 4	4	60		○	Mega 60s Tremolo
Gtr	Ballad	2238	[Mg]MB_12/8 Bld _C	4 / 4	4	60		○	:
Gtr	Ballad	2239	[Mg]MC_12/8 Bld _C	4 / 4	4	60		○	:
Gtr	Ballad	2240	[Mg]MD_12/8 Bld _C	4 / 4	4	60		○	:
Gtr	Ballad	2241	[Mg]FA_12/8 Bld _C	4 / 4	1	60		○	:
Gtr	Ballad	2242	[Mg]FB_12/8 Bld _C	4 / 4	1	60		○	:
Gtr	Ballad	2243	[Mg]FC_12/8 Bld _C	4 / 4	1	60		○	:
Gtr	Ballad	2244	[Mg]FD_12/8 Bld _C	4 / 4	1	60		○	:
Gtr	Ballad	2245	[Mg]EA_12/8 Bld _C	4 / 4	3	60		○	:
Gtr	Ballad	2246	[Mg]MA1_CntryBld _C	4 / 4	4	75		○	Mega Steel
Gtr	Ballad	2247	[Mg]MB1_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2248	[Mg]MC1_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2249	[Mg]MD1_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2250	[Mg]FA1_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2251	[Mg]FB1_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2252	[Mg]FC1_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2253	[Mg]FD1_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2254	[Mg]EA1_CntryBld _C	4 / 4	3	75		○	:
Gtr	Ballad	2255	[Mg]MA2_CntryBld _C	4 / 4	4	75		○	Mega 1coil Tremolo
Gtr	Ballad	2256	[Mg]MB2_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2257	[Mg]MC2_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2258	[Mg]MD2_CntryBld _C	4 / 4	4	75		○	:
Gtr	Ballad	2259	[Mg]FA2_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2260	[Mg]FB2_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2261	[Mg]FC2_CntryBld _C	4 / 4	1	75		○	:
Gtr	Ballad	2262	[Mg]FD2_CntryBld _C	4 / 4	1	75		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Ballad	2263	[Mg]EA2_CntryBld _C	4 / 4	3	75		○	:
Gtr	Ballad	2264	[Mg]MA1_AnthRkBd _C	4 / 4	4	72		○	Mega Steel
Gtr	Ballad	2265	[Mg]MB1_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2266	[Mg]MC1_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2267	[Mg]MD1_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2268	[Mg]FA1_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2269	[Mg]FB1_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2270	[Mg]FC1_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2271	[Mg]FD1_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2272	[Mg]EA1_AnthRkBd _C	4 / 4	3	72		○	:
Gtr	Ballad	2273	[Mg]MA2_AnthRkBd _C	4 / 4	4	72		○	Mega 60s Clean
Gtr	Ballad	2274	[Mg]MB2_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2275	[Mg]MC2_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2276	[Mg]MD2_AnthRkBd _C	4 / 4	4	72		○	:
Gtr	Ballad	2277	[Mg]FA2_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2278	[Mg]FB2_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2279	[Mg]FC2_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2280	[Mg]FD2_AnthRkBd _C	4 / 4	1	72		○	:
Gtr	Ballad	2281	[Mg]EA2_AnthRkBd _C	4 / 4	3	72		○	:
Gtr	Ballad	2282	[Mg]MA_EclectBld _C	4 / 4	4	84		○	Mega Nylon
Gtr	Ballad	2283	[Mg]MB_EclectBld _C	4 / 4	4	84		○	:
Gtr	Ballad	2284	[Mg]MC_EclectBld _C	4 / 4	4	84		○	:
Gtr	Ballad	2285	[Mg]MD_EclectBld _C	4 / 4	4	84		○	:
Gtr	Ballad	2286	[Mg]FA_EclectBld _C	4 / 4	1	84		○	:
Gtr	Ballad	2287	[Mg]FB_EclectBld _C	4 / 4	1	84		○	:
Gtr	Ballad	2288	[Mg]FC_EclectBld _C	4 / 4	1	84		○	:
Gtr	Ballad	2289	[Mg]FD_EclectBld _C	4 / 4	1	84		○	:
Gtr	Ballad	2290	[Mg]EA_EclectBld _C	4 / 4	4	84		○	:
Gtr	Ballad	2291	[Mg]MA1_GtBallad _C	4 / 4	8	94		○	Mega Steel
Gtr	Ballad	2292	[Mg]MB1_GtBallad _C	4 / 4	8	94		○	:
Gtr	Ballad	2293	[Mg]MC1_GtBallad _C	4 / 4	8	94		○	:
Gtr	Ballad	2294	[Mg]FA1_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2295	[Mg]FB1_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2296	[Mg]FC1_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2297	[Mg]BA1_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2298	[Mg]EA1_GtBallad _C	4 / 4	4	94		○	:
Gtr	Ballad	2299	[Mg]EB1_GtBallad _C	4 / 4	4	94		○	:
Gtr	Ballad	2300	[Mg]MA1_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2301	[Mg]MB1_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2302	[Mg]MC1_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2303	[Mg]FA1_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2304	[Mg]FB1_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2305	[Mg]FC1_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2306	[Mg]BA1_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2307	[Mg]MA2_GtBallad _C	4 / 4	8	94		○	Mega Nylon
Gtr	Ballad	2308	[Mg]MB2_GtBallad _C	4 / 4	8	94		○	:
Gtr	Ballad	2309	[Mg]MC2_GtBallad _C	4 / 4	8	94		○	:
Gtr	Ballad	2310	[Mg]FA2_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2311	[Mg]FB2_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2312	[Mg]FC2_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2313	[Mg]BA2_GtBallad _C	4 / 4	1	94		○	:
Gtr	Ballad	2314	[Mg]EA2_GtBallad _C	4 / 4	4	94		○	:
Gtr	Ballad	2315	[Mg]EB2_GtBallad _C	4 / 4	4	94		○	:
Gtr	Ballad	2316	[Mg]MA2_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2317	[Mg]MB2_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2318	[Mg]MC2_GtBallad	4 / 4	8	94		○	:
Gtr	Ballad	2319	[Mg]FA2_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2320	[Mg]FB2_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2321	[Mg]FC2_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2322	[Mg]BA2_GtBallad	4 / 4	1	94		○	:
Gtr	Ballad	2323	[Mg]MA_Unpluggd1 _C	4 / 4	4	120		○	Mega Steel
Gtr	Ballad	2324	[Mg]MB_Unpluggd1 _C	4 / 4	4	120		○	:
Gtr	Ballad	2325	[Mg]MC_Unpluggd1 _C	4 / 4	4	120		○	:
Gtr	Ballad	2326	[Mg]FA_Unpluggd1 _C	4 / 4	1	120		○	:
Gtr	Ballad	2327	[Mg]FB_Unpluggd1 _C	4 / 4	1	120		○	:
Gtr	Ballad	2328	[Mg]FC_Unpluggd1 _C	4 / 4	1	120		○	:
Gtr	Ballad	2329	[Mg]BA_Unpluggd1 _C	4 / 4	1	120		○	:
Gtr	Ballad	2330	[Mg]MA_Unplugged 1	4 / 4	4	120		○	:
Gtr	Ballad	2331	[Mg]MB_Unplugged 1	4 / 4	4	120		○	:
Gtr	Ballad	2332	[Mg]MC_Unplugged 1	4 / 4	4	120		○	:
Gtr	Ballad	2333	[Mg]FA_Unplugged 1	4 / 4	1	120		○	:
Gtr	Ballad	2334	[Mg]FB_Unplugged 1	4 / 4	1	120		○	:
Gtr	Ballad	2335	[Mg]FC_Unplugged 1	4 / 4	1	120		○	:
Gtr	Ballad	2336	[Mg]BA_Unplugged 1	4 / 4	1	120		○	:
Gtr	Ballad	2337	[Mg]MA_Unpluggd2 _C	4 / 4	8	120		○	:
Gtr	Ballad	2338	[Mg]MB_Unpluggd2 _C	4 / 4	8	120		○	:
Gtr	Ballad	2339	[Mg]MC_Unpluggd2 _C	4 / 4	8	120		○	:
Gtr	Ballad	2340	[Mg]FA_Unpluggd2 _C	4 / 4	1	120		○	:
Gtr	Ballad	2341	[Mg]FB_Unpluggd2 _C	4 / 4	1	120		○	:
Gtr	Ballad	2342	[Mg]FC_Unpluggd2 _C	4 / 4	1	120		○	:
Gtr	Ballad	2343	[Mg]BA_Unpluggd2 _C	4 / 4	1	120		○	:
Gtr	Ballad	2344	[Mg]EA_Unpluggd2 _C	4 / 4	5	120		○	:
Gtr	Ballad	2345	[Mg]EB_Unpluggd2 _C	4 / 4	4	120		○	:
Gtr	Ballad	2346	[Mg]MA_Unplugged 2	4 / 4	8	120		○	:
Gtr	Ballad	2347	[Mg]MB_Unplugged 2	4 / 4	8	120		○	:
Gtr	Ballad	2348	[Mg]MC_Unplugged 2	4 / 4	8	120		○	:
Gtr	Ballad	2349	[Mg]FA_Unplugged 2	4 / 4	1	120		○	:
Gtr	Ballad	2350	[Mg]FB_Unplugged 2	4 / 4	1	120		○	:
Gtr	Ballad	2351	[Mg]FC_Unplugged 2	4 / 4	1	120		○	:
Gtr	Ballad	2352	[Mg]BA_Unplugged 2	4 / 4	1	120		○	:
Gtr	Ballad	2353	[Mg]MA_EP Ballad _C	4 / 4	2	60		○	Mega 1coil SlapClean
Gtr	Ballad	2354	[Mg]MB_EP Ballad _C	4 / 4	2	60		○	:
Gtr	Ballad	2355	[Mg]MC_EP Ballad _C	4 / 4	2	60		○	:
Gtr	Ballad	2356	[Mg]FA_EP Ballad _C	4 / 4	1	60		○	:
Gtr	Ballad	2357	[Mg]FB_EP Ballad _C	4 / 4	1	60		○	:
Gtr	Ballad	2358	[Mg]FC_EP Ballad _C	4 / 4	1	60		○	:
Gtr	Ballad	2359	[Mg]BA_EP Ballad _C	4 / 4	1	60		○	:
Gtr	Ballad	2360	[Mg]EA_EP Ballad _C	4 / 4	4	60		○	:
Gtr	Ballad	2361	[Mg]EB_EP Ballad _C	4 / 4	4	60		○	:
Gtr	Hip Hop	2362	[Mg]MA_Dancehall _C	4 / 4	4	103		○	Mega 1coil Old R&R
Gtr	Hip Hop	2363	[Mg]MB_Dancehall _C	4 / 4	4	103		○	:
Gtr	Hip Hop	2364	[Mg]MD_Dancehall _C	4 / 4	4	103		○	:
Gtr	Hip Hop	2365	[Mg]FA_Dancehall _C	4 / 4	1	103		○	:
Gtr	Hip Hop	2366	[Mg]FB_Dancehall _C	4 / 4	1	103		○	:
Gtr	Hip Hop	2367	[Mg]FD_Dancehall _C	4 / 4	1	103		○	:
Gtr	Hip Hop	2368	[Mg]BA_Dancehall _C	4 / 4	1	103		○	:
Gtr	Hip Hop	2369	[Mg]EA_Dancehall _C	4 / 4	3	103		○	:
Gtr	Modern R&B	2370	[Mg]MA_NeoUKSoul _C	4 / 4	4	79		○	Mega Steel
Gtr	Modern R&B	2371	[Mg]MB_NeoUKSoul _C	4 / 4	4	79		○	:
Gtr	Modern R&B	2372	[Mg]MC_NeoUKSoul _C	4 / 4	4	79		○	:
Gtr	Modern R&B	2373	[Mg]MD_NeoUKSoul _C	4 / 4	4	79		○	:
Gtr	Modern R&B	2374	[Mg]FA_NeoUKSoul _C	4 / 4	1	79		○	:
Gtr	Modern R&B	2375	[Mg]FB_NeoUKSoul _C	4 / 4	1	79		○	:
Gtr	Modern R&B	2376	[Mg]FC_NeoUKSoul _C	4 / 4	1	79		○	:
Gtr	Modern R&B	2377	[Mg]FD_NeoUKSoul _C	4 / 4	1	79		○	:
Gtr	Modern R&B	2378	[Mg]EA_NeoUKSoul _C	4 / 4	3	79		○	:
Gtr	Modern R&B	2379	[Mg]MA_Slow&Easy _C	4 / 4	4	72		○	Mega 60s Clean
Gtr	Modern R&B	2380	[Mg]MB_Slow&Easy _C	4 / 4	4	72		○	:
Gtr	Modern R&B	2381	[Mg]MC_Slow&Easy _C	4 / 4	4	72		○	:
Gtr	Modern R&B	2382	[Mg]FA_Slow&Easy _C	4 / 4	1	72		○	:
Gtr	Modern R&B	2383	[Mg]FB_Slow&Easy _C	4 / 4	1	72		○	:
Gtr	Modern R&B	2384	[Mg]FC_Slow&Easy _C	4 / 4	1	72		○	:
Gtr	Modern R&B	2385	[Mg]BA_Slow&Easy _C	4 / 4	1	72		○	:
Gtr	Modern R&B	2386	[Mg]EA_Slow&Easy _C	4 / 4	3	72		○	:
Gtr	Modern R&B	2387	[Mg]EB_Slow&Easy _C	4 / 4	4	72		○	:
Gtr	Modern R&B	2388	[Mg]MA_R&B _C	4 / 4	2	83		○	Mega 60s Tube Tone
Gtr	Modern R&B	2389	[Mg]MB_R&B _C	4 / 4	2	83		○	:
Gtr	Modern R&B	2390	[Mg]MC_R&B _C	4 / 4	2	83		○	:
Gtr	Modern R&B	2391	[Mg]FA_R&B _C	4 / 4	1	83		○	:
Gtr	Modern R&B	2392	[Mg]FB_R&B _C	4 / 4	1	83		○	:
Gtr	Modern R&B	2393	[Mg]FC_R&B _C	4 / 4	1	83		○	:
Gtr	Modern R&B	2394	[Mg]BA_R&B _C	4 / 4	1	83		○	:
Gtr	Modern R&B	2395	[Mg]EA_R&B _C	4 / 4	4	83		○	:
Gtr	Modern R&B	2396	[Mg]EB_R&B _C	4 / 4	4	83		○	:
Gtr	Modern R&B	2397	[Mg]MA_New R&B 1 _C	4 / 4	2	98		○	Mega Steel
Gtr	Modern R&B	2398	[Mg]MB_New R&B 1 _C	4 / 4	2	98		○	:
Gtr	Modern R&B	2399	[Mg]MC_New R&B 1 _C	4 / 4	2	98		○	:
Gtr	Modern R&B	2400	[Mg]FA_New R&B 1 _C	4 / 4	1	98		○	:
Gtr	Modern R&B	2401	[Mg]FB_New R&B 1 _C	4 / 4	1	98		○	:
Gtr	Modern R&B	2402	[Mg]FC_New R&B 1 _C	4 / 4	1	98		○	:
Gtr	Modern R&B	2403	[Mg]BA_New R&B 1 _C	4 / 4	1	98		○	:
Gtr	Modern R&B	2404	[Mg]EA_New R&B 1 _C	4 / 4	3	98		○	:
Gtr	Modern R&B	2405	[Mg]EB_New R&B 1 _C	4 / 4	4	98		○	:
Gtr	Modern R&B	2406	[Mg]MA_R&B Bld1 _C	4 / 4	4	70		○	Mega 60s Slap Clean
Gtr	Modern R&B	2407	[Mg]MB_R&B Bld1 _C	4 / 4	4	70		○	:
Gtr	Modern R&B	2408	[Mg]MC_R&B Bld1 _C	4 / 4	4	70		○	:
Gtr	Modern R&B	2409	[Mg]FA_R&B Bld1 _C	4 / 4	1	70		○	:
Gtr	Modern R&B	2410	[Mg]FB_R&B Bld1 _C	4 / 4	1	70		○	:
Gtr	Modern R&B	2411	[Mg]FC_R&B Bld1 _C	4 / 4	1	70		○	:
Gtr	Modern R&B	2412	[Mg]BA_R&B Bld1 _C	4 / 4	1	70		○	:
Gtr	Classic R&B	2413	[Mg]MA_StndrdDsc _C	4 / 4	4	120		○	Mega 60s Clean
Gtr	Classic R&B	2414	[Mg]MB_StndrdDsc _C	4 / 4	4	120		○	:
Gtr	Classic R&B	2415	[Mg]MC_StndrdDsc _C	4 / 4	4	120		○	:
Gtr	Classic R&B	2416	[Mg]FA_StndrdDsc _C	4 / 4	1	120		○	:
Gtr	Classic R&B	2417	[Mg]FB_StndrdDsc _C	4 / 4	1	120		○	:
Gtr	Classic R&B	2418	[Mg]FC_StndrdDsc _C	4 / 4	1	120		○	:
Gtr	Classic R&B	2419	[Mg]BA_StndrdDsc _C	4 / 4	1	120		○	:
Gtr	Classic R&B	2420	[Mg]EA_StndrdDsc _C	4 / 4	3	120		○	:
Gtr	Classic R&B	2421	[Mg]EB_StndrdDsc _C	4 / 4	3	120		○	:
Gtr	Classic R&B	2422	[Mg]MA_Retro Dsc _C	4 / 4	4	108		○	Mega1coilSlpPedalWah
Gtr	Classic R&B	2423	[Mg]MB_Retro Dsc _C	4 / 4	4	108		○	:
Gtr	Classic R&B	2424	[Mg]MC_Retro Dsc _C	4 / 4	4	108		○	:
Gtr	Classic R&B	2425	[Mg]FA_Retro Dsc _C	4 / 4	1	108		○	:
Gtr	Classic R&B	2426	[Mg]FB_Retro Dsc _C	4 / 4	1	108		○	:
Gtr	Classic R&B	2427	[Mg]FC_Retro Dsc _C	4 / 4	1	108		○	:
Gtr	Classic R&B	2428	[Mg]BA_Retro Dsc _C	4 / 4	1	108		○	:
Gtr	Classic R&B	2429	[Mg]EA_Retro Dsc _C	4 / 4	4	108		○	:
Gtr	Classic R&B	2430	[Mg]EB_Retro Dsc _C	4 / 4	4	108		○	:
Gtr	Classic R&B	2431	[Mg]MA_70CoolDsc _C	4 / 4	4	114		○	Mega 60s ChorusCombo
Gtr	Classic R&B	2432	[Mg]MB_70CoolDsc _C	4 / 4	4	114		○	:
Gtr	Classic R&B	2433	[Mg]MC_70CoolDsc _C	4 / 4	4	114		○	:
Gtr	Classic R&B	2434	[Mg]FA_70CoolDsc _C	4 / 4	1	114		○	:
Gtr	Classic R&B	2435	[Mg]FB_70CoolDsc _C	4 / 4	1	114		○	:
Gtr	Classic R&B	2436	[Mg]FC_70CoolDsc _C	4 / 4	1	114		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Classic R&B	2437	[Mg]BA_70CoolDsc _C	4 / 4	1	114		O	:
Gtr	Classic R&B	2438	[Mg]EA_70CoolDsc _C	4 / 4	4	114		O	:
Gtr	Classic R&B	2439	[Mg]EB_70CoolDsc _C	4 / 4	3	114		O	:
Gtr	Classic R&B	2440	[Mg]MA_Philly _C	4 / 4	2	100		O	Mega 60s Pedal Wah
Gtr	Classic R&B	2441	[Mg]MB_Philly _C	4 / 4	2	100		O	:
Gtr	Classic R&B	2442	[Mg]MC_Philly _C	4 / 4	2	100		O	:
Gtr	Classic R&B	2443	[Mg]FA_Philly _C	4 / 4	1	100		O	:
Gtr	Classic R&B	2444	[Mg]FB_Philly _C	4 / 4	1	100		O	:
Gtr	Classic R&B	2445	[Mg]FC_Philly _C	4 / 4	1	100		O	:
Gtr	Classic R&B	2446	[Mg]BA_Philly _C	4 / 4	1	100		O	:
Gtr	Classic R&B	2447	[Mg]MA_Philly	4 / 4	2	100		O	:
Gtr	Classic R&B	2448	[Mg]MB_Philly	4 / 4	2	100		O	:
Gtr	Classic R&B	2449	[Mg]MC_Philly	4 / 4	2	100		O	:
Gtr	Classic R&B	2450	[Mg]FA_Philly	4 / 4	1	100		O	:
Gtr	Classic R&B	2451	[Mg]FB_Philly	4 / 4	1	100		O	:
Gtr	Classic R&B	2452	[Mg]FC_Philly	4 / 4	1	100		O	:
Gtr	Classic R&B	2453	[Mg]BA_Philly	4 / 4	1	100		O	:
Gtr	Classic R&B	2454	[Mg]EA_Philly _C	4 / 4	4	100		O	:
Gtr	Classic R&B	2455	[Mg]EB_Philly _C	4 / 4	3	100		O	:
Gtr	Classic R&B	2456	[Mg]MA_Soul 1 _C	4 / 4	2	116		O	Mega 1coil Slap Dist
Gtr	Classic R&B	2457	[Mg]MB_Soul 1 _C	4 / 4	2	116		O	:
Gtr	Classic R&B	2458	[Mg]MC_Soul 1 _C	4 / 4	2	116		O	:
Gtr	Classic R&B	2459	[Mg]FA_Soul 1 _C	4 / 4	1	116		O	:
Gtr	Classic R&B	2460	[Mg]FB_Soul 1 _C	4 / 4	1	116		O	:
Gtr	Classic R&B	2461	[Mg]FC_Soul 1 _C	4 / 4	1	116		O	:
Gtr	Classic R&B	2462	[Mg]BA_Soul 1 _C	4 / 4	1	116		O	:
Gtr	Classic R&B	2463	[Mg]EA_Soul 1 _C	4 / 4	4	116		O	:
Gtr	Classic R&B	2464	[Mg]EB_Soul 1 _C	4 / 4	3	116		O	:
Gtr	Classic R&B	2465	[Mg]MA_70ChrSoul _C	4 / 4	2	108		O	Mega 60s ChorusCombo
Gtr	Classic R&B	2466	[Mg]MB_70ChrSoul _C	4 / 4	2	108		O	:
Gtr	Classic R&B	2467	[Mg]MC_70ChrSoul _C	4 / 4	2	108		O	:
Gtr	Classic R&B	2468	[Mg]FA_70ChrSoul _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2469	[Mg]FB_70ChrSoul _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2470	[Mg]FC_70ChrSoul _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2471	[Mg]BA_70ChrSoul _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2472	[Mg]EA_70ChrSoul _C	4 / 4	5	108		O	:
Gtr	Classic R&B	2473	[Mg]EB_70ChrSoul _C	4 / 4	3	108		O	:
Gtr	Classic R&B	2474	[Mg]MA_FrankSoul _C	4 / 4	4	120		O	Mega 60s Clean
Gtr	Classic R&B	2475	[Mg]MB_FrankSoul _C	4 / 4	4	120		O	:
Gtr	Classic R&B	2476	[Mg]MC_FrankSoul _C	4 / 4	4	120		O	:
Gtr	Classic R&B	2477	[Mg]FA_FrankSoul _C	4 / 4	1	120		O	:
Gtr	Classic R&B	2478	[Mg]FB_FrankSoul _C	4 / 4	1	120		O	:
Gtr	Classic R&B	2479	[Mg]FC_FrankSoul _C	4 / 4	1	120		O	:
Gtr	Classic R&B	2480	[Mg]BA_FrankSoul _C	4 / 4	1	120		O	:
Gtr	Classic R&B	2481	[Mg]MA_Frankly Soul	4 / 4	4	120		O	:
Gtr	Classic R&B	2482	[Mg]MB_Frankly Soul	4 / 4	4	120		O	:
Gtr	Classic R&B	2483	[Mg]MC_Frankly Soul	4 / 4	4	120		O	:
Gtr	Classic R&B	2484	[Mg]FA_Frankly Soul	4 / 4	1	120		O	:
Gtr	Classic R&B	2485	[Mg]FB_Frankly Soul	4 / 4	1	120		O	:
Gtr	Classic R&B	2486	[Mg]FC_Frankly Soul	4 / 4	1	120		O	:
Gtr	Classic R&B	2487	[Mg]BA_Frankly Soul	4 / 4	1	120		O	:
Gtr	Classic R&B	2488	[Mg]EA_FrankSoul _C	4 / 4	3	120		O	:
Gtr	Classic R&B	2489	[Mg]EB_FrankSoul _C	4 / 4	4	120		O	:
Gtr	Classic R&B	2490	[Mg]MA_Soul Beat _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2491	[Mg]MB_Soul Beat _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2492	[Mg]MC_Soul Beat _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2493	[Mg]FA_Soul Beat _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2494	[Mg]FB_Soul Beat _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2495	[Mg]FC_Soul Beat _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2496	[Mg]BA_Soul Beat _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2497	[Mg]EA_Soul Beat _C	4 / 4	3	123		O	:
Gtr	Classic R&B	2498	[Mg]EB_Soul Beat _C	4 / 4	3	123		O	:
Gtr	Classic R&B	2499	[Mg]MA1_SoulBand _C	4 / 4	4	129		O	Mega Steel
Gtr	Classic R&B	2500	[Mg]MB1_SoulBand _C	4 / 4	4	129		O	:
Gtr	Classic R&B	2501	[Mg]MC1_SoulBand _C	4 / 4	4	129		O	:
Gtr	Classic R&B	2502	[Mg]FA1_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2503	[Mg]FB1_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2504	[Mg]FC1_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2505	[Mg]BA1_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2506	[Mg]MA2_SoulBand _C	4 / 4	4	129		O	Mega 60s Tube Tone
Gtr	Classic R&B	2507	[Mg]MB2_SoulBand _C	4 / 4	4	129		O	:
Gtr	Classic R&B	2508	[Mg]MC2_SoulBand _C	4 / 4	4	129		O	:
Gtr	Classic R&B	2509	[Mg]FA2_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2510	[Mg]FB2_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2511	[Mg]FC2_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2512	[Mg]BA2_SoulBand _C	4 / 4	1	129		O	:
Gtr	Classic R&B	2513	[Mg]MA_SoulShuff _C	4 / 4	4	98		O	Mega 60s Clean
Gtr	Classic R&B	2514	[Mg]MB_SoulShuff _C	4 / 4	4	98		O	:
Gtr	Classic R&B	2515	[Mg]MC_SoulShuff _C	4 / 4	4	98		O	:
Gtr	Classic R&B	2516	[Mg]FA_SoulShuff _C	4 / 4	1	98		O	:
Gtr	Classic R&B	2517	[Mg]FB_SoulShuff _C	4 / 4	1	98		O	:
Gtr	Classic R&B	2518	[Mg]FC_SoulShuff _C	4 / 4	1	98		O	:
Gtr	Classic R&B	2519	[Mg]BA_SoulShuff _C	4 / 4	1	98		O	:
Gtr	Classic R&B	2520	[Mg]EA_SoulShuff _C	4 / 4	3	98		O	:
Gtr	Classic R&B	2521	[Mg]EB_SoulShuff _C	4 / 4	3	98		O	:
Gtr	Classic R&B	2522	[Mg]MA_SoulSwing _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2523	[Mg]MB_SoulSwing _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2524	[Mg]MC_SoulSwing _C	4 / 4	4	124		O	:
Gtr	Classic R&B	2525	[Mg]FA_SoulSwing _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2526	[Mg]FB_SoulSwing _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2527	[Mg]FC_SoulSwing _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2528	[Mg]BA_SoulSwing _C	4 / 4	1	124		O	:
Gtr	Classic R&B	2529	[Mg]EA_SoulSwing _C	4 / 4	3	123		O	:
Gtr	Classic R&B	2530	[Mg]EB_SoulSwing _C	4 / 4	5	123		O	:
Gtr	Classic R&B	2531	[Mg]MA_Gospel Br _C	4 / 4	4	108		O	Mega 60s ChorusCombo
Gtr	Classic R&B	2532	[Mg]MB_Gospel Br _C	4 / 4	4	108		O	:
Gtr	Classic R&B	2533	[Mg]MC_Gospel Br _C	4 / 4	4	108		O	:
Gtr	Classic R&B	2534	[Mg]FA_Gospel Br _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2535	[Mg]FB_Gospel Br _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2536	[Mg]FC_Gospel Br _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2537	[Mg]BA_Gospel Br _C	4 / 4	1	108		O	:
Gtr	Classic R&B	2538	[Mg]EA_Gospel Br _C	4 / 4	4	108		O	:
Gtr	Classic R&B	2539	[Mg]EB_Gospel Br _C	4 / 4	3	108		O	:
Gtr	Funk	2540	[Mg]MA_UrbanFunk _C	4 / 4	4	115		O	Mega 60s Clean
Gtr	Funk	2541	[Mg]MB_UrbanFunk _C	4 / 4	4	115		O	:
Gtr	Funk	2542	[Mg]MC_UrbanFunk _C	4 / 4	4	115		O	:
Gtr	Funk	2543	[Mg]MD_UrbanFunk _C	4 / 4	4	115		O	:
Gtr	Funk	2544	[Mg]FA_UrbanFunk _C	4 / 4	1	115		O	:
Gtr	Funk	2545	[Mg]FC_UrbanFunk _C	4 / 4	1	115		O	:
Gtr	Funk	2546	[Mg]FD_UrbanFunk _C	4 / 4	1	115		O	:
Gtr	Funk	2547	[Mg]EA_UrbanFunk _C	4 / 4	5	115		O	:
Gtr	Funk	2548	[Mg]MA_Funk 1 _C	4 / 4	8	104		O	Mega 1coil SlapClean
Gtr	Funk	2549	[Mg]MB_Funk 1 _C	4 / 4	8	104		O	:
Gtr	Funk	2550	[Mg]MC_Funk 1 _C	4 / 4	8	104		O	:
Gtr	Funk	2551	[Mg]FA_Funk 1 _C	4 / 4	1	104		O	:
Gtr	Funk	2552	[Mg]FB_Funk 1 _C	4 / 4	1	104		O	:
Gtr	Funk	2553	[Mg]FC_Funk 1 _C	4 / 4	1	104		O	:
Gtr	Funk	2554	[Mg]BA_Funk 1 _C	4 / 4	1	104		O	:
Gtr	Funk	2555	[Mg]EA_Funk 1 _C	4 / 4	9	104		O	:
Gtr	Funk	2556	[Mg]EB_Funk 1 _C	4 / 4	4	104		O	:
Gtr	Funk	2557	[Mg]MA1_FunkPpRk _C	4 / 4	4	95		O	Mega 60s Clean
Gtr	Funk	2558	[Mg]MB1_FunkPpRk _C	4 / 4	4	95		O	:
Gtr	Funk	2559	[Mg]MC1_FunkPpRk _C	4 / 4	4	95		O	:
Gtr	Funk	2560	[Mg]FA1_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2561	[Mg]FB1_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2562	[Mg]FC1_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2563	[Mg]BA1_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2564	[Mg]EA1_FunkPpRk _C	4 / 4	4	94		O	:
Gtr	Funk	2565	[Mg]EB1_FunkPpRk _C	4 / 4	3	94		O	:
Gtr	Funk	2566	[Mg]MA1_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2567	[Mg]MB1_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2568	[Mg]MC1_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2569	[Mg]FA1_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2570	[Mg]FB1_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2571	[Mg]FC1_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2572	[Mg]BA1_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2573	[Mg]MA2_FunkPpRk _C	4 / 4	4	95		O	Mega 1coil Slap Dist
Gtr	Funk	2574	[Mg]MB2_FunkPpRk _C	4 / 4	4	95		O	:
Gtr	Funk	2575	[Mg]MC2_FunkPpRk _C	4 / 4	4	95		O	:
Gtr	Funk	2576	[Mg]FA2_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2577	[Mg]FB2_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2578	[Mg]FC2_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2579	[Mg]BA2_FunkPpRk _C	4 / 4	1	95		O	:
Gtr	Funk	2580	[Mg]MA2_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2581	[Mg]MB2_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2582	[Mg]MC2_FunkPpRk	4 / 4	4	94		O	:
Gtr	Funk	2583	[Mg]FA2_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2584	[Mg]FB2_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2585	[Mg]FC2_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2586	[Mg]BA2_FunkPpRk	4 / 4	1	94		O	:
Gtr	Funk	2587	[Mg]MA_JazzFunk1 _C	4 / 4	4	120		O	Mega 60s Clean
Gtr	Funk	2588	[Mg]MB_JazzFunk1 _C	4 / 4	4	120		O	:
Gtr	Funk	2589	[Mg]MC_JazzFunk1 _C	4 / 4	4	120		O	:
Gtr	Funk	2590	[Mg]FA_JazzFunk1 _C	4 / 4	1	120		O	:
Gtr	Funk	2591	[Mg]FB_JazzFunk1 _C	4 / 4	1	120		O	:
Gtr	Funk	2592	[Mg]FC_JazzFunk1 _C	4 / 4	1	120		O	:
Gtr	Funk	2593	[Mg]BA_JazzFunk1 _C	4 / 4	1	120		O	:
Gtr	Funk	2594	[Mg]EA_JazzFunk1 _C	4 / 4	3	120		O	:
Gtr	Funk	2595	[Mg]EB_JazzFunk1 _C	4 / 4	3	120		O	:
Gtr	Funk	2596	[Mg]MA_Jazz Funk 1	4 / 4	4	120		O	:
Gtr	Funk	2597	[Mg]MB_Jazz Funk 1	4 / 4	4	120		O	:
Gtr	Funk	2598	[Mg]MC_Jazz Funk 1	4 / 4	4	120		O	:
Gtr	Funk	2599	[Mg]FA_Jazz Funk 1	4 / 4	1	120		O	:
Gtr	Funk	2600	[Mg]FB_Jazz Funk 1	4 / 4	1	120		O	:
Gtr	Funk	2601	[Mg]FC_Jazz Funk 1	4 / 4	1	120		O	:
Gtr	Funk	2602	[Mg]BA_Jazz Funk 1	4 / 4	1	120		O	:
Gtr	Funk	2603	[Mg]MA_Jazz Pop _C	4 / 4	2	102		O	Mega 60s ChorusCombo
Gtr	Funk	2604	[Mg]MB_Jazz Pop _C	4 / 4	2	102		O	:
Gtr	Funk	2605	[Mg]MC_Jazz Pop _C	4 / 4	2	102		O	:
Gtr	Funk	2606	[Mg]FA_Jazz Pop _C	4 / 4	1	102		O	:
Gtr	Funk	2607	[Mg]FB_Jazz Pop _C	4 / 4	1	102		O	:
Gtr	Funk	2608	[Mg]FC_Jazz Pop _C	4 / 4	1	102		O	:
Gtr	Funk	2609	[Mg]BA_Jazz Pop _C	4 / 4	1	102		O	:
Gtr	Funk	2610	[Mg]MA_Jazz Pop	4 / 4	2	102		O	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Funk	2611	[Mg]MB_Jazz Pop	4 / 4	2	102		○	:
Gtr	Funk	2612	[Mg]MC_Jazz Pop	4 / 4	2	102		○	:
Gtr	Funk	2613	[Mg]FA_Jazz Pop	4 / 4	1	102		○	:
Gtr	Funk	2614	[Mg]FB_Jazz Pop	4 / 4	1	102		○	:
Gtr	Funk	2615	[Mg]FC_Jazz Pop	4 / 4	1	102		○	:
Gtr	Funk	2616	[Mg]BA_Jazz Pop	4 / 4	1	102		○	:
Gtr	Funk	2617	[Mg]MA_GospelFnk _C	4 / 4	4	106		○	Mega 60s Clean
Gtr	Funk	2618	[Mg]MB_GospelFnk _C	4 / 4	4	106		○	:
Gtr	Funk	2619	[Mg]MC_GospelFnk _C	4 / 4	4	106		○	:
Gtr	Funk	2620	[Mg]FA_GospelFnk _C	4 / 4	1	106		○	:
Gtr	Funk	2621	[Mg]FB_GospelFnk _C	4 / 4	1	106		○	:
Gtr	Funk	2622	[Mg]FC_GospelFnk _C	4 / 4	1	106		○	:
Gtr	Funk	2623	[Mg]BA_GospelFnk _C	4 / 4	1	106		○	:
Gtr	Funk	2624	[Mg]EA_GospelFnk _C	4 / 4	4	106		○	:
Gtr	Funk	2625	[Mg]EB_GospelFnk _C	4 / 4	3	106		○	:
Gtr	Funk	2626	[Mg]MA_Funk Dsc _C	4 / 4	2	126		○	Mega 60s Small Blues
Gtr	Funk	2627	[Mg]MB_Funk Dsc _C	4 / 4	2	126		○	:
Gtr	Funk	2628	[Mg]MC_Funk Dsc _C	4 / 4	2	126		○	:
Gtr	Funk	2629	[Mg]FA_Funk Dsc _C	4 / 4	1	126		○	:
Gtr	Funk	2630	[Mg]FB_Funk Dsc _C	4 / 4	1	126		○	:
Gtr	Funk	2631	[Mg]FC_Funk Dsc _C	4 / 4	1	126		○	:
Gtr	Funk	2632	[Mg]BA_Funk Dsc _C	4 / 4	1	126		○	:
Gtr	Funk	2633	[Mg]EA_Funk Dsc _C	4 / 4	4	126		○	:
Gtr	Funk	2634	[Mg]EB_Funk Dsc _C	4 / 4	3	126		○	:
Gtr	Funk	2635	[Mg]MA_70DscFunk _C	4 / 4	4	112		○	Mega 1coil Slap Dist
Gtr	Funk	2636	[Mg]MB_70DscFunk _C	4 / 4	4	112		○	:
Gtr	Funk	2637	[Mg]MC_70DscFunk _C	4 / 4	4	112		○	:
Gtr	Funk	2638	[Mg]FA_70DscFunk _C	4 / 4	1	112		○	:
Gtr	Funk	2639	[Mg]FB_70DscFunk _C	4 / 4	1	112		○	:
Gtr	Funk	2640	[Mg]FC_70DscFunk _C	4 / 4	1	112		○	:
Gtr	Funk	2641	[Mg]BA_70DscFunk _C	4 / 4	1	112		○	:
Gtr	Funk	2642	[Mg]EA_70DscFunk _C	4 / 4	4	112		○	:
Gtr	Funk	2643	[Mg]EB_70DscFunk _C	4 / 4	3	112		○	:
Gtr	House	2644	[Mg]MA_Dsc House _C	4 / 4	4	126		○	Mega 60s ChorusCombo
Gtr	House	2645	[Mg]MB_Dsc House _C	4 / 4	4	126		○	:
Gtr	House	2646	[Mg]MC_Dsc House _C	4 / 4	4	126		○	:
Gtr	House	2647	[Mg]FA_Dsc House _C	4 / 4	1	126		○	:
Gtr	House	2648	[Mg]FB_Dsc House _C	4 / 4	1	126		○	:
Gtr	House	2649	[Mg]FC_Dsc House _C	4 / 4	1	126		○	:
Gtr	House	2650	[Mg]BA_Dsc House _C	4 / 4	1	126		○	:
Gtr	Jazz	2651	[Mg]MA_JzGtrClub _C	4 / 4	8	142		○	Mega Jazz Guitar
Gtr	Jazz	2652	[Mg]MB_JzGtrClub _C	4 / 4	8	142		○	:
Gtr	Jazz	2653	[Mg]MC_JzGtrClub _C	4 / 4	8	142		○	:
Gtr	Jazz	2654	[Mg]FA_JzGtrClub _C	4 / 4	1	142		○	:
Gtr	Jazz	2655	[Mg]FB_JzGtrClub _C	4 / 4	1	142		○	:
Gtr	Jazz	2656	[Mg]FC_JzGtrClub _C	4 / 4	1	142		○	:
Gtr	Jazz	2657	[Mg]BA_JzGtrClub _C	4 / 4	1	142		○	:
Gtr	Jazz	2658	[Mg]EA_JzGtrClub _C	4 / 4	6	142		○	:
Gtr	Jazz	2659	[Mg]MA_JazWlzMed _C	3 / 4	8	180		○	:
Gtr	Jazz	2660	[Mg]MB_JazWlzMed _C	3 / 4	8	180		○	:
Gtr	Jazz	2661	[Mg]MC_JazWlzMed _C	3 / 4	8	180		○	:
Gtr	Jazz	2662	[Mg]FA_JazWlzMed _C	3 / 4	1	180		○	:
Gtr	Jazz	2663	[Mg]FB_JazWlzMed _C	3 / 4	1	180		○	:
Gtr	Jazz	2664	[Mg]FC_JazWlzMed _C	3 / 4	1	180		○	:
Gtr	Jazz	2665	[Mg]BA_JazWlzMed _C	3 / 4	1	180		○	:
Gtr	Jazz	2666	[Mg]EA_JazWlzMed _C	3 / 4	7	180		○	:
Gtr	Jazz	2667	[Mg]MA_ShffBlues _C	4 / 4	4	115		○	Mega 60s Tube Tone
Gtr	Jazz	2668	[Mg]MB_ShffBlues _C	4 / 4	4	115		○	:
Gtr	Jazz	2669	[Mg]MC_ShffBlues _C	4 / 4	4	115		○	:
Gtr	Jazz	2670	[Mg]FA_ShffBlues _C	4 / 4	1	115		○	:
Gtr	Jazz	2671	[Mg]FB_ShffBlues _C	4 / 4	1	115		○	:
Gtr	Jazz	2672	[Mg]FC_ShffBlues _C	4 / 4	1	115		○	:
Gtr	Jazz	2673	[Mg]BA_ShffBlues _C	4 / 4	1	115		○	:
Gtr	Jazz	2674	[Mg]EA_ShffBlues _C	4 / 4	5	115		○	:
Gtr	Jazz	2675	[Mg]EB_ShffBlues _C	4 / 4	6	115		○	:
Gtr	Jazz	2676	[Mg]MA_SlwBlues1 _C	4 / 4	2	49		○	:
Gtr	Jazz	2677	[Mg]MB_SlwBlues1 _C	4 / 4	2	49		○	:
Gtr	Jazz	2678	[Mg]MC_SlwBlues1 _C	4 / 4	2	49		○	:
Gtr	Jazz	2679	[Mg]FA_SlwBlues1 _C	4 / 4	1	49		○	:
Gtr	Jazz	2680	[Mg]FB_SlwBlues1 _C	4 / 4	1	49		○	:
Gtr	Jazz	2681	[Mg]FC_SlwBlues1 _C	4 / 4	1	49		○	:
Gtr	Jazz	2682	[Mg]BA_SlwBlues1 _C	4 / 4	1	49		○	:
Gtr	Jazz	2683	[Mg]EA_SlwBlues1 _C	4 / 4	3	49		○	:
Gtr	Jazz	2684	[Mg]EB_SlwBlues1 _C	4 / 4	3	49		○	:
Gtr	Jazz	2685	[Mg]MA_PnoBoogie _C	4 / 4	8	160		○	Mega 60s ChorusCombo
Gtr	Jazz	2686	[Mg]MB_PnoBoogie _C	4 / 4	4	160		○	:
Gtr	Jazz	2687	[Mg]MC_PnoBoogie _C	4 / 4	4	160		○	:
Gtr	Jazz	2688	[Mg]FA_PnoBoogie _C	4 / 4	1	160		○	:
Gtr	Jazz	2689	[Mg]FB_PnoBoogie _C	4 / 4	1	160		○	:
Gtr	Jazz	2690	[Mg]FC_PnoBoogie _C	4 / 4	1	160		○	:
Gtr	Jazz	2691	[Mg]BA_PnoBoogie _C	4 / 4	1	160		○	:
Gtr	Jazz	2692	[Mg]EA_PnoBoogie _C	4 / 4	5	160		○	:
Gtr	Jazz	2693	[Mg]EB_PnoBoogie _C	4 / 4	5	160		○	:
Gtr	Latin	2694	[Mg]MA_BrzSamba _C	4 / 4	4	96		○	Mega Nylon
Gtr	Latin	2695	[Mg]MB_BrzSamba _C	4 / 4	4	96		○	:
Gtr	Latin	2696	[Mg]MC_BrzSamba _C	4 / 4	4	96		○	:
Gtr	Latin	2697	[Mg]FA_BrzSamba _C	4 / 4	1	96		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	Latin	2698	[Mg]FB_BrzSamba _C	4 / 4	1	96		○	:
Gtr	Latin	2699	[Mg]FC_BrzSamba _C	4 / 4	1	96		○	:
Gtr	Latin	2700	[Mg]BA_BrzSamba _C	4 / 4	1	96		○	:
Gtr	Latin	2701	[Mg]EA_BrzSamba _C	4 / 4	4	96		○	:
Gtr	Latin	2702	[Mg]EB_BrzSamba _C	4 / 4	4	96		○	:
Gtr	Latin	2703	[Mg]MA_Bossa _C	4 / 4	4	124		○	:
Gtr	Latin	2704	[Mg]MB_Bossa _C	4 / 4	4	124		○	:
Gtr	Latin	2705	[Mg]MC_Bossa _C	4 / 4	4	124		○	:
Gtr	Latin	2706	[Mg]FA_Bossa _C	4 / 4	1	124		○	:
Gtr	Latin	2707	[Mg]FB_Bossa _C	4 / 4	1	124		○	:
Gtr	Latin	2708	[Mg]FC_Bossa _C	4 / 4	1	124		○	:
Gtr	Latin	2709	[Mg]BA_Bossa _C	4 / 4	1	124		○	:
Gtr	Latin	2710	[Mg]EA_Bossa _C	4 / 4	4	123		○	:
Gtr	Latin	2711	[Mg]EB_Bossa _C	4 / 4	4	123		○	:
Gtr	Latin	2712	[Mg]MA_Bossa	4 / 4	4	123		○	:
Gtr	Latin	2713	[Mg]MB_Bossa	4 / 4	4	123		○	:
Gtr	Latin	2714	[Mg]MC_Bossa	4 / 4	4	123		○	:
Gtr	Latin	2715	[Mg]FA_Bossa	4 / 4	1	123		○	:
Gtr	Latin	2716	[Mg]FB_Bossa	4 / 4	1	123		○	:
Gtr	Latin	2717	[Mg]FC_Bossa	4 / 4	1	123		○	:
Gtr	Latin	2718	[Mg]BA_Bossa	4 / 4	1	123		○	:
Gtr	Latin	2719	[Mg]MA_Merengue _C	4 / 4	4	130		○	Mega Steel
Gtr	Latin	2720	[Mg]MB_Merengue _C	4 / 4	4	130		○	:
Gtr	Latin	2721	[Mg]MC_Merengue _C	4 / 4	4	130		○	:
Gtr	Latin	2722	[Mg]FA_Merengue _C	4 / 4	1	130		○	:
Gtr	Latin	2723	[Mg]FB_Merengue _C	4 / 4	1	130		○	:
Gtr	Latin	2724	[Mg]FC_Merengue _C	4 / 4	1	130		○	:
Gtr	Latin	2725	[Mg]BA_Merengue _C	4 / 4	1	130		○	:
Gtr	Latin	2726	[Mg]EA_Merengue _C	4 / 4	3	130		○	:
Gtr	Latin	2727	[Mg]EB_Merengue _C	4 / 4	3	130		○	:
Gtr	Latin	2728	[Mg]MA_Merengue	4 / 4	4	130		○	:
Gtr	Latin	2729	[Mg]MB_Merengue	4 / 4	4	130		○	:
Gtr	Latin	2730	[Mg]MC_Merengue	4 / 4	4	130		○	:
Gtr	Latin	2731	[Mg]FA_Merengue	4 / 4	1	130		○	:
Gtr	Latin	2732	[Mg]FB_Merengue	4 / 4	1	130		○	:
Gtr	Latin	2733	[Mg]FC_Merengue	4 / 4	1	130		○	:
Gtr	Latin	2734	[Mg]BA_Merengue	4 / 4	1	130		○	:
Gtr	World	2735	[Mg]MA1_ReggaeSh _C	4 / 4	4	90		○	Mega 60s Clean
Gtr	World	2736	[Mg]MB1_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2737	[Mg]MC1_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2738	[Mg]FA1_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2739	[Mg]FB1_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2740	[Mg]FC1_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2741	[Mg]BA1_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2742	[Mg]EA1_ReggaeSh _C	4 / 4	3	90		○	:
Gtr	World	2743	[Mg]EB1_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2744	[Mg]MA2_ReggaeSh _C	4 / 4	4	90		○	Mega 1coil SlapClean
Gtr	World	2745	[Mg]MB2_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2746	[Mg]MC2_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2747	[Mg]FA2_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2748	[Mg]FB2_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2749	[Mg]FC2_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2750	[Mg]BA2_ReggaeSh _C	4 / 4	1	90		○	:
Gtr	World	2751	[Mg]EA2_ReggaeSh _C	4 / 4	3	90		○	:
Gtr	World	2752	[Mg]EB2_ReggaeSh _C	4 / 4	4	90		○	:
Gtr	World	2753	[Mg]MA_JmbReggae _C	4 / 4	4	100		○	Mega 60s Clean
Gtr	World	2754	[Mg]MB_JmbReggae _C	4 / 4	4	100		○	:
Gtr	World	2755	[Mg]MC_JmbReggae _C	4 / 4	4	100		○	:
Gtr	World	2756	[Mg]FA_JmbReggae _C	4 / 4	1	100		○	:
Gtr	World	2757	[Mg]FB_JmbReggae _C	4 / 4	1	100		○	:
Gtr	World	2758	[Mg]FC_JmbReggae _C	4 / 4	1	100		○	:
Gtr	World	2759	[Mg]BA_JmbReggae _C	4 / 4	1	100		○	:
Gtr	World	2760	[Mg]EA_JmbReggae _C	4 / 4	3	100		○	:
Gtr	World	2761	[Mg]EB_JmbReggae _C	4 / 4	3	100		○	:
Gtr	World	2762	[Mg]MA_RmbFlamnc _C	4 / 4	4	106		○	Mega Nylon
Gtr	World	2763	[Mg]MB_RmbFlamnc _C	4 / 4	4	106		○	:
Gtr	World	2764	[Mg]MC_RmbFlamnc _C	4 / 4	4	106		○	:
Gtr	World	2765	[Mg]FA_RmbFlamnc _C	4 / 4	1	106		○	:
Gtr	World	2766	[Mg]FB_RmbFlamnc _C	4 / 4	1	106		○	:
Gtr	World	2767	[Mg]FC_RmbFlamnc _C	4 / 4	1	106		○	:
Gtr	World	2768	[Mg]BA_RmbFlamnc _C	4 / 4	1	106		○	:
Gtr	World	2769	[Mg]EA_RmbFlamnc _C	4 / 4	3	106		○	:
Gtr	World	2770	[Mg]EB_RmbFlamnc _C	4 / 4	3	106		○	:
Gtr	World	2771	[Mg]MA_ModBlugrs _C	4 / 4	4	121		○	Mega 1coil Old R&R
Gtr	World	2772	[Mg]MB_ModBlugrs _C	4 / 4	4	121		○	:
Gtr	World	2773	[Mg]MC_ModBlugrs _C	4 / 4	4	121		○	:
Gtr	World	2774	[Mg]FA_ModBlugrs _C	4 / 4	1	121		○	:
Gtr	World	2775	[Mg]FB_ModBlugrs _C	4 / 4	1	121		○	:
Gtr	World	2776	[Mg]FC_ModBlugrs _C	4 / 4	1	121		○	:
Gtr	World	2777	[Mg]BA_ModBlugrs _C	4 / 4	1	121		○	:
Gtr	World	2778	[Mg]EA_ModBlugrs _C	4 / 4	6	121		○	:
Gtr	World	2779	[Mg]MA_IrishHymn _C	3 / 4	4	70		○	Mega Steel
Gtr	World	2780	[Mg]MB_IrishHymn _C	3 / 4	4	70		○	:
Gtr	World	2781	[Mg]MC_IrishHymn _C	3 / 4	4	70		○	:
Gtr	World	2782	[Mg]FA_IrishHymn _C	3 / 4	1	70		○	:
Gtr	World	2783	[Mg]FB_IrishHymn _C	3 / 4	1	70		○	:
Gtr	World	2784	[Mg]FC_IrishHymn _C	3 / 4	1	70		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Gtr	World	2785	[Mg]BA_IrishHymn _C	3 / 4	1	70		○	:
Gtr	World	2786	[Mg]EA_IrishHymn _C	3 / 4	5	70		○	:
Gtr	World	2787	[Mg]EB_IrishHymn _C	3 / 4	5	70		○	:
Gtr	World	2788	[Mg]MA_TurkshEu1 _C	4 / 4	4	112		○	:
Gtr	World	2789	[Mg]MB_TurkshEu1 _C	4 / 4	4	112		○	:
Gtr	World	2790	[Mg]MC_TurkshEu1 _C	4 / 4	4	112		○	:
Gtr	World	2791	[Mg]FA_TurkshEu1 _C	4 / 4	1	112		○	:
Gtr	World	2792	[Mg]FB_TurkshEu1 _C	4 / 4	1	112		○	:
Gtr	World	2793	[Mg]FC_TurkshEu1 _C	4 / 4	1	112		○	:
Gtr	World	2794	[Mg]BA_TurkshEu1 _C	4 / 4	1	112		○	:
Gtr	World	2795	[Mg]EA_TurkshEu1 _C	4 / 4	3	112		○	:
Bass	Rock	2796	MA_Under Dirt _N	4 / 4	1	95			Finger Bass
Bass	Rock	2797	MA_AlternaRock1 _N	4 / 4	4	97			:
Bass	Rock	2798	MB_AlternaRock1 _N	4 / 4	4	97			:
Bass	Rock	2799	MC_AlternaRock1	4 / 4	4	97			:
Bass	Rock	2800	FA_AlternaRock1	4 / 4	1	97			:
Bass	Rock	2801	FB_AlternaRock1	4 / 4	1	97			:
Bass	Rock	2802	FC_AlternaRock1 _N	4 / 4	1	97			:
Bass	Rock	2803	BA_AlternaRock1	4 / 4	1	97			:
Bass	Rock	2804	MA_AlternaRock2 _N	4 / 4	4	100			:
Bass	Rock	2805	MB_AlternaRock2 _N	4 / 4	4	100			:
Bass	Rock	2806	MC_AlternaRock2 _N	4 / 4	4	100			:
Bass	Rock	2807	FA_AlternaRock2 _N	4 / 4	1	100			:
Bass	Rock	2808	FB_AlternaRock2 _N	4 / 4	1	100			:
Bass	Rock	2809	FC_AlternaRock2 _N	4 / 4	1	100			:
Bass	Rock	2810	BA_AlternaRock2	4 / 4	1	100			:
Bass	Rock	2811	MA_Xover Rock	4 / 4	1	100			:
Bass	Rock	2812	MB_Xover Rock	4 / 4	1	100			:
Bass	Rock	2813	MC_Xover Rock _N	4 / 4	2	100			:
Bass	Rock	2814	MD_Xover Rock _N	4 / 4	2	100			:
Bass	Rock	2815	IA_Xover Rock _N	4 / 4	2	100			:
Bass	Rock	2816	FB_Xover Rock _N	4 / 4	1	100			:
Bass	Rock	2817	FC_Xover Rock _N	4 / 4	2	100			:
Bass	Rock	2818	MA_8Beat Rock _C	4 / 4	4	75			:
Bass	Rock	2819	MB_8Beat Rock _C	4 / 4	4	75			:
Bass	Rock	2820	MC_8Beat Rock _C	4 / 4	4	75			:
Bass	Rock	2821	FA_8Beat Rock _C	4 / 4	1	75			:
Bass	Rock	2822	FB_8Beat Rock _C	4 / 4	1	75			:
Bass	Rock	2823	FC_8Beat Rock _C	4 / 4	1	75			:
Bass	Rock	2824	BA_8Beat Rock _C	4 / 4	1	75			:
Bass	Rock	2825	MA_8Beat Rock _N	4 / 4	4	75			:
Bass	Rock	2826	MB_8Beat Rock _N	4 / 4	4	75			:
Bass	Rock	2827	MC_8Beat Rock _N	4 / 4	4	75			:
Bass	Rock	2828	FA_8Beat Rock _N	4 / 4	1	75			:
Bass	Rock	2829	FB_8Beat Rock _N	4 / 4	1	75			:
Bass	Rock	2830	FC_8Beat Rock _N	4 / 4	1	75			:
Bass	Rock	2831	BA_8Beat Rock	4 / 4	1	75			:
Bass	Rock	2832	MA_ProgresRock1 _C	4 / 4	4	110			Synth Bass
Bass	Rock	2833	MB_ProgresRock1 _C	4 / 4	3	110			:
Bass	Rock	2834	MC_ProgresRock1 _C	4 / 4	4	110			:
Bass	Rock	2835	FA_ProgresRock1 _C	4 / 4	1	110			:
Bass	Rock	2836	FB_ProgresRock1 _C	4 / 4	1	110			:
Bass	Rock	2837	FC_ProgresRock1 _C	4 / 4	1	110			:
Bass	Rock	2838	BA_ProgresRock1 _C	4 / 4	1	110			:
Bass	Rock	2839	MA_ProgresRock1 _N	4 / 4	4	110			:
Bass	Rock	2840	MB_ProgresRock1 _N	4 / 4	3	110			:
Bass	Rock	2841	MC_ProgresRock1	4 / 4	4	110			:
Bass	Rock	2842	FA_ProgresRock1 _N	4 / 4	1	110			:
Bass	Rock	2843	FB_ProgresRock1	4 / 4	1	110			:
Bass	Rock	2844	FC_ProgresRock1	4 / 4	1	110			:
Bass	Rock	2845	BA_ProgresRock1	4 / 4	1	110			:
Bass	Rock	2846	MA_ProgresRock2 _C	4 / 4	4	120			Finger Bass
Bass	Rock	2847	MB_ProgresRock2 _C	4 / 4	4	120			:
Bass	Rock	2848	MC_ProgresRock2 _C	4 / 4	4	120			:
Bass	Rock	2849	FA_ProgresRock2 _C	4 / 4	1	120			:
Bass	Rock	2850	FB_ProgresRock2 _C	4 / 4	1	120			:
Bass	Rock	2851	FC_ProgresRock2 _C	4 / 4	1	120			:
Bass	Rock	2852	BA_ProgresRock2 _C	4 / 4	1	120			:
Bass	Rock	2853	MA_ProgresRock2	4 / 4	4	120			:
Bass	Rock	2854	MB_ProgresRock2 _N	4 / 4	4	120			:
Bass	Rock	2855	MC_ProgresRock2 _N	4 / 4	4	120			:
Bass	Rock	2856	FA_ProgresRock2	4 / 4	1	120			:
Bass	Rock	2857	FB_ProgresRock2	4 / 4	1	120			:
Bass	Rock	2858	FC_ProgresRock2	4 / 4	1	120			:
Bass	Rock	2859	BA_ProgresRock2	4 / 4	1	120			:
Bass	Rock	2860	MA_Pick Bass1	4 / 4	4	120			Pick Bass
Bass	Rock	2861	MA_Pick Bass2	4 / 4	4	120			:
Bass	Rock	2862	MA_Pick Bass3 _N	4 / 4	4	120			:
Bass	Rock	2863	MA_Pick Bass4 _N	4 / 4	4	120			:
Bass	Rock	2864	MA_Pick Bass5	4 / 4	4	120			:
Bass	Pop Rock	2865	MA_Atebits Rock Bass _N	4 / 4	2	120			Synth Bass
Bass	Pop Rock	2866	MB_Atebits Rock Bass _N	4 / 4	4	120			:
Bass	Pop Rock	2867	MC_Atebits Rock Bass _N	4 / 4	4	120			:
Bass	Pop Rock	2868	MD_Atebits Rock Bass _N	4 / 4	2	120			:
Bass	Pop Rock	2869	ME_Atebits Rock Bass _N	4 / 4	2	120			:
Bass	Pop Rock	2870	MF_Atebits Rock Bass _N	4 / 4	2	120			:
Bass	Pop Rock	2871	MG_Atebits Rock Bass _N	4 / 4	2	120			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Pop Rock	2872	MH_Atebits Rock Bass _N	4 / 4	4	120			:
Bass	Pop Rock	2873	MI_Atebits Rock Bass _N	4 / 4	1	120			:
Bass	Pop Rock	2874	MA_SyBassRiff Pop 1	4 / 4	4	100			:
Bass	Pop Rock	2875	MA_SyBassRiff Pop 2	4 / 4	4	100			:
Bass	Pop Rock	2876	MA_SyBassRiff Pop 3	4 / 4	4	105			:
Bass	Pop Rock	2877	MA_SyBassRiff Pop 4	4 / 4	4	120			:
Bass	Pop Rock	2878	MA_SyBassRiff Shf 1	4 / 4	2	120			:
Bass	Pop Rock	2879	MA_SyBassRiff Shf 2	4 / 4	2	120			:
Bass	Pop Rock	2880	MA_SyBassRiff Shf 3	4 / 4	4	120			:
Bass	Pop Rock	2881	MA_SyBassRiff Shf 4	4 / 4	4	120			:
Bass	Pop Rock	2882	MA_Active Bass _N	4 / 4	4	120			Finger Bass
Bass	Pop Rock	2883	MA_NakedFretbrd _N	4 / 4	4	105			Fretless Bass
Bass	Pop Rock	2884	MA_Ice Cream _N	4 / 4	1	98			Synth Bass
Bass	Pop Rock	2885	MA_Guitar Pop 2 _N	4 / 4	2	90			Finger Bass
Bass	Pop Rock	2886	MB_Guitar Pop 2 _N	4 / 4	1	90			:
Bass	Pop Rock	2887	MC_Guitar Pop 2 _N	4 / 4	2	90			:
Bass	Pop Rock	2888	MD_Guitar Pop 2 _N	4 / 4	2	90			:
Bass	Pop Rock	2889	FB_Guitar Pop 2 _N	4 / 4	1	90			:
Bass	Pop Rock	2890	FC_Guitar Pop 2 _N	4 / 4	2	90			:
Bass	Pop Rock	2891	MA_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2892	MB_FingerPickin _N	4 / 4	2	120			:
Bass	Pop Rock	2893	MC_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2894	MD_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2895	FA_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2896	FB_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2897	FC_FingerPickin _N	4 / 4	1	120			:
Bass	Pop Rock	2898	MB_Folk Rock	4 / 4	1	120			:
Bass	Pop Rock	2899	MC_Folk Rock	4 / 4	1	120			:
Bass	Pop Rock	2900	MD_Folk Rock	4 / 4	1	120			:
Bass	Pop Rock	2901	FA_Folk Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2902	FC_Folk Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2903	MB_70s Rock _N	4 / 4	4	130			:
Bass	Pop Rock	2904	MC_70s Rock _N	4 / 4	2	130			:
Bass	Pop Rock	2905	MD_70s Rock	4 / 4	4	130			:
Bass	Pop Rock	2906	FA_70s Rock _N	4 / 4	1	130			:
Bass	Pop Rock	2907	MA_8Beat Basic _C	4 / 4	4	120			:
Bass	Pop Rock	2908	MB_8Beat Basic _C	4 / 4	4	120			:
Bass	Pop Rock	2909	MC_8Beat Basic _C	4 / 4	4	120			:
Bass	Pop Rock	2910	FA_8Beat Basic _C	4 / 4	1	120			:
Bass	Pop Rock	2911	FB_8Beat Basic _C	4 / 4	1	120			:
Bass	Pop Rock	2912	FC_8Beat Basic _C	4 / 4	1	120			:
Bass	Pop Rock	2913	BA_8Beat Basic _C	4 / 4	1	120			:
Bass	Pop Rock	2914	MA_8Beat Basic _N	4 / 4	4	120			:
Bass	Pop Rock	2915	MB_8Beat Basic _N	4 / 4	4	120			:
Bass	Pop Rock	2916	MC_8Beat Basic _N	4 / 4	4	120			:
Bass	Pop Rock	2917	FA_8Beat Basic _N	4 / 4	1	120			:
Bass	Pop Rock	2918	FB_8Beat Basic	4 / 4	1	120			:
Bass	Pop Rock	2919	FC_8Beat Basic	4 / 4	1	120			:
Bass	Pop Rock	2920	BA_8Beat Basic	4 / 4	1	120			:
Bass	Pop Rock	2921	MA_8Beat Soft _C	4 / 4	4	100			:
Bass	Pop Rock	2922	MB_8Beat Soft _C	4 / 4	4	100			:
Bass	Pop Rock	2923	MC_8Beat Soft _C	4 / 4	4	100			:
Bass	Pop Rock	2924	FA_8Beat Soft _C	4 / 4	1	100			:
Bass	Pop Rock	2925	FB_8Beat Soft _C	4 / 4	1	100			:
Bass	Pop Rock	2926	FC_8Beat Soft _C	4 / 4	1	100			:
Bass	Pop Rock	2927	BA_8Beat Soft _C	4 / 4	1	100			:
Bass	Pop Rock	2928	MA_8Beat Soft _N	4 / 4	4	100			:
Bass	Pop Rock	2929	MB_8Beat Soft _N	4 / 4	4	100			:
Bass	Pop Rock	2930	MC_8Beat Soft _N	4 / 4	4	100			:
Bass	Pop Rock	2931	FA_8Beat Soft	4 / 4	1	100			:
Bass	Pop Rock	2932	FB_8Beat Soft _N	4 / 4	1	100			:
Bass	Pop Rock	2933	FC_8Beat Soft _N	4 / 4	1	100			:
Bass	Pop Rock	2934	BA_8Beat Soft	4 / 4	1	100			:
Bass	Pop Rock	2935	MA_Soft Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2936	MB_Soft Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2937	MC_Soft Rock	4 / 4	1	120			:
Bass	Pop Rock	2938	MD_Soft Rock	4 / 4	1	120			:
Bass	Pop Rock	2939	IA_Soft Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2940	FA_Soft Rock _N	4 / 4	1	120			:
Bass	Pop Rock	2941	FB_Soft Rock	4 / 4	1	120			:
Bass	Pop Rock	2942	MA_16BeatBasic1 _C	4 / 4	4	90			Finger/Slap Bass
Bass	Pop Rock	2943	MB_16BeatBasic1 _C	4 / 4	4	90			:
Bass	Pop Rock	2944	MC_16BeatBasic1 _C	4 / 4	4	90			:
Bass	Pop Rock	2945	FA_16BeatBasic1 _C	4 / 4	1	90			:
Bass	Pop Rock	2946	FB_16BeatBasic1 _C	4 / 4	1	90			:
Bass	Pop Rock	2947	FC_16BeatBasic1 _C	4 / 4	1	90			:
Bass	Pop Rock	2948	BA_16BeatBasic1 _C	4 / 4	1	90			:
Bass	Pop Rock	2949	MA_16BeatBasic1 _N	4 / 4	4	90			:
Bass	Pop Rock	2950	MB_16BeatBasic1 _N	4 / 4	4	90			:
Bass	Pop Rock	2951	MC_16BeatBasic1 _N	4 / 4	4	90			:
Bass	Pop Rock	2952	FA_16BeatBasic1 _N	4 / 4	1	90			:
Bass	Pop Rock	2953	FB_16BeatBasic1 _N	4 / 4	1	90			:
Bass	Pop Rock	2954	FC_16BeatBasic1 _N	4 / 4	1	90			:
Bass	Pop Rock	2955	BA_16BeatBasic1	4 / 4	1	90			:
Bass	Pop Rock	2956	MA_16BeatBasic2 _C	4 / 4	4	77			Synth Bass
Bass	Pop Rock	2957	MB_16BeatBasic2 _C	4 / 4	4	77			:
Bass	Pop Rock	2958	MC_16BeatBasic2 _C	4 / 4	4	77			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Pop Rock	2959	FA_16BeatBasic2 _C	4 / 4	1	77			:
Bass	Pop Rock	2960	FB_16BeatBasic2 _C	4 / 4	1	77			:
Bass	Pop Rock	2961	FC_16BeatBasic2 _C	4 / 4	1	77			:
Bass	Pop Rock	2962	BA_16BeatBasic2 _C	4 / 4	1	77			:
Bass	Pop Rock	2963	MA_16BeatBasic2 _N	4 / 4	3	77			:
Bass	Pop Rock	2964	MB_16BeatBasic2 _N	4 / 4	4	77			:
Bass	Pop Rock	2965	MC_16BeatBasic2 _N	4 / 4	4	77			:
Bass	Pop Rock	2966	FA_16BeatBasic2 _N	4 / 4	1	77			:
Bass	Pop Rock	2967	FB_16BeatBasic2 _N	4 / 4	1	77			:
Bass	Pop Rock	2968	FC_16BeatBasic2 _N	4 / 4	1	77			:
Bass	Pop Rock	2969	BA_16BeatBasic2	4 / 4	1	77			:
Bass	Pop Rock	2970	MA_16Beat Pop 2 _C	4 / 4	4	94			:
Bass	Pop Rock	2971	MB_16Beat Pop 2 _C	4 / 4	4	94			:
Bass	Pop Rock	2972	MC_16Beat Pop 2 _C	4 / 4	4	94			:
Bass	Pop Rock	2973	FA_16Beat Pop 2 _C	4 / 4	1	94			:
Bass	Pop Rock	2974	FB_16Beat Pop 2 _C	4 / 4	1	94			:
Bass	Pop Rock	2975	FC_16Beat Pop 2 _C	4 / 4	1	94			:
Bass	Pop Rock	2976	BA_16Beat Pop 2 _C	4 / 4	1	94			:
Bass	Pop Rock	2977	MA_16Beat Pop 2	4 / 4	4	94			:
Bass	Pop Rock	2978	MB_16Beat Pop 2	4 / 4	4	94			:
Bass	Pop Rock	2979	MC_16Beat Pop 2	4 / 4	4	94			:
Bass	Pop Rock	2980	FA_16Beat Pop 2	4 / 4	1	94			:
Bass	Pop Rock	2981	FB_16Beat Pop 2	4 / 4	1	94			:
Bass	Pop Rock	2982	FC_16Beat Pop 2	4 / 4	1	94			:
Bass	Pop Rock	2983	BA_16Beat Pop 2	4 / 4	1	94			:
Bass	Pop Rock	2984	MA_16Beat Rock _C	4 / 4	4	86			:
Bass	Pop Rock	2985	MB_16Beat Rock _C	4 / 4	4	86			:
Bass	Pop Rock	2986	MC_16Beat Rock _C	4 / 4	4	86			:
Bass	Pop Rock	2987	FA_16Beat Rock _C	4 / 4	1	86			:
Bass	Pop Rock	2988	FB_16Beat Rock _C	4 / 4	1	86			:
Bass	Pop Rock	2989	FC_16Beat Rock _C	4 / 4	1	86			:
Bass	Pop Rock	2990	BA_16Beat Rock _C	4 / 4	1	86			:
Bass	Pop Rock	2991	MA_16Beat Rock	4 / 4	4	86			:
Bass	Pop Rock	2992	MB_16Beat Rock	4 / 4	4	86			:
Bass	Pop Rock	2993	MC_16Beat Rock	4 / 4	4	86			:
Bass	Pop Rock	2994	FA_16Beat Rock	4 / 4	1	86			:
Bass	Pop Rock	2995	FB_16Beat Rock	4 / 4	1	86			:
Bass	Pop Rock	2996	FC_16Beat Rock	4 / 4	1	86			:
Bass	Pop Rock	2997	BA_16Beat Rock	4 / 4	1	86			:
Bass	Pop Rock	2998	MA_Piano Club _N	4 / 4	2	96			Finger Bass
Bass	Pop Rock	2999	MB_Piano Club _N	4 / 4	2	96			:
Bass	Pop Rock	3000	MC_Piano Club _N	4 / 4	2	96			:
Bass	Pop Rock	3001	MD_Piano Club _N	4 / 4	1	96			:
Bass	Pop Rock	3002	IA_Piano Club _N	4 / 4	2	96			:
Bass	Pop Rock	3003	FA_Piano Club _N	4 / 4	1	96			:
Bass	Pop Rock	3004	FB_Piano Club _N	4 / 4	1	96			:
Bass	Pop Rock	3005	FC_Piano Club _N	4 / 4	4	96			:
Bass	Pop Rock	3006	MA_Analog Pop	4 / 4	2	93			Pick Bass
Bass	Pop Rock	3007	MB_Analog Pop _N	4 / 4	2	93			:
Bass	Pop Rock	3008	MC_Analog Pop _N	4 / 4	2	93			:
Bass	Pop Rock	3009	MD_Analog Pop _N	4 / 4	4	93			:
Bass	Pop Rock	3010	IA_Analog Pop _N	4 / 4	2	93			:
Bass	Pop Rock	3011	FA_Analog Pop _N	4 / 4	1	93			:
Bass	Pop Rock	3012	FB_Analog Pop _N	4 / 4	1	93			:
Bass	Pop Rock	3013	FC_Analog Pop	4 / 4	2	93			:
Bass	Pop Rock	3014	MA_6/8 Pop _C	4 / 4	4	100			Finger/Slap Bass
Bass	Pop Rock	3015	MB_6/8 Pop _C	4 / 4	4	100			:
Bass	Pop Rock	3016	MC_6/8 Pop _C	4 / 4	4	100			:
Bass	Pop Rock	3017	FA_6/8 Pop _C	4 / 4	1	100			:
Bass	Pop Rock	3018	FB_6/8 Pop _C	4 / 4	1	100			:
Bass	Pop Rock	3019	FC_6/8 Pop _C	4 / 4	1	100			:
Bass	Pop Rock	3020	BA_6/8 Pop _C	4 / 4	1	100			:
Bass	Pop Rock	3021	EA_6/8 Pop _C	4 / 4	3	123			:
Bass	Pop Rock	3022	MA_6/8 Pop _N	4 / 4	4	100			:
Bass	Pop Rock	3023	MB_6/8 Pop _N	4 / 4	4	100			:
Bass	Pop Rock	3024	MC_6/8 Pop _N	4 / 4	4	100			:
Bass	Pop Rock	3025	FA_6/8 Pop _N	4 / 4	1	100			:
Bass	Pop Rock	3026	FB_6/8 Pop _N	4 / 4	1	100			:
Bass	Pop Rock	3027	FC_6/8 Pop _N	4 / 4	1	100			:
Bass	Pop Rock	3028	BA_6/8 Pop	4 / 4	1	100			:
Bass	Ballad	3029	MA_Unplugged 3 _C	4 / 4	4	113			Acoustic Bass
Bass	Ballad	3030	MB_Unplugged 3 _C	4 / 4	4	113			:
Bass	Ballad	3031	MC_Unplugged 3 _C	4 / 4	4	113			:
Bass	Ballad	3032	FA_Unplugged 3 _C	4 / 4	1	113			:
Bass	Ballad	3033	FB_Unplugged 3 _C	4 / 4	1	113			:
Bass	Ballad	3034	FC_Unplugged 3 _C	4 / 4	1	113			:
Bass	Ballad	3035	BA_Unplugged 3 _C	4 / 4	1	113			:
Bass	Ballad	3036	MA_Unplugged 3 _N	4 / 4	4	113			:
Bass	Ballad	3037	MB_Unplugged 3 _N	4 / 4	4	113			:
Bass	Ballad	3038	MC_Unplugged 3 _N	4 / 4	4	113			:
Bass	Ballad	3039	FA_Unplugged 3	4 / 4	1	113			:
Bass	Ballad	3040	FB_Unplugged 3 _N	4 / 4	1	113			:
Bass	Ballad	3041	FC_Unplugged 3	4 / 4	1	113			:
Bass	Ballad	3042	BA_Unplugged 3	4 / 4	1	113			:
Bass	Ballad	3043	MA_8Beat Slow _C	4 / 4	4	78			Finger Bass
Bass	Ballad	3044	MB_8Beat Slow _C	4 / 4	4	78			:
Bass	Ballad	3045	MC_8Beat Slow _C	4 / 4	4	78			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Ballad	3046	FA_8Beat Slow _C	4 / 4	1	78			:
Bass	Ballad	3047	FB_8Beat Slow _C	4 / 4	1	78			:
Bass	Ballad	3048	FC_8Beat Slow _C	4 / 4	1	78			:
Bass	Ballad	3049	BA_8Beat Slow _C	4 / 4	1	78			:
Bass	Ballad	3050	MA_8Beat Slow	4 / 4	4	78			:
Bass	Ballad	3051	MB_8Beat Slow _N	4 / 4	4	78			:
Bass	Ballad	3052	MC_8Beat Slow _N	4 / 4	4	78			:
Bass	Ballad	3053	FA_8Beat Slow	4 / 4	1	78			:
Bass	Ballad	3054	FB_8Beat Slow _N	4 / 4	1	78			:
Bass	Ballad	3055	FC_8Beat Slow	4 / 4	1	78			:
Bass	Ballad	3056	BA_8Beat Slow	4 / 4	1	78			:
Bass	Ballad	3057	MA_Slowfeel	4 / 4	1	74			Fretless Bass
Bass	Ballad	3058	MB_Slowfeel _N	4 / 4	1	74			:
Bass	Ballad	3059	MC_Slowfeel _N	4 / 4	1	74			:
Bass	Ballad	3060	MD_Slowfeel _N	4 / 4	1	74			:
Bass	Ballad	3061	IA_Slowfeel _N	4 / 4	2	74			:
Bass	Ballad	3062	FA_Slowfeel _N	4 / 4	1	74			:
Bass	Ballad	3063	FB_Slowfeel _N	4 / 4	1	74			:
Bass	Ballad	3064	FC_Slowfeel _N	4 / 4	2	74			:
Bass	Ballad	3065	MA_16Bt Ballad2 _C	4 / 4	4	75			Finger Bass
Bass	Ballad	3066	MB_16Bt Ballad2 _C	4 / 4	4	75			:
Bass	Ballad	3067	MC_16Bt Ballad2 _C	4 / 4	4	75			:
Bass	Ballad	3068	FA_16Bt Ballad2 _C	4 / 4	1	75			:
Bass	Ballad	3069	FB_16Bt Ballad2 _C	4 / 4	1	75			:
Bass	Ballad	3070	FC_16Bt Ballad2 _C	4 / 4	1	75			:
Bass	Ballad	3071	BA_16Bt Ballad2 _C	4 / 4	1	75			:
Bass	Ballad	3072	MA_16Bt Ballad2 _N	4 / 4	4	75			:
Bass	Ballad	3073	MB_16Bt Ballad2 _N	4 / 4	4	75			:
Bass	Ballad	3074	MC_16Bt Ballad2 _N	4 / 4	4	75			:
Bass	Ballad	3075	FA_16Bt Ballad2	4 / 4	1	75			:
Bass	Ballad	3076	FB_16Bt Ballad2	4 / 4	1	75			:
Bass	Ballad	3077	FC_16Bt Ballad2 _N	4 / 4	1	75			:
Bass	Ballad	3078	BA_16Bt Ballad2	4 / 4	1	75			:
Bass	Ballad	3079	MA_6/8 Ballad _C	6 / 8	4	87			Finger/Slap Bass
Bass	Ballad	3080	MB_6/8 Ballad _C	6 / 8	4	87			:
Bass	Ballad	3081	MC_6/8 Ballad _C	6 / 8	4	87			:
Bass	Ballad	3082	FA_6/8 Ballad _C	6 / 8	1	87			:
Bass	Ballad	3083	FB_6/8 Ballad _C	6 / 8	1	87			:
Bass	Ballad	3084	FC_6/8 Ballad _C	6 / 8	1	87			:
Bass	Ballad	3085	BA_6/8 Ballad _C	6 / 8	1	87			:
Bass	Ballad	3086	EA_6/8 Ballad _C	6 / 8	6	87			:
Bass	Ballad	3087	EB_6/8 Ballad _C	6 / 8	6	87			:
Bass	Ballad	3088	MA_6/8 Ballad _N	6 / 8	4	87			:
Bass	Ballad	3089	MB_6/8 Ballad _N	6 / 8	4	87			:
Bass	Ballad	3090	MC_6/8 Ballad _N	6 / 8	4	87			:
Bass	Ballad	3091	FA_6/8 Ballad _N	6 / 8	1	87			:
Bass	Ballad	3092	FB_6/8 Ballad	6 / 8	1	87			:
Bass	Ballad	3093	FC_6/8 Ballad	6 / 8	1	87			:
Bass	Ballad	3094	BA_6/8 Ballad	6 / 8	1	87			:
Bass	Hip Hop	3095	MA_Trap Sub Bass 1 _N	4 / 4	4	88			Synth Bass
Bass	Hip Hop	3096	MA_Trap Sub Bass 2	4 / 4	2	88			:
Bass	Hip Hop	3097	MA_Trap Sub Bass 3 _N	4 / 4	2	88			:
Bass	Hip Hop	3098	MA_Trap Sub Bass 4 _N	4 / 4	2	88			:
Bass	Hip Hop	3099	MA_Trap Sub Bass 5	4 / 4	2	88			:
Bass	Hip Hop	3100	MA_Trap Sub Bass 6 _N	4 / 4	2	88			:
Bass	Hip Hop	3101	MA_Trap Sub Bass 7	4 / 4	2	88			:
Bass	Hip Hop	3102	MA_More Fatty _C	4 / 4	4	76			:
Bass	Hip Hop	3103	MB_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3104	MC_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3105	MD_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3106	ME_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3107	MF_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3108	MG_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3109	MH_More Fatty _N	4 / 4	4	76			:
Bass	Hip Hop	3110	MA_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3111	MB_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3112	MC_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3113	MD_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3114	ME_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3115	MF_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3116	MG_Tricky Hip Hop Bass _N	4 / 4	4	92			:
Bass	Hip Hop	3117	MH_Tricky Hip Hop Bass _N	4 / 4	2	92			:
Bass	Hip Hop	3118	MA_SyBsRiff1-01	4 / 4	4	120			:
Bass	Hip Hop	3119	MA_SyBsRiff1-02	4 / 4	4	120			:
Bass	Hip Hop	3120	MA_SyBsRiff1-03	4 / 4	4	120			:
Bass	Hip Hop	3121	MA_SyBsRiff1-04	4 / 4	4	120			:
Bass	Hip Hop	3122	MA_SyBassRiff HH 1	4 / 4	4	100			:
Bass	Hip Hop	3123	MA_SyBassRiff HH 2	4 / 4	4	105			:
Bass	Hip Hop	3124	MA_SyBassRiff HH 3	4 / 4	4	120			:
Bass	Hip Hop	3125	MA_SyBassRiff HH 4	4 / 4	4	120			:
Bass	Hip Hop	3126	MA_SyBassRiff FM 5	4 / 4	4	120			:
Bass	Hip Hop	3127	MA_SyBassRiff FM 6	4 / 4	4	130			:
Bass	Hip Hop	3128	MA_SyBassRiff FM 7	4 / 4	4	120			:
Bass	Hip Hop	3129	MA_SyBassRiff FM 8	4 / 4	4	120			:
Bass	Hip Hop	3130	MA_TrapHardBass _N	4 / 4	2	107			:
Bass	Hip Hop	3131	MA_Yay Area Funk _N	4 / 4	2	95			:
Bass	Hip Hop	3132	MA_Grouchy Bass _N	4 / 4	4	105			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Hip Hop	3133	MA_2BZ4U _C	4 / 4	4	75			:
Bass	Hip Hop	3134	MB_2BZ4U _C	4 / 4	4	75			:
Bass	Hip Hop	3135	MC_2BZ4U _C	4 / 4	4	75			:
Bass	Hip Hop	3136	MA_2BZ4U _N	4 / 4	4	75			:
Bass	Hip Hop	3137	MB_2BZ4U _N	4 / 4	4	75			:
Bass	Hip Hop	3138	MC_2BZ4U _N	4 / 4	4	75			:
Bass	Hip Hop	3139	MA_DirtySynth _C	4 / 4	4	85			:
Bass	Hip Hop	3140	MB_DirtySynth _C	4 / 4	4	85			:
Bass	Hip Hop	3141	MC_DirtySynth _C	4 / 4	4	85			:
Bass	Hip Hop	3142	MA_DirtySynth _N	4 / 4	4	85			:
Bass	Hip Hop	3143	MB_DirtySynth _N	4 / 4	4	85			:
Bass	Hip Hop	3144	MC_DirtySynth _N	4 / 4	4	85			:
Bass	Hip Hop	3145	MA_PepRally _C	4 / 4	2	75			:
Bass	Hip Hop	3146	MB_PepRally _C	4 / 4	2	75			:
Bass	Hip Hop	3147	MC_PepRally _C	4 / 4	2	75			:
Bass	Hip Hop	3148	MD_PepRally _C	4 / 4	2	75			:
Bass	Hip Hop	3149	ME_PepRally _C	4 / 4	2	75			:
Bass	Hip Hop	3150	MA_PepRally	4 / 4	2	75			:
Bass	Hip Hop	3151	MB_PepRally	4 / 4	2	75			:
Bass	Hip Hop	3152	MC_PepRally	4 / 4	2	75			:
Bass	Hip Hop	3153	MD_PepRally	4 / 4	2	75			:
Bass	Hip Hop	3154	ME_PepRally	4 / 4	2	75			:
Bass	Hip Hop	3155	MA_HipHopEpic _C	4 / 4	2	85			:
Bass	Hip Hop	3156	MB_HipHopEpic _C	4 / 4	2	85			:
Bass	Hip Hop	3157	MC_HipHopEpic _C	4 / 4	2	85			:
Bass	Hip Hop	3158	MA_HipHopEpic	4 / 4	2	85			:
Bass	Hip Hop	3159	MB_HipHopEpic	4 / 4	2	85			:
Bass	Hip Hop	3160	MC_HipHopEpic	4 / 4	2	85			:
Bass	Hip Hop	3161	MA_New Hip Hop _C	4 / 4	2	85			:
Bass	Hip Hop	3162	MB_New Hip Hop _C	4 / 4	2	85			:
Bass	Hip Hop	3163	MC_New Hip Hop _C	4 / 4	2	85			:
Bass	Hip Hop	3164	FA_New Hip Hop _C	4 / 4	1	85			:
Bass	Hip Hop	3165	FB_New Hip Hop _C	4 / 4	1	85			:
Bass	Hip Hop	3166	FC_New Hip Hop _C	4 / 4	1	85			:
Bass	Hip Hop	3167	BA_New Hip Hop _C	4 / 4	1	85			:
Bass	Hip Hop	3168	EA_New Hip Hop _C	4 / 4	3	85			:
Bass	Hip Hop	3169	EB_New Hip Hop _C	4 / 4	3	85			:
Bass	Hip Hop	3170	MA_East Coast _C	4 / 4	2	103			:
Bass	Hip Hop	3171	MB_East Coast _C	4 / 4	2	103			:
Bass	Hip Hop	3172	MC_East Coast _C	4 / 4	2	103			:
Bass	Hip Hop	3173	MD_East Coast _C	4 / 4	2	103			:
Bass	Hip Hop	3174	MA_East Coast _N	4 / 4	2	103			:
Bass	Hip Hop	3175	MB_East Coast _N	4 / 4	2	103			:
Bass	Hip Hop	3176	MC_East Coast _N	4 / 4	2	103			:
Bass	Hip Hop	3177	MD_East Coast _N	4 / 4	2	103			:
Bass	Hip Hop	3178	MA_West Coast _C	4 / 4	2	97			:
Bass	Hip Hop	3179	MB_West Coast _C	4 / 4	2	97			:
Bass	Hip Hop	3180	MC_West Coast _C	4 / 4	2	97			:
Bass	Hip Hop	3181	MD_West Coast _C	4 / 4	2	97			:
Bass	Hip Hop	3182	MA_West Coast _N	4 / 4	2	97			:
Bass	Hip Hop	3183	MB_West Coast _N	4 / 4	2	97			:
Bass	Hip Hop	3184	MC_West Coast	4 / 4	2	97			:
Bass	Hip Hop	3185	MD_West Coast _N	4 / 4	2	97			:
Bass	Hip Hop	3186	MA_South Rap 1 _C	4 / 4	4	98			:
Bass	Hip Hop	3187	MB_South Rap 1 _C	4 / 4	4	98			:
Bass	Hip Hop	3188	MC_South Rap 1 _C	4 / 4	4	98			:
Bass	Hip Hop	3189	MD_South Rap 1 _C	4 / 4	4	98			:
Bass	Hip Hop	3190	MA_South Rap 1	4 / 4	4	98			:
Bass	Hip Hop	3191	MB_South Rap 1 _N	4 / 4	4	98			:
Bass	Hip Hop	3192	MC_South Rap 1 _N	4 / 4	4	98			:
Bass	Hip Hop	3193	MD_South Rap 1 _N	4 / 4	4	98			:
Bass	Hip Hop	3194	MA_South Rap 2 _C	4 / 4	2	90			:
Bass	Hip Hop	3195	MB_South Rap 2 _C	4 / 4	2	90			:
Bass	Hip Hop	3196	MC_South Rap 2 _C	4 / 4	2	90			:
Bass	Hip Hop	3197	MD_South Rap 2 _C	4 / 4	2	90			:
Bass	Hip Hop	3198	MA_South Rap 2	4 / 4	2	90			:
Bass	Hip Hop	3199	MB_South Rap 2	4 / 4	2	90			:
Bass	Hip Hop	3200	MC_South Rap 2 _N	4 / 4	2	90			:
Bass	Hip Hop	3201	MD_South Rap 2 _N	4 / 4	2	90			:
Bass	Hip Hop	3202	MA_Hip Hop 1 _N	4 / 4	2	105			:
Bass	Hip Hop	3203	MB_Hip Hop 1 _N	4 / 4	2	105			:
Bass	Hip Hop	3204	MC_Hip Hop 1 _N	4 / 4	2	105			:
Bass	Hip Hop	3205	MD_Hip Hop 1 _N	4 / 4	2	105			:
Bass	Hip Hop	3206	FA_Hip Hop 1 _N	4 / 4	1	105			:
Bass	Hip Hop	3207	FB_Hip Hop 1 _N	4 / 4	1	105			:
Bass	Hip Hop	3208	FC_Hip Hop 1 _N	4 / 4	2	105			:
Bass	Hip Hop	3209	MA_Hip Hop 2	4 / 4	2	94			:
Bass	Hip Hop	3210	MB_Hip Hop 2	4 / 4	2	94			:
Bass	Hip Hop	3211	MC_Hip Hop 2	4 / 4	2	94			:
Bass	Hip Hop	3212	MD_Hip Hop 2 _N	4 / 4	2	94			:
Bass	Hip Hop	3213	FA_Hip Hop 2	4 / 4	1	94			:
Bass	Hip Hop	3214	FB_Hip Hop 2 _N	4 / 4	1	94			:
Bass	Hip Hop	3215	FC_Hip Hop 2 _N	4 / 4	2	94			:
Bass	Hip Hop	3216	MA_Hip Hop 3 _N	4 / 4	2	104			:
Bass	Hip Hop	3217	MB_Hip Hop 3 _N	4 / 4	2	104			:
Bass	Hip Hop	3218	MC_Hip Hop 3 _N	4 / 4	2	104			:
Bass	Hip Hop	3219	MD_Hip Hop 3 _N	4 / 4	2	104			:
Bass	Hip Hop	3220	FC_Hip Hop 3 _N	4 / 4	2	104			:
Bass	Hip Hop	3221	MA_Hip Hop 5 _C	4 / 4	2	103			:
Bass	Hip Hop	3222	MB_Hip Hop 5 _C	4 / 4	4	103			:
Bass	Hip Hop	3223	MC_Hip Hop 5 _C	4 / 4	2	103			:
Bass	Hip Hop	3224	MD_Hip Hop 5 _C	4 / 4	2	103			:
Bass	Hip Hop	3225	MA_Hip Hop 5 _N	4 / 4	2	103			:
Bass	Hip Hop	3226	MB_Hip Hop 5 _N	4 / 4	4	103			:
Bass	Hip Hop	3227	MC_Hip Hop 5 _N	4 / 4	2	103			:
Bass	Hip Hop	3228	MD_Hip Hop 5	4 / 4	2	103			:
Bass	Hip Hop	3229	MA_Hip Hop 6 _C	4 / 4	4	96			:
Bass	Hip Hop	3230	MB_Hip Hop 6 _C	4 / 4	4	96			:
Bass	Hip Hop	3231	MC_Hip Hop 6 _C	4 / 4	4	96			:
Bass	Hip Hop	3232	FA_Hip Hop 6 _C	4 / 4	1	96			:
Bass	Hip Hop	3233	FB_Hip Hop 6 _C	4 / 4	1	96			:
Bass	Hip Hop	3234	FC_Hip Hop 6 _C	4 / 4	1	96			:
Bass	Hip Hop	3235	BA_Hip Hop 6 _C	4 / 4	1	96			:
Bass	Hip Hop	3236	MA_Hip Break _C	4 / 4	4	98			:
Bass	Hip Hop	3237	MB_Hip Break _C	4 / 4	4	98			:
Bass	Hip Hop	3238	MC_Hip Break _C	4 / 4	4	98			:
Bass	Hip Hop	3239	FA_Hip Break _C	4 / 4	1	98			:
Bass	Hip Hop	3240	FB_Hip Break _C	4 / 4	1	98			:
Bass	Hip Hop	3241	FC_Hip Break _C	4 / 4	1	98			:
Bass	Hip Hop	3242	BA_Hip Break _C	4 / 4	1	98			:
Bass	Hip Hop	3243	MA_Hip Rock 1 _C	4 / 4	4	90			:
Bass	Hip Hop	3244	MB_Hip Rock 1 _C	4 / 4	4	90			:
Bass	Hip Hop	3245	MC_Hip Rock 1 _C	4 / 4	4	90			:
Bass	Hip Hop	3246	FA_Hip Rock 1 _C	4 / 4	1	90			:
Bass	Hip Hop	3247	FB_Hip Rock 1 _C	4 / 4	1	90			:
Bass	Hip Hop	3248	MA_Hip Rock 2 _C	4 / 4	4	132			Finger Bass
Bass	Hip Hop	3249	MB_Hip Rock 2 _C	4 / 4	4	132			:
Bass	Hip Hop	3250	MC_Hip Rock 2 _C	4 / 4	4	132			:
Bass	Hip Hop	3251	FA_Hip Rock 2 _C	4 / 4	1	132			:
Bass	Hip Hop	3252	FB_Hip Rock 2 _C	4 / 4	1	132			:
Bass	Hip Hop	3253	FC_Hip Rock 2 _C	4 / 4	1	132			:
Bass	Hip Hop	3254	BA_Hip Rock 2 _C	4 / 4	1	132			:
Bass	Hip Hop	3255	MA_Hip Reggae _C	4 / 4	4	92			Synth Bass
Bass	Hip Hop	3256	MB_Hip Reggae _C	4 / 4	4	92			:
Bass	Hip Hop	3257	MC_Hip Reggae _C	4 / 4	4	92			:
Bass	Hip Hop	3258	FA_Hip Reggae _C	4 / 4	1	92			:
Bass	Hip Hop	3259	FB_Hip Reggae _C	4 / 4	1	92			:
Bass	Hip Hop	3260	FC_Hip Reggae _C	4 / 4	1	92			:
Bass	Hip Hop	3261	MA_Reggaeton 2 _C	4 / 4	4	98			:
Bass	Hip Hop	3262	MB_Reggaeton 2 _C	4 / 4	4	98			:
Bass	Hip Hop	3263	MC_Reggaeton 2 _C	4 / 4	4	98			:
Bass	Hip Hop	3264	FA_Reggaeton 2 _C	4 / 4	1	98			:
Bass	Hip Hop	3265	FB_Reggaeton 2 _C	4 / 4	1	98			:
Bass	Hip Hop	3266	FC_Reggaeton 2 _C	4 / 4	1	98			:
Bass	Hip Hop	3267	BA_Reggaeton 2 _C	4 / 4	1	98			:
Bass	Hip Hop	3268	MA_Dancehall _C	4 / 4	4	103			:
Bass	Hip Hop	3269	MB_Dancehall _C	4 / 4	4	103			:
Bass	Hip Hop	3270	MD_Dancehall _C	4 / 4	4	103			:
Bass	Hip Hop	3271	FA_Dancehall _C	4 / 4	1	103			:
Bass	Hip Hop	3272	FB_Dancehall _C	4 / 4	1	103			:
Bass	Hip Hop	3273	FD_Dancehall _C	4 / 4	1	103			:
Bass	Hip Hop	3274	BA_Dancehall _C	4 / 4	1	103			:
Bass	Hip Hop	3275	EA_Dancehall _C	4 / 4	3	103			:
Bass	Hip Hop	3276	MA_ClasicHipHop _N	4 / 4	2	90			:
Bass	Hip Hop	3277	MB_ClasicHipHop _N	4 / 4	2	90			:
Bass	Hip Hop	3278	MC_ClasicHipHop _N	4 / 4	2	90			:
Bass	Hip Hop	3279	MD_ClasicHipHop _N	4 / 4	2	90			:
Bass	Hip Hop	3280	FC_ClasicHipHop _N	4 / 4	1	90			:
Bass	Hip Hop	3281	MA_ElectroHipBs	4 / 4	4	70			:
Bass	Hip Hop	3282	MA_GruvBass	4 / 4	2	120			:
Bass	Modern R&B	3283	MA_Pop Shuffle2 _C	4 / 4	4	94			Finger/Slap Bass
Bass	Modern R&B	3284	MB_Pop Shuffle2 _C	4 / 4	4	94			:
Bass	Modern R&B	3285	MC_Pop Shuffle2 _C	4 / 4	4	94			:
Bass	Modern R&B	3286	FA_Pop Shuffle2 _C	4 / 4	1	94			:
Bass	Modern R&B	3287	FB_Pop Shuffle2 _C	4 / 4	1	94			:
Bass	Modern R&B	3288	FC_Pop Shuffle2 _C	4 / 4	1	94			:
Bass	Modern R&B	3289	BA_Pop Shuffle2 _C	4 / 4	1	94			:
Bass	Modern R&B	3290	MA_Pop Shuffle2 _N	4 / 4	4	94			:
Bass	Modern R&B	3291	MB_Pop Shuffle2 _N	4 / 4	4	94			:
Bass	Modern R&B	3292	MC_Pop Shuffle2 _N	4 / 4	4	94			:
Bass	Modern R&B	3293	FA_Pop Shuffle2 _N	4 / 4	1	94			:
Bass	Modern R&B	3294	FB_Pop Shuffle2 _N	4 / 4	1	94			:
Bass	Modern R&B	3295	FC_Pop Shuffle2 _N	4 / 4	1	94			:
Bass	Modern R&B	3296	BA_Pop Shuffle2	4 / 4	1	94			:
Bass	Modern R&B	3297	MA_Pop Shuffle3 _C	4 / 4	4	80			Pick Bass
Bass	Modern R&B	3298	MB_Pop Shuffle3 _C	4 / 4	4	80			:
Bass	Modern R&B	3299	MC_Pop Shuffle3 _C	4 / 4	4	80			:
Bass	Modern R&B	3300	FA_Pop Shuffle3 _C	4 / 4	1	80			:
Bass	Modern R&B	3301	FB_Pop Shuffle3 _C	4 / 4	1	80			:
Bass	Modern R&B	3302	FC_Pop Shuffle3 _C	4 / 4	1	80			:
Bass	Modern R&B	3303	BA_Pop Shuffle3 _C	4 / 4	1	80			:
Bass	Modern R&B	3304	MA_Pop Shuffle3 _N	4 / 4	4	80			:
Bass	Modern R&B	3305	MB_Pop Shuffle3 _N	4 / 4	4	80			:
Bass	Modern R&B	3306	MC_Pop Shuffle3 _N	4 / 4	4	80			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Modern R&B	3307	FA_Pop Shuffle3 _N	4 / 4	1	80			:
Bass	Modern R&B	3308	FB_Pop Shuffle3 _N	4 / 4	1	80			:
Bass	Modern R&B	3309	FC_Pop Shuffle3 _N	4 / 4	1	80			:
Bass	Modern R&B	3310	BA_Pop Shuffle3	4 / 4	1	80			:
Bass	Modern R&B	3311	MA_R&B Disco _N	4 / 4	2	110			Synth Bass
Bass	Modern R&B	3312	MB_R&B Disco _N	4 / 4	2	110			:
Bass	Modern R&B	3313	MC_R&B Disco _N	4 / 4	2	110			:
Bass	Modern R&B	3314	MD_R&B Disco _N	4 / 4	2	110			:
Bass	Modern R&B	3315	FA_R&B Disco _N	4 / 4	1	110			:
Bass	Modern R&B	3316	FB_R&B Disco _N	4 / 4	1	110			:
Bass	Modern R&B	3317	FC_R&B Disco _N	4 / 4	2	110			:
Bass	Modern R&B	3318	MA_Chart R&B _C	4 / 4	4	130			:
Bass	Modern R&B	3319	MB_Chart R&B _C	4 / 4	4	130			:
Bass	Modern R&B	3320	MC_Chart R&B _C	4 / 4	4	130			:
Bass	Modern R&B	3321	FA_Chart R&B _C	4 / 4	1	130			:
Bass	Modern R&B	3322	FB_Chart R&B _C	4 / 4	1	130			:
Bass	Modern R&B	3323	FC_Chart R&B _C	4 / 4	1	130			:
Bass	Modern R&B	3324	BA_Chart R&B _C	4 / 4	1	130			:
Bass	Modern R&B	3325	EA_Chart R&B _C	4 / 4	5	130			:
Bass	Modern R&B	3326	EB_Chart R&B _C	4 / 4	10	130			:
Bass	Modern R&B	3327	MA_ChartPop1 _C	4 / 4	4	92			:
Bass	Modern R&B	3328	MB_ChartPop1 _C	4 / 4	4	92			:
Bass	Modern R&B	3329	MC_ChartPop1 _C	4 / 4	4	92			:
Bass	Modern R&B	3330	FA_ChartPop1 _C	4 / 4	1	92			:
Bass	Modern R&B	3331	FB_ChartPop1 _C	4 / 4	1	92			:
Bass	Modern R&B	3332	FC_ChartPop1 _C	4 / 4	1	92			:
Bass	Modern R&B	3333	BA_ChartPop1 _C	4 / 4	1	92			:
Bass	Modern R&B	3334	EA_ChartPop1 _C	4 / 4	3	92			:
Bass	Modern R&B	3335	EB_ChartPop1 _C	4 / 4	3	92			:
Bass	Modern R&B	3336	MA_ChartPop2 _C	4 / 4	2	92			:
Bass	Modern R&B	3337	MB_ChartPop2 _C	4 / 4	2	92			:
Bass	Modern R&B	3338	MC_ChartPop2 _C	4 / 4	2	92			:
Bass	Modern R&B	3339	MD_ChartPop2 _C	4 / 4	2	92			:
Bass	Modern R&B	3340	MA_ChartPop2	4 / 4	2	92			:
Bass	Modern R&B	3341	MB_ChartPop2	4 / 4	2	92			:
Bass	Modern R&B	3342	MC_ChartPop2	4 / 4	2	92			:
Bass	Modern R&B	3343	MD_ChartPop2 _N	4 / 4	2	92			:
Bass	Modern R&B	3344	MA_R&B _C	4 / 4	2	83			:
Bass	Modern R&B	3345	MB_R&B _C	4 / 4	2	83			:
Bass	Modern R&B	3346	MC_R&B _C	4 / 4	2	83			:
Bass	Modern R&B	3347	FA_R&B _C	4 / 4	1	83			:
Bass	Modern R&B	3348	FB_R&B _C	4 / 4	1	83			:
Bass	Modern R&B	3349	FC_R&B _C	4 / 4	1	83			:
Bass	Modern R&B	3350	BA_R&B _C	4 / 4	1	83			:
Bass	Modern R&B	3351	EA_R&B _C	4 / 4	4	83			:
Bass	Modern R&B	3352	EB_R&B _C	4 / 4	4	83			:
Bass	Modern R&B	3353	MA_New R&B 1 _C	4 / 4	2	98			:
Bass	Modern R&B	3354	MB_New R&B 1 _C	4 / 4	2	98			:
Bass	Modern R&B	3355	MC_New R&B 1 _C	4 / 4	2	98			:
Bass	Modern R&B	3356	FA_New R&B 1 _C	4 / 4	1	98			:
Bass	Modern R&B	3357	FB_New R&B 1 _C	4 / 4	1	98			:
Bass	Modern R&B	3358	FC_New R&B 1 _C	4 / 4	1	98			:
Bass	Modern R&B	3359	BA_New R&B 1 _C	4 / 4	1	98			:
Bass	Modern R&B	3360	EA_New R&B 1 _C	4 / 4	3	98			:
Bass	Modern R&B	3361	EB_New R&B 1 _C	4 / 4	4	98			:
Bass	Modern R&B	3362	MA_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3363	MB_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3364	MC_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3365	MD_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3366	IA_New R&B 2	4 / 4	2	97			:
Bass	Modern R&B	3367	FA_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3368	FB_New R&B 2	4 / 4	1	97			:
Bass	Modern R&B	3369	FC_New R&B 2	4 / 4	2	97			:
Bass	Modern R&B	3370	MB_New R&B 3 _N	4 / 4	2	90			:
Bass	Modern R&B	3371	MC_New R&B 3 _N	4 / 4	2	90			:
Bass	Modern R&B	3372	MD_New R&B 3 _N	4 / 4	2	90			:
Bass	Modern R&B	3373	IA_New R&B 3 _N	4 / 4	2	90			:
Bass	Modern R&B	3374	FA_New R&B 3 _N	4 / 4	1	90			:
Bass	Modern R&B	3375	FB_New R&B 3 _N	4 / 4	1	90			:
Bass	Modern R&B	3376	FC_New R&B 3 _N	4 / 4	2	90			:
Bass	Modern R&B	3377	MA_Pop R&B _C	4 / 4	4	67			:
Bass	Modern R&B	3378	MB_Pop R&B _C	4 / 4	4	67			:
Bass	Modern R&B	3379	MC_Pop R&B _C	4 / 4	4	67			:
Bass	Modern R&B	3380	FA_Pop R&B _C	4 / 4	1	67			:
Bass	Modern R&B	3381	FB_Pop R&B _C	4 / 4	1	67			:
Bass	Modern R&B	3382	FC_Pop R&B _C	4 / 4	1	67			:
Bass	Modern R&B	3383	BA_Pop R&B _C	4 / 4	1	67			:
Bass	Modern R&B	3384	MA_H-R&B Pop _C	4 / 4	4	140			:
Bass	Modern R&B	3385	MB_H-R&B Pop _C	4 / 4	4	140			:
Bass	Modern R&B	3386	MC_H-R&B Pop _C	4 / 4	4	140			:
Bass	Modern R&B	3387	FA_H-R&B Pop _C	4 / 4	1	140			:
Bass	Modern R&B	3388	FC_H-R&B Pop _C	4 / 4	1	140			:
Bass	Modern R&B	3389	BA_H-R&B Pop _C	4 / 4	1	140			:
Bass	Modern R&B	3390	MA_J-R&B Pop _C	4 / 4	4	100			:
Bass	Modern R&B	3391	MB_J-R&B Pop _C	4 / 4	4	100			:
Bass	Modern R&B	3392	MC_J-R&B Pop _C	4 / 4	4	100			:
Bass	Modern R&B	3393	FA_J-R&B Pop _C	4 / 4	1	100			:
Bass	Modern R&B	3394	FB_J-R&B Pop _C	4 / 4	1	100			:
Bass	Modern R&B	3395	FC_J-R&B Pop _C	4 / 4	1	100			:
Bass	Modern R&B	3396	MA_R&B Ana Pop _C	4 / 4	4	95			:
Bass	Modern R&B	3397	MB_R&B Ana Pop _C	4 / 4	4	95			:
Bass	Modern R&B	3398	MC_R&B Ana Pop _C	4 / 4	4	95			:
Bass	Modern R&B	3399	FA_R&B Ana Pop _C	4 / 4	1	95			:
Bass	Modern R&B	3400	FB_R&B Ana Pop _C	4 / 4	1	95			:
Bass	Modern R&B	3401	FC_R&B Ana Pop _C	4 / 4	1	95			:
Bass	Modern R&B	3402	BA_R&B Ana Pop _C	4 / 4	1	95			:
Bass	Modern R&B	3403	MA_R&B Ballad 1 _C	4 / 4	4	70			:
Bass	Modern R&B	3404	MB_R&B Ballad 1 _C	4 / 4	4	70			:
Bass	Modern R&B	3405	MC_R&B Ballad 1 _C	4 / 4	4	70			:
Bass	Modern R&B	3406	FA_R&B Ballad 1 _C	4 / 4	1	70			:
Bass	Modern R&B	3407	FB_R&B Ballad 1 _C	4 / 4	1	70			:
Bass	Modern R&B	3408	FC_R&B Ballad 1 _C	4 / 4	1	70			:
Bass	Modern R&B	3409	BA_R&B Ballad 1 _C	4 / 4	1	70			:
Bass	Modern R&B	3410	MA_R&B Ballad 2 _C	4 / 4	2	60			:
Bass	Modern R&B	3411	MB_R&B Ballad 2 _C	4 / 4	2	60			:
Bass	Modern R&B	3412	MC_R&B Ballad 2 _C	4 / 4	2	60			:
Bass	Modern R&B	3413	MD_R&B Ballad 2 _C	4 / 4	2	60			:
Bass	Modern R&B	3414	MA_R&B Ballad 2 _N	4 / 4	2	60			:
Bass	Modern R&B	3415	MB_R&B Ballad 2 _N	4 / 4	2	60			:
Bass	Modern R&B	3416	MC_R&B Ballad 2	4 / 4	2	60			:
Bass	Modern R&B	3417	MD_R&B Ballad 2 _N	4 / 4	2	60			:
Bass	Modern R&B	3418	MA_R&B Ballad 3 _C	4 / 4	4	113			:
Bass	Modern R&B	3419	MB_R&B Ballad 3 _C	4 / 4	4	113			:
Bass	Modern R&B	3420	MC_R&B Ballad 3 _C	4 / 4	4	113			:
Bass	Modern R&B	3421	FA_R&B Ballad 3 _C	4 / 4	1	113			:
Bass	Modern R&B	3422	FB_R&B Ballad 3 _C	4 / 4	1	113			:
Bass	Modern R&B	3423	FC_R&B Ballad 3 _C	4 / 4	1	113			:
Bass	Modern R&B	3424	BA_R&B Ballad 3 _C	4 / 4	1	113			:
Bass	Modern R&B	3425	MA_6/8 R&B _N	4 / 4	2	61			:
Bass	Modern R&B	3426	MC_6/8 R&B _N	4 / 4	2	61			:
Bass	Modern R&B	3427	MD_6/8 R&B _N	4 / 4	2	61			:
Bass	Modern R&B	3428	FA_6/8 R&B _N	4 / 4	1	61			:
Bass	Modern R&B	3429	FB_6/8 R&B _N	4 / 4	1	61			:
Bass	Modern R&B	3430	FC_6/8 R&B _N	4 / 4	2	61			:
Bass	Modern R&B	3431	MA_Smooth 1	4 / 4	2	115			:
Bass	Modern R&B	3432	MB_Smooth 1	4 / 4	2	115			:
Bass	Modern R&B	3433	MC_Smooth 1 _N	4 / 4	2	115			:
Bass	Modern R&B	3434	MD_Smooth 1 _N	4 / 4	2	115			:
Bass	Modern R&B	3435	FA_Smooth 1 _N	4 / 4	1	115			:
Bass	Modern R&B	3436	FB_Smooth 1	4 / 4	1	115			:
Bass	Modern R&B	3437	FC_Smooth 1 _N	4 / 4	2	115			:
Bass	Modern R&B	3438	MA_Flip Hop 1 _N	4 / 4	2	132			Finger Bass
Bass	Modern R&B	3439	MB_Flip Hop 1 _N	4 / 4	2	132			:
Bass	Modern R&B	3440	MC_Flip Hop 1 _N	4 / 4	2	132			:
Bass	Modern R&B	3441	MD_Flip Hop 1 _N	4 / 4	2	132			:
Bass	Modern R&B	3442	IA_Flip Hop 1 _N	4 / 4	2	132			:
Bass	Modern R&B	3443	MA_New Gospel _N	4 / 4	2	90			Synth Bass
Bass	Modern R&B	3444	MB_New Gospel _N	4 / 4	2	90			:
Bass	Modern R&B	3445	MC_New Gospel _N	4 / 4	2	90			:
Bass	Modern R&B	3446	MD_New Gospel _N	4 / 4	2	90			:
Bass	Modern R&B	3447	FA_New Gospel _N	4 / 4	1	90			:
Bass	Modern R&B	3448	FC_New Gospel _N	4 / 4	2	90			:
Bass	Classic R&B	3449	MA_Soul 2 _N	4 / 4	4	120			Finger Bass
Bass	Classic R&B	3450	MB_Soul 2 _N	4 / 4	1	120			:
Bass	Classic R&B	3451	MC_Soul 2 _N	4 / 4	4	120			:
Bass	Classic R&B	3452	MD_Soul 2 _N	4 / 4	4	120			:
Bass	Classic R&B	3453	MA_Soul 3 _C	4 / 4	4	88			Synth Bass
Bass	Classic R&B	3454	MB_Soul 3 _C	4 / 4	4	88			:
Bass	Classic R&B	3455	MC_Soul 3 _C	4 / 4	4	88			:
Bass	Classic R&B	3456	MD_Soul 3 _C	4 / 4	4	88			:
Bass	Classic R&B	3457	MA_Soul 3 _N	4 / 4	4	88			:
Bass	Classic R&B	3458	MB_Soul 3 _N	4 / 4	4	88			:
Bass	Classic R&B	3459	MC_Soul 3 _N	4 / 4	4	88			:
Bass	Classic R&B	3460	MD_Soul 3	4 / 4	4	88			:
Bass	Classic R&B	3461	MA_Soul Beat _C	4 / 4	4	124			Finger Bass
Bass	Classic R&B	3462	MB_Soul Beat _C	4 / 4	4	124			:
Bass	Classic R&B	3463	MC_Soul Beat _C	4 / 4	4	124			:
Bass	Classic R&B	3464	FA_Soul Beat _C	4 / 4	1	124			:
Bass	Classic R&B	3465	FB_Soul Beat _C	4 / 4	1	124			:
Bass	Classic R&B	3466	FC_Soul Beat _C	4 / 4	1	124			:
Bass	Classic R&B	3467	BA_Soul Beat _C	4 / 4	1	124			:
Bass	Classic R&B	3468	EA_Soul Beat _C	4 / 4	3	123			:
Bass	Classic R&B	3469	EB_Soul Beat _C	4 / 4	3	123			:
Bass	Funk	3470	MA_Modern Funk Bass 1	4 / 4	4	124			:
Bass	Funk	3471	MA_Modern Funk Bass 2	4 / 4	4	124			:
Bass	Funk	3472	MA_Modern Funk Bass 3	4 / 4	4	124			:
Bass	Funk	3473	MA_Modern Funk Bass 4	4 / 4	4	120			:
Bass	Funk	3474	MA_Modern Funk Bass 5a	4 / 4	4	120			:
Bass	Funk	3475	MA_Modern Funk Bass 5b	4 / 4	4	124			Synth Bass
Bass	Funk	3476	MA_Modern Funk Bass 6a	4 / 4	4	124			Finger Bass
Bass	Funk	3477	MA_Modern Funk Bass 6b	4 / 4	4	124			Synth Bass
Bass	Funk	3478	MA_Modern Funk Bass 7	4 / 4	2	120			Finger Bass
Bass	Funk	3479	MA_Modern Funk Bass 8	4 / 4	4	124			:
Bass	Funk	3480	MA_Modern Funk Slap 1 _N	4 / 4	4	123			Slap Bass

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Funk	3481	MA_Modern Funk Slap 2	4 / 4	4	124			:
Bass	Funk	3482	MA_Modern Funk Slap 3	4 / 4	2	123			:
Bass	Funk	3483	MA_Modern Funk Slap 4	4 / 4	2	124			:
Bass	Funk	3484	MA_Step Up Bass _N	4 / 4	8	130			Acoustic Bass
Bass	Funk	3485	MA_PushButtonBs _N	4 / 4	2	115			Synth Bass
Bass	Funk	3486	MA_Frozen Yogurt	4 / 4	1	120			:
Bass	Funk	3487	MA_Funk 3 _N	4 / 4	2	132			Finger Bass
Bass	Funk	3488	MB_Funk 3 _N	4 / 4	2	132			:
Bass	Funk	3489	MC_Funk 3 _N	4 / 4	4	132			:
Bass	Funk	3490	MD_Funk 3 _N	4 / 4	4	132			:
Bass	Funk	3491	IA_Funk 3	4 / 4	1	132			:
Bass	Funk	3492	FB_Funk 3 _N	4 / 4	1	132			:
Bass	Funk	3493	MA1_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3494	MB1_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3495	MC1_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3496	MD1_Cool Funk _N	4 / 4	4	96			:
Bass	Funk	3497	IA1_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3498	FA1_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3499	FB1_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3500	FC1_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3501	MA2_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3502	MB2_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3503	MC2_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3504	MD2_Cool Funk _N	4 / 4	4	96			:
Bass	Funk	3505	IA2_Cool Funk _N	4 / 4	2	96			:
Bass	Funk	3506	FA2_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3507	FB2_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3508	FC2_Cool Funk _N	4 / 4	1	96			:
Bass	Funk	3509	MA_Jazz Funk 2 _N	4 / 4	2	120			:
Bass	Funk	3510	MB_Jazz Funk 2 _N	4 / 4	4	120			:
Bass	Funk	3511	MC_Jazz Funk 2 _N	4 / 4	4	120			:
Bass	Funk	3512	MD_Jazz Funk 2 _N	4 / 4	4	120			:
Bass	Funk	3513	FC_Jazz Funk 2 _N	4 / 4	1	120			:
Bass	Funk	3514	MA_Jazz Funk 3 _C	4 / 4	4	123			Synth Bass
Bass	Funk	3515	MB_Jazz Funk 3 _C	4 / 4	4	123			:
Bass	Funk	3516	MC_Jazz Funk 3 _C	4 / 4	4	123			:
Bass	Funk	3517	MD_Jazz Funk 3 _C	4 / 4	2	123			:
Bass	Funk	3518	MA_Jazz Funk 3 _N	4 / 4	4	123			:
Bass	Funk	3519	MB_Jazz Funk 3 _N	4 / 4	4	123			:
Bass	Funk	3520	MC_Jazz Funk 3 _N	4 / 4	4	123			:
Bass	Funk	3521	MD_Jazz Funk 3 _N	4 / 4	2	123			:
Bass	Funk	3522	MA_Club Jazz 1 _C	4 / 4	4	125			Finger Bass
Bass	Funk	3523	MB_Club Jazz 1 _C	4 / 4	4	125			:
Bass	Funk	3524	MC_Club Jazz 1 _C	4 / 4	4	125			:
Bass	Funk	3525	FA_Club Jazz 1 _C	4 / 4	1	125			:
Bass	Funk	3526	FB_Club Jazz 1 _C	4 / 4	1	125			:
Bass	Funk	3527	FC_Club Jazz 1 _C	4 / 4	1	125			:
Bass	Funk	3528	BA_Club Jazz 1 _C	4 / 4	1	125			:
Bass	Funk	3529	MA_Club Jazz 1 _N	4 / 4	4	125			:
Bass	Funk	3530	MB_Club Jazz 1 _N	4 / 4	4	125			:
Bass	Funk	3531	MC_Club Jazz 1 _N	4 / 4	4	125			:
Bass	Funk	3532	FA_Club Jazz 1	4 / 4	1	125			:
Bass	Funk	3533	FB_Club Jazz 1 _N	4 / 4	1	125			:
Bass	Funk	3534	FC_Club Jazz 1 _N	4 / 4	1	125			:
Bass	Funk	3535	BA_Club Jazz 1	4 / 4	1	125			:
Bass	Funk	3536	MA_Club Jazz 2 _C	4 / 4	4	92			:
Bass	Funk	3537	MB_Club Jazz 2 _C	4 / 4	4	92			:
Bass	Funk	3538	MC_Club Jazz 2 _C	4 / 4	4	92			:
Bass	Funk	3539	FA_Club Jazz 2 _C	4 / 4	1	92			:
Bass	Funk	3540	FB_Club Jazz 2 _C	4 / 4	1	92			:
Bass	Funk	3541	FC_Club Jazz 2 _C	4 / 4	1	92			:
Bass	Funk	3542	BA_Club Jazz 2 _C	4 / 4	1	92			:
Bass	Funk	3543	MA_Club Jazz 2 _N	4 / 4	4	92			:
Bass	Funk	3544	MB_Club Jazz 2 _N	4 / 4	4	92			:
Bass	Funk	3545	MC_Club Jazz 2 _N	4 / 4	4	92			:
Bass	Funk	3546	FA_Club Jazz 2	4 / 4	1	92			:
Bass	Funk	3547	FB_Club Jazz 2 _N	4 / 4	1	92			:
Bass	Funk	3548	FC_Club Jazz 2 _N	4 / 4	1	92			:
Bass	Funk	3549	BA_Club Jazz 2	4 / 4	1	92			:
Bass	Funk	3550	MA_FingerBass1 _N	4 / 4	1	115			:
Bass	Funk	3551	MA_FingerBass2 _N	4 / 4	1	115			:
Bass	Funk	3552	MA_FingerBass3 _N	4 / 4	3	115			:
Bass	Funk	3553	MA_FingerBass4 _N	4 / 4	1	115			:
Bass	Funk	3554	MA_FingerBass5 _N	4 / 4	1	115			:
Bass	Funk	3555	MA_FingerBass6 _N	4 / 4	1	115			:
Bass	Funk	3556	MA_FingerBass7 _N	4 / 4	2	120			:
Bass	Funk	3557	MA_FingerBass8 _N	4 / 4	2	150			:
Bass	Funk	3558	MA_FingerBass9 _N	4 / 4	2	150			:
Bass	Funk	3559	MA_FingerBass10 _N	4 / 4	2	89			:
Bass	Funk	3560	MA_FingerBass11 _N	4 / 4	2	89			:
Bass	Funk	3561	MA_FingerBass12 _N	4 / 4	1	115			:
Bass	Funk	3562	MA_FingerBass13 _N	4 / 4	1	115			:
Bass	Funk	3563	MA_FingerBass14 _N	4 / 4	1	115			:
Bass	Funk	3564	MA_FingerBass15 _N	4 / 4	4	107			:
Bass	Funk	3565	MA_FingerBass16 _N	4 / 4	4	107			:
Bass	Funk	3566	MA_FingerBass17 _N	4 / 4	4	107			:
Bass	Funk	3567	MA_FingerBass18 _N	4 / 4	4	107			:
Bass	Funk	3568	MA_FingerBass19 _N	4 / 4	4	107			:
Bass	Funk	3569	MA_Slap Bass1	4 / 4	4	120			Slap Bass
Bass	Funk	3570	MA_Slap Bass2	4 / 4	2	120			:
Bass	Funk	3571	MA_Slap Bass3 _N	4 / 4	1	124			:
Bass	Funk	3572	MA_Slap Bass4 _N	4 / 4	1	124			:
Bass	Funk	3573	MA_Slap Bass5 _N	4 / 4	2	124			:
Bass	Funk	3574	MA_Slap Bass6 _N	4 / 4	1	105			:
Bass	Funk	3575	MA_Slap Bass7 _N	4 / 4	1	105			:
Bass	Funk	3576	MA_Slap Bass8 _N	4 / 4	1	105			:
Bass	Funk	3577	MA_Slap Bass9 _N	4 / 4	2	110			:
Bass	Funk	3578	MA_Slap Bass10 _N	4 / 4	1	110			:
Bass	Funk	3579	MA_Slap Bass11 _N	4 / 4	1	90			:
Bass	Funk	3580	MA_Slap Bass12 _N	4 / 4	3	120			:
Bass	Funk	3581	MA_Slap Bass13 _N	4 / 4	1	120			:
Bass	Techno	3582	MA_Offbeat Bass Lp	4 / 4	1	126			Synth Bass
Bass	Techno	3583	MA_Offbeat Bass Vari	4 / 4	4	126			:
Bass	Techno	3584	MA_Offbeat Bass Mutes	4 / 4	4	126			:
Bass	Techno	3585	MA_Break Bass Lp1	4 / 4	1	126			:
Bass	Techno	3586	MA_Break Bass Lp2	4 / 4	1	126			:
Bass	Techno	3587	MA_Break Bass Vari	4 / 4	4	126			:
Bass	Techno	3588	MA_Synth Bass6-01	4 / 4	8	130			:
Bass	Techno	3589	MA_Synth Bass6-02	4 / 4	8	130			:
Bass	Techno	3590	MA_Synth Bass6-03	4 / 4	2	130			:
Bass	Techno	3591	MA_Synth Bass6-04	4 / 4	2	130			:
Bass	Techno	3592	MA_Synth Bass6-05	4 / 4	1	130			:
Bass	Techno	3593	MA_Synth Bass6-06	4 / 4	1	130			:
Bass	Techno	3594	MA_Synth Bass6-07	4 / 4	2	130			:
Bass	Techno	3595	MA_Synth Bass6-08	4 / 4	1	130			:
Bass	Techno	3596	MA_Synth Bass6-09	4 / 4	1	130			:
Bass	Techno	3597	MA_SynthBass6-10 _N	4 / 4	4	130			:
Bass	Techno	3598	MA_SynthBass6-11 _N	4 / 4	4	130			:
Bass	Techno	3599	MA_Synth Bass6-11	4 / 4	4	130			:
Bass	Techno	3600	MA_Synth Bass6-12	4 / 4	2	130			:
Bass	Techno	3601	MA_SyBsRiff2-01	4 / 4	1	130			:
Bass	Techno	3602	MA_SyBsRiff2-02	4 / 4	2	130			:
Bass	Techno	3603	MA_SyBsRiff2-03 _N	4 / 4	2	130			:
Bass	Techno	3604	MA_SyBsRiff2-04 _N	4 / 4	2	130			:
Bass	Techno	3605	MA_SyBsRiff2-04	4 / 4	2	130			:
Bass	Techno	3606	MA_More N More _N	4 / 4	1	122			:
Bass	Techno	3607	MA_Cloud Version _N	4 / 4	1	125			:
Bass	Techno	3608	MA_Castle Stairs _N	4 / 4	1	128			:
Bass	Techno	3609	MA_Techno 1 _N	4 / 4	4	135			:
Bass	Techno	3610	MB_Techno 1 _N	4 / 4	8	135			:
Bass	Techno	3611	MC_Techno 1 _N	4 / 4	8	135			:
Bass	Techno	3612	FA_Techno 1 _N	4 / 4	1	135			:
Bass	Techno	3613	FB_Techno 1 _N	4 / 4	1	135			:
Bass	Techno	3614	FC_Techno 1 _N	4 / 4	1	135			:
Bass	Techno	3615	BA_Techno 1	4 / 4	3	135			:
Bass	Techno	3616	MB_Techno 2	4 / 4	4	137			Finger Bass
Bass	Techno	3617	MC_Techno 2 _N	4 / 4	4	137			Synth Bass
Bass	Techno	3618	FA_Techno 2 _N	4 / 4	1	137			:
Bass	Techno	3619	FB_Techno 2	4 / 4	2	137			Finger Bass
Bass	Techno	3620	BA_Techno 2 _N	4 / 4	4	137			Synth Bass
Bass	Techno	3621	MA_Trance 1 _C	4 / 4	8	142			:
Bass	Techno	3622	MB_Trance 1 _C	4 / 4	4	142			:
Bass	Techno	3623	MC_Trance 1 _C	4 / 4	16	142			:
Bass	Techno	3624	FA_Trance 1 _C	4 / 4	2	142			:
Bass	Techno	3625	FB_Trance 1 _C	4 / 4	8	142			:
Bass	Techno	3626	FC_Trance 1 _C	4 / 4	8	142			:
Bass	Techno	3627	MA_Trance 1 _N	4 / 4	8	142			:
Bass	Techno	3628	MB_Trance 1 _N	4 / 4	4	142			:
Bass	Techno	3629	MC_Trance 1 _N	4 / 4	16	142			:
Bass	Techno	3630	FA_Trance 1 _N	4 / 4	2	142			:
Bass	Techno	3631	FB_Trance 1 _N	4 / 4	8	142			:
Bass	Techno	3632	FC_Trance 1 _N	4 / 4	8	142			:
Bass	Techno	3633	MA_Trance 2 _C	4 / 4	8	135			:
Bass	Techno	3634	MB_Trance 2 _C	4 / 4	8	135			:
Bass	Techno	3635	MC_Trance 2 _C	4 / 4	8	135			:
Bass	Techno	3636	FA_Trance 2 _C	4 / 4	1	135			:
Bass	Techno	3637	FB_Trance 2 _C	4 / 4	8	135			:
Bass	Techno	3638	FC_Trance 2 _C	4 / 4	1	135			:
Bass	Techno	3639	BA_Trance 2 _C	4 / 4	1	135			:
Bass	Techno	3640	MA_Trance 2 _N	4 / 4	8	135			:
Bass	Techno	3641	MB_Trance 2 _N	4 / 4	8	135			:
Bass	Techno	3642	MC_Trance 2 _N	4 / 4	8	135			:
Bass	Techno	3643	FA_Trance 2 _N	4 / 4	1	135			:
Bass	Techno	3644	FB_Trance 2 _N	4 / 4	8	135			:
Bass	Techno	3645	FC_Trance 2 _N	4 / 4	1	135			:
Bass	Techno	3646	BA_Trance 2 _N	4 / 4	1	135			:
Bass	Techno	3647	MA_Trance 3 _C	4 / 4	2	140			:
Bass	Techno	3648	MB_Trance 3 _C	4 / 4	2	140			:
Bass	Techno	3649	MC_Trance 3 _C	4 / 4	3	140			:
Bass	Techno	3650	FA_Trance 3 _C	4 / 4	2	140			:
Bass	Techno	3651	FB_Trance 3 _C	4 / 4	2	140			:
Bass	Techno	3652	FC_Trance 3 _C	4 / 4	4	140			:
Bass	Techno	3653	BA_Trance 3 _C	4 / 4	1	140			:
Bass	Techno	3654	MA_Trance 3 _N	4 / 4	2	140			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Techno	3655	MB_Trance 3 _N	4 / 4	2	140			:
Bass	Techno	3656	MC_Trance 3	4 / 4	3	140			:
Bass	Techno	3657	FA_Trance 3 _N	4 / 4	2	140			:
Bass	Techno	3658	FB_Trance 3 _N	4 / 4	2	140			:
Bass	Techno	3659	FC_Trance 3	4 / 4	4	140			:
Bass	Techno	3660	BA_Trance 3 _N	4 / 4	1	140			:
Bass	Techno	3661	MA_Trance 4 _C	4 / 4	4	130			:
Bass	Techno	3662	MB_Trance 4 _C	4 / 4	2	130			:
Bass	Techno	3663	MC_Trance 4 _C	4 / 4	4	130			:
Bass	Techno	3664	FA_Trance 4 _C	4 / 4	4	130			:
Bass	Techno	3665	FB_Trance 4 _C	4 / 4	2	130			:
Bass	Techno	3666	FC_Trance 4 _C	4 / 4	4	130			:
Bass	Techno	3667	BA_Trance 4 _C	4 / 4	2	130			:
Bass	Techno	3668	MA_Trance 4 _N	4 / 4	4	130			:
Bass	Techno	3669	MB_Trance 4	4 / 4	2	130			:
Bass	Techno	3670	MC_Trance 4 _N	4 / 4	4	130			:
Bass	Techno	3671	FA_Trance 4 _N	4 / 4	4	130			:
Bass	Techno	3672	FB_Trance 4 _N	4 / 4	2	130			:
Bass	Techno	3673	FC_Trance 4 _N	4 / 4	4	130			:
Bass	Techno	3674	BA_Trance 4 _N	4 / 4	2	130			:
Bass	Techno	3675	MA_Trance 5	4 / 4	1	140			:
Bass	Techno	3676	FA_Trance 5 _N	4 / 4	1	140			:
Bass	Techno	3677	FC_Trance 5 _N	4 / 4	4	140			:
Bass	Techno	3678	MA_TranceBassA1 _N	4 / 4	2	143			:
Bass	Techno	3679	MA_TranceBassA2 _N	4 / 4	1	143			:
Bass	Techno	3680	MA_TranceBassA3 _N	4 / 4	1	143			:
Bass	Techno	3681	MA_TranceBassA4 _N	4 / 4	1	143			:
Bass	Techno	3682	MA_TranceBassA5 _N	4 / 4	1	143			:
Bass	Techno	3683	MA_TranceBassB1	4 / 4	1	143			:
Bass	Techno	3684	MA_TranceBassB2 _N	4 / 4	1	143			:
Bass	Techno	3685	MA_TranceBassB3 _N	4 / 4	1	143			:
Bass	Techno	3686	MA_TranceBassB4 _N	4 / 4	1	143			:
Bass	Techno	3687	MA_TranceBassB5 _N	4 / 4	1	143			:
Bass	Techno	3688	MA_Trance Vision	4 / 4	1	134			:
Bass	Techno	3689	MB_Trance Vision	4 / 4	1	134			:
Bass	Techno	3690	MC_Trance Vision	4 / 4	1	134			:
Bass	Techno	3691	MD_Trance Vision	4 / 4	1	134			:
Bass	Techno	3692	MA_Dream Trance	4 / 4	1	140			:
Bass	Techno	3693	MB_Dream Trance	4 / 4	1	140			:
Bass	Techno	3694	MC_Dream Trance	4 / 4	1	140			:
Bass	Techno	3695	MA_Electrix	4 / 4	1	119			:
Bass	Techno	3696	MB_Electrix	4 / 4	1	119			:
Bass	Techno	3697	MC_Electrix	4 / 4	1	119			:
Bass	Techno	3698	MA_Cool Breakz	4 / 4	1	116			:
Bass	Techno	3699	MB_Cool Breakz	4 / 4	1	116			:
Bass	Techno	3700	MA_Synthlines	4 / 4	1	124			:
Bass	Techno	3701	MB_Synthlines	4 / 4	1	124			:
Bass	Techno	3702	MC_Synthlines	4 / 4	1	124			:
Bass	Techno	3703	MA_Noize Xpress	4 / 4	4	70			:
Bass	Techno	3704	MA_Tek Bass1	4 / 4	1	138			:
Bass	Techno	3705	MA_Tek Bass2	4 / 4	1	138			:
Bass	Techno	3706	MA_Tek Bass3	4 / 4	8	138			:
Bass	Techno	3707	MA_Acid Bass1	4 / 4	1	86			:
Bass	Techno	3708	MA_Acid Bass2	4 / 4	1	120			:
Bass	Techno	3709	MA_Acid Flux	4 / 4	1	130			:
Bass	Techno	3710	MA_Octaver	4 / 4	1	120			:
Bass	Techno	3711	MA_Twister	4 / 4	1	135			:
Bass	Techno	3712	MA_Cyborg	4 / 4	1	90			:
Bass	Techno	3713	MA_LoRidr	4 / 4	1	90			:
Bass	Techno	3714	MA_Kronic	4 / 4	1	100			:
Bass	Techno	3715	MA_Triplet	4 / 4	1	120			:
Bass	Techno	3716	MA_Tronica	4 / 4	1	120			:
Bass	Techno	3717	MA_Wazzo	4 / 4	1	94			:
Bass	Techno	3718	MA_Swing Bass	4 / 4	2	132			:
Bass	Techno	3719	MA_Synth Bass1 _N	4 / 4	1	120			:
Bass	Techno	3720	MA_Synth Bass2 _N	4 / 4	1	120			:
Bass	Techno	3721	MA_Synth Bass3 _N	4 / 4	1	120			:
Bass	Techno	3722	MA_Synth Bass4 _N	4 / 4	1	120			:
Bass	Techno	3723	MA_Synth Bass5 _N	4 / 4	1	120			:
Bass	House	3724	MA_ElectroPop2Bass1 Lp	4 / 4	1	124			:
Bass	House	3725	MA_ElectroPop2Bass1 Vari	4 / 4	4	124			:
Bass	House	3726	MA_ElectroPop2Bass1 CF2	4 / 4	2	124			:
Bass	House	3727	MA_ElectroPop2Bass1 CF4	4 / 4	4	124			:
Bass	House	3728	MA_ElectroPop2Bass1 CF8	4 / 4	8	124			:
Bass	House	3729	MA_ElectroPop2Bass2	4 / 4	1	124			:
Bass	House	3730	MA_ElectroPop2Bass3	4 / 4	1	124			:
Bass	House	3731	MA_Boogie Bass 1	4 / 4	4	140			:
Bass	House	3732	MA_Boogie Bass 2	4 / 4	4	140			:
Bass	House	3733	MA_Boogie Bass 3	4 / 4	2	140			:
Bass	House	3734	MA_Boogie Bass 4	4 / 4	4	140			:
Bass	House	3735	MA_Boogie Bass 5	4 / 4	2	140			:
Bass	House	3736	MA_Boogie Bass 6	4 / 4	2	140			:
Bass	House	3737	MA_Boogie Bass 7	4 / 4	2	140			:
Bass	House	3738	MA_Boogie Bass 8	4 / 4	4	140			:
Bass	House	3739	MA_Reggaeton1 Bass _N	4 / 4	2	90			:
Bass	House	3740	MB_Reggaeton1 Bass _N	4 / 4	4	90			:
Bass	House	3741	MC_Reggaeton1 Bass _N	4 / 4	2	90			:
Bass	House	3742	MD_Reggaeton1 Bass _N	4 / 4	4	90			:
Bass	House	3743	ME_Reggaeton1 Bass _N	4 / 4	2	90			:
Bass	House	3744	MF_Reggaeton1 Bass _N	4 / 4	4	90			:
Bass	House	3745	MG_Reggaeton1 Bass _N	4 / 4	4	90			:
Bass	House	3746	MH_Reggaeton1 Bass _N	4 / 4	4	90			:
Bass	House	3747	MA_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3748	MB_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3749	MC_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3750	MD_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3751	ME_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3752	MF_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3753	MG_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3754	MH_TropicalHouse1 Bass _N	4 / 4	4	110			:
Bass	House	3755	MB_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3756	MC_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3757	MD_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3758	ME_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3759	MF_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3760	MG_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3761	MH_UK Garage1 Bass _N	4 / 4	4	132			:
Bass	House	3762	MA_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3763	MB_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3764	MC_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3765	MD_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3766	ME_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3767	MF_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3768	MG_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3769	MH_Pick It Up Bass _N	4 / 4	4	180			:
Bass	House	3770	MA_DanceLoop1 Bass _N	4 / 4	2	120			:
Bass	House	3771	MA_DanceLoop2 Bass _N	4 / 4	4	120			:
Bass	House	3772	MA_DanceLoop3 Bass _N	4 / 4	4	120			:
Bass	House	3773	MA_DanceLoop4 Bass _N	4 / 4	2	120			:
Bass	House	3774	MA_DanceLoop5 Bass _N	4 / 4	2	120			:
Bass	House	3775	MA_DanceLoop6 Bass _N	4 / 4	2	120			:
Bass	House	3776	MA_DanceLoop7 Bass _N	4 / 4	2	120			:
Bass	House	3777	FA_Riser Fill Bass _N	4 / 4	4	120			:
Bass	House	3778	MA_SynthBass7-01 _N	4 / 4	2	130			:
Bass	House	3779	MA_Synth Bass7-01	4 / 4	2	130			:
Bass	House	3780	MA_SynthBass7-02 _N	4 / 4	2	130			:
Bass	House	3781	MA_Synth Bass7-02	4 / 4	2	130			:
Bass	House	3782	MA_SynthBass7-03 _N	4 / 4	1	130			:
Bass	House	3783	MA_Synth Bass7-03	4 / 4	1	130			:
Bass	House	3784	MA_SynthBass7-04 _N	4 / 4	1	130			:
Bass	House	3785	MA_Synth Bass7-04	4 / 4	1	130			:
Bass	House	3786	MA_Synth Bass7-05	4 / 4	4	130			:
Bass	House	3787	MA_Synth Bass7-06	4 / 4	2	130			:
Bass	House	3788	MA_Synth Bass7-07	4 / 4	2	130			:
Bass	House	3789	MA_Synth Bass7-08	4 / 4	2	130			:
Bass	House	3790	MA_Synth Bass7-09	4 / 4	2	130			:
Bass	House	3791	MA_Synth Bass7-10	4 / 4	2	130			:
Bass	House	3792	MA_SynthBass8-01 _N	4 / 4	2	122			:
Bass	House	3793	MA_Synth Bass8-01	4 / 4	2	122			:
Bass	House	3794	MA_SynthBass8-02 _N	4 / 4	2	128			:
Bass	House	3795	MA_Synth Bass8-02	4 / 4	2	128			:
Bass	House	3796	MA_SynthBass8-03 _N	4 / 4	2	128			:
Bass	House	3797	MA_Synth Bass8-03	4 / 4	2	128			:
Bass	House	3798	MA_SynthBass8-04 _N	4 / 4	2	120			:
Bass	House	3799	MA_Synth Bass8-04	4 / 4	2	120			:
Bass	House	3800	MA_SynthBass8-05 _N	4 / 4	2	125			:
Bass	House	3801	MA_Synth Bass8-05	4 / 4	2	125			:
Bass	House	3802	MA_SynthBass8-06 _N	4 / 4	2	125			:
Bass	House	3803	MA_Synth Bass8-06	4 / 4	2	125			:
Bass	House	3804	MA_SynthBass8-07 _N	4 / 4	4	122			:
Bass	House	3805	MA_Synth Bass8-07	4 / 4	4	122			:
Bass	House	3806	MA_Synth Bass8-08	4 / 4	2	128			:
Bass	House	3807	MA_SynthBass8-09 _N	4 / 4	2	120			:
Bass	House	3808	MA_Synth Bass8-09	4 / 4	2	120			:
Bass	House	3809	MA_SynthBass8-10 _N	4 / 4	4	128			:
Bass	House	3810	MA_Synth Bass8-10	4 / 4	4	128			:
Bass	House	3811	MA_Synth Bass8-11a	4 / 4	4	122			:
Bass	House	3812	MA_Synth Bass8-11b	4 / 4	4	122			:
Bass	House	3813	MA_Synth Bass8-12	4 / 4	2	122			:
Bass	House	3814	MA_SynthBass8-13 _N	4 / 4	1	128			:
Bass	House	3815	MA_Synth Bass8-13	4 / 4	1	128			:
Bass	House	3816	MA_Synth Bass8-14a	4 / 4	2	122			:
Bass	House	3817	MA_Synth Bass8-14b	4 / 4	2	122			:
Bass	House	3818	MA_SynthBass8-15 _N	4 / 4	4	122			:
Bass	House	3819	MA_Synth Bass8-15	4 / 4	4	122			:
Bass	House	3820	MA_SyBsRiff3-01 _N	4 / 4	4	130			:
Bass	House	3821	MA_SyBsRiff3-01	4 / 4	4	130			:
Bass	House	3822	MA_SyBsRiff3-02	4 / 4	2	130			:
Bass	House	3823	MA_SyBsRiff3-03	4 / 4	4	130			:
Bass	House	3824	MA_SyBsRiff3-04 _N	4 / 4	2	130			:
Bass	House	3825	MA_SyBsRiff3-04	4 / 4	2	130			:
Bass	House	3826	MA_SyBsRiff3-05 _N	4 / 4	2	130			:
Bass	House	3827	MA_SyBsRiff3-06	4 / 4	2	130			:
Bass	House	3828	MA_SyBsRiff3-07 _N	4 / 4	2	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	House	3829	MA_SyBsRiff3-08 _N	4 / 4	2	130			:
Bass	House	3830	MA_SyBsRiff3-09 _N	4 / 4	2	130			:
Bass	House	3831	MA_SyBsRiff3-10 _N	4 / 4	2	130			:
Bass	House	3832	MA_SyBsRiff3-10	4 / 4	2	130			:
Bass	House	3833	MA_SyBsRiff3-11 _N	4 / 4	2	130			:
Bass	House	3834	MA_Analog Bass	4 / 4	2	99			:
Bass	House	3835	MA_Analog Drum Bass	4 / 4	2	111			:
Bass	House	3836	MA_Anthem Party Bs	4 / 4	4	113			:
Bass	House	3837	MA_Atrium Bass	4 / 4	2	125			:
Bass	House	3838	MA_Baby Jump Bass	4 / 4	2	120			:
Bass	House	3839	MA_Bromeo Bass	4 / 4	2	120			:
Bass	House	3840	MA_Colors Bass	4 / 4	2	128			:
Bass	House	3841	MA_Cosmic Heart Bs	4 / 4	2	122			:
Bass	House	3842	MA_Deep N Low Bass	4 / 4	2	122			:
Bass	House	3843	MA_EmoDM Bass	4 / 4	4	120			:
Bass	House	3844	MA_Epoque Bass	4 / 4	2	122			:
Bass	House	3845	MA_Funky Walk Bass	4 / 4	2	112			:
Bass	House	3846	MA_In My House Bass	4 / 4	2	117			:
Bass	House	3847	MA_Make Me Sing Bs	4 / 4	2	126			:
Bass	House	3848	MA_Organa Bass	4 / 4	2	110			:
Bass	House	3849	MA_Play Thing Bass	4 / 4	2	110			:
Bass	House	3850	MA_PlayThingWobble	4 / 4	2	110			:
Bass	House	3851	MA_Rodeo Bass	4 / 4	2	120			:
Bass	House	3852	MA_Back Two One _N	4 / 4	1	120			:
Bass	House	3853	MA_Den Haag _N	4 / 4	2	120			:
Bass	House	3854	MA_Around Us _N	4 / 4	1	120			:
Bass	House	3855	MA_Dream Dance _N	4 / 4	2	136			:
Bass	House	3856	MB_Dream Dance	4 / 4	1	136			:
Bass	House	3857	MC_Dream Dance _N	4 / 4	4	136			:
Bass	House	3858	MD_Dream Dance _N	4 / 4	4	136			:
Bass	House	3859	FA_Dream Dance _N	4 / 4	1	136			:
Bass	House	3860	MA_Ibiza	4 / 4	2	135			:
Bass	House	3861	MB_Ibiza	4 / 4	2	135			:
Bass	House	3862	MC_Ibiza _N	4 / 4	2	135			:
Bass	House	3863	MD_Ibiza _N	4 / 4	2	135			:
Bass	House	3864	IA_Ibiza	4 / 4	1	135			:
Bass	House	3865	FC_Ibiza _N	4 / 4	4	135			:
Bass	House	3866	MA_Retro Pop _N	4 / 4	2	126			:
Bass	House	3867	MA_Disco House _C	4 / 4	4	126			:
Bass	House	3868	MB_Disco House _C	4 / 4	4	126			:
Bass	House	3869	MC_Disco House _C	4 / 4	4	126			:
Bass	House	3870	FA_Disco House _C	4 / 4	1	126			:
Bass	House	3871	FB_Disco House _C	4 / 4	1	126			:
Bass	House	3872	FC_Disco House _C	4 / 4	1	126			:
Bass	House	3873	BA_Disco House _C	4 / 4	1	126			:
Bass	House	3874	MA_Club House _N	4 / 4	1	128			:
Bass	House	3875	MB_Club House _N	4 / 4	1	128			:
Bass	House	3876	MC_Club House _N	4 / 4	1	128			:
Bass	House	3877	MD_Club House _N	4 / 4	1	128			:
Bass	House	3878	IA_Club House _N	4 / 4	1	128			:
Bass	House	3879	FA_Club House _N	4 / 4	1	128			:
Bass	House	3880	FB_Club House _N	4 / 4	1	128			:
Bass	House	3881	MA_Garage 2 _N	4 / 4	2	127			:
Bass	House	3882	MB_Garage 2 _N	4 / 4	2	127			:
Bass	House	3883	MC_Garage 2 _N	4 / 4	2	127			:
Bass	House	3884	MD_Garage 2 _N	4 / 4	2	127			:
Bass	House	3885	IA_Garage 2 _N	4 / 4	2	127			:
Bass	House	3886	FC_Garage 2 _N	4 / 4	2	127			:
Bass	House	3887	MA_House Bass	4 / 4	4	120			:
Bass	Pop Rock	3888	MA_Fight Bass _N	4 / 4	8	165			:
Bass	Pop Rock	3889	MB_PrecFlatWound _N	4 / 4	8	165			Finger Bass
Bass	Pop Rock	3890	MC_Chronic Circuits _N	4 / 4	4	127			:
Bass	Pop Rock	3891	MD_Hybrid Bass _N	4 / 4	4	148			:
Bass	Pop Rock	3892	ME_Bass Morphe _N	4 / 4	4	165			Synth Bass
Bass	Pop Rock	3893	MF_Big Bass _N	4 / 4	4	118			:
Bass	Pop Rock	3894	MG_Pulse Stop _N	4 / 4	4	146			:
Bass	Pop Rock	3895	MH_UprightBass _N	4 / 4	8	165			Acoustic Bass
Bass	Pop Rock	3896	MA_BreakLoop1 Bass _N	4 / 4	4	85			Synth Bass
Bass	Pop Rock	3897	MA_BreakLoop2 Bass _N	4 / 4	2	85			:
Bass	Pop Rock	3898	MA_BreakLoop3 Bass _N	4 / 4	4	85			:
Bass	Pop Rock	3899	MA_BreakLoop4 Bass _N	4 / 4	2	95			:
Bass	Pop Rock	3900	MA_BreakLoop5 Bass _N	4 / 4	4	95			:
Bass	Pop Rock	3901	MA_BreakLoop6 _N	4 / 4	2	95			:
Bass	Pop Rock	3902	MA_BreakLoop7 Bass _N	4 / 4	4	95			:
Bass	Pop Rock	3903	MA_BreakLoop8 Bass _N	4 / 4	2	100			:
Bass	Pop Rock	3904	MA_BreakLoop9 Bass _N	4 / 4	2	100			:
Bass	Pop Rock	3905	MA_BreakLoop10 Bass _N	4 / 4	1	100			:
Bass	Pop Rock	3906	MA_BreakLoop11 Bass _N	4 / 4	1	118			:
Bass	Pop Rock	3907	MA_BreakLoop12 Bass _N	4 / 4	1	118			:
Bass	Pop Rock	3908	MA_Tracker 1 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3909	MA_Tracker 2 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3910	MA_Tracker 3 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3911	MA_Tracker 4 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3912	MA_Tracker 5 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3913	MA_Tracker 6 Bass _N	4 / 4	2	170			:
Bass	Pop Rock	3914	MA_Tracker 7 Bass _N	4 / 4	2	170			:
Bass	Pop Rock	3915	MA_Tracker 8 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3916	MA_Tracker 9 Bass _N	4 / 4	4	170			:
Bass	Pop Rock	3917	MA_Tracker 10 Bass _N	4 / 4	4	170			:
Bass	D&B	3918	MA_Big Bass Wobble	4 / 4	2	140			:
Bass	D&B	3919	MA_Big Open Wobble	4 / 4	2	120			:
Bass	D&B	3920	MA_Hit Wobble	4 / 4	2	140			:
Bass	D&B	3921	MA_Dubtastic Wobble	4 / 4	2	140			:
Bass	D&B	3922	MA_Big Beat 1 _N	4 / 4	4	115			Finger Bass
Bass	D&B	3923	MB_Big Beat 1 _N	4 / 4	4	115			:
Bass	D&B	3924	MC_Big Beat 1 _N	4 / 4	4	115			:
Bass	D&B	3925	FA_Big Beat 1	4 / 4	1	115			:
Bass	D&B	3926	FB_Big Beat 1	4 / 4	1	115			:
Bass	D&B	3927	FC_Big Beat 1	4 / 4	1	115			:
Bass	D&B	3928	BA_Big Beat 1	4 / 4	1	115			:
Bass	D&B	3929	MA_Breakbeats 1	4 / 4	4	115			Synth Bass
Bass	D&B	3930	MB_Breakbeats 1 _N	4 / 4	4	115			:
Bass	D&B	3931	MC_Breakbeats 1 _N	4 / 4	2	115			:
Bass	D&B	3932	FA_Breakbeats 1	4 / 4	1	115			:
Bass	D&B	3933	FB_Breakbeats 1	4 / 4	1	115			:
Bass	D&B	3934	FC_Breakbeats 1 _N	4 / 4	1	115			:
Bass	D&B	3935	BA_Breakbeats 1	4 / 4	1	115			:
Bass	D&B	3936	MA_Breakbeats 2 _N	4 / 4	4	88			:
Bass	D&B	3937	MB_Breakbeats 2 _N	4 / 4	4	88			:
Bass	D&B	3938	MC_Breakbeats 2 _N	4 / 4	4	88			:
Bass	D&B	3939	FA_Breakbeats 2	4 / 4	1	88			:
Bass	D&B	3940	FB_Breakbeats 2 _N	4 / 4	1	88			:
Bass	D&B	3941	FC_Breakbeats 2 _N	4 / 4	1	88			:
Bass	D&B	3942	BA_Breakbeats 2 _N	4 / 4	1	88			:
Bass	Chill	3943	MA_Chill Out Bass 1	4 / 4	4	84			:
Bass	Chill	3944	MA_Chill Out Bass 2	4 / 4	4	84			:
Bass	Chill	3945	MA_Chill Out Bass 3	4 / 4	4	84			:
Bass	Chill	3946	MA_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3947	MB_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3948	MC_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3949	MD_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3950	ME_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3951	MF_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3952	MG_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3953	MI_Trap City Bass _N	4 / 4	4	120			:
Bass	Chill	3954	MA_EDM Ballad Bass	4 / 4	4	120			:
Bass	Chill	3955	MA_Ambient 1 _C	4 / 4	4	102			:
Bass	Chill	3956	MB_Ambient 1 _C	4 / 4	4	102			:
Bass	Chill	3957	MC_Ambient 1 _C	4 / 4	4	102			:
Bass	Chill	3958	FB_Ambient 1 _C	4 / 4	1	102			:
Bass	Chill	3959	FC_Ambient 1 _C	4 / 4	1	102			:
Bass	Chill	3960	MA_Ambient 1 _N	4 / 4	4	102			:
Bass	Chill	3961	MB_Ambient 1 _N	4 / 4	4	102			:
Bass	Chill	3962	MC_Ambient 1 _N	4 / 4	4	102			:
Bass	Chill	3963	FB_Ambient 1 _N	4 / 4	1	102			:
Bass	Chill	3964	FC_Ambient 1 _N	4 / 4	1	102			:
Bass	Chill	3965	MA_Ambient 2 _C	4 / 4	4	111			:
Bass	Chill	3966	MB_Ambient 2 _C	4 / 4	2	111			:
Bass	Chill	3967	MC_Ambient 2 _C	4 / 4	4	111			:
Bass	Chill	3968	FA_Ambient 2 _C	4 / 4	1	111			:
Bass	Chill	3969	FB_Ambient 2 _C	4 / 4	8	111			:
Bass	Chill	3970	FC_Ambient 2 _C	4 / 4	1	111			:
Bass	Chill	3971	BA_Ambient 2 _C	4 / 4	2	111			:
Bass	Chill	3972	MA_Ambient 2 _N	4 / 4	4	111			:
Bass	Chill	3973	MB_Ambient 2	4 / 4	2	111			:
Bass	Chill	3974	MC_Ambient 2 _N	4 / 4	4	111			:
Bass	Chill	3975	FA_Ambient 2 _N	4 / 4	1	111			:
Bass	Chill	3976	FB_Ambient 2 _N	4 / 4	8	111			:
Bass	Chill	3977	FC_Ambient 2 _N	4 / 4	1	111			:
Bass	Chill	3978	BA_Ambient 2 _N	4 / 4	2	111			:
Bass	Chill	3979	MB_Chill Out	4 / 4	2	79			:
Bass	Chill	3980	MC_Chill Out _N	4 / 4	4	79			:
Bass	Chill	3981	MD_Chill Out _N	4 / 4	1	79			Finger Bass
Bass	Chill	3982	IA_Chill Out _N	4 / 4	3	79			:
Bass	Chill	3983	FA_Chill Out _N	4 / 4	1	79			Finger Bass (PB Range=12)
Bass	Chill	3984	FC_Chill Out _N	4 / 4	4	79			Finger Bass
Bass	Chill	3985	MA_ChillKitBass	4 / 4	4	70			Synth Bass
Bass	Chill	3986	MA_ClubtechBas1	4 / 4	1	70			:
Bass	Chill	3987	MA_ClubtechBas2	4 / 4	1	70			:
Bass	Chill	3988	MA_ClubtechBas3	4 / 4	1	70			:
Bass	Chill	3989	MA_HeavyChillBs	4 / 4	4	70			:
Bass	Chill	3990	MA_HeartbreakBs	4 / 4	4	70			:
Bass	Chill	3991	MA_PopBreaksBas	4 / 4	4	70			:
Bass	Chill	3992	MB_Synth Pop	4 / 4	2	90			:
Bass	Chill	3993	MD_Synth Pop	4 / 4	2	90			:
Bass	Chill	3994	FC_Synth Pop	4 / 4	2	90			:
Bass	Chill	3995	MA_Eighties	4 / 4	1	120			:
Bass	Chill	3996	MA_Eighties AF1	4 / 4	1	120			:
Bass	Chill	3997	MB_Eighties	4 / 4	1	120			:
Bass	Chill	3998	MB_Eighties AF1	4 / 4	1	120			:
Bass	Chill	3999	MC_Eighties	4 / 4	1	120			:
Bass	Chill	4000	MC_Eighties AF1	4 / 4	1	120			:
Bass	Jazz	4001	MA_AcousticJaz/1 _N	4 / 4	4	204			Acoustic Bass
Bass	Jazz	4002	MA_AcousticJaz/2 _N	4 / 4	4	204			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Jazz	4003	MA_AcousticJaz/3 _N	4 / 4	4	204			:
Bass	Jazz	4004	MA_AcousticJaz/4 _N	4 / 4	4	204			:
Bass	Jazz	4005	MB_AcousticJaz/1 _N	4 / 4	4	204			:
Bass	Jazz	4006	MB_AcousticJaz/2 _N	4 / 4	4	204			:
Bass	Jazz	4007	MB_AcousticJaz/3 _N	4 / 4	4	204			:
Bass	Jazz	4008	MB_AcousticJaz/4 _N	4 / 4	4	204			:
Bass	Jazz	4009	MC_AcousticJaz/1 _N	4 / 4	4	204			:
Bass	Jazz	4010	MC_AcousticJaz/2 _N	4 / 4	4	204			:
Bass	Jazz	4011	MC_AcousticJaz/3 _N	4 / 4	4	204			:
Bass	Jazz	4012	MC_AcousticJaz/4 _N	4 / 4	4	204			:
Bass	Jazz	4013	MD_AcousticJaz/1 _N	4 / 4	4	204			:
Bass	Jazz	4014	MD_AcousticJaz/2 _N	4 / 4	4	204			:
Bass	Jazz	4015	MD_AcousticJaz/3 _N	4 / 4	4	204			:
Bass	Jazz	4016	MD_AcousticJaz/4 _N	4 / 4	4	204			:
Bass	Jazz	4017	IA_AcousticJazz _N	4 / 4	4	204			:
Bass	Jazz	4018	FA_AcousticJazz _N	4 / 4	1	204			:
Bass	Jazz	4019	FB_AcousticJazz _N	4 / 4	1	204			:
Bass	Jazz	4020	FC_AcousticJazz _N	4 / 4	4	204			:
Bass	Jazz	4021	MA_AcousticBas1	4 / 4	4	132			:
Bass	Jazz	4022	MA_AcousticBas2 _N	4 / 4	4	132			:
Bass	Jazz	4023	MA_AcousticBas3 _N	4 / 4	4	132			:
Bass	Jazz	4024	MA_AcousticBas4 _N	4 / 4	8	132			:
Bass	Jazz	4025	MA_AcousticBas5 _N	4 / 4	4	132			:
Bass	Jazz	4026	MA_Walkin	4 / 4	3	103			:
Bass	Jazz	4027	MA_Slow Blues 2 _C	4 / 4	4	72			Finger Bass
Bass	Jazz	4028	MB_Slow Blues 2 _C	4 / 4	4	72			:
Bass	Jazz	4029	MC_Slow Blues 2 _C	4 / 4	4	72			:
Bass	Jazz	4030	FA_Slow Blues 2 _C	4 / 4	1	72			:
Bass	Jazz	4031	FB_Slow Blues 2 _C	4 / 4	1	72			:
Bass	Jazz	4032	FC_Slow Blues 2 _C	4 / 4	1	72			:
Bass	Jazz	4033	BA_Slow Blues 2 _C	4 / 4	1	72			:
Bass	Jazz	4034	MA_Slow Blues 2 _N	4 / 4	4	72			:
Bass	Jazz	4035	MB_Slow Blues 2 _N	4 / 4	4	72			:
Bass	Jazz	4036	MC_Slow Blues 2 _N	4 / 4	4	72			:
Bass	Jazz	4037	FA_Slow Blues 2 _N	4 / 4	1	72			:
Bass	Jazz	4038	FB_Slow Blues 2 _N	4 / 4	1	72			:
Bass	Jazz	4039	FC_Slow Blues 2	4 / 4	1	72			:
Bass	Jazz	4040	BA_Slow Blues 2	4 / 4	1	72			:
Bass	Latin	4041	MA_Salsa 2 _N	4 / 4	4	123			Acoustic Bass
Bass	Latin	4042	MB_Salsa 2 _N	4 / 4	4	123			:
Bass	Latin	4043	FA_Salsa 2 _N	4 / 4	1	123			:
Bass	Latin	4044	FC_Salsa 2 _N	4 / 4	2	123			:
Bass	Latin	4045	MA_Montuno _N	4 / 4	4	100			Finger Bass
Bass	Latin	4046	MC_Montuno/1 _N	4 / 4	4	100			:
Bass	Latin	4047	MC_Montuno/2 _N	4 / 4	4	100			:
Bass	Latin	4048	MD_Montuno/1 _N	4 / 4	4	100			:
Bass	Latin	4049	MD_Montuno/2 _N	4 / 4	4	100			:
Bass	Latin	4050	MD_Montuno /3 _N	4 / 4	4	100			:
Bass	Latin	4051	MD_Montuno /4 _N	4 / 4	4	100			:
Bass	Latin	4052	FA_Montuno/1 _N	4 / 4	1	100			:
Bass	Latin	4053	FA_Montuno/2 _N	4 / 4	1	100			:
Bass	Latin	4054	FC_Montuno _N	4 / 4	4	100			:
Bass	Latin	4055	MA_Samba _N	4 / 4	2	120			:
Bass	Latin	4056	MC_Samba _N	4 / 4	4	120			:
Bass	Latin	4057	MD_Samba _N	4 / 4	4	120			:
Bass	Latin	4058	IA_Samba _N	4 / 4	2	120			:
Bass	Latin	4059	MA_FretlessBas1 _N	4 / 4	4	124			Fretless Bass
Bass	Latin	4060	MA_FretlessBas2 _N	4 / 4	4	124			:
Bass	Latin	4061	MA_FretlessBas3 _N	4 / 4	4	124			:
Bass	Latin	4062	MA_FretlessBas4 _N	4 / 4	4	124			:
Bass	Latin	4063	MA_FretlessBas5 _N	4 / 4	4	124			:
Bass	Latin	4064	MA_Latin Rock	4 / 4	2	120			Finger Bass
Bass	Latin	4065	MB_Latin Rock	4 / 4	2	120			:
Bass	Latin	4066	MC_Latin Rock	4 / 4	2	120			:
Bass	Latin	4067	MD_Latin Rock	4 / 4	4	120			:
Bass	Latin	4068	IA_Latin Rock	4 / 4	2	120			:
Bass	Latin	4069	FA_Latin Rock _N	4 / 4	1	120			:
Bass	Latin	4070	FB_Latin Rock _N	4 / 4	1	120			:
Bass	Latin	4071	MA_Disco Latin _C	4 / 4	4	100			:
Bass	Latin	4072	MB_Disco Latin _C	4 / 4	4	100			:
Bass	Latin	4073	MC_Disco Latin _C	4 / 4	4	100			:
Bass	Latin	4074	FA_Disco Latin _C	4 / 4	1	100			:
Bass	Latin	4075	FB_Disco Latin _C	4 / 4	1	100			:
Bass	Latin	4076	FC_Disco Latin _C	4 / 4	1	100			:
Bass	Latin	4077	BA_Disco Latin _C	4 / 4	1	100			:
Bass	Latin	4078	MA_Latin House _N	4 / 4	4	138			:
Bass	Latin	4079	MC_Latin House _N	4 / 4	4	138			:
Bass	Latin	4080	FA_Latin House _N	4 / 4	4	138			Synth Bass
Bass	World	4081	MA_AsianDanceShf Bass _N	4 / 4	8	120			Finger Bass
Bass	World	4082	MC_AsianDanceShf Bass _N	4 / 4	8	120			:
Bass	World	4083	MD_AsianDanceShf Bass _N	4 / 4	8	120			Fretless Bass
Bass	World	4084	MA_AfricanDanceShf Bs _N	4 / 4	8	120			Synth Bass
Bass	World	4085	MB_AfricanDanceShf Bs _N	4 / 4	8	120			:
Bass	World	4086	MC_AfricanDanceShf Bs _N	4 / 4	8	120			Finger Bass
Bass	World	4087	MD_AfricanDanceShf Bs _N	4 / 4	8	120			:
Bass	World	4088	MA_Jumbo Reggae _C	4 / 4	4	100			Synth Bass
Bass	World	4089	MB_Jumbo Reggae _C	4 / 4	4	100			:
Bass	World	4090	MC_Jumbo Reggae _C	4 / 4	4	100			:
Bass	World	4091	FA_Jumbo Reggae _C	4 / 4	1	100			:
Bass	World	4092	FB_Jumbo Reggae _C	4 / 4	1	100			:
Bass	World	4093	FC_Jumbo Reggae _C	4 / 4	1	100			:
Bass	World	4094	BA_Jumbo Reggae _C	4 / 4	1	100			:
Bass	World	4095	EA_Jumbo Reggae _C	4 / 4	3	100			:
Bass	World	4096	EB_Jumbo Reggae _C	4 / 4	3	100			:
Bass	World	4097	MA_Reggae 1	4 / 4	4	102			Finger Bass
Bass	World	4098	MB_Reggae 1	4 / 4	4	102			:
Bass	World	4099	MC_Reggae 1	4 / 4	4	80			:
Bass	World	4100	MD_Reggae 1	4 / 4	4	90			:
Bass	World	4101	IA_Reggae 1	4 / 4	4	102			:
Bass	World	4102	FA_Reggae 1	4 / 4	1	96			:
Bass	World	4103	FB_Reggae 1	4 / 4	1	90			:
Bass	World	4104	FC_Reggae 1	4 / 4	4	96			:
Bass	World	4105	MA_Reggae 2 _N	4 / 4	2	92			:
Bass	World	4106	MB_Reggae 2 _N	4 / 4	2	92			:
Bass	World	4107	MC_Reggae 2 _N	4 / 4	2	92			:
Bass	World	4108	MD_Reggae 2 _N	4 / 4	2	92			:
Bass	World	4109	IA_Reggae 2	4 / 4	2	92			:
Bass	World	4110	FA_Reggae 2 _N	4 / 4	1	92			:
Bass	World	4111	FB_Reggae 2 _N	4 / 4	1	92			:
Bass	World	4112	MA_Spanish Pop _N	4 / 4	1	120			:
Bass	World	4113	MB_Spanish Pop _N	4 / 4	2	120			:
Bass	World	4114	MC_Spanish Pop _N	4 / 4	1	120			:
Bass	World	4115	MD_Spanish Pop _N	4 / 4	1	120			:
Bass	World	4116	FA_Spanish Pop _N	4 / 4	1	120			:
Bass	World	4117	FC_Spanish Pop _N	4 / 4	2	120			:
Bass	World	4118	MA_Turkish Pop _C	4 / 4	4	101			Synth Bass
Bass	World	4119	MB_Turkish Pop _C	4 / 4	4	101			:
Bass	World	4120	MC_Turkish Pop _C	4 / 4	4	101			:
Bass	World	4121	MD_Turkish Pop _C	4 / 4	4	101			:
Bass	World	4122	MA_Turkish Pop _N	4 / 4	4	101			:
Bass	World	4123	MB_Turkish Pop _N	4 / 4	4	101			:
Bass	World	4124	MC_Turkish Pop _N	4 / 4	4	101			:
Bass	World	4125	MD_Turkish Pop _N	4 / 4	4	101			:
Bass	World	4126	MA_TurkishDance _C	4 / 4	4	130			:
Bass	World	4127	MB_TurkishDance _C	4 / 4	4	130			:
Bass	World	4128	MC_TurkishDance _C	4 / 4	4	130			:
Bass	World	4129	MD_TurkishDance _C	4 / 4	4	130			:
Bass	World	4130	MA_TurkishDance _N	4 / 4	4	130			:
Bass	World	4131	MB_TurkishDance	4 / 4	4	130			:
Bass	World	4132	MC_TurkishDance	4 / 4	4	130			:
Bass	World	4133	MD_TurkishDance _N	4 / 4	4	130			:
Bass	World	4134	MA_Turkish _N	4 / 4	2	105			Finger Bass
Bass	World	4135	MB_Turkish _N	4 / 4	2	105			:
Bass	World	4136	MC_Turkish _N	9 / 8	2	125			:
Bass	World	4137	MD_Turkish _N	9 / 8	2	125			:
Bass	World	4138	ME_Turkish _N	4 / 4	2	105			:
Bass	World	4139	MF_Turkish _N	4 / 4	2	105			:
Bass	World	4140	IA_Turkish _N	4 / 4	2	86			:
Bass	World	4141	MA_TurkishEuro1 _C	4 / 4	4	112			Synth Bass
Bass	World	4142	MB_TurkishEuro1 _C	4 / 4	4	112			:
Bass	World	4143	MC_TurkishEuro1 _C	4 / 4	4	112			:
Bass	World	4144	FA_TurkishEuro1 _C	4 / 4	1	112			:
Bass	World	4145	FB_TurkishEuro1 _C	4 / 4	1	112			:
Bass	World	4146	FC_TurkishEuro1 _C	4 / 4	1	112			:
Bass	World	4147	BA_TurkishEuro1 _C	4 / 4	1	112			:
Bass	World	4148	EA_TurkishEuro1 _C	4 / 4	3	112			:
Bass	World	4149	MA_TurkishEuro2 _C	4 / 4	4	120			:
Bass	World	4150	MB_TurkishEuro2 _C	4 / 4	4	120			:
Bass	World	4151	MC_TurkishEuro2 _C	4 / 4	4	120			:
Bass	World	4152	FA_TurkishEuro2 _C	4 / 4	1	120			:
Bass	World	4153	FB_TurkishEuro2 _C	4 / 4	1	120			:
Bass	World	4154	FC_TurkishEuro2 _C	4 / 4	1	120			:
Bass	World	4155	BA_TurkishEuro2 _C	4 / 4	1	120			:
Bass	World	4156	EA_TurkishEuro2 _C	4 / 4	3	120			:
Bass	Rock	4157	[Mg]MA_StandrdRk _C	4 / 4	4	131		○	Mega Finger+Slap
Bass	Rock	4158	[Mg]MB_StandrdRk _C	4 / 4	4	131		○	:
Bass	Rock	4159	[Mg]MC_StandrdRk _C	4 / 4	4	131		○	:
Bass	Rock	4160	[Mg]FA_StandrdRk _C	4 / 4	1	131		○	:
Bass	Rock	4161	[Mg]FB_StandrdRk _C	4 / 4	1	131		○	:
Bass	Rock	4162	[Mg]FC_StandrdRk _C	4 / 4	1	131		○	:
Bass	Rock	4163	[Mg]BA_StandrdRk _C	4 / 4	1	131		○	:
Bass	Rock	4164	[Mg]EA_StandrdRk _C	4 / 4	4	131		○	:
Bass	Rock	4165	[Mg]EB_StandrdRk _C	4 / 4	6	131		○	:
Bass	Rock	4166	[Mg]MA_PowerRock _C	4 / 4	4	120		○	Mega Pick Open Mute
Bass	Rock	4167	[Mg]MB_PowerRock _C	4 / 4	4	120		○	:
Bass	Rock	4168	[Mg]MC_PowerRock _C	4 / 4	4	120		○	:
Bass	Rock	4169	[Mg]FA_PowerRock _C	4 / 4	1	120		○	:
Bass	Rock	4170	[Mg]FB_PowerRock _C	4 / 4	1	120		○	:
Bass	Rock	4171	[Mg]FC_PowerRock _C	4 / 4	1	120		○	:
Bass	Rock	4172	[Mg]BA_PowerRock _C	4 / 4	1	120		○	:
Bass	Rock	4173	[Mg]EA_PowerRock _C	4 / 4	4	120		○	:
Bass	Rock	4174	[Mg]EB_PowerRock _C	4 / 4	7	120		○	:
Bass	Rock	4175	[Mg]MA_CntmpRock _C	4 / 4	4	126		○	:
Bass	Rock	4176	[Mg]MB_CntmpRock _C	4 / 4	4	126		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Rock	4177	[Mg]MC_CntmpRock _C	4 / 4	4	126		○	:
Bass	Rock	4178	[Mg]FA_CntmpRock _C	4 / 4	1	126		○	:
Bass	Rock	4179	[Mg]FB_CntmpRock _C	4 / 4	1	126		○	:
Bass	Rock	4180	[Mg]FC_CntmpRock _C	4 / 4	1	126		○	:
Bass	Rock	4181	[Mg]BA_CntmpRock _C	4 / 4	1	126		○	:
Bass	Rock	4182	[Mg]EA_CntmpRock _C	4 / 4	4	126		○	:
Bass	Rock	4183	[Mg]EB_CntmpRock _C	4 / 4	4	126		○	:
Bass	Rock	4184	[Mg]MA_Hard Rock _C	4 / 4	4	120		○	Mega Finger+Slap
Bass	Rock	4185	[Mg]MB_Hard Rock _C	4 / 4	4	120		○	:
Bass	Rock	4186	[Mg]MC_Hard Rock _C	4 / 4	4	120		○	:
Bass	Rock	4187	[Mg]FA_Hard Rock _C	4 / 4	1	120		○	:
Bass	Rock	4188	[Mg]FB_Hard Rock _C	4 / 4	1	120		○	:
Bass	Rock	4189	[Mg]FC_Hard Rock _C	4 / 4	1	120		○	:
Bass	Rock	4190	[Mg]BA_Hard Rock _C	4 / 4	1	120		○	:
Bass	Rock	4191	[Mg]EA_Hard Rock _C	4 / 4	3	120		○	:
Bass	Rock	4192	[Mg]EB_Hard Rock _C	4 / 4	6	120		○	:
Bass	Rock	4193	[Mg]MA_BluesRck _C	4 / 4	4	120		○	:
Bass	Rock	4194	[Mg]MB_BluesRck _C	4 / 4	4	120		○	:
Bass	Rock	4195	[Mg]MC_BluesRck _C	4 / 4	4	120		○	:
Bass	Rock	4196	[Mg]FA_BluesRck _C	4 / 4	1	120		○	:
Bass	Rock	4197	[Mg]FB_BluesRck _C	4 / 4	1	120		○	:
Bass	Rock	4198	[Mg]FC_BluesRck _C	4 / 4	1	120		○	:
Bass	Rock	4199	[Mg]BA_BluesRck _C	4 / 4	1	120		○	:
Bass	Rock	4200	[Mg]EA_BluesRck _C	4 / 4	3	120		○	:
Bass	Rock	4201	[Mg]EB_BluesRck _C	4 / 4	5	120		○	:
Bass	Rock	4202	[Mg]MA_RkShuffle _C	4 / 4	4	121		○	Mega Pick Open Mute
Bass	Rock	4203	[Mg]MB_RkShuffle _C	4 / 4	4	121		○	:
Bass	Rock	4204	[Mg]MC_RkShuffle _C	4 / 4	4	121		○	:
Bass	Rock	4205	[Mg]FA_RkShuffle _C	4 / 4	1	121		○	:
Bass	Rock	4206	[Mg]FB_RkShuffle _C	4 / 4	1	121		○	:
Bass	Rock	4207	[Mg]FC_RkShuffle _C	4 / 4	1	121		○	:
Bass	Rock	4208	[Mg]BA_RkShuffle _C	4 / 4	1	121		○	:
Bass	Rock	4209	[Mg]EA_RkShuffle _C	4 / 4	6	121		○	:
Bass	Rock	4210	[Mg]MA_Rock&Roll _C	4 / 4	4	172		○	:
Bass	Rock	4211	[Mg]MB_Rock&Roll _C	4 / 4	4	172		○	:
Bass	Rock	4212	[Mg]MC_Rock&Roll _C	4 / 4	4	172		○	:
Bass	Rock	4213	[Mg]FA_Rock&Roll _C	4 / 4	1	172		○	:
Bass	Rock	4214	[Mg]FB_Rock&Roll _C	4 / 4	1	172		○	:
Bass	Rock	4215	[Mg]FC_Rock&Roll _C	4 / 4	1	172		○	:
Bass	Rock	4216	[Mg]BA_Rock&Roll _C	4 / 4	1	172		○	:
Bass	Rock	4217	[Mg]EA_Rock&Roll _C	4 / 4	5	172		○	:
Bass	Rock	4218	[Mg]EB_Rock&Roll _C	4 / 4	6	172		○	:
Bass	Rock	4219	[Mg]MC_MapleCsBs _C	4 / 4	4	150		○	Mega Finger+Slap
Bass	Rock	4220	[Mg]MD_MapleCsBs _C	4 / 4	4	150		○	:
Bass	Rock	4221	[Mg]EA_MapleCsBs _C	4 / 4	7	150		○	:
Bass	Pop Rock	4222	[Mg]MA_8Beat Med _C	4 / 4	4	105		○	Mega Finger+Harmonic
Bass	Pop Rock	4223	[Mg]MB_8Beat Med _C	4 / 4	4	105		○	:
Bass	Pop Rock	4224	[Mg]MC_8Beat Med _C	4 / 4	4	105		○	:
Bass	Pop Rock	4225	[Mg]MD_8Beat Med _C	4 / 4	4	105		○	:
Bass	Pop Rock	4226	[Mg]FA_8Beat Med _C	4 / 4	1	105		○	:
Bass	Pop Rock	4227	[Mg]FB_8Beat Med _C	4 / 4	1	105		○	:
Bass	Pop Rock	4228	[Mg]FC_8Beat Med _C	4 / 4	1	105		○	:
Bass	Pop Rock	4229	[Mg]FD_8Beat Med _C	4 / 4	1	105		○	:
Bass	Pop Rock	4230	[Mg]EA_8Beat Med _C	4 / 4	4	105		○	:
Bass	Pop Rock	4231	[Mg]MA_8Bt Fast _C	4 / 4	4	140		○	Mega Pick Open Mute
Bass	Pop Rock	4232	[Mg]MB_8Bt Fast _C	4 / 4	4	140		○	:
Bass	Pop Rock	4233	[Mg]MC_8Bt Fast _C	4 / 4	4	140		○	:
Bass	Pop Rock	4234	[Mg]MD_8Bt Fast _C	4 / 4	4	140		○	:
Bass	Pop Rock	4235	[Mg]FA_8Bt Fast _C	4 / 4	1	140		○	:
Bass	Pop Rock	4236	[Mg]FB_8Bt Fast _C	4 / 4	1	140		○	:
Bass	Pop Rock	4237	[Mg]FC_8Bt Fast _C	4 / 4	1	140		○	:
Bass	Pop Rock	4238	[Mg]FD_8Bt Fast _C	4 / 4	1	140		○	:
Bass	Pop Rock	4239	[Mg]EA_8Bt Fast _C	4 / 4	5	140		○	:
Bass	Pop Rock	4240	[Mg]MA_16Bt Med _C	4 / 4	4	96		○	Mega Finger+Harmonic
Bass	Pop Rock	4241	[Mg]MB_16Bt Med _C	4 / 4	4	96		○	:
Bass	Pop Rock	4242	[Mg]MC_16Bt Med _C	4 / 4	4	96		○	:
Bass	Pop Rock	4243	[Mg]MD_16Bt Med _C	4 / 4	4	96		○	:
Bass	Pop Rock	4244	[Mg]FA_16Bt Med _C	4 / 4	1	96		○	:
Bass	Pop Rock	4245	[Mg]FB_16Bt Med _C	4 / 4	1	96		○	:
Bass	Pop Rock	4246	[Mg]FC_16Bt Med _C	4 / 4	1	96		○	:
Bass	Pop Rock	4247	[Mg]FD_16Bt Med _C	4 / 4	1	96		○	:
Bass	Pop Rock	4248	[Mg]EA_16Bt Med _C	4 / 4	4	96		○	:
Bass	Pop Rock	4249	[Mg]MA_GtPopMed _C	4 / 4	4	98		○	:
Bass	Pop Rock	4250	[Mg]MB_GtPopMed _C	4 / 4	4	98		○	:
Bass	Pop Rock	4251	[Mg]MC_GtPopMed _C	4 / 4	4	98		○	:
Bass	Pop Rock	4252	[Mg]MD_GtPopMed _C	4 / 4	4	98		○	:
Bass	Pop Rock	4253	[Mg]FA_GtPopMed _C	4 / 4	1	98		○	:
Bass	Pop Rock	4254	[Mg]FB_GtPopMed _C	4 / 4	1	98		○	:
Bass	Pop Rock	4255	[Mg]FC_GtPopMed _C	4 / 4	1	98		○	:
Bass	Pop Rock	4256	[Mg]FD_GtPopMed _C	4 / 4	1	98		○	:
Bass	Pop Rock	4257	[Mg]EA_GtPopMed _C	4 / 4	3	98		○	:
Bass	Pop Rock	4258	[Mg]MA_PopShft1 _C	4 / 4	4	180		○	:
Bass	Pop Rock	4259	[Mg]MB_PopShft1 _C	4 / 4	4	180		○	:
Bass	Pop Rock	4260	[Mg]MC_PopShft1 _C	4 / 4	4	180		○	:
Bass	Pop Rock	4261	[Mg]MD_PopShft1 _C	4 / 4	4	180		○	:
Bass	Pop Rock	4262	[Mg]FA_PopShft1 _C	4 / 4	1	180		○	:
Bass	Pop Rock	4263	[Mg]FB_PopShft1 _C	4 / 4	1	180		○	:
Bass	Pop Rock	4264	[Mg]FC_PopShft1 _C	4 / 4	1	180		○	:
Bass	Pop Rock	4265	[Mg]FD_PopShft1 _C	4 / 4	1	180		○	:
Bass	Pop Rock	4266	[Mg]EA_PopShft1 _C	4 / 4	5	180		○	:
Bass	Pop Rock	4267	[Mg]MA_SwMOR Pp _C	4 / 4	4	94		○	:
Bass	Pop Rock	4268	[Mg]MB_SwMOR Pp _C	4 / 4	4	94		○	:
Bass	Pop Rock	4269	[Mg]MC_SwMOR Pp _C	4 / 4	4	94		○	:
Bass	Pop Rock	4270	[Mg]MD_SwMOR Pp _C	4 / 4	4	94		○	:
Bass	Pop Rock	4271	[Mg]FA_SwMOR Pp _C	4 / 4	1	94		○	:
Bass	Pop Rock	4272	[Mg]FB_SwMOR Pp _C	4 / 4	1	94		○	:
Bass	Pop Rock	4273	[Mg]FC_SwMOR Pp _C	4 / 4	1	94		○	:
Bass	Pop Rock	4274	[Mg]FD_SwMOR Pp _C	4 / 4	1	94		○	:
Bass	Pop Rock	4275	[Mg]EA_SwMOR Pp _C	4 / 4	3	94		○	:
Bass	Pop Rock	4276	[Mg]MA_12/8 Pop _C	6 / 4	4	90		○	:
Bass	Pop Rock	4277	[Mg]MB_12/8 Pop _C	6 / 4	4	90		○	:
Bass	Pop Rock	4278	[Mg]MC_12/8 Pop _C	6 / 4	4	90		○	:
Bass	Pop Rock	4279	[Mg]MD_12/8 Pop _C	6 / 4	4	90		○	:
Bass	Pop Rock	4280	[Mg]FA_12/8 Pop _C	6 / 4	1	90		○	:
Bass	Pop Rock	4281	[Mg]FB_12/8 Pop _C	6 / 4	1	90		○	:
Bass	Pop Rock	4282	[Mg]FC_12/8 Pop _C	6 / 4	1	90		○	:
Bass	Pop Rock	4283	[Mg]FD_12/8 Pop _C	6 / 4	1	90		○	:
Bass	Pop Rock	4284	[Mg]EA_12/8 Pop _C	6 / 4	4	90		○	:
Bass	Pop Rock	4285	[Mg]MA_Cntry8Bt _C	4 / 4	4	82		○	:
Bass	Pop Rock	4286	[Mg]MB_Cntry8Bt _C	4 / 4	4	82		○	:
Bass	Pop Rock	4287	[Mg]MC_Cntry8Bt _C	4 / 4	4	82		○	:
Bass	Pop Rock	4288	[Mg]MD_Cntry8Bt _C	4 / 4	4	82		○	:
Bass	Pop Rock	4289	[Mg]FA_Cntry8Bt _C	4 / 4	1	82		○	:
Bass	Pop Rock	4290	[Mg]FB_Cntry8Bt _C	4 / 4	1	82		○	:
Bass	Pop Rock	4291	[Mg]FC_Cntry8Bt _C	4 / 4	1	82		○	:
Bass	Pop Rock	4292	[Mg]FD_Cntry8Bt _C	4 / 4	1	82		○	:
Bass	Pop Rock	4293	[Mg]EA_Cntry8Bt _C	4 / 4	3	82		○	:
Bass	Pop Rock	4294	[Mg]MA_CntrySwg _C	4 / 4	4	182		○	Mega Acoustic Bass
Bass	Pop Rock	4295	[Mg]MB_CntrySwg _C	4 / 4	4	182		○	:
Bass	Pop Rock	4296	[Mg]MC_CntrySwg _C	4 / 4	4	182		○	:
Bass	Pop Rock	4297	[Mg]MD_CntrySwg _C	4 / 4	4	182		○	:
Bass	Pop Rock	4298	[Mg]FA_CntrySwg _C	4 / 4	1	182		○	:
Bass	Pop Rock	4299	[Mg]FB_CntrySwg _C	4 / 4	1	182		○	:
Bass	Pop Rock	4300	[Mg]FC_CntrySwg _C	4 / 4	1	182		○	:
Bass	Pop Rock	4301	[Mg]FD_CntrySwg _C	4 / 4	1	182		○	:
Bass	Pop Rock	4302	[Mg]EA_CntrySwg _C	4 / 4	5	182		○	:
Bass	Pop Rock	4303	[Mg]MA_CntryWlz _C	3 / 4	4	144		○	Mega Pick Open Mute
Bass	Pop Rock	4304	[Mg]MB_CntryWlz _C	3 / 4	4	144		○	:
Bass	Pop Rock	4305	[Mg]MC_CntryWlz _C	3 / 4	4	144		○	:
Bass	Pop Rock	4306	[Mg]MD_CntryWlz _C	3 / 4	4	144		○	:
Bass	Pop Rock	4307	[Mg]FA_CntryWlz _C	3 / 4	1	144		○	:
Bass	Pop Rock	4308	[Mg]FB_CntryWlz _C	3 / 4	1	144		○	:
Bass	Pop Rock	4309	[Mg]FC_CntryWlz _C	3 / 4	1	144		○	:
Bass	Pop Rock	4310	[Mg]FD_CntryWlz _C	3 / 4	1	144		○	:
Bass	Pop Rock	4311	[Mg]EA_CntryWlz _C	3 / 4	5	144		○	:
Bass	Pop Rock	4312	[Mg]MA_Gtr Pop1 _C	4 / 4	4	100		○	Mega Finger+Slap
Bass	Pop Rock	4313	[Mg]MB_Gtr Pop1 _C	4 / 4	4	100		○	:
Bass	Pop Rock	4314	[Mg]MC_Gtr Pop1 _C	4 / 4	4	100		○	:
Bass	Pop Rock	4315	[Mg]FA_Gtr Pop1 _C	4 / 4	1	100		○	:
Bass	Pop Rock	4316	[Mg]FB_Gtr Pop1 _C	4 / 4	1	100		○	:
Bass	Pop Rock	4317	[Mg]FC_Gtr Pop1 _C	4 / 4	1	100		○	:
Bass	Pop Rock	4318	[Mg]BA_Gtr Pop1 _C	4 / 4	1	100		○	:
Bass	Pop Rock	4319	[Mg]EA_Gtr Pop1 _C	4 / 4	3	100		○	:
Bass	Pop Rock	4320	[Mg]EB_Gtr Pop1 _C	4 / 4	3	100		○	:
Bass	Pop Rock	4321	[Mg]MA_AcoustPp _C	4 / 4	4	110		○	:
Bass	Pop Rock	4322	[Mg]MB_AcoustPp _C	4 / 4	4	110		○	:
Bass	Pop Rock	4323	[Mg]MC_AcoustPp _C	4 / 4	4	110		○	:
Bass	Pop Rock	4324	[Mg]FA_AcoustPp _C	4 / 4	1	110		○	:
Bass	Pop Rock	4325	[Mg]FB_AcoustPp _C	4 / 4	1	110		○	:
Bass	Pop Rock	4326	[Mg]FC_AcoustPp _C	4 / 4	1	110		○	:
Bass	Pop Rock	4327	[Mg]MA_WorshpSlw _C	4 / 4	4	75		○	:
Bass	Pop Rock	4328	[Mg]MB_WorshpSlw _C	4 / 4	4	75		○	:
Bass	Pop Rock	4329	[Mg]MC_WorshpSlw _C	4 / 4	4	75		○	:
Bass	Pop Rock	4330	[Mg]FA_WorshpSlw _C	4 / 4	1	75		○	:
Bass	Pop Rock	4331	[Mg]FB_WorshpSlw _C	4 / 4	1	75		○	:
Bass	Pop Rock	4332	[Mg]FC_WorshpSlw _C	4 / 4	1	75		○	:
Bass	Pop Rock	4333	[Mg]BA_WorshpSlw _C	4 / 4	1	75		○	:
Bass	Pop Rock	4334	[Mg]EA_WorshpSlw _C	4 / 4	4	75		○	:
Bass	Pop Rock	4335	[Mg]EB_WorshpSlw _C	4 / 4	4	75		○	:
Bass	Pop Rock	4336	[Mg]MA_WorshpMed _C	4 / 4	8	140		○	Mega Acoustic Bass
Bass	Pop Rock	4337	[Mg]MB_WorshpMed _C	4 / 4	4	140		○	:
Bass	Pop Rock	4338	[Mg]MC_WorshpMed _C	4 / 4	4	140		○	:
Bass	Pop Rock	4339	[Mg]FA_WorshpMed _C	4 / 4	1	140		○	:
Bass	Pop Rock	4340	[Mg]FB_WorshpMed _C	4 / 4	1	140		○	:
Bass	Pop Rock	4341	[Mg]FC_WorshpMed _C	4 / 4	1	140		○	:
Bass	Pop Rock	4342	[Mg]BA_WorshpMed _C	4 / 4	1	140		○	:
Bass	Pop Rock	4343	[Mg]EA_WorshpMed _C	4 / 4	4	140		○	:
Bass	Pop Rock	4344	[Mg]EB_WorshpMed _C	4 / 4	4	140		○	:
Bass	Pop Rock	4345	[Mg]MA_WorshpFst _C	4 / 4	8	114		○	Mega Finger+Slap
Bass	Pop Rock	4346	[Mg]MB_WorshpFst _C	4 / 4	4	114		○	:
Bass	Pop Rock	4347	[Mg]MC_WorshpFst _C	4 / 4	4	114		○	:
Bass	Pop Rock	4348	[Mg]FA_WorshpFst _C	4 / 4	1	114		○	:
Bass	Pop Rock	4349	[Mg]FB_WorshpFst _C	4 / 4	1	114		○	:
Bass	Pop Rock	4350	[Mg]FC_WorshpFst _C	4 / 4	1	114		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Pop Rock	4351	[Mg]BA_WorshpFst _C	4 / 4	1	114		○	:
Bass	Pop Rock	4352	[Mg]EA_WorshpFst _C	4 / 4	4	114		○	:
Bass	Pop Rock	4353	[Mg]EB_WorshpFst _C	4 / 4	2	114		○	:
Bass	Pop Rock	4354	[Mg]MA_New Cntry _C	4 / 4	2	118		○	:
Bass	Pop Rock	4355	[Mg]MB_New Cntry _C	4 / 4	4	118		○	:
Bass	Pop Rock	4356	[Mg]MC_New Cntry _C	4 / 4	2	118		○	:
Bass	Pop Rock	4357	[Mg]FA_New Cntry _C	4 / 4	1	118		○	:
Bass	Pop Rock	4358	[Mg]FB_New Cntry _C	4 / 4	1	118		○	:
Bass	Pop Rock	4359	[Mg]FC_New Cntry _C	4 / 4	1	118		○	:
Bass	Pop Rock	4360	[Mg]BA_New Cntry _C	4 / 4	1	118		○	:
Bass	Pop Rock	4361	[Mg]EA_New Cntry _C	4 / 4	4	118		○	:
Bass	Pop Rock	4362	[Mg]EB_New Cntry _C	4 / 4	4	118		○	:
Bass	Pop Rock	4363	[Mg]MA_VintgGtPp _C	4 / 4	4	148		○	:
Bass	Pop Rock	4364	[Mg]MB_VintgGtPp _C	4 / 4	4	148		○	:
Bass	Pop Rock	4365	[Mg]MC_VintgGtPp _C	4 / 4	4	148		○	:
Bass	Pop Rock	4366	[Mg]FA_VintgGtPp _C	4 / 4	1	148		○	:
Bass	Pop Rock	4367	[Mg]FB_VintgGtPp _C	4 / 4	1	148		○	:
Bass	Pop Rock	4368	[Mg]FC_VintgGtPp _C	4 / 4	1	148		○	:
Bass	Pop Rock	4369	[Mg]BA_VintgGtPp _C	4 / 4	1	148		○	:
Bass	Pop Rock	4370	[Mg]EA_VintgGtPp _C	4 / 4	4	148		○	:
Bass	Pop Rock	4371	[Mg]EB_VintgGtPp _C	4 / 4	4	148		○	:
Bass	Pop Rock	4372	[Mg]MA_WestCstPp _C	4 / 4	4	100		○	:
Bass	Pop Rock	4373	[Mg]MB_WestCstPp _C	4 / 4	4	100		○	:
Bass	Pop Rock	4374	[Mg]MC_WestCstPp _C	4 / 4	4	100		○	:
Bass	Pop Rock	4375	[Mg]FA_WestCstPp _C	4 / 4	1	100		○	:
Bass	Pop Rock	4376	[Mg]FB_WestCstPp _C	4 / 4	1	100		○	:
Bass	Pop Rock	4377	[Mg]FC_WestCstPp _C	4 / 4	1	100		○	:
Bass	Pop Rock	4378	[Mg]BA_WestCstPp _C	4 / 4	1	100		○	:
Bass	Pop Rock	4379	[Mg]EA_WestCstPp _C	4 / 4	4	100		○	:
Bass	Pop Rock	4380	[Mg]EB_WestCstPp _C	4 / 4	4	100		○	:
Bass	Pop Rock	4381	[Mg]MA_Brit Pop _C	4 / 4	2	86		○	:
Bass	Pop Rock	4382	[Mg]MB_Brit Pop _C	4 / 4	2	86		○	:
Bass	Pop Rock	4383	[Mg]MC_Brit Pop _C	4 / 4	2	86		○	:
Bass	Pop Rock	4384	[Mg]FA_Brit Pop _C	4 / 4	1	86		○	:
Bass	Pop Rock	4385	[Mg]FB_Brit Pop _C	4 / 4	1	86		○	:
Bass	Pop Rock	4386	[Mg]FC_Brit Pop _C	4 / 4	1	86		○	:
Bass	Pop Rock	4387	[Mg]BA_Brit Pop _C	4 / 4	1	86		○	:
Bass	Pop Rock	4388	[Mg]EA_Brit Pop _C	4 / 4	4	86		○	:
Bass	Pop Rock	4389	[Mg]EB_Brit Pop _C	4 / 4	4	86		○	:
Bass	Pop Rock	4390	[Mg]MA_BritPpSwg _C	4 / 4	2	110		○	:
Bass	Pop Rock	4391	[Mg]MB_BritPpSwg _C	4 / 4	2	110		○	:
Bass	Pop Rock	4392	[Mg]MC_BritPpSwg _C	4 / 4	2	110		○	:
Bass	Pop Rock	4393	[Mg]FA_BritPpSwg _C	4 / 4	1	110		○	:
Bass	Pop Rock	4394	[Mg]FB_BritPpSwg _C	4 / 4	1	110		○	:
Bass	Pop Rock	4395	[Mg]FC_BritPpSwg _C	4 / 4	1	110		○	:
Bass	Pop Rock	4396	[Mg]BA_BritPpSwg _C	4 / 4	1	110		○	:
Bass	Pop Rock	4397	[Mg]EA_BritPpSwg _C	4 / 4	4	110		○	:
Bass	Pop Rock	4398	[Mg]EB_BritPpSwg _C	4 / 4	4	110		○	:
Bass	Pop Rock	4399	[Mg]MA_Cool 8Bt _C	4 / 4	2	100		○	:
Bass	Pop Rock	4400	[Mg]MB_Cool 8Bt _C	4 / 4	2	100		○	:
Bass	Pop Rock	4401	[Mg]MC_Cool 8Bt _C	4 / 4	2	100		○	:
Bass	Pop Rock	4402	[Mg]FA_Cool 8Bt _C	4 / 4	1	100		○	:
Bass	Pop Rock	4403	[Mg]FB_Cool 8Bt _C	4 / 4	1	100		○	:
Bass	Pop Rock	4404	[Mg]FC_Cool 8Bt _C	4 / 4	1	100		○	:
Bass	Pop Rock	4405	[Mg]BA_Cool 8Bt _C	4 / 4	1	100		○	:
Bass	Pop Rock	4406	[Mg]EA_Cool 8Bt _C	4 / 4	4	100		○	:
Bass	Pop Rock	4407	[Mg]EB_Cool 8Bt _C	4 / 4	4	100		○	:
Bass	Pop Rock	4408	[Mg]MA_BritRkPop _C	4 / 4	4	123		○	:
Bass	Pop Rock	4409	[Mg]MB_BritRkPop _C	4 / 4	4	123		○	:
Bass	Pop Rock	4410	[Mg]MC_BritRkPop _C	4 / 4	4	123		○	:
Bass	Pop Rock	4411	[Mg]FA_BritRkPop _C	4 / 4	1	123		○	:
Bass	Pop Rock	4412	[Mg]FB_BritRkPop _C	4 / 4	1	123		○	:
Bass	Pop Rock	4413	[Mg]FC_BritRkPop _C	4 / 4	1	123		○	:
Bass	Pop Rock	4414	[Mg]BA_BritRkPop _C	4 / 4	1	123		○	:
Bass	Pop Rock	4415	[Mg]EA_BritRkPop _C	4 / 4	6	123		○	:
Bass	Pop Rock	4416	[Mg]MA_80sPopRk _C	4 / 4	4	111		○	Mega Pick Open Mute
Bass	Pop Rock	4417	[Mg]MB_80sPopRk _C	4 / 4	4	111		○	:
Bass	Pop Rock	4418	[Mg]MC_80sPopRk _C	4 / 4	4	111		○	:
Bass	Pop Rock	4419	[Mg]FA_80sPopRk _C	4 / 4	1	111		○	:
Bass	Pop Rock	4420	[Mg]FB_80sPopRk _C	4 / 4	1	111		○	:
Bass	Pop Rock	4421	[Mg]FC_80sPopRk _C	4 / 4	1	111		○	:
Bass	Pop Rock	4422	[Mg]BA_80sPopRk _C	4 / 4	1	111		○	:
Bass	Pop Rock	4423	[Mg]EA_80sPopRk _C	4 / 4	7	111		○	:
Bass	Pop Rock	4424	[Mg]MA_80SynthRk _C	4 / 4	4	96		○	Mega Finger+Harmonic
Bass	Pop Rock	4425	[Mg]MB_80SynthRk _C	4 / 4	4	96		○	:
Bass	Pop Rock	4426	[Mg]MC_80SynthRk _C	4 / 4	8	96		○	:
Bass	Pop Rock	4427	[Mg]FA_80SynthRk _C	4 / 4	1	96		○	:
Bass	Pop Rock	4428	[Mg]FB_80SynthRk _C	4 / 4	1	96		○	:
Bass	Pop Rock	4429	[Mg]FC_80SynthRk _C	4 / 4	1	96		○	:
Bass	Pop Rock	4430	[Mg]BA_80SynthRk _C	4 / 4	1	96		○	:
Bass	Pop Rock	4431	[Mg]EA_80SynthRk _C	4 / 4	3	96		○	:
Bass	Pop Rock	4432	[Mg]MA_60VintgPp _C	4 / 4	4	132		○	Mega Acoustic Bass
Bass	Pop Rock	4433	[Mg]MB_60VintgPp _C	4 / 4	4	132		○	:
Bass	Pop Rock	4434	[Mg]MC_60VintgPp _C	4 / 4	4	132		○	:
Bass	Pop Rock	4435	[Mg]FA_60VintgPp _C	4 / 4	1	132		○	:
Bass	Pop Rock	4436	[Mg]FB_60VintgPp _C	4 / 4	1	132		○	:
Bass	Pop Rock	4437	[Mg]FC_60VintgPp _C	4 / 4	1	132		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Pop Rock	4438	[Mg]BA_60VintgPp _C	4 / 4	1	132		○	:
Bass	Pop Rock	4439	[Mg]EA_60VintgPp _C	4 / 4	2	132		○	:
Bass	Pop Rock	4440	[Mg]MA_60ChartSw _C	4 / 4	4	123		○	Mega Finger+Harmonic
Bass	Pop Rock	4441	[Mg]MB_60ChartSw _C	4 / 4	4	123		○	:
Bass	Pop Rock	4442	[Mg]MC_60ChartSw _C	4 / 4	4	123		○	:
Bass	Pop Rock	4443	[Mg]FA_60ChartSw _C	4 / 4	1	123		○	:
Bass	Pop Rock	4444	[Mg]FB_60ChartSw _C	4 / 4	1	123		○	:
Bass	Pop Rock	4445	[Mg]FC_60ChartSw _C	4 / 4	1	123		○	:
Bass	Pop Rock	4446	[Mg]BA_60ChartSw _C	4 / 4	1	123		○	:
Bass	Pop Rock	4447	[Mg]EA_60ChartSw _C	4 / 4	4	123		○	:
Bass	Pop Rock	4448	[Mg]MA_16Bt Pop1 _C	4 / 4	4	103		○	Mega Slap Bass
Bass	Pop Rock	4449	[Mg]MB_16Bt Pop1 _C	4 / 4	4	103		○	:
Bass	Pop Rock	4450	[Mg]MC_16Bt Pop1 _C	4 / 4	4	103		○	:
Bass	Pop Rock	4451	[Mg]FA_16Bt Pop1 _C	4 / 4	1	103		○	:
Bass	Pop Rock	4452	[Mg]FB_16Bt Pop1 _C	4 / 4	1	103		○	:
Bass	Pop Rock	4453	[Mg]FC_16Bt Pop1 _C	4 / 4	1	103		○	:
Bass	Pop Rock	4454	[Mg]BA_16Bt Pop1 _C	4 / 4	1	103		○	:
Bass	Pop Rock	4455	[Mg]MA_16Bt Pop1 _N	4 / 4	4	103		○	:
Bass	Pop Rock	4456	[Mg]MB_16Bt Pop1 _N	4 / 4	4	103		○	:
Bass	Pop Rock	4457	[Mg]MC_16Bt Pop1 _N	4 / 4	4	103		○	:
Bass	Pop Rock	4458	[Mg]FA_16Bt Pop1 _N	4 / 4	1	103		○	:
Bass	Pop Rock	4459	[Mg]FB_16Bt Pop1 _N	4 / 4	1	103		○	:
Bass	Pop Rock	4460	[Mg]FC_16Bt Pop1 _N	4 / 4	1	103		○	:
Bass	Pop Rock	4461	[Mg]BA_16Beat Pop 1	4 / 4	1	103		○	:
Bass	Ballad	4462	[Mg]MA_8Bt Bld1 _C	4 / 4	4	103		○	Mega Finger+Harmonic
Bass	Ballad	4463	[Mg]MB_8Bt Bld1 _C	4 / 4	4	103		○	:
Bass	Ballad	4464	[Mg]MC_8Bt Bld1 _C	4 / 4	4	103		○	:
Bass	Ballad	4465	[Mg]MD_8Bt Bld1 _C	4 / 4	4	103		○	:
Bass	Ballad	4466	[Mg]FA_8Bt Bld1 _C	4 / 4	1	103		○	:
Bass	Ballad	4467	[Mg]FB_8Bt Bld1 _C	4 / 4	1	103		○	:
Bass	Ballad	4468	[Mg]FC_8Bt Bld1 _C	4 / 4	1	103		○	:
Bass	Ballad	4469	[Mg]FD_8Bt Bld1 _C	4 / 4	1	103		○	:
Bass	Ballad	4470	[Mg]EA_8Bt Bld1 _C	4 / 4	4	103		○	:
Bass	Ballad	4471	[Mg]MA_16Bt Bld1 _C	4 / 4	4	59		○	:
Bass	Ballad	4472	[Mg]MB_16Bt Bld1 _C	4 / 4	4	59		○	:
Bass	Ballad	4473	[Mg]MC_16Bt Bld1 _C	4 / 4	4	59		○	:
Bass	Ballad	4474	[Mg]MD_16Bt Bld1 _C	4 / 4	4	59		○	:
Bass	Ballad	4475	[Mg]FA_16Bt Bld1 _C	4 / 4	1	59		○	:
Bass	Ballad	4476	[Mg]FB_16Bt Bld1 _C	4 / 4	1	59		○	:
Bass	Ballad	4477	[Mg]FC_16Bt Bld1 _C	4 / 4	1	59		○	:
Bass	Ballad	4478	[Mg]FD_16Bt Bld1 _C	4 / 4	1	59		○	:
Bass	Ballad	4479	[Mg]EA_16Bt Bld1 _C	4 / 4	3	59		○	:
Bass	Ballad	4480	[Mg]MA_12/8 Bld _C	4 / 4	4	60		○	:
Bass	Ballad	4481	[Mg]MB_12/8 Bld _C	4 / 4	4	60		○	:
Bass	Ballad	4482	[Mg]MC_12/8 Bld _C	4 / 4	4	60		○	:
Bass	Ballad	4483	[Mg]MD_12/8 Bld _C	4 / 4	4	60		○	:
Bass	Ballad	4484	[Mg]FA_12/8 Bld _C	4 / 4	1	60		○	:
Bass	Ballad	4485	[Mg]FB_12/8 Bld _C	4 / 4	1	60		○	:
Bass	Ballad	4486	[Mg]FC_12/8 Bld _C	4 / 4	1	60		○	:
Bass	Ballad	4487	[Mg]FD_12/8 Bld _C	4 / 4	1	60		○	:
Bass	Ballad	4488	[Mg]EA_12/8 Bld _C	4 / 4	3	60		○	:
Bass	Ballad	4489	[Mg]MA_CntryBld _C	4 / 4	4	75		○	Mega Acoustic Bass
Bass	Ballad	4490	[Mg]MB_CntryBld _C	4 / 4	4	75		○	:
Bass	Ballad	4491	[Mg]MC_CntryBld _C	4 / 4	4	75		○	:
Bass	Ballad	4492	[Mg]MD_CntryBld _C	4 / 4	4	75		○	:
Bass	Ballad	4493	[Mg]FA_CntryBld _C	4 / 4	1	75		○	:
Bass	Ballad	4494	[Mg]FB_CntryBld _C	4 / 4	1	75		○	:
Bass	Ballad	4495	[Mg]FC_CntryBld _C	4 / 4	1	75		○	:
Bass	Ballad	4496	[Mg]FD_CntryBld _C	4 / 4	1	75		○	:
Bass	Ballad	4497	[Mg]EA_CntryBld _C	4 / 4	3	75		○	:
Bass	Ballad	4498	[Mg]MA_AnthRkBd _C	4 / 4	4	72		○	Mega Finger+Harmonic
Bass	Ballad	4499	[Mg]MB_AnthRkBd _C	4 / 4	4	72		○	:
Bass	Ballad	4500	[Mg]MC_AnthRkBd _C	4 / 4	4	72		○	:
Bass	Ballad	4501	[Mg]MD_AnthRkBd _C	4 / 4	4	72		○	:
Bass	Ballad	4502	[Mg]FA_AnthRkBd _C	4 / 4	1	72		○	:
Bass	Ballad	4503	[Mg]FB_AnthRkBd _C	4 / 4	1	72		○	:
Bass	Ballad	4504	[Mg]FC_AnthRkBd _C	4 / 4	1	72		○	:
Bass	Ballad	4505	[Mg]FD_AnthRkBd _C	4 / 4	1	72		○	:
Bass	Ballad	4506	[Mg]EA_AnthRkBd _C	4 / 4	3	72		○	:
Bass	Ballad	4507	[Mg]MA_EclectBld _C	4 / 4	4	84		○	Mega Acoustic Bass
Bass	Ballad	4508	[Mg]MB_EclectBld _C	4 / 4	4	84		○	:
Bass	Ballad	4509	[Mg]MC_EclectBld _C	4 / 4	4	84		○	:
Bass	Ballad	4510	[Mg]MD_EclectBld _C	4 / 4	4	84		○	:
Bass	Ballad	4511	[Mg]FA_EclectBld _C	4 / 4	1	84		○	:
Bass	Ballad	4512	[Mg]FB_EclectBld _C	4 / 4	1	84		○	:
Bass	Ballad	4513	[Mg]FC_EclectBld _C	4 / 4	1	84		○	:
Bass	Ballad	4514	[Mg]FD_EclectBld _C	4 / 4	1	84		○	:
Bass	Ballad	4515	[Mg]EA_EclectBld _C	4 / 4	4	84		○	:
Bass	Ballad	4516	[Mg]MA_GtBallad _C	4 / 4	8	94		○	Mega Finger+Slap
Bass	Ballad	4517	[Mg]MB_GtBallad _C	4 / 4	8	94		○	:
Bass	Ballad	4518	[Mg]MC_GtBallad _C	4 / 4	8	94		○	:
Bass	Ballad	4519	[Mg]FA_GtBallad _C	4 / 4	1	94		○	:
Bass	Ballad	4520	[Mg]FB_GtBallad _C	4 / 4	1	94		○	:
Bass	Ballad	4521	[Mg]FC_GtBallad _C	4 / 4	1	94		○	:
Bass	Ballad	4522	[Mg]BA_GtBallad _C	4 / 4	1	94		○	:
Bass	Ballad	4523	[Mg]EA_GtBallad _C	4 / 4	4	94		○	:
Bass	Ballad	4524	[Mg]EB_GtBallad _C	4 / 4	4	94		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Ballad	4525	[Mg]MA_Unpluggd1 _C	4 / 4	4	120		O	Mega Acoustic Bass
Bass	Ballad	4526	[Mg]MB_Unpluggd1 _C	4 / 4	4	120		O	:
Bass	Ballad	4527	[Mg]MC_Unpluggd1 _C	4 / 4	4	120		O	:
Bass	Ballad	4528	[Mg]FA_Unpluggd1 _C	4 / 4	1	120		O	:
Bass	Ballad	4529	[Mg]FB_Unpluggd1 _C	4 / 4	1	120		O	:
Bass	Ballad	4530	[Mg]FC_Unpluggd1 _C	4 / 4	1	120		O	:
Bass	Ballad	4531	[Mg]BA_Unpluggd1 _C	4 / 4	1	120		O	:
Bass	Ballad	4532	[Mg]MA_Unpluggd2 _C	4 / 4	8	120		O	Mega Finger+Slap
Bass	Ballad	4533	[Mg]MB_Unpluggd2 _C	4 / 4	8	120		O	:
Bass	Ballad	4534	[Mg]MC_Unpluggd2 _C	4 / 4	8	120		O	:
Bass	Ballad	4535	[Mg]FA_Unpluggd2 _C	4 / 4	1	120		O	:
Bass	Ballad	4536	[Mg]FB_Unpluggd2 _C	4 / 4	1	120		O	:
Bass	Ballad	4537	[Mg]FC_Unpluggd2 _C	4 / 4	1	120		O	:
Bass	Ballad	4538	[Mg]BA_Unpluggd2 _C	4 / 4	1	120		O	:
Bass	Ballad	4539	[Mg]EA_Unpluggd2 _C	4 / 4	5	120		O	:
Bass	Ballad	4540	[Mg]EB_Unpluggd2 _C	4 / 4	4	120		O	:
Bass	Ballad	4541	[Mg]MA_8Bt Bld2 _C	4 / 4	4	101		O	:
Bass	Ballad	4542	[Mg]MB_8Bt Bld2 _C	4 / 4	4	101		O	:
Bass	Ballad	4543	[Mg]MC_8Bt Bld2 _C	4 / 4	4	101		O	:
Bass	Ballad	4544	[Mg]FA_8Bt Bld2 _C	4 / 4	1	101		O	:
Bass	Ballad	4545	[Mg]FB_8Bt Bld2 _C	4 / 4	1	101		O	:
Bass	Ballad	4546	[Mg]FC_8Bt Bld2 _C	4 / 4	1	101		O	:
Bass	Ballad	4547	[Mg]BA_8Bt Bld2 _C	4 / 4	1	101		O	:
Bass	Ballad	4548	[Mg]EA_8Bt Bld2 _C	4 / 4	5	101		O	:
Bass	Ballad	4549	[Mg]EB_8Bt Bld2 _C	4 / 4	5	101		O	:
Bass	Ballad	4550	[Mg]MA_EP Ballad _C	4 / 4	2	60		O	:
Bass	Ballad	4551	[Mg]MB_EP Ballad _C	4 / 4	2	60		O	:
Bass	Ballad	4552	[Mg]MC_EP Ballad _C	4 / 4	2	60		O	:
Bass	Ballad	4553	[Mg]FA_EP Ballad _C	4 / 4	1	60		O	:
Bass	Ballad	4554	[Mg]FB_EP Ballad _C	4 / 4	1	60		O	:
Bass	Ballad	4555	[Mg]FC_EP Ballad _C	4 / 4	1	60		O	:
Bass	Ballad	4556	[Mg]BA_EP Ballad _C	4 / 4	1	60		O	:
Bass	Ballad	4557	[Mg]EA_EP Ballad _C	4 / 4	4	60		O	:
Bass	Ballad	4558	[Mg]EB_EP Ballad _C	4 / 4	4	60		O	:
Bass	Ballad	4559	[Mg]EA_NuJazzyBs _C	4 / 4	4	61		O	:
Bass	Modern R&B	4560	[Mg]MA_NeoUKSoul _C	4 / 4	4	79		O	Mega Finger+Harmonic
Bass	Modern R&B	4561	[Mg]MB_NeoUKSoul _C	4 / 4	4	79		O	:
Bass	Modern R&B	4562	[Mg]MC_NeoUKSoul _C	4 / 4	4	79		O	:
Bass	Modern R&B	4563	[Mg]MD_NeoUKSoul _C	4 / 4	4	79		O	:
Bass	Modern R&B	4564	[Mg]FA_NeoUKSoul _C	4 / 4	1	79		O	:
Bass	Modern R&B	4565	[Mg]FB_NeoUKSoul _C	4 / 4	1	79		O	:
Bass	Modern R&B	4566	[Mg]FC_NeoUKSoul _C	4 / 4	1	79		O	:
Bass	Modern R&B	4567	[Mg]FD_NeoUKSoul _C	4 / 4	1	79		O	:
Bass	Modern R&B	4568	[Mg]EA_NeoUKSoul _C	4 / 4	3	79		O	:
Bass	Modern R&B	4569	[Mg]MA_Slow&Easy _C	4 / 4	4	72		O	Mega Finger+Slap
Bass	Modern R&B	4570	[Mg]MB_Slow&Easy _C	4 / 4	4	72		O	:
Bass	Modern R&B	4571	[Mg]MC_Slow&Easy _C	4 / 4	4	72		O	:
Bass	Modern R&B	4572	[Mg]FA_Slow&Easy _C	4 / 4	1	72		O	:
Bass	Modern R&B	4573	[Mg]FB_Slow&Easy _C	4 / 4	1	72		O	:
Bass	Modern R&B	4574	[Mg]FC_Slow&Easy _C	4 / 4	1	72		O	:
Bass	Modern R&B	4575	[Mg]BA_Slow&Easy _C	4 / 4	1	72		O	:
Bass	Modern R&B	4576	[Mg]EA_Slow&Easy _C	4 / 4	3	72		O	:
Bass	Modern R&B	4577	[Mg]EB_Slow&Easy _C	4 / 4	4	72		O	:
Bass	Classic R&B	4578	[Mg]MA_StndrdDsc _C	4 / 4	4	120		O	:
Bass	Classic R&B	4579	[Mg]MB_StndrdDsc _C	4 / 4	4	120		O	:
Bass	Classic R&B	4580	[Mg]MC_StndrdDsc _C	4 / 4	4	120		O	:
Bass	Classic R&B	4581	[Mg]FA_StndrdDsc _C	4 / 4	1	120		O	:
Bass	Classic R&B	4582	[Mg]FB_StndrdDsc _C	4 / 4	1	120		O	:
Bass	Classic R&B	4583	[Mg]FC_StndrdDsc _C	4 / 4	1	120		O	:
Bass	Classic R&B	4584	[Mg]BA_StndrdDsc _C	4 / 4	1	120		O	:
Bass	Classic R&B	4585	[Mg]EA_StndrdDsc _C	4 / 4	3	120		O	:
Bass	Classic R&B	4586	[Mg]EB_StndrdDsc _C	4 / 4	3	120		O	:
Bass	Classic R&B	4587	[Mg]MA_Retro Dsc _C	4 / 4	4	108		O	:
Bass	Classic R&B	4588	[Mg]MB_Retro Dsc _C	4 / 4	4	108		O	:
Bass	Classic R&B	4589	[Mg]MC_Retro Dsc _C	4 / 4	4	108		O	:
Bass	Classic R&B	4590	[Mg]FA_Retro Dsc _C	4 / 4	1	108		O	:
Bass	Classic R&B	4591	[Mg]FB_Retro Dsc _C	4 / 4	1	108		O	:
Bass	Classic R&B	4592	[Mg]FC_Retro Dsc _C	4 / 4	1	108		O	:
Bass	Classic R&B	4593	[Mg]BA_Retro Dsc _C	4 / 4	1	108		O	:
Bass	Classic R&B	4594	[Mg]EA_Retro Dsc _C	4 / 4	4	108		O	:
Bass	Classic R&B	4595	[Mg]EB_Retro Dsc _C	4 / 4	4	108		O	:
Bass	Classic R&B	4596	[Mg]MA_70CoolDsc _C	4 / 4	4	114		O	:
Bass	Classic R&B	4597	[Mg]MB_70CoolDsc _C	4 / 4	4	114		O	:
Bass	Classic R&B	4598	[Mg]MC_70CoolDsc _C	4 / 4	4	114		O	:
Bass	Classic R&B	4599	[Mg]FA_70CoolDsc _C	4 / 4	1	114		O	:
Bass	Classic R&B	4600	[Mg]FB_70CoolDsc _C	4 / 4	1	114		O	:
Bass	Classic R&B	4601	[Mg]FC_70CoolDsc _C	4 / 4	1	114		O	:
Bass	Classic R&B	4602	[Mg]BA_70CoolDsc _C	4 / 4	1	114		O	:
Bass	Classic R&B	4603	[Mg]EA_70CoolDsc _C	4 / 4	4	114		O	:
Bass	Classic R&B	4604	[Mg]EB_70CoolDsc _C	4 / 4	3	114		O	:
Bass	Classic R&B	4605	[Mg]MA_Philly _C	4 / 4	2	100		O	:
Bass	Classic R&B	4606	[Mg]MB_Philly _C	4 / 4	2	100		O	:
Bass	Classic R&B	4607	[Mg]MC_Philly _C	4 / 4	2	100		O	:
Bass	Classic R&B	4608	[Mg]FA_Philly _C	4 / 4	1	100		O	:
Bass	Classic R&B	4609	[Mg]FB_Philly _C	4 / 4	1	100		O	:
Bass	Classic R&B	4610	[Mg]FC_Philly _C	4 / 4	1	100		O	:
Bass	Classic R&B	4611	[Mg]BA_Philly _C	4 / 4	1	100		O	:
Bass	Classic R&B	4612	[Mg]EA_Philly _C	4 / 4	4	100		O	:
Bass	Classic R&B	4613	[Mg]EB_Philly _C	4 / 4	3	100		O	:
Bass	Classic R&B	4614	[Mg]MA_Soul 1 _C	4 / 4	2	116		O	:
Bass	Classic R&B	4615	[Mg]MB_Soul 1 _C	4 / 4	2	116		O	:
Bass	Classic R&B	4616	[Mg]MC_Soul 1 _C	4 / 4	2	116		O	:
Bass	Classic R&B	4617	[Mg]FA_Soul 1 _C	4 / 4	1	116		O	:
Bass	Classic R&B	4618	[Mg]FB_Soul 1 _C	4 / 4	1	116		O	:
Bass	Classic R&B	4619	[Mg]FC_Soul 1 _C	4 / 4	1	116		O	:
Bass	Classic R&B	4620	[Mg]BA_Soul 1 _C	4 / 4	1	116		O	:
Bass	Classic R&B	4621	[Mg]EA_Soul 1 _C	4 / 4	4	116		O	:
Bass	Classic R&B	4622	[Mg]EB_Soul 1 _C	4 / 4	3	116		O	:
Bass	Classic R&B	4623	[Mg]MA_70ChrSoul _C	4 / 4	2	108		O	:
Bass	Classic R&B	4624	[Mg]MB_70ChrSoul _C	4 / 4	2	108		O	:
Bass	Classic R&B	4625	[Mg]MC_70ChrSoul _C	4 / 4	2	108		O	:
Bass	Classic R&B	4626	[Mg]FA_70ChrSoul _C	4 / 4	1	108		O	:
Bass	Classic R&B	4627	[Mg]FB_70ChrSoul _C	4 / 4	1	108		O	:
Bass	Classic R&B	4628	[Mg]FC_70ChrSoul _C	4 / 4	1	108		O	:
Bass	Classic R&B	4629	[Mg]BA_70ChrSoul _C	4 / 4	1	108		O	:
Bass	Classic R&B	4630	[Mg]EA_70ChrSoul _C	4 / 4	5	108		O	:
Bass	Classic R&B	4631	[Mg]EB_70ChrSoul _C	4 / 4	3	108		O	:
Bass	Classic R&B	4632	[Mg]MA_FrankSoul _C	4 / 4	4	120		O	:
Bass	Classic R&B	4633	[Mg]MB_FrankSoul _C	4 / 4	4	120		O	:
Bass	Classic R&B	4634	[Mg]MC_FrankSoul _C	4 / 4	4	120		O	:
Bass	Classic R&B	4635	[Mg]FA_FrankSoul _C	4 / 4	1	120		O	:
Bass	Classic R&B	4636	[Mg]FB_FrankSoul _C	4 / 4	1	120		O	:
Bass	Classic R&B	4637	[Mg]FC_FrankSoul _C	4 / 4	1	120		O	:
Bass	Classic R&B	4638	[Mg]BA_FrankSoul _C	4 / 4	1	120		O	:
Bass	Classic R&B	4639	[Mg]EA_FrankSoul _C	4 / 4	3	120		O	:
Bass	Classic R&B	4640	[Mg]EB_FrankSoul _C	4 / 4	4	120		O	:
Bass	Classic R&B	4641	[Mg]MA_Soul Band _C	4 / 4	4	129		O	:
Bass	Classic R&B	4642	[Mg]MB_Soul Band _C	4 / 4	4	129		O	:
Bass	Classic R&B	4643	[Mg]MC_Soul Band _C	4 / 4	4	129		O	:
Bass	Classic R&B	4644	[Mg]FA_Soul Band _C	4 / 4	1	129		O	:
Bass	Classic R&B	4645	[Mg]FB_Soul Band _C	4 / 4	1	129		O	:
Bass	Classic R&B	4646	[Mg]FC_Soul Band _C	4 / 4	1	129		O	:
Bass	Classic R&B	4647	[Mg]BA_Soul Band _C	4 / 4	1	129		O	:
Bass	Classic R&B	4648	[Mg]MA_SoulShuff _C	4 / 4	4	98		O	:
Bass	Classic R&B	4649	[Mg]MB_SoulShuff _C	4 / 4	4	98		O	:
Bass	Classic R&B	4650	[Mg]MC_SoulShuff _C	4 / 4	4	98		O	:
Bass	Classic R&B	4651	[Mg]FA_SoulShuff _C	4 / 4	1	98		O	:
Bass	Classic R&B	4652	[Mg]FB_SoulShuff _C	4 / 4	1	98		O	:
Bass	Classic R&B	4653	[Mg]FC_SoulShuff _C	4 / 4	1	98		O	:
Bass	Classic R&B	4654	[Mg]BA_SoulShuff _C	4 / 4	1	98		O	:
Bass	Classic R&B	4655	[Mg]EA_SoulShuff _C	4 / 4	3	98		O	:
Bass	Classic R&B	4656	[Mg]EB_SoulShuff _C	4 / 4	3	98		O	:
Bass	Classic R&B	4657	[Mg]MA_SoulSwing _C	4 / 4	4	124		O	:
Bass	Classic R&B	4658	[Mg]MB_SoulSwing _C	4 / 4	4	124		O	:
Bass	Classic R&B	4659	[Mg]MC_SoulSwing _C	4 / 4	4	124		O	:
Bass	Classic R&B	4660	[Mg]FA_SoulSwing _C	4 / 4	1	124		O	:
Bass	Classic R&B	4661	[Mg]FB_SoulSwing _C	4 / 4	1	124		O	:
Bass	Classic R&B	4662	[Mg]FC_SoulSwing _C	4 / 4	1	124		O	:
Bass	Classic R&B	4663	[Mg]BA_SoulSwing _C	4 / 4	1	124		O	:
Bass	Classic R&B	4664	[Mg]EA_SoulSwing _C	4 / 4	3	123		O	:
Bass	Classic R&B	4665	[Mg]EB_SoulSwing _C	4 / 4	5	123		O	:
Bass	Classic R&B	4666	[Mg]MA_Gospel Br _C	4 / 4	4	108		O	:
Bass	Classic R&B	4667	[Mg]MB_Gospel Br _C	4 / 4	4	108		O	:
Bass	Classic R&B	4668	[Mg]MC_Gospel Br _C	4 / 4	4	108		O	:
Bass	Classic R&B	4669	[Mg]FA_Gospel Br _C	4 / 4	1	108		O	:
Bass	Classic R&B	4670	[Mg]FB_Gospel Br _C	4 / 4	1	108		O	:
Bass	Classic R&B	4671	[Mg]FC_Gospel Br _C	4 / 4	1	108		O	:
Bass	Classic R&B	4672	[Mg]BA_Gospel Br _C	4 / 4	1	108		O	:
Bass	Classic R&B	4673	[Mg]EA_Gospel Br _C	4 / 4	4	108		O	:
Bass	Classic R&B	4674	[Mg]EB_Gospel Br _C	4 / 4	3	108		O	:
Bass	Funk	4675	[Mg]MA_UrbanFunk _C	4 / 4	4	115		O	:
Bass	Funk	4676	[Mg]MB_UrbanFunk _C	4 / 4	4	115		O	:
Bass	Funk	4677	[Mg]MC_UrbanFunk _C	4 / 4	4	115		O	:
Bass	Funk	4678	[Mg]MD_UrbanFunk _C	4 / 4	4	115		O	:
Bass	Funk	4679	[Mg]FA_UrbanFunk _C	4 / 4	1	115		O	:
Bass	Funk	4680	[Mg]FB_UrbanFunk _C	4 / 4	1	115		O	:
Bass	Funk	4681	[Mg]FC_UrbanFunk _C	4 / 4	1	115		O	:
Bass	Funk	4682	[Mg]FD_UrbanFunk _C	4 / 4	1	115		O	:
Bass	Funk	4683	[Mg]EA_UrbanFunk _C	4 / 4	5	115		O	:
Bass	Funk	4684	[Mg]MA_Funk 1 _C	4 / 4	8	104		O	:
Bass	Funk	4685	[Mg]MB_Funk 1 _C	4 / 4	8	104		O	:
Bass	Funk	4686	[Mg]MC_Funk 1 _C	4 / 4	8	104		O	:
Bass	Funk	4687	[Mg]FA_Funk 1 _C	4 / 4	1	104		O	:
Bass	Funk	4688	[Mg]FB_Funk 1 _C	4 / 4	1	104		O	:
Bass	Funk	4689	[Mg]FC_Funk 1 _C	4 / 4	1	104		O	:
Bass	Funk	4690	[Mg]BA_Funk 1 _C	4 / 4	1	104		O	:
Bass	Funk	4691	[Mg]EA_Funk 1 _C	4 / 4	9	104		O	:
Bass	Funk	4692	[Mg]EB_Funk 1 _C	4 / 4	4	104		O	:
Bass	Funk	4693	[Mg]MA_FunkPopRk _C	4 / 4	4	95		O	:
Bass	Funk	4694	[Mg]MB_FunkPopRk _C	4 / 4	4	95		O	:
Bass	Funk	4695	[Mg]MC_FunkPopRk _C	4 / 4	4	95		O	:
Bass	Funk	4696	[Mg]FA_FunkPopRk _C	4 / 4	1	95		O	:
Bass	Funk	4697	[Mg]FB_FunkPopRk _C	4 / 4	1	95		O	:
Bass	Funk	4698	[Mg]FC_FunkPopRk _C	4 / 4	1	95		O	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Funk	4699	[Mg]BA_FunkPopRk _C	4 / 4	1	95		○	:
Bass	Funk	4700	[Mg]EA_FunkPopRk _C	4 / 4	4	94		○	:
Bass	Funk	4701	[Mg]EB_FunkPopRk _C	4 / 4	3	94		○	:
Bass	Funk	4702	[Mg]MA_JazzFunk1 _C	4 / 4	4	120		○	:
Bass	Funk	4703	[Mg]MB_JazzFunk1 _C	4 / 4	4	120		○	:
Bass	Funk	4704	[Mg]MC_JazzFunk1 _C	4 / 4	4	120		○	:
Bass	Funk	4705	[Mg]FA_JazzFunk1 _C	4 / 4	1	120		○	:
Bass	Funk	4706	[Mg]FB_JazzFunk1 _C	4 / 4	1	120		○	:
Bass	Funk	4707	[Mg]FC_JazzFunk1 _C	4 / 4	1	120		○	:
Bass	Funk	4708	[Mg]BA_JazzFunk1 _C	4 / 4	1	120		○	:
Bass	Funk	4709	[Mg]EA_JazzFunk1 _C	4 / 4	3	120		○	:
Bass	Funk	4710	[Mg]EB_JazzFunk1 _C	4 / 4	3	120		○	:
Bass	Funk	4711	[Mg]MA_Jazz Pop _C	4 / 4	2	102		○	:
Bass	Funk	4712	[Mg]MB_Jazz Pop _C	4 / 4	2	102		○	:
Bass	Funk	4713	[Mg]MC_Jazz Pop _C	4 / 4	2	102		○	:
Bass	Funk	4714	[Mg]FA_Jazz Pop _C	4 / 4	1	102		○	:
Bass	Funk	4715	[Mg]FB_Jazz Pop _C	4 / 4	1	102		○	:
Bass	Funk	4716	[Mg]FC_Jazz Pop _C	4 / 4	1	102		○	:
Bass	Funk	4717	[Mg]BA_Jazz Pop _C	4 / 4	1	102		○	:
Bass	Funk	4718	[Mg]MA_GospelFnk _C	4 / 4	4	106		○	:
Bass	Funk	4719	[Mg]MB_GospelFnk _C	4 / 4	4	106		○	:
Bass	Funk	4720	[Mg]MC_GospelFnk _C	4 / 4	4	106		○	:
Bass	Funk	4721	[Mg]FA_GospelFnk _C	4 / 4	1	106		○	:
Bass	Funk	4722	[Mg]FB_GospelFnk _C	4 / 4	1	106		○	:
Bass	Funk	4723	[Mg]FC_GospelFnk _C	4 / 4	1	106		○	:
Bass	Funk	4724	[Mg]BA_GospelFnk _C	4 / 4	1	106		○	:
Bass	Funk	4725	[Mg]EA_GospelFnk _C	4 / 4	4	106		○	:
Bass	Funk	4726	[Mg]EB_GospelFnk _C	4 / 4	3	106		○	:
Bass	Funk	4727	[Mg]MA_Funk Dsc _C	4 / 4	2	126		○	:
Bass	Funk	4728	[Mg]MB_Funk Dsc _C	4 / 4	2	126		○	:
Bass	Funk	4729	[Mg]MC_Funk Dsc _C	4 / 4	2	126		○	:
Bass	Funk	4730	[Mg]FA_Funk Dsc _C	4 / 4	1	126		○	:
Bass	Funk	4731	[Mg]FB_Funk Dsc _C	4 / 4	1	126		○	:
Bass	Funk	4732	[Mg]FC_Funk Dsc _C	4 / 4	1	126		○	:
Bass	Funk	4733	[Mg]BA_Funk Dsc _C	4 / 4	1	126		○	:
Bass	Funk	4734	[Mg]EA_Funk Dsc _C	4 / 4	4	126		○	:
Bass	Funk	4735	[Mg]EB_Funk Dsc _C	4 / 4	3	126		○	:
Bass	Funk	4736	[Mg]MA_70DscFunk _C	4 / 4	4	112		○	:
Bass	Funk	4737	[Mg]MB_70DscFunk _C	4 / 4	4	112		○	:
Bass	Funk	4738	[Mg]MC_70DscFunk _C	4 / 4	4	112		○	:
Bass	Funk	4739	[Mg]FA_70DscFunk _C	4 / 4	1	112		○	:
Bass	Funk	4740	[Mg]FB_70DscFunk _C	4 / 4	1	112		○	:
Bass	Funk	4741	[Mg]FC_70DscFunk _C	4 / 4	1	112		○	:
Bass	Funk	4742	[Mg]BA_70DscFunk _C	4 / 4	1	112		○	:
Bass	Funk	4743	[Mg]EA_70DscFunk _C	4 / 4	4	112		○	:
Bass	Funk	4744	[Mg]EB_70DscFunk _C	4 / 4	3	112		○	:
Bass	Funk	4745	[Mg]EA_OakCstmBs _C	4 / 4	4	114		○	:
Bass	Jazz	4746	[Mg]MA_ModernJaz _C	4 / 4	16	218		○	Mega Acoustic Bass
Bass	Jazz	4747	[Mg]MB_ModernJaz _C	4 / 4	16	218		○	:
Bass	Jazz	4748	[Mg]MC_ModernJaz _C	4 / 4	16	218		○	:
Bass	Jazz	4749	[Mg]FA_ModernJaz _C	4 / 4	1	218		○	:
Bass	Jazz	4750	[Mg]FB_ModernJaz _C	4 / 4	1	218		○	:
Bass	Jazz	4751	[Mg]FC_ModernJaz _C	4 / 4	1	218		○	:
Bass	Jazz	4752	[Mg]BA_ModernJaz _C	4 / 4	1	218		○	:
Bass	Jazz	4753	[Mg]EA_ModernJaz _C	4 / 4	6	218		○	:
Bass	Jazz	4754	[Mg]EB_ModernJaz _C	4 / 4	7	218		○	:
Bass	Jazz	4755	[Mg]MA_JzGtrClub _C	4 / 4	8	142		○	:
Bass	Jazz	4756	[Mg]MB_JzGtrClub _C	4 / 4	8	142		○	:
Bass	Jazz	4757	[Mg]MC_JzGtrClub _C	4 / 4	8	142		○	:
Bass	Jazz	4758	[Mg]FA_JzGtrClub _C	4 / 4	1	142		○	:
Bass	Jazz	4759	[Mg]FB_JzGtrClub _C	4 / 4	1	142		○	:
Bass	Jazz	4760	[Mg]FC_JzGtrClub _C	4 / 4	1	142		○	:
Bass	Jazz	4761	[Mg]BA_JzGtrClub _C	4 / 4	1	142		○	:
Bass	Jazz	4762	[Mg]EA_JzGtrClub _C	4 / 4	6	142		○	:
Bass	Jazz	4763	[Mg]MA_JazWlzMed _C	3 / 4	8	180		○	:
Bass	Jazz	4764	[Mg]MB_JazWlzMed _C	3 / 4	8	180		○	:
Bass	Jazz	4765	[Mg]MC_JazWlzMed _C	3 / 4	8	180		○	:
Bass	Jazz	4766	[Mg]FA_JazWlzMed _C	3 / 4	1	180		○	:
Bass	Jazz	4767	[Mg]FB_JazWlzMed _C	3 / 4	1	180		○	:
Bass	Jazz	4768	[Mg]FC_JazWlzMed _C	3 / 4	1	180		○	:
Bass	Jazz	4769	[Mg]BA_JazWlzMed _C	3 / 4	1	180		○	:
Bass	Jazz	4770	[Mg]EA_JazWlzMed _C	3 / 4	7	180		○	:
Bass	Jazz	4771	[Mg]MA_R&R Shuff _C	4 / 4	4	192		○	:
Bass	Jazz	4772	[Mg]MB_R&R Shuff _C	4 / 4	4	192		○	:
Bass	Jazz	4773	[Mg]MC_R&R Shuff _C	4 / 4	4	192		○	:
Bass	Jazz	4774	[Mg]FA_R&R Shuff _C	4 / 4	1	192		○	:
Bass	Jazz	4775	[Mg]FB_R&R Shuff _C	4 / 4	1	192		○	:
Bass	Jazz	4776	[Mg]FC_R&R Shuff _C	4 / 4	1	192		○	:
Bass	Jazz	4777	[Mg]BA_R&R Shuff _C	4 / 4	1	192		○	:
Bass	Jazz	4778	[Mg]EA_R&R Shuff _C	4 / 4	5	192		○	:
Bass	Jazz	4779	[Mg]EB_R&R Shuff _C	4 / 4	5	192		○	:
Bass	Jazz	4780	[Mg]MA_ShffBlues _C	4 / 4	4	115		○	Mega Pick Open Mute
Bass	Jazz	4781	[Mg]MB_ShffBlues _C	4 / 4	4	115		○	:
Bass	Jazz	4782	[Mg]MC_ShffBlues _C	4 / 4	4	115		○	:
Bass	Jazz	4783	[Mg]FA_ShffBlues _C	4 / 4	1	115		○	:
Bass	Jazz	4784	[Mg]FB_ShffBlues _C	4 / 4	1	115		○	:
Bass	Jazz	4785	[Mg]FC_ShffBlues _C	4 / 4	1	115		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	Jazz	4786	[Mg]BA_ShffBlues _C	4 / 4	1	115		○	:
Bass	Jazz	4787	[Mg]EA_ShffBlues _C	4 / 4	5	115		○	:
Bass	Jazz	4788	[Mg]EB_ShffBlues _C	4 / 4	6	115		○	:
Bass	Jazz	4789	[Mg]MA_SlwBlues1 _C	4 / 4	2	49		○	Mega Finger+Slap
Bass	Jazz	4790	[Mg]MB_SlwBlues1 _C	4 / 4	2	49		○	:
Bass	Jazz	4791	[Mg]MC_SlwBlues1 _C	4 / 4	2	49		○	:
Bass	Jazz	4792	[Mg]FA_SlwBlues1 _C	4 / 4	1	49		○	:
Bass	Jazz	4793	[Mg]FB_SlwBlues1 _C	4 / 4	1	49		○	:
Bass	Jazz	4794	[Mg]FC_SlwBlues1 _C	4 / 4	1	49		○	:
Bass	Jazz	4795	[Mg]BA_SlwBlues1 _C	4 / 4	1	49		○	:
Bass	Jazz	4796	[Mg]EA_SlwBlues1 _C	4 / 4	3	49		○	:
Bass	Jazz	4797	[Mg]EB_SlwBlues1 _C	4 / 4	3	49		○	:
Bass	Jazz	4798	[Mg]MA_PnoBoogie _C	4 / 4	8	160		○	Mega Acoustic Bass
Bass	Jazz	4799	[Mg]MB_PnoBoogie _C	4 / 4	4	160		○	:
Bass	Jazz	4800	[Mg]MC_PnoBoogie _C	4 / 4	4	160		○	:
Bass	Jazz	4801	[Mg]FA_PnoBoogie _C	4 / 4	1	160		○	:
Bass	Jazz	4802	[Mg]FB_PnoBoogie _C	4 / 4	1	160		○	:
Bass	Jazz	4803	[Mg]FC_PnoBoogie _C	4 / 4	1	160		○	:
Bass	Jazz	4804	[Mg]BA_PnoBoogie _C	4 / 4	1	160		○	:
Bass	Jazz	4805	[Mg]EA_PnoBoogie _C	4 / 4	5	160		○	:
Bass	Jazz	4806	[Mg]EB_PnoBoogie _C	4 / 4	5	160		○	:
Bass	Latin	4807	[Mg]MA_Salsa 1 _C	4 / 4	4	177		○	:
Bass	Latin	4808	[Mg]MB_Salsa 1 _C	4 / 4	4	177		○	:
Bass	Latin	4809	[Mg]MC_Salsa 1 _C	4 / 4	4	177		○	:
Bass	Latin	4810	[Mg]FA_Salsa 1 _C	4 / 4	1	177		○	:
Bass	Latin	4811	[Mg]FB_Salsa 1 _C	4 / 4	1	177		○	:
Bass	Latin	4812	[Mg]FC_Salsa 1 _C	4 / 4	1	177		○	:
Bass	Latin	4813	[Mg]BA_Salsa 1 _C	4 / 4	1	177		○	:
Bass	Latin	4814	[Mg]EA_Salsa 1 _C	4 / 4	5	177		○	:
Bass	Latin	4815	[Mg]EB_Salsa 1 _C	4 / 4	5	177		○	:
Bass	Latin	4816	[Mg]MA_AfroCuban _C	4 / 4	4	200		○	:
Bass	Latin	4817	[Mg]MB_AfroCuban _C	4 / 4	4	200		○	:
Bass	Latin	4818	[Mg]MC_AfroCuban _C	4 / 4	4	200		○	:
Bass	Latin	4819	[Mg]FA_AfroCuban _C	4 / 4	1	200		○	:
Bass	Latin	4820	[Mg]FB_AfroCuban _C	4 / 4	1	200		○	:
Bass	Latin	4821	[Mg]FC_AfroCuban _C	4 / 4	1	200		○	:
Bass	Latin	4822	[Mg]BA_AfroCuban _C	4 / 4	1	200		○	:
Bass	Latin	4823	[Mg]EA_AfroCuban _C	4 / 4	6	200		○	:
Bass	Latin	4824	[Mg]EB_AfroCuban _C	4 / 4	5	200		○	:
Bass	Latin	4825	[Mg]MA_BrzSamba _C	4 / 4	4	96		○	Mega Finger+Slap
Bass	Latin	4826	[Mg]MB_BrzSamba _C	4 / 4	4	96		○	:
Bass	Latin	4827	[Mg]MC_BrzSamba _C	4 / 4	4	96		○	:
Bass	Latin	4828	[Mg]FA_BrzSamba _C	4 / 4	1	96		○	:
Bass	Latin	4829	[Mg]FB_BrzSamba _C	4 / 4	1	96		○	:
Bass	Latin	4830	[Mg]FC_BrzSamba _C	4 / 4	1	96		○	:
Bass	Latin	4831	[Mg]BA_BrzSamba _C	4 / 4	1	96		○	:
Bass	Latin	4832	[Mg]EA_BrzSamba _C	4 / 4	4	96		○	:
Bass	Latin	4833	[Mg]EB_BrzSamba _C	4 / 4	4	96		○	:
Bass	Latin	4834	[Mg]MA_Bomba _C	4 / 4	4	99		○	Mega Acoustic Bass
Bass	Latin	4835	[Mg]MB_Bomba _C	4 / 4	4	99		○	:
Bass	Latin	4836	[Mg]MC_Bomba _C	4 / 4	4	99		○	:
Bass	Latin	4837	[Mg]FA_Bomba _C	4 / 4	1	99		○	:
Bass	Latin	4838	[Mg]FB_Bomba _C	4 / 4	1	99		○	:
Bass	Latin	4839	[Mg]FC_Bomba _C	4 / 4	1	99		○	:
Bass	Latin	4840	[Mg]BA_Bomba _C	4 / 4	1	99		○	:
Bass	Latin	4841	[Mg]EA_Bomba _C	4 / 4	3	99		○	:
Bass	Latin	4842	[Mg]EB_Bomba _C	4 / 4	3	99		○	:
Bass	Latin	4843	[Mg]MA_Bossa _C	4 / 4	4	124		○	Mega Finger+Slap
Bass	Latin	4844	[Mg]MB_Bossa _C	4 / 4	4	124		○	:
Bass	Latin	4845	[Mg]MC_Bossa _C	4 / 4	4	124		○	:
Bass	Latin	4846	[Mg]FA_Bossa _C	4 / 4	1	124		○	:
Bass	Latin	4847	[Mg]FB_Bossa _C	4 / 4	1	124		○	:
Bass	Latin	4848	[Mg]FC_Bossa _C	4 / 4	1	124		○	:
Bass	Latin	4849	[Mg]BA_Bossa _C	4 / 4	1	124		○	:
Bass	Latin	4850	[Mg]EA_Bossa _C	4 / 4	4	123		○	:
Bass	Latin	4851	[Mg]EB_Bossa _C	4 / 4	4	123		○	:
Bass	Latin	4852	[Mg]MA_Merengue _C	4 / 4	4	130		○	:
Bass	Latin	4853	[Mg]MB_Merengue _C	4 / 4	4	130		○	:
Bass	Latin	4854	[Mg]MC_Merengue _C	4 / 4	4	130		○	:
Bass	Latin	4855	[Mg]FA_Merengue _C	4 / 4	1	130		○	:
Bass	Latin	4856	[Mg]FB_Merengue _C	4 / 4	1	130		○	:
Bass	Latin	4857	[Mg]FC_Merengue _C	4 / 4	1	130		○	:
Bass	Latin	4858	[Mg]BA_Merengue _C	4 / 4	1	130		○	:
Bass	Latin	4859	[Mg]EA_Merengue _C	4 / 4	3	130		○	:
Bass	Latin	4860	[Mg]EB_Merengue _C	4 / 4	3	130		○	:
Bass	Latin	4861	[Mg]MA_Guaguanco _C	4 / 4	4	120		○	Mega Acoustic Bass
Bass	Latin	4862	[Mg]MB_Guaguanco _C	4 / 4	4	120		○	:
Bass	Latin	4863	[Mg]MC_Guaguanco _C	4 / 4	4	120		○	:
Bass	Latin	4864	[Mg]FA_Guaguanco _C	4 / 4	1	120		○	:
Bass	Latin	4865	[Mg]FB_Guaguanco _C	4 / 4	1	120		○	:
Bass	Latin	4866	[Mg]FC_Guaguanco _C	4 / 4	1	120		○	:
Bass	Latin	4867	[Mg]BA_Guaguanco _C	4 / 4	1	120		○	:
Bass	Latin	4868	[Mg]EA_Guaguanco _C	4 / 4	3	120		○	:
Bass	Latin	4869	[Mg]EB_Guaguanco _C	4 / 4	3	120		○	:
Bass	World	4870	[Mg]MA_ReggaeShf _C	4 / 4	4	90		○	Mega Finger+Slap
Bass	World	4871	[Mg]MB_ReggaeShf _C	4 / 4	4	90		○	:
Bass	World	4872	[Mg]MC_ReggaeShf _C	4 / 4	4	90		○	:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Bass	World	4873	[Mg]FA_ReggaeShf _C	4 / 4	1	90		○	:
Bass	World	4874	[Mg]FB_ReggaeShf _C	4 / 4	1	90		○	:
Bass	World	4875	[Mg]FC_ReggaeShf _C	4 / 4	1	90		○	:
Bass	World	4876	[Mg]BA_ReggaeShf _C	4 / 4	1	90		○	:
Bass	World	4877	[Mg]EA_ReggaeShf _C	4 / 4	3	90		○	:
Bass	World	4878	[Mg]EB_ReggaeShf _C	4 / 4	4	90		○	:
Bass	World	4879	[Mg]MA_RmbFlamnc _C	4 / 4	4	106		○	:
Bass	World	4880	[Mg]MB_RmbFlamnc _C	4 / 4	4	106		○	:
Bass	World	4881	[Mg]MC_RmbFlamnc _C	4 / 4	4	106		○	:
Bass	World	4882	[Mg]FA_RmbFlamnc _C	4 / 4	1	106		○	:
Bass	World	4883	[Mg]FB_RmbFlamnc _C	4 / 4	1	106		○	:
Bass	World	4884	[Mg]FC_RmbFlamnc _C	4 / 4	1	106		○	:
Bass	World	4885	[Mg]BA_RmbFlamnc _C	4 / 4	1	106		○	:
Bass	World	4886	[Mg]EA_RmbFlamnc _C	4 / 4	3	106		○	:
Bass	World	4887	[Mg]EB_RmbFlamnc _C	4 / 4	3	106		○	:
Bass	World	4888	[Mg]MA_ModBlugrs _C	4 / 4	4	121		○	Mega Finger+Harmonic
Bass	World	4889	[Mg]MB_ModBlugrs _C	4 / 4	4	121		○	:
Bass	World	4890	[Mg]MC_ModBlugrs _C	4 / 4	4	121		○	:
Bass	World	4891	[Mg]FA_ModBlugrs _C	4 / 4	1	121		○	:
Bass	World	4892	[Mg]FB_ModBlugrs _C	4 / 4	1	121		○	:
Bass	World	4893	[Mg]FC_ModBlugrs _C	4 / 4	1	121		○	:
Bass	World	4894	[Mg]BA_ModBlugrs _C	4 / 4	1	121		○	:
Bass	World	4895	[Mg]EA_ModBlugrs _C	4 / 4	6	121		○	:
Bass	World	4896	[Mg]MA_IrishHymn _C	3 / 4	4	70		○	Mega Finger+Slap
Bass	World	4897	[Mg]MB_IrishHymn _C	3 / 4	4	70		○	:
Bass	World	4898	[Mg]MC_IrishHymn _C	3 / 4	4	70		○	:
Bass	World	4899	[Mg]FA_IrishHymn _C	3 / 4	1	70		○	:
Bass	World	4900	[Mg]FB_IrishHymn _C	3 / 4	1	70		○	:
Bass	World	4901	[Mg]FC_IrishHymn _C	3 / 4	1	70		○	:
Bass	World	4902	[Mg]BA_IrishHymn _C	3 / 4	1	70		○	:
Bass	World	4903	[Mg]EA_IrishHymn _C	3 / 4	5	70		○	:
Bass	World	4904	[Mg]EB_IrishHymn _C	3 / 4	5	70		○	:
Bass	World	4905	[Mg]MA_Saeidy 1 _C	4 / 4	2	120		○	:
Bass	World	4906	[Mg]MB_Saeidy 1 _C	4 / 4	2	120		○	:
Bass	World	4907	[Mg]MC_Saeidy 1 _C	4 / 4	4	120		○	:
Bass	World	4908	[Mg]FA_Saeidy 1 _C	4 / 4	1	120		○	:
Bass	World	4909	[Mg]FB_Saeidy 1 _C	4 / 4	1	120		○	:
Bass	World	4910	[Mg]FC_Saeidy 1 _C	4 / 4	1	120		○	:
Bass	World	4911	[Mg]BA_Saeidy 1 _C	4 / 4	1	120		○	:
Bass	World	4912	[Mg]EA_Saeidy 1 _C	4 / 4	4	120		○	:
Str	Pop Rock	4913	MA_Straight Shot _N	4 / 4	1	120			Viola
Str	Pop Rock	4914	MA_Bow Push _N	4 / 4	1	120			Contrabass
Str	Ballad	4915	MA_8Beat Ballad2 _C	4 / 4	4	101			Strings
Str	Ballad	4916	MB_8Beat Ballad2 _C	4 / 4	4	101			:
Str	Ballad	4917	MC_8Beat Ballad2 _C	4 / 4	4	101			:
Str	Ballad	4918	FA_8Beat Ballad2 _C	4 / 4	1	101			:
Str	Ballad	4919	FB_8Beat Ballad2 _C	4 / 4	1	101			:
Str	Ballad	4920	FC_8Beat Ballad2 _C	4 / 4	1	101			:
Str	Ballad	4921	BA_8Beat Ballad2 _C	4 / 4	1	101			:
Str	Ballad	4922	EA_8Beat Ballad2 _C	4 / 4	5	101			:
Str	Ballad	4923	EB_8Beat Ballad2 _C	4 / 4	5	101			:
Str	Hip Hop	4924	MA_DirtySynth _N	4 / 4	4	85			:
Str	Hip Hop	4925	MB_DirtySynth	4 / 4	4	85			:
Str	Hip Hop	4926	MC_DirtySynth	4 / 4	4	85			:
Str	Hip Hop	4927	MA_HipHopEpic _C	4 / 4	2	85			:
Str	Hip Hop	4928	MA_HipHopEpic	4 / 4	2	85			:
Str	Hip Hop	4929	MB_HipHopEpic	4 / 4	2	85			:
Str	Hip Hop	4930	MC_HipHopEpic	4 / 4	2	85			:
Str	Modern R&B	4931	MC_New R&B 2	4 / 4	1	97			Harp
Str	Modern R&B	4932	MD_New R&B 2	4 / 4	1	97			:
Str	Modern R&B	4933	MA_New R&B 3 _N	4 / 4	2	90			Strings
Str	Modern R&B	4934	MB_New R&B 3 _N	4 / 4	2	90			:
Str	Modern R&B	4935	MC_New R&B 3 _N	4 / 4	2	90			:
Str	Modern R&B	4936	MD_New R&B 3 /1 _N	4 / 4	2	90			:
Str	Modern R&B	4937	MD_New R&B 3 /2 _N	4 / 4	2	90			:
Str	Modern R&B	4938	FA_New R&B 3 _N	4 / 4	1	90			:
Str	Modern R&B	4939	FC_New R&B 3 _N	4 / 4	2	90			:
Str	Modern R&B	4940	MA_Pop R&B _C	4 / 4	4	67			:
Str	Modern R&B	4941	MB_Pop R&B _C	4 / 4	4	67			:
Str	Modern R&B	4942	MC_Pop R&B _C	4 / 4	4	67			:
Str	Modern R&B	4943	FA_Pop R&B _C	4 / 4	1	67			:
Str	Modern R&B	4944	FB_Pop R&B _C	4 / 4	1	67			:
Str	Modern R&B	4945	FC_Pop R&B _C	4 / 4	1	67			:
Str	Modern R&B	4946	MA1_R&B Ana Pop _C	4 / 4	4	95			Harp
Str	Modern R&B	4947	MB1_R&B Ana Pop _C	4 / 4	4	95			:
Str	Modern R&B	4948	MC1_R&B Ana Pop _C	4 / 4	4	95			:
Str	Modern R&B	4949	FA1_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4950	FB1_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4951	FC1_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4952	BA1_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4953	MA2_R&B Ana Pop _C	4 / 4	4	95			Strings
Str	Modern R&B	4954	MB2_R&B Ana Pop _C	4 / 4	4	95			:
Str	Modern R&B	4955	MC2_R&B Ana Pop _C	4 / 4	4	95			:
Str	Modern R&B	4956	FA2_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4957	FB2_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4958	FC2_R&B Ana Pop _C	4 / 4	1	95			:
Str	Modern R&B	4959	MC_Smooth 1 _N	4 / 4	2	115			Pizzicato Strings

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Str	Modern R&B	4960	MD_Smooth 1 _N	4 / 4	2	115			:
Str	Modern R&B	4961	MC_Flip Hop 1 _N	4 / 4	2	132			:
Str	Modern R&B	4962	MD_Flip Hop 1 _N	4 / 4	2	132			:
Str	Modern R&B	4963	FB_Flip Hop 1 _N	4 / 4	1	132			:
Str	Modern R&B	4964	MC_Hip Hop 1 _N	4 / 4	2	105			:
Str	Modern R&B	4965	MD_Hip Hop 1 _N	4 / 4	2	105			:
Str	Modern R&B	4966	FB_Hip Hop 1 _N	4 / 4	1	105			:
Str	Modern R&B	4967	MD_Hip Hop 3 _N	4 / 4	2	104			Harp
Str	Techno	4968	MA_Side 2 Side _N	4 / 4	1	130			Strings
Str	Techno	4969	MA_Psyche Pizz1 _N	4 / 4	1	143			Pizzicato Strings
Str	Techno	4970	MA_Psyche Pizz2 _N	4 / 4	1	143			:
Str	Techno	4971	MA_Psyche Pizz3 _N	4 / 4	2	143			:
Str	Techno	4972	MA_Psyche Pizz4 _N	4 / 4	3	143			:
Str	Techno	4973	MA_Psyche Pizz5 _N	4 / 4	2	143			:
Str	House	4974	MA_UK Garage1 Pizz _N	4 / 4	8	132			:
Str	House	4975	MB_UK Garage1 Pizz _N	4 / 4	4	132			:
Str	House	4976	MC_UK Garage1 Pizz _N	4 / 4	4	132			:
Str	House	4977	MD_UK Garage1 Pizz _N	4 / 4	4	132			:
Str	House	4978	MH_UK Garage1 Pizz _N	4 / 4	4	132			:
Str	Chill	4979	MA_Dirt Mello	4 / 4	1	110			Strings
Str	World	4980	MA_Irish Hymn _C	3 / 4	4	70			:
Str	World	4981	MB_Irish Hymn _C	3 / 4	4	70			:
Str	World	4982	MC_Irish Hymn _C	3 / 4	4	70			:
Str	World	4983	FA_Irish Hymn _C	3 / 4	1	70			:
Str	World	4984	FB_Irish Hymn _C	3 / 4	1	70			:
Str	World	4985	FC_Irish Hymn _C	3 / 4	1	70			:
Str	World	4986	BA_Irish Hymn _C	3 / 4	1	70			:
Str	World	4987	EA_Irish Hymn _C	3 / 4	5	70			:
Str	World	4988	EB_Irish Hymn _C	3 / 4	5	70			:
Str	World	4989	MD_Turkish _N	9 / 8	2	125			:
Str	World	4990	MF_Turkish _N	4 / 4	2	105			:
Str	World	4991	IA_Turkish _N	4 / 4	2	86			:
Str	General	4992	4/4 QuarterNotes	4 / 4	2	120			:
Str	General	4993	4/4 QuarterNotesMono	4 / 4	2	120			:
Str	General	4994	Stacc1 Poly Velocity	4 / 4	1	120			:
Str	General	4995	Stacc2 Oct Melody _N	4 / 4	4	120			:
Str	General	4996	MA1_Orchestra _C	4 / 4	4	102			:
Str	General	4997	MB1_Orchestra _C	4 / 4	8	102			:
Str	General	4998	MC1_Orchestra _C	4 / 4	8	102			:
Str	General	4999	MD1_Orchestra _C	4 / 4	4	102			:
Str	General	5000	FA1_Orchestra _C	4 / 4	1	102			:
Str	General	5001	MA2_Orchestra _C	4 / 4	4	102			Harp
Str	General	5002	MB2_Orchestra _C	4 / 4	8	102			:
Str	General	5003	MC2_Orchestra _C	4 / 4	8	102			:
Str	General	5004	MD2_Orchestra _C	4 / 4	4	102			:
Str	General	5005	FA2_Orchestra _C	4 / 4	1	102			:
Str	General	5006	MA1_Baroque _C	4 / 4	4	88			Strings
Str	General	5007	MB1_Baroque _C	4 / 4	4	88			:
Str	General	5008	MC1_Baroque _C	4 / 4	4	88			:
Str	General	5009	MD1_Baroque _C	4 / 4	4	88			:
Str	General	5010	FA1_Baroque _C	4 / 4	1	88			:
Str	General	5011	FB1_Baroque _C	4 / 4	1	88			:
Str	General	5012	FC1_Baroque _C	4 / 4	1	88			:
Str	General	5013	FD1_Baroque _C	4 / 4	1	88			:
Str	General	5014	MA2_Baroque _C	4 / 4	4	88			:
Str	General	5015	MB2_Baroque _C	4 / 4	4	88			:
Str	General	5016	MC2_Baroque _C	4 / 4	4	88			:
Str	General	5017	MD2_Baroque _C	4 / 4	4	88			:
Str	General	5018	FA2_Baroque _C	4 / 4	1	88			:
Str	General	5019	FB2_Baroque _C	4 / 4	1	88			:
Str	General	5020	FC2_Baroque _C	4 / 4	1	88			:
Str	General	5021	FD2_Baroque _C	4 / 4	1	88			:
Str	General	5022	MA_Strings1	4 / 4	1	101			:
Str	General	5023	MA_Strings2	4 / 4	1	101			:
Str	General	5024	MA_Strings3	4 / 4	1	101			:
Str	General	5025	MA_Strings4	4 / 4	1	101			:
Str	General	5026	MA_Strings5	4 / 4	1	101			:
Str	General	5027	MA_Strings6	4 / 4	1	101			:
Str	General	5028	MA_Strings7	4 / 4	1	101			:
Str	General	5029	MA_Strings8	4 / 4	1	101			:
Str	General	5030	MA_Strings9	4 / 4	2	120			:
Str	General	5031	MA_Jupiter	4 / 4	4	120			:
Str	General	5032	MA_Strings Up1 _N	4 / 4	1	120			:
Str	General	5033	MA_StringsDown1 _N	4 / 4	1	120			:
Str	General	5034	MA_Strings Up2 _N	4 / 4	1	120			:
Str	General	5035	MA_StringsDown2 _N	4 / 4	1	120			:
Str	General	5036	MA_Cello1	4 / 4	2	120			Cello
Str	General	5037	MA_Cello2	4 / 4	2	120			:
Str	General	5038	MA_OrchStrings	4 / 4	4	126			Strings
Str	General	5039	MA_OrchChord	4 / 4	4	126			:
Str	General	5040	MA_Pizz1	4 / 4	1	120			Pizzicato Strings
Str	General	5041	MA_Pizz2	4 / 4	1	120			:
Str	General	5042	MA_Pizz3	4 / 4	1	120			:
Str	General	5043	MA_Pizz4	4 / 4	1	124			:
Str	General	5044	MA_Pizz5	4 / 4	1	124			:
Str	General	5045	MA_Harp1	4 / 4	2	120			Harp
Str	General	5046	MA_Harp2	4 / 4	2	120			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Str	General	5047	MA_Harp3	4 / 4	1	120			:
Str	General	5048	MA_Harp4	4 / 4	1	120			:
Brass	Pop Rock	5049	MA_Your Horn _N	4 / 4	1	95			Trombone
Brass	Hip Hop	5050	MA_Hip Break _C	4 / 4	4	98			Brass Section
Brass	Hip Hop	5051	MB_Hip Break _C	4 / 4	4	98			:
Brass	Hip Hop	5052	MC_Hip Break _C	4 / 4	4	98			:
Brass	Hip Hop	5053	FA_Hip Break _C	4 / 4	1	98			:
Brass	Hip Hop	5054	FB_Hip Break _C	4 / 4	1	98			:
Brass	Hip Hop	5055	FC_Hip Break _C	4 / 4	1	98			:
Brass	Hip Hop	5056	BA_Hip Break _C	4 / 4	1	98			:
Brass	Modern R&B	5057	FC_New Gospel	4 / 4	2	90			:
Brass	Classic R&B	5058	FA_Soul 2	4 / 4	1	120			:
Brass	Classic R&B	5059	MA_70sChartSoul _C	4 / 4	2	108			Velo Falls
Brass	Classic R&B	5060	MB_70sChartSoul _C	4 / 4	2	108			:
Brass	Classic R&B	5061	MC_70sChartSoul _C	4 / 4	2	108			:
Brass	Classic R&B	5062	FA_70sChartSoul _C	4 / 4	1	108			:
Brass	Classic R&B	5063	FB_70sChartSoul _C	4 / 4	1	108			:
Brass	Classic R&B	5064	FC_70sChartSoul _C	4 / 4	1	108			:
Brass	Classic R&B	5065	BA_70sChartSoul _C	4 / 4	1	108			:
Brass	Classic R&B	5066	EA_70sChartSoul _C	4 / 4	5	108			:
Brass	Classic R&B	5067	EB_70sChartSoul _C	4 / 4	3	108			:
Brass	Funk	5068	MB_Urban Funk _C	4 / 4	4	115			Brass Section
Brass	Funk	5069	MC_Urban Funk _C	4 / 4	4	115			:
Brass	Funk	5070	MD_Urban Funk _C	4 / 4	4	115			:
Brass	Funk	5071	FA_Urban Funk _C	4 / 4	1	115			:
Brass	Funk	5072	FC_Urban Funk _C	4 / 4	1	115			:
Brass	Funk	5073	FD_Urban Funk _C	4 / 4	1	115			:
Brass	Funk	5074	EA_Urban Funk _C	4 / 4	5	115			:
Brass	Funk	5075	MB_Funk 3	4 / 4	2	132			:
Brass	Funk	5076	MC_Funk 3	4 / 4	4	132			:
Brass	Funk	5077	MD_Funk 3	4 / 4	2	132			:
Brass	Funk	5078	IA_Funk 3	4 / 4	1	132			:
Brass	Funk	5079	FA_Funk 3	4 / 4	1	132			:
Brass	Funk	5080	FB_Funk 3	4 / 4	1	132			:
Brass	Funk	5081	MC_Jazz Funk 2	4 / 4	4	120			:
Brass	Funk	5082	MD_Jazz Funk 2 /1	4 / 4	4	120			:
Brass	Funk	5083	MD_Jazz Funk 2 /2	4 / 4	1	120			:
Brass	Funk	5084	IA_Jazz Funk 2	4 / 4	1	120			:
Brass	Funk	5085	FA_Jazz Funk 2	4 / 4	1	120			:
Brass	Latin	5086	MB1_Salsa 2	4 / 4	1	123			:
Brass	Latin	5087	MC1_Salsa 2	4 / 4	1	123			:
Brass	Latin	5088	FC1_Salsa 2	4 / 4	2	123			:
Brass	Latin	5089	MA2_Salsa 2	4 / 4	1	123			:
Brass	Latin	5090	MB2_Salsa 2	4 / 4	4	120			:
Brass	Latin	5091	MA3_Salsa 2 _N	4 / 4	2	123			:
Brass	Latin	5092	MB3_Salsa 2 _N	4 / 4	2	123			:
Brass	Latin	5093	MC3_Salsa 2 _N	4 / 4	2	123			:
Brass	Latin	5094	FA3_Salsa 2 _N	4 / 4	1	123			:
Brass	Latin	5095	FC3_Salsa 2 _N	4 / 4	1	123			:
Brass	Latin	5096	MD1_Samba	4 / 4	4	120			:
Brass	Latin	5097	IA1_Samba	4 / 4	2	120			:
Brass	Latin	5098	FC1_Samba	4 / 4	2	120			:
Brass	Latin	5099	MB2_Samba	4 / 4	4	120			Trombone
Brass	Latin	5100	MC2_Samba	4 / 4	4	120			:
Brass	World	5101	MC_Turkish	9 / 8	2	125			Mute Trumpet
Brass	General	5102	MA_Trumpple	4 / 4	2	145			Trumpet
Brass	General	5103	MA_Orchestra _C	4 / 4	4	102			French Horn
Brass	General	5104	MB_Orchestra _C	4 / 4	8	102			:
Brass	General	5105	MC_Orchestra _C	4 / 4	8	102			:
Brass	General	5106	MD_Orchestra _C	4 / 4	4	102			:
Brass	General	5107	FA_Orchestra _C	4 / 4	1	102			:
Brass	General	5108	MB_Baroque _C	4 / 4	4	88			Trumpet
Brass	General	5109	MD_Baroque _C	4 / 4	4	88			:
Brass	General	5110	FA_Baroque _C	4 / 4	1	88			:
Brass	General	5111	FD_Baroque _C	4 / 4	1	88			:
Brass	General	5112	MA_Brass Sec1	4 / 4	1	120			Brass Section
Brass	General	5113	MA_Brass Sec2	4 / 4	1	123			:
Brass	General	5114	MA_Brass Sec3	4 / 4	1	120			:
Brass	General	5115	MA_Brass Sec4	4 / 4	1	120			:
Brass	General	5116	MA_Brass Sec5	4 / 4	1	120			:
Brass	General	5117	MA_Brass Sec6	4 / 4	1	120			:
Brass	General	5118	MA_Brass Sec7	4 / 4	1	120			:
WW	Hip Hop	5119	MD_Hip Hop 1 _N	4 / 4	2	105			Saxophone
WW	Hip Hop	5120	FC_Hip Hop 1 _N	4 / 4	2	105			:
WW	Classic R&B	5121	MB_Soul 2 _N	4 / 4	4	120			:
WW	Classic R&B	5122	MC_Soul 2 _N	4 / 4	4	120			:
WW	Classic R&B	5123	FB_Soul 2 _N	4 / 4	1	120			:
WW	Classic R&B	5124	FC_Soul 2	4 / 4	1	120			:
WW	Funk	5125	MA_Club Jazz 2 _C	4 / 4	4	92			Sax Section
WW	Funk	5126	MB_Club Jazz 2 _C	4 / 4	4	92			:
WW	Funk	5127	MC_Club Jazz 2 _C	4 / 4	4	92			:
WW	Funk	5128	FA_Club Jazz 2 _C	4 / 4	1	92			:
WW	Funk	5129	FB_Club Jazz 2 _C	4 / 4	1	92			:
WW	Funk	5130	FC_Club Jazz 2 _C	4 / 4	1	92			:
WW	Funk	5131	BA_Club Jazz 2 _C	4 / 4	1	92			:
WW	Funk	5132	MA_Club Jazz 2 _N	4 / 4	4	92			:
WW	Funk	5133	MB_Club Jazz 2 _N	4 / 4	4	92			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
WW	Funk	5134	MC_Club Jazz 2 _N	4 / 4	4	92			:
WW	Funk	5135	FA_Club Jazz 2 _N	4 / 4	1	92			:
WW	Funk	5136	FB_Club Jazz 2 _N	4 / 4	1	92			:
WW	Funk	5137	FC_Club Jazz 2 _N	4 / 4	1	92			:
WW	Funk	5138	BA_Club Jazz 2 _N	4 / 4	1	92			:
WW	Latin	5139	MA_Samba _N	4 / 4	2	120			Saxophone
WW	Latin	5140	MC_Samba	4 / 4	4	120			:
WW	Latin	5141	MD_Samba _N	4 / 4	4	120			:
WW	Latin	5142	FC_Samba _N	4 / 4	2	120			:
WW	World	5143	MB2_Turkish _N	4 / 4	2	105			:
WW	World	5144	MC2_Turkish _N	9 / 8	2	125			:
WW	World	5145	MD2_Turkish _N	9 / 8	2	125			:
WW	World	5146	ME2_Turkish	4 / 4	2	105			:
WW	General	5147	MC_Baroque _C	4 / 4	4	88			Oboe
WW	General	5148	MD_Baroque _C	4 / 4	4	88			:
WW	General	5149	FB_Baroque _C	4 / 4	1	88			:
WW	General	5150	FC_Baroque _C	4 / 4	1	88			:
WW	General	5151	FD_Baroque _C	4 / 4	1	88			:
WW	General	5152	Accel1 Mono	4 / 4	16	90			Flute
WW	General	5153	Accel2 Mono	4 / 4	16	90			:
WW	General	5154	Flute Accent _N	4 / 4	1	102			:
WW	General	5155	Flute1	4 / 4	1	120			:
WW	General	5156	Flute2	4 / 4	1	120			:
WW	General	5157	Flute3	4 / 4	1	120			:
WW	General	5158	Flutter1	4 / 4	1	120			Flute/Reed
WW	General	5159	Flutter2	4 / 4	1	120			:
WW	General	5160	Flutter3	4 / 4	1	120			:
SynLd	House	5161	MA_ElectroPop2Hook1a	4 / 4	1	124			Synth Lead
SynLd	House	5162	MA_ElectroPop2Hook1b	4 / 4	1	124			:
SynLd	House	5163	MA_ElectroPop2Hook1b CF8	4 / 4	8	124			:
SynLd	House	5164	MA_ElectroPop2Hook2a	4 / 4	8	124			:
SynLd	House	5165	MA_ElectroPop2Hook2b	4 / 4	1	124			:
SynLd	House	5166	MA_ElectroPop2Hook2b CF16	4 / 4	8	124			:
SynLd	House	5167	MA_ElectroPop2Hook3a	4 / 4	1	124			:
SynLd	House	5168	MA_ElectroPop2Hook3a CF2	4 / 4	2	124			:
SynLd	House	5169	MA_ElectroPop2Hook3b	4 / 4	4	124			:
SynLd	House	5170	MA_ElectroPop2Hook3b CF8	4 / 4	8	124			:
SynLd	House	5171	MA_ElectroPop2Hook4	4 / 4	2	124			:
SynLd	House	5172	MA_ElectroPop2Hook4 CF2	4 / 4	2	124			:
SynLd	House	5173	MA_Reggaeton1 BrassStab _N	4 / 4	2	90			:
SynLd	House	5174	MC_Reggaeton1 BrassStab _N	4 / 4	2	90			:
SynLd	House	5175	MD_Reggaeton1 BrassStab _N	4 / 4	4	90			:
SynLd	House	5176	ME_Reggaeton1 BrassStab _N	4 / 4	2	90			:
SynLd	House	5177	MF_Reggaeton1 BrassStab	4 / 4	4	90			:
SynLd	House	5178	MG_Reggaeton1 BrassStab	4 / 4	4	90			:
SynLd	House	5179	MH_Reggaeton1 BrassStab	4 / 4	4	90			:
SynLd	House	5180	MH_UK Garage1 Lead _N	4 / 4	4	132			:
SynLd	House	5181	MA_Syn Acid 1	4 / 4	4	120			:
SynLd	House	5182	MA_Syn Acid 2	4 / 4	4	120			:
SynLd	House	5183	MA_Syn Acid 3	4 / 4	4	120			:
SynLd	House	5184	MA_SynthRiff2-01 _N	4 / 4	1	135			:
SynLd	House	5185	MA_SynthRiff2-01	4 / 4	1	135			:
SynLd	House	5186	MA_SynthRiff2-02	4 / 4	1	140			:
SynLd	House	5187	MA_SynthRiff2-03	4 / 4	1	130			:
SynLd	House	5188	MA_SynthRiff2-04	4 / 4	1	130			:
SynLd	House	5189	MA_SynthRiff2-05	4 / 4	1	130			:
SynLd	House	5190	MA_SynthRiff2-06	4 / 4	1	130			:
SynLd	House	5191	MA_SynthRiff2-07	4 / 4	1	130			:
SynLd	House	5192	MA_SynthRiff2-08	4 / 4	2	130			:
SynLd	House	5193	MA_SynthRiff2-09	4 / 4	4	130			:
SynLd	House	5194	MA_SynthRiff2-10	4 / 4	1	130			:
SynLd	House	5195	MA_LayerHook2-01 _N	4 / 4	2	128			:
SynLd	House	5196	MA_LayerHook2-01	4 / 4	2	128			:
SynLd	House	5197	MA_LayerHook2-02 _N	4 / 4	2	128			:
SynLd	House	5198	MA_LayerHook2-02	4 / 4	2	128			:
SynLd	House	5199	MA_LayerHook2-03 _N	4 / 4	2	128			:
SynLd	House	5200	MA_LayerHook2-03	4 / 4	2	128			:
SynLd	House	5201	MA_LayerHook2-04 _N	4 / 4	4	128			:
SynLd	House	5202	MA_LayerHook2-04	4 / 4	4	128			:
SynLd	House	5203	MA_LayerHook2-05 _N	4 / 4	2	128			:
SynLd	House	5204	MA_LayerHook2-05	4 / 4	2	128			:
SynLd	House	5205	MA_LayerHook2-06 _N	4 / 4	2	128			:
SynLd	House	5206	MA_LayerHook2-06	4 / 4	2	128			:
SynLd	House	5207	MA_LayerHook2-07 _N	4 / 4	2	128			:
SynLd	House	5208	MA_LayerHook2-07	4 / 4	2	128			:
SynLd	House	5209	MA_LayerHook2-08 _N	4 / 4	2	128			:
SynLd	House	5210	MA_LayerHook2-08	4 / 4	2	128			:
SynLd	House	5211	MA_LayerHook2-09 _N	4 / 4	2	128			:
SynLd	House	5212	MA_LayerHook2-09	4 / 4	2	128			:
SynLd	House	5213	MA_LayerHook2-10 _N	4 / 4	2	128			:
SynLd	House	5214	MA_LayerHook2-10	4 / 4	2	128			:
SynLd	House	5215	MA_16th Riff 01 _N	4 / 4	4	130			:
SynLd	House	5216	MA_16th Riff 01	4 / 4	4	130			:
SynLd	House	5217	MA_16th Riff 02 _N	4 / 4	4	124			:
SynLd	House	5218	MA_16th Riff 02	4 / 4	4	124			:
SynLd	House	5219	MA_16th Riff 03 _N	4 / 4	2	124			:
SynLd	House	5220	MA_16th Riff 03	4 / 4	2	124			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynLd	House	5221	MA_16th Riff 04 _N	4 / 4	2	124			:
SynLd	House	5222	MA_16th Riff 04	4 / 4	2	124			:
SynLd	House	5223	MA_16th Riff 05 _N	4 / 4	2	124			:
SynLd	House	5224	MA_16th Riff 05	4 / 4	2	124			:
SynLd	House	5225	MA_16th Riff 06 _N	4 / 4	2	130			:
SynLd	House	5226	MA_16th Riff 06	4 / 4	2	130			:
SynLd	House	5227	MA_16th Riff 07 _N	4 / 4	2	124			:
SynLd	House	5228	MA_16th Riff 07	4 / 4	2	124			:
SynLd	House	5229	MA_16th Riff 08 _N	4 / 4	4	130			:
SynLd	House	5230	MA_16th Riff 08	4 / 4	4	130			:
SynLd	House	5231	MA_16th Riff 09 _N	4 / 4	4	130			:
SynLd	House	5232	MA_16th Riff 09	4 / 4	4	130			:
SynLd	House	5233	MA_16th Riff 10 _N	4 / 4	4	130			:
SynLd	House	5234	MA_16th Riff 10	4 / 4	4	130			:
SynLd	House	5235	MA_MelodcPluck01 _N	4 / 4	4	130			:
SynLd	House	5236	MA_MelodicPluck01	4 / 4	4	130			:
SynLd	House	5237	MA_MelodcPluck02 _N	4 / 4	2	130			:
SynLd	House	5238	MA_MelodicPluck02	4 / 4	2	130			:
SynLd	House	5239	MA_MelodcPluck03 _N	4 / 4	4	130			:
SynLd	House	5240	MA_MelodicPluck03	4 / 4	4	130			:
SynLd	House	5241	MA_MelodcPluck04 _N	4 / 4	2	130			:
SynLd	House	5242	MA_MelodicPluck04	4 / 4	2	130			:
SynLd	House	5243	MA_MelodcPluck05 _N	4 / 4	2	130			:
SynLd	House	5244	MA_MelodicPluck05	4 / 4	2	130			:
SynLd	House	5245	MA_MelodcPluck06 _N	4 / 4	2	140			:
SynLd	House	5246	MA_MelodicPluck06	4 / 4	2	140			:
SynLd	House	5247	MA_MelodcPluck07 _N	4 / 4	2	130			:
SynLd	House	5248	MA_MelodicPluck07	4 / 4	2	130			:
SynLd	House	5249	MA_SimpleNt 2-01 _N	4 / 4	4	130			:
SynLd	House	5250	MA_SimpleNt 2-01	4 / 4	4	130			:
SynLd	House	5251	MA_SimpleNt 2-02 _N	4 / 4	2	130			:
SynLd	House	5252	MA_SimpleNt 2-02	4 / 4	2	130			:
SynLd	House	5253	MA_SimpleNt 2-03 _N	4 / 4	2	130			:
SynLd	House	5254	MA_SimpleNt 2-03	4 / 4	2	130			:
SynLd	House	5255	MA_SimpleNt 2-04a	4 / 4	2	130			:
SynLd	House	5256	MA_SimpleNt 2-04b	4 / 4	2	130			:
SynLd	House	5257	MA_SimpleNt 2-05 _N	4 / 4	2	130			:
SynLd	House	5258	MA_SimpleNt 2-05	4 / 4	2	130			:
SynLd	House	5259	MA_SimpleNt 2-06 _N	4 / 4	2	130			:
SynLd	House	5260	MA_SimpleNt 2-06	4 / 4	2	130			:
SynLd	House	5261	MA_SimpleNt 2-07 _N	4 / 4	2	130			:
SynLd	House	5262	MA_SimpleNt 2-07	4 / 4	2	130			:
SynLd	House	5263	MA_SimpleNt 2-08a	4 / 4	2	130			:
SynLd	House	5264	MA_SimpleNt 2-08b	4 / 4	2	130			:
SynLd	House	5265	MA_SimpleNt 2-09 _N	4 / 4	2	130			:
SynLd	House	5266	MA_SimpleNt 2-09	4 / 4	2	130			:
SynLd	House	5267	MA_SimpleNt 2-10 _N	4 / 4	2	130			:
SynLd	House	5268	MA_SimpleNt 2-10	4 / 4	2	130			:
SynLd	House	5269	MA_SyChrdRiff1-1 _N	4 / 4	2	130			:
SynLd	House	5270	MA_SyChrdRiff1-1	4 / 4	2	130			:
SynLd	House	5271	MA_SyChrdRiff1-2 _N	4 / 4	2	130			:
SynLd	House	5272	MA_SyChrdRiff1-2	4 / 4	2	130			:
SynLd	House	5273	MA_SyChrdRiff1-3 _N	4 / 4	2	130			:
SynLd	House	5274	MA_SyChrdRiff1-3	4 / 4	2	130			:
SynLd	House	5275	MA_SynthRiff3-01 _N	4 / 4	4	130			:
SynLd	House	5276	MA_SynthRiff3-02	4 / 4	4	130			:
SynLd	House	5277	MA_SynthRiff3-03 _N	4 / 4	2	130			:
SynLd	House	5278	MA_SynthRiff3-04 _N	4 / 4	2	130			:
SynLd	House	5279	MA_SynthRiff3-05 _N	4 / 4	2	130			:
SynLd	House	5280	MA_SynthRiff3-06 _N	4 / 4	2	130			:
SynLd	House	5281	MA_SynthRiff3-07 _N	4 / 4	2	147			:
SynLd	House	5282	MA_SynthRiff3-08 _N	4 / 4	2	147			:
SynLd	House	5283	MA_SynthRiff3-09 _N	4 / 4	2	147			:
SynLd	House	5284	MA_SynthRiff3-10 _N	4 / 4	2	147			:
SynLd	House	5285	MA_SynthRiff3-11 _N	4 / 4	4	147			:
SynLd	House	5286	MA_SynthRiff3-12 _N	4 / 4	2	130			:
SynLd	House	5287	MA_SynthRiff3-13 _N	4 / 4	2	130			:
SynLd	House	5288	MA_EmoDM Lead	4 / 4	4	120			:
SynLd	House	5289	MA_Octopus	4 / 4	4	150			:
SynLd	House	5290	MA_Skate King _N	4 / 4	4	133			:
SynLd	Techno	5291	MA_SynthRiff1-01 _N	4 / 4	4	130			:
SynLd	Techno	5292	MA_SynthRiff1-01	4 / 4	4	130			:
SynLd	Techno	5293	MA_SynthRiff1-02 _N	4 / 4	2	130			:
SynLd	Techno	5294	MA_SynthRiff1-02	4 / 4	2	130			:
SynLd	Techno	5295	MA_SynthRiff1-03 _N	4 / 4	4	130			:
SynLd	Techno	5296	MA_SynthRiff1-03	4 / 4	4	130			:
SynLd	Techno	5297	MA_SynthRiff1-04 _N	4 / 4	2	130			:
SynLd	Techno	5298	MA_SynthRiff1-04	4 / 4	2	130			:
SynLd	Techno	5299	MA_SynthRiff1-05 _N	4 / 4	2	130			:
SynLd	Techno	5300	MA_SynthRiff1-05	4 / 4	2	130			:
SynLd	Techno	5301	MA_SynthRiff1-06a	4 / 4	1	130			:
SynLd	Techno	5302	MA_SynthRiff1-06b	4 / 4	1	130			:
SynLd	Techno	5303	MA_SynthRiff1-07 _N	4 / 4	4	130			:
SynLd	Techno	5304	MA_SynthRiff1-07	4 / 4	4	130			:
SynLd	Techno	5305	MA_SynthRiff1-08 _N	4 / 4	2	130			:
SynLd	Techno	5306	MA_SynthRiff1-08	4 / 4	2	130			:
SynLd	Techno	5307	MA_SynthRiff1-09	4 / 4	2	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynLd	Techno	5308	MA_SynthRiff1-10	4 / 4	2	130			:
SynLd	Techno	5309	MA_SynthRiff1-11	4 / 4	2	130			:
SynLd	Techno	5310	MA_SynthRiff1-12	4 / 4	1	130			:
SynLd	Techno	5311	MA_LayerHook1-01 _N	4 / 4	2	130			:
SynLd	Techno	5312	MA_LayerHook1-01	4 / 4	2	130			:
SynLd	Techno	5313	MA_LayerHook1-02	4 / 4	4	130			:
SynLd	Techno	5314	MA_LayerHook1-03 _N	4 / 4	4	130			:
SynLd	Techno	5315	MA_LayerHook1-03	4 / 4	4	130			:
SynLd	Techno	5316	MA_LayerHook1-04 _N	4 / 4	2	130			:
SynLd	Techno	5317	MA_LayerHook1-04	4 / 4	2	130			:
SynLd	Techno	5318	MA_LayerHook1-05 _N	4 / 4	4	130			:
SynLd	Techno	5319	MA_LayerHook1-05	4 / 4	4	130			:
SynLd	Techno	5320	MA_LayerHook1-06 _N	4 / 4	2	130			:
SynLd	Techno	5321	MA_LayerHook1-06	4 / 4	2	130			:
SynLd	Techno	5322	MA_LayerHook1-07 _N	4 / 4	2	130			:
SynLd	Techno	5323	MA_LayerHook1-07	4 / 4	2	130			:
SynLd	Techno	5324	MA_LayerHook1-08 _N	4 / 4	4	130			:
SynLd	Techno	5325	MA_LayerHook1-08	4 / 4	4	130			:
SynLd	Techno	5326	MA_LayerHook1-09 _N	4 / 4	2	130			:
SynLd	Techno	5327	MA_LayerHook1-09	4 / 4	2	130			:
SynLd	Techno	5328	MA_LayerHook1-10	4 / 4	2	130			:
SynLd	Techno	5329	MA_LayerHook1-11	4 / 4	2	130			:
SynLd	Techno	5330	MA_LayerHook1-12	4 / 4	2	130			:
SynLd	Techno	5331	MA_Simple Lead 01	4 / 4	1	130			:
SynLd	Techno	5332	MA_Simple Lead 02	4 / 4	1	130			:
SynLd	Techno	5333	MA_Simple Lead 03	4 / 4	1	130			:
SynLd	Techno	5334	MA_Simple Lead 04	4 / 4	1	130			:
SynLd	Techno	5335	MA_Simple Lead 05	4 / 4	1	130			:
SynLd	Techno	5336	MA_Simple Lead 06	4 / 4	1	130			:
SynLd	Techno	5337	MA_Simple Lead 07	4 / 4	1	130			:
SynLd	Techno	5338	MA_Simple Lead08 _N	4 / 4	4	130			:
SynLd	Techno	5339	MA_Simple Lead 08	4 / 4	4	130			:
SynLd	Techno	5340	MA_Simple Lead09 _N	4 / 4	4	130			:
SynLd	Techno	5341	MA_Simple Lead 09	4 / 4	4	130			:
SynLd	Techno	5342	MA_Simple Lead10 _N	4 / 4	4	130			:
SynLd	Techno	5343	MA_Simple Lead 10	4 / 4	4	130			:
SynLd	Techno	5344	MA_Alarm Lucky _N	4 / 4	4	128			:
SynLd	Techno	5345	MA_Switched _N	4 / 4	1	122			:
SynLd	Techno	5346	MA_Alarma _N	4 / 4	1	140			:
SynLd	Techno	5347	MA_Unison Sky _N	4 / 4	4	120			:
SynLd	Techno	5348	MA_Trance 1 _C	4 / 4	8	142			:
SynLd	Techno	5349	MB_Trance 1 _C	4 / 4	4	142			:
SynLd	Techno	5350	MC_Trance 1 _C	4 / 4	16	142			:
SynLd	Techno	5351	FA_Trance 1 _C	4 / 4	2	142			:
SynLd	Techno	5352	FB_Trance 1 _C	4 / 4	8	142			:
SynLd	Techno	5353	FC_Trance 1 _C	4 / 4	8	142			:
SynLd	Techno	5354	BA_Trance 1 _C	4 / 4	1	142			:
SynLd	Techno	5355	MA_Trance 1 _N	4 / 4	8	142			:
SynLd	Techno	5356	MB_Trance 1 _N	4 / 4	4	142			:
SynLd	Techno	5357	MC_Trance 1 _N	4 / 4	16	142			:
SynLd	Techno	5358	FA_Trance 1 _N	4 / 4	2	142			:
SynLd	Techno	5359	FB_Trance 1 _N	4 / 4	8	142			:
SynLd	Techno	5360	FC_Trance 1 _N	4 / 4	8	142			:
SynLd	Techno	5361	BA_Trance 1 _N	4 / 4	1	142			:
SynLd	Techno	5362	MA_Trance 3 _C	4 / 4	2	140			:
SynLd	Techno	5363	MB_Trance 3 _C	4 / 4	2	140			:
SynLd	Techno	5364	MC_Trance 3 _C	4 / 4	3	140			:
SynLd	Techno	5365	FA_Trance 3 _C	4 / 4	2	140			:
SynLd	Techno	5366	FB_Trance 3 _C	4 / 4	2	140			:
SynLd	Techno	5367	FC_Trance 3 _C	4 / 4	4	140			:
SynLd	Techno	5368	BA_Trance 3 _C	4 / 4	1	140			:
SynLd	Techno	5369	MA_Trance 3 _N	4 / 4	2	140			:
SynLd	Techno	5370	MB_Trance 3 _N	4 / 4	2	140			:
SynLd	Techno	5371	MC_Trance 3 _N	4 / 4	3	140			:
SynLd	Techno	5372	FA_Trance 3 _N	4 / 4	2	140			:
SynLd	Techno	5373	FB_Trance 3 _N	4 / 4	2	140			:
SynLd	Techno	5374	FC_Trance 3 _N	4 / 4	4	140			:
SynLd	Techno	5375	BA_Trance 3	4 / 4	1	140			:
SynLd	Techno	5376	MA_Trance 4 _C	4 / 4	4	130			:
SynLd	Techno	5377	MB_Trance 4 _C	4 / 4	2	130			:
SynLd	Techno	5378	MC_Trance 4 _C	4 / 4	4	130			:
SynLd	Techno	5379	FA_Trance 4 _C	4 / 4	4	130			:
SynLd	Techno	5380	FB_Trance 4 _C	4 / 4	2	130			:
SynLd	Techno	5381	FC_Trance 4 _C	4 / 4	4	130			:
SynLd	Techno	5382	BA_Trance 4 _C	4 / 4	2	130			:
SynLd	Techno	5383	MA_Trance 4 _N	4 / 4	4	130			:
SynLd	Techno	5384	MB_Trance 4 _N	4 / 4	2	130			:
SynLd	Techno	5385	MC_Trance 4 _N	4 / 4	4	130			:
SynLd	Techno	5386	FA_Trance 4 _N	4 / 4	4	130			:
SynLd	Techno	5387	FB_Trance 4 _N	4 / 4	2	130			:
SynLd	Techno	5388	FC_Trance 4 _N	4 / 4	4	130			:
SynLd	Techno	5389	BA_Trance 4 _N	4 / 4	2	130			:
SynLd	Techno	5390	MA_Trance Lead1 _N	4 / 4	8	143			:
SynLd	Techno	5391	MA_Trance Lead2 _N	4 / 4	2	143			:
SynLd	Techno	5392	MA_Trance Lead3 _N	4 / 4	2	143			:
SynLd	Techno	5393	MA_Trance Lead4 _N	4 / 4	1	143			:
SynLd	Techno	5394	MA_Trance Lead5 _N	4 / 4	2	143			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynLd	Techno	5395	MA_Psyche Lead1 _N	4 / 4	1	143			:
SynLd	Techno	5396	MA_Psyche Lead2 _N	4 / 4	1	143			:
SynLd	Techno	5397	MA_Psyche Lead3 _N	4 / 4	1	143			:
SynLd	Techno	5398	MA_Psyche Lead4 _N	4 / 4	2	143			:
SynLd	Techno	5399	MA_Psyche Lead5 _N	4 / 4	2	143			:
SynLd	Pop Rock	5400	MA_BreakLoop1 Lead _N	4 / 4	4	85			:
SynLd	Pop Rock	5401	MA_Tracker 1 Synth1 _N	4 / 4	2	170			:
SynLd	Pop Rock	5402	MA_Tracker 2 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5403	MA_Tracker 3 Synth1 _N	4 / 4	2	170			:
SynLd	Pop Rock	5404	MA_Tracker 4 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5405	MA_Tracker 5 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5406	MA_Tracker 6 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5407	MA_Tracker 7 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5408	MA_Tracker 8 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5409	MA_Tracker 9 Synth1 _N	4 / 4	4	170			:
SynLd	Pop Rock	5410	MA_Tracker 10 Synth1 _N	4 / 4	4	170			:
SynLd	D&B	5411	MA_Fun Lead _N	4 / 4	4	150			:
SynLd	D&B	5412	MA_Big Beat 2 _N	4 / 4	4	145			:
SynLd	D&B	5413	MB_Big Beat 2 _N	4 / 4	8	145			:
SynLd	D&B	5414	MC_Big Beat 2 _N	4 / 4	4	145			:
SynLd	D&B	5415	FA_Big Beat 2 _N	4 / 4	1	145			:
SynLd	D&B	5416	FB_Big Beat 2 _N	4 / 4	1	145			:
SynLd	D&B	5417	FC_Big Beat 2 _N	4 / 4	1	145			:
SynLd	D&B	5418	BA_Big Beat 2 _N	4 / 4	2	145			:
SynLd	Chill	5419	MA_Sunrise Arp _N	4 / 4	1	103			:
SynLd	Chill	5420	MA_Sunset _N	4 / 4	1	120			:
SynLd	Hip Hop	5421	MA_Trap Lead A1 _N	4 / 4	2	88			:
SynLd	Hip Hop	5422	MA_Trap Lead A2 _N	4 / 4	2	88			:
SynLd	Hip Hop	5423	MA_Trap Lead A3 _N	4 / 4	2	88			:
SynLd	Hip Hop	5424	MA_Trap Lead A4 _N	4 / 4	2	88			:
SynLd	Hip Hop	5425	MA_Trap Lead A5 _N	4 / 4	2	88			:
SynLd	Hip Hop	5426	MA_Trap Lead A6 _N	4 / 4	2	88			:
SynLd	Hip Hop	5427	MA_Trap Lead B1 _N	4 / 4	4	88			:
SynLd	Hip Hop	5428	MA_Trap Lead B2 _N	4 / 4	2	88			:
SynLd	Hip Hop	5429	MA_Trap Lead B3 _N	4 / 4	1	88			:
SynLd	Hip Hop	5430	MA_Trap Lead B4 _N	4 / 4	1	88			:
SynLd	Hip Hop	5431	MA_Trap Lead B5 _N	4 / 4	2	88			:
SynLd	Hip Hop	5432	MA_Trap Lead B6 _N	4 / 4	2	88			:
SynLd	Hip Hop	5433	MA_Trap Lead B7 _N	4 / 4	2	88			:
SynLd	Hip Hop	5434	MA_SynClassicTrap 1	4 / 4	4	140			:
SynLd	Hip Hop	5435	MA_SynClassicTrap 2	4 / 4	4	120			:
SynLd	Hip Hop	5436	MA_MEast Riff PB 1	4 / 4	4	105			:
SynLd	Hip Hop	5437	MA_MEast Riff PB 2	4 / 4	4	105			:
SynLd	Hip Hop	5438	MA_MEast Riff PB 3	4 / 4	4	120			:
SynLd	Hip Hop	5439	MA_MEast Riff PB 4	4 / 4	4	120			:
SynLd	Hip Hop	5440	MA_MEast Riff PB 5	4 / 4	4	120			:
SynLd	Hip Hop	5441	MA_Simple Melody 1	4 / 4	4	120			:
SynLd	Hip Hop	5442	MA_Simple Melody 2	4 / 4	4	120			:
SynLd	Hip Hop	5443	MA_Simple Melody 3	4 / 4	4	120			:
SynLd	Hip Hop	5444	MA_Harlem	4 / 4	4	140			:
SynLd	Hip Hop	5445	MA_SimpleNt 1-01	4 / 4	4	124			:
SynLd	Hip Hop	5446	MA_SimpleNt 1-02	4 / 4	4	130			:
SynLd	Hip Hop	5447	MA_Squid Funk _N	4 / 4	1	96			:
SynLd	Hip Hop	5448	MA_DirtySynth	4 / 4	2	85			:
SynLd	Hip Hop	5449	MB_DirtySynth	4 / 4	2	85			:
SynLd	Hip Hop	5450	MC_DirtySynth	4 / 4	2	85			:
SynLd	Hip Hop	5451	MD_DirtySynth	4 / 4	2	85			:
SynLd	Hip Hop	5452	MA_HipHopEpic /1	4 / 4	2	85			:
SynLd	Hip Hop	5453	MA_HipHopEpic /2 _N	4 / 4	2	85			:
SynLd	Hip Hop	5454	MA_HipHopEpic /3 _N	4 / 4	2	85			:
SynLd	Hip Hop	5455	MA_HipHopEpic /4 _N	4 / 4	2	85			:
SynLd	Hip Hop	5456	MB_Hip Rock 1 _C	4 / 4	4	90			:
SynLd	Hip Hop	5457	MC_Hip Rock 1 _C	4 / 4	4	90			:
SynLd	Hip Hop	5458	FA_Hip Rock 1 _C	4 / 4	1	90			:
SynLd	Hip Hop	5459	FB_Hip Rock 1 _C	4 / 4	1	90			:
SynLd	Hip Hop	5460	FC_Hip Rock 1 _C	4 / 4	1	90			:
SynLd	Hip Hop	5461	MA_Reggaeton 2 _C	4 / 4	4	98			:
SynLd	Hip Hop	5462	MB_Reggaeton 2 _C	4 / 4	4	98			:
SynLd	Hip Hop	5463	MC_Reggaeton 2 _C	4 / 4	4	98			:
SynLd	Hip Hop	5464	FA_Reggaeton 2 _C	4 / 4	1	98			:
SynLd	Hip Hop	5465	FB_Reggaeton 2 _C	4 / 4	1	98			:
SynLd	Hip Hop	5466	FC_Reggaeton 2 _C	4 / 4	1	98			:
SynLd	Hip Hop	5467	MA_Rap Lead1	4 / 4	2	120			:
SynLd	Hip Hop	5468	MA_Rap Lead2	4 / 4	2	100			:
SynLd	Modern R&B	5469	MB_R&B Disco _N	4 / 4	2	110			:
SynLd	Modern R&B	5470	MC_R&B Disco _N	4 / 4	1	110			:
SynLd	Modern R&B	5471	MD_R&B Disco _N	4 / 4	2	110			:
SynLd	Modern R&B	5472	FA_R&B Disco _N	4 / 4	1	110			:
SynLd	Modern R&B	5473	FB_R&B Disco	4 / 4	1	110			:
SynLd	Modern R&B	5474	FC_R&B Disco _N	4 / 4	2	110			:
SynLd	Modern R&B	5475	MA_R&B Ballad 1 _C	4 / 4	4	113			:
SynLd	Modern R&B	5476	MB_R&B Ballad 1 _C	4 / 4	4	113			:
SynLd	Modern R&B	5477	MC_R&B Ballad 1 _C	4 / 4	4	113			:
SynLd	Modern R&B	5478	FA_R&B Ballad 1 _C	4 / 4	1	113			:
SynLd	Modern R&B	5479	FB_R&B Ballad 1 _C	4 / 4	1	113			:
SynLd	Modern R&B	5480	FC_R&B Ballad 1 _C	4 / 4	1	113			:
SynLd	Funk	5481	MA_Modern Funk Lead 1	4 / 4	4	124			:
SynLd	Funk	5482	MA_Modern Funk Lead 2	4 / 4	4	124			:
SynLd	Funk	5483	MA_Club Jazz 1 _C	4 / 4	4	125			:
SynLd	Funk	5484	MB_Club Jazz 1 _C	4 / 4	4	125			:
SynLd	Funk	5485	MC_Club Jazz 1 _C	4 / 4	4	125			:
SynLd	Funk	5486	FA_Club Jazz 1 _C	4 / 4	1	125			:
SynLd	Funk	5487	FB_Club Jazz 1 _C	4 / 4	1	125			:
SynLd	Funk	5488	FC_Club Jazz 1 _C	4 / 4	1	125			:
SynLd	Funk	5489	BA_Club Jazz 1 _C	4 / 4	1	125			:
SynLd	Funk	5490	MA_Club Jazz 1 _N	4 / 4	2	125			:
SynLd	Funk	5491	MB_Club Jazz 1 _N	4 / 4	4	125			:
SynLd	Funk	5492	MC_Club Jazz 1 _N	4 / 4	4	125			:
SynLd	Funk	5493	FA_Club Jazz 1	4 / 4	1	125			:
SynLd	Funk	5494	FB_Club Jazz 1 _N	4 / 4	1	125			:
SynLd	Funk	5495	FC_Club Jazz 1 _N	4 / 4	1	125			:
SynLd	Funk	5496	BA_Club Jazz 1 _N	4 / 4	1	125			:
SynLd	Pop Rock	5497	MA_Atebits Rock Lead _N	4 / 4	2	120			:
SynLd	Pop Rock	5498	MB_Atebits Rock Lead _N	4 / 4	4	120			:
SynLd	Pop Rock	5499	MC_Atebits Rock Lead _N	4 / 4	2	120			:
SynLd	Pop Rock	5500	MD_Atebits Rock Lead _N	4 / 4	1	120			:
SynLd	Pop Rock	5501	ME_Atebits Rock Lead _N	4 / 4	3	120			:
SynLd	Pop Rock	5502	MF_Atebits Rock Lead _N	4 / 4	2	120			:
SynLd	Pop Rock	5503	MG_Atebits Rock Lead _N	4 / 4	3	120			:
SynLd	Pop Rock	5504	MH_Atebits Rock Lead _N	4 / 4	2	120			:
SynLd	Pop Rock	5505	MI_Atebits Rock Lead _N	4 / 4	2	120			:
SynLd	General	5506	MA_Needlz	4 / 4	2	132			:
SynLd	General	5507	MA_Pretzel	4 / 4	1	120			:
SynLd	General	5508	MA_DitDot	4 / 4	2	145			:
SynLd	General	5509	MA_CurlyQ	4 / 4	1	145			:
SynLd	General	5510	MA_Sproingo	4 / 4	2	120			:
SynLd	General	5511	MA_Bouncy	4 / 4	1	138			:
Pad	House	5512	MA_Reggaeton1 Pad	4 / 4	2	90			Synth Pad
Pad	House	5513	MB_Reggaeton1 Pad	4 / 4	4	90			:
Pad	House	5514	MC_Reggaeton1 Pad	4 / 4	2	90			:
Pad	House	5515	MD_Reggaeton1 Pad	4 / 4	4	90			:
Pad	House	5516	ME_Reggaeton1 Pad	4 / 4	2	90			:
Pad	House	5517	MG_Reggaeton1 Pad _N	4 / 4	4	90			:
Pad	House	5518	MH_Reggaeton1 Pad	4 / 4	4	90			:
Pad	House	5519	MA_TropicalHouse1 Pad	4 / 4	3	110			:
Pad	House	5520	MB_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5521	MC_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5522	MD_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5523	ME_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5524	MF_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5525	MG_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5526	MH_TropicalHouse1 Pad	4 / 4	4	110			:
Pad	House	5527	MA_UK Garage1 Pad _N	4 / 4	8	132			:
Pad	House	5528	MB_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5529	MC_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5530	MD_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5531	ME_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5532	MF_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5533	MG_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5534	MH_UK Garage1 Pad _N	4 / 4	4	132			:
Pad	House	5535	MA_Baby Jump Keys	4 / 4	2	120			:
Pad	House	5536	MA_CosmicHeartLead	4 / 4	2	122			:
Pad	House	5537	MA_Deep N Low Keys	4 / 4	2	122			:
Pad	House	5538	MA_Play Thing Pad	4 / 4	2	110			:
Pad	House	5539	MA_ShowTheLights _N	4 / 4	1	120			:
Pad	Techno	5540	MC2_Techno 1 _N	4 / 4	8	135			:
Pad	Techno	5541	MA_Cloud View _N	4 / 4	1	120			:
Pad	Pop Rock	5542	MA_Pink Oracle	4 / 4	8	165			:
Pad	Pop Rock	5543	ME_Cliff _N	4 / 4	4	165			:
Pad	Pop Rock	5544	MH_The Golden Key _N	4 / 4	8	165			:
Pad	Pop Rock	5545	MA_BreakLoop11 Pad _N	4 / 4	4	118			:
Pad	Pop Rock	5546	MA_Tracker 5 Synth2 _N	4 / 4	2	170			:
Pad	Pop Rock	5547	MA_Tracker 6 Synth2 _N	4 / 4	2	170			:
Pad	Pop Rock	5548	MA_Tracker 7 Synth2 _N	4 / 4	2	170			:
Pad	Pop Rock	5549	MA_Tracker 10 Synth2 _N	4 / 4	2	170			:
Pad	D&B	5550	MA_Dubtastic Pad	4 / 4	2	140			:
Pad	Chill	5551	MA_Atmo Pad Lp	4 / 4	1	84			:
Pad	Chill	5552	MA_Atmo Pad CF4	4 / 4	4	84			:
Pad	Chill	5553	MA_Science _N	4 / 4	2	120			:
Pad	Hip Hop	5554	MA_SynClassic Trap	4 / 4	4	120			:
Pad	Hip Hop	5555	MA_Trap Hard Keys	4 / 4	2	107			:
Pad	Modern R&B	5556	MA_Pop Shuffle3 _C	4 / 4	4	80			:
Pad	Modern R&B	5557	MB_Pop Shuffle3 _C	4 / 4	4	80			:
Pad	Modern R&B	5558	MC_Pop Shuffle3 _C	4 / 4	4	80			:
Pad	Modern R&B	5559	FA_Pop Shuffle3 _C	4 / 4	1	80			:
Pad	Modern R&B	5560	FB_Pop Shuffle3 _C	4 / 4	1	80			:
Pad	Modern R&B	5561	FC_Pop Shuffle3 _C	4 / 4	1	80			:
Pad	Modern R&B	5562	BA_Pop Shuffle3 _C	4 / 4	1	80			:
Pad	Modern R&B	5563	MA_Pop Shuffle3 _N	4 / 4	4	80			:
Pad	Modern R&B	5564	MB_Pop Shuffle3 _N	4 / 4	4	80			:
Pad	Modern R&B	5565	MC_Pop Shuffle3 _N	4 / 4	4	80			:
Pad	Modern R&B	5566	FA_Pop Shuffle3 _N	4 / 4	1	80			:
Pad	Modern R&B	5567	FB_Pop Shuffle3 _N	4 / 4	1	80			:
Pad	Modern R&B	5568	FC_Pop Shuffle3 _N	4 / 4	1	80			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Pad	Modern R&B	5569	BA_Pop Shuffle3 _N	4 / 4	1	80			:
Pad	Modern R&B	5570	MA_Chart R&B _C	4 / 4	4	130			:
Pad	Modern R&B	5571	MB_Chart R&B _C	4 / 4	4	130			:
Pad	Modern R&B	5572	MC_Chart R&B _C	4 / 4	4	130			:
Pad	Modern R&B	5573	FA_Chart R&B _C	4 / 4	1	130			:
Pad	Modern R&B	5574	FB_Chart R&B _C	4 / 4	1	130			:
Pad	Modern R&B	5575	FC_Chart R&B _C	4 / 4	1	130			:
Pad	Modern R&B	5576	BA_Chart R&B _C	4 / 4	1	130			:
Pad	Modern R&B	5577	EA_Chart R&B _C	4 / 4	5	130			:
Pad	Modern R&B	5578	EB_Chart R&B _C	4 / 4	10	130			:
Pad	Modern R&B	5579	MD_Smooth 1	4 / 4	2	115			:
Pad	Modern R&B	5580	FC_Smooth 1	4 / 4	2	115			:
Pad	Funk	5581	MA_Modern Funk Pad 1	4 / 4	4	124			:
Pad	Funk	5582	MA_Modern Funk Pad 2	4 / 4	2	124			:
Pad	Funk	5583	MA_Modern Funk Pad 3	4 / 4	4	124			:
Pad	Funk	5584	MA_Modern Funk Pad 4	4 / 4	4	124			:
Pad	Funk	5585	MA_Modern Funk Pad 5	4 / 4	2	124			:
Pad	Funk	5586	MA_Modern Funk Pad 6	4 / 4	4	124			:
Pad	Pop Rock	5587	MA_16Beat Pop 1 _C	4 / 4	4	103			:
Pad	Pop Rock	5588	MB_16Beat Pop 1 _C	4 / 4	4	103			:
Pad	Pop Rock	5589	MC_16Beat Pop 1 _C	4 / 4	4	103			:
Pad	Pop Rock	5590	FA_16Beat Pop 1 _C	4 / 4	1	103			:
Pad	Pop Rock	5591	FB_16Beat Pop 1 _C	4 / 4	1	103			:
Pad	Pop Rock	5592	FC_16Beat Pop 1 _C	4 / 4	1	103			:
Pad	Pop Rock	5593	BA_16Beat Pop 1 _C	4 / 4	1	103			:
Pad	Pop Rock	5594	MA_16Beat Pop 1 _N	4 / 4	4	103			:
Pad	Pop Rock	5595	MB_16Beat Pop 1 _N	4 / 4	4	103			:
Pad	Pop Rock	5596	MC_16Beat Pop 1 _N	4 / 4	4	103			:
Pad	Pop Rock	5597	FA_16Beat Pop 1 _N	4 / 4	1	103			:
Pad	Pop Rock	5598	FB_16Beat Pop 1 _N	4 / 4	1	103			:
Pad	Pop Rock	5599	FC_16Beat Pop 1 _N	4 / 4	1	103			:
Pad	Pop Rock	5600	BA_16Beat Pop 1 _N	4 / 4	1	103			:
Pad	Pop Rock	5601	MA_16Beat Pop 2 _C	4 / 4	4	94			:
Pad	Pop Rock	5602	MB_16Beat Pop 2 _C	4 / 4	4	94			:
Pad	Pop Rock	5603	MC_16Beat Pop 2 _C	4 / 4	4	94			:
Pad	Pop Rock	5604	FA_16Beat Pop 2 _C	4 / 4	1	94			:
Pad	Pop Rock	5605	FB_16Beat Pop 2 _C	4 / 4	1	94			:
Pad	Pop Rock	5606	FC_16Beat Pop 2 _C	4 / 4	1	94			:
Pad	Pop Rock	5607	BA_16Beat Pop 2 _C	4 / 4	1	94			:
Pad	Pop Rock	5608	MA_16Beat Pop 2 _N	4 / 4	4	94			:
Pad	Pop Rock	5609	MB_16Beat Pop 2 _N	4 / 4	4	94			:
Pad	Pop Rock	5610	MC_16Beat Pop 2 _N	4 / 4	4	94			:
Pad	Pop Rock	5611	FA_16Beat Pop 2 _N	4 / 4	1	94			:
Pad	Pop Rock	5612	FB_16Beat Pop 2 _N	4 / 4	1	94			:
Pad	Pop Rock	5613	FC_16Beat Pop 2 _N	4 / 4	1	94			:
Pad	Pop Rock	5614	BA_16Beat Pop 2 _N	4 / 4	1	94			:
Pad	Pop Rock	5615	MC_Analog Pop	4 / 4	1	93			:
Pad	Pop Rock	5616	MD_Analog Pop	4 / 4	1	93			:
Pad	Rock	5617	MA_16BeatBasic2 _C	4 / 4	4	77			:
Pad	Rock	5618	MB_16BeatBasic2 _C	4 / 4	4	77			:
Pad	Rock	5619	MC_16BeatBasic2 _C	4 / 4	4	77			:
Pad	Rock	5620	FA_16BeatBasic2 _C	4 / 4	1	77			:
Pad	Rock	5621	FB_16BeatBasic2 _C	4 / 4	1	77			:
Pad	Rock	5622	FC_16BeatBasic2 _C	4 / 4	1	77			:
Pad	Rock	5623	BA_16BeatBasic2 _C	4 / 4	1	77			:
Pad	Rock	5624	MA_16BeatBasic2 _N	4 / 4	4	77			:
Pad	Rock	5625	MB_16BeatBasic2 _N	4 / 4	4	77			:
Pad	Rock	5626	MC_16BeatBasic2 _N	4 / 4	4	77			:
Pad	Rock	5627	FA_16BeatBasic2 _N	4 / 4	1	77			:
Pad	Rock	5628	FB_16BeatBasic2 _N	4 / 4	1	77			:
Pad	Rock	5629	FC_16BeatBasic2 _N	4 / 4	1	77			:
Pad	Rock	5630	BA_16BeatBasic2 _N	4 / 4	1	77			:
Pad	Rock	5631	MA_16Beat Rock _C	4 / 4	4	86			:
Pad	Rock	5632	MB_16Beat Rock _C	4 / 4	4	86			:
Pad	Rock	5633	MC_16Beat Rock _C	4 / 4	4	86			:
Pad	Rock	5634	FA_16Beat Rock _C	4 / 4	1	86			:
Pad	Rock	5635	FB_16Beat Rock _C	4 / 4	1	86			:
Pad	Rock	5636	FC_16Beat Rock _C	4 / 4	1	86			:
Pad	Rock	5637	BA_16Beat Rock _C	4 / 4	1	86			:
Pad	Rock	5638	MA_16Beat Rock _N	4 / 4	4	86			:
Pad	Rock	5639	MB_16Beat Rock _N	4 / 4	4	86			:
Pad	Rock	5640	MC_16Beat Rock _N	4 / 4	4	86			:
Pad	Rock	5641	FA_16Beat Rock _N	4 / 4	1	86			:
Pad	Rock	5642	FB_16Beat Rock _N	4 / 4	1	86			:
Pad	Rock	5643	FC_16Beat Rock _N	4 / 4	1	86			:
Pad	Rock	5644	BA_16Beat Rock _N	4 / 4	1	86			:
Pad	General	5645	MA_Cycle1	4 / 4	3	120			:
Pad	General	5646	MA_Cycle2	4 / 4	6	120			:
Pad	General	5647	MA_Cycle3 _N	4 / 4	14	118			:
Pad	General	5648	MA_Ripples _N	4 / 4	4	82			:
Pad	General	5649	MA_PulsPad	4 / 4	4	120			:
SynCp	House	5650	MA_Electro Pop2 Arp	4 / 4	4	124			Syn Comp/Lead
SynCp	House	5651	MA_Electro Pop2 8thArp1	4 / 4	4	124			:
SynCp	House	5652	MA_Electro Pop2 8thArp2	4 / 4	4	124			:
SynCp	House	5653	MA_Electro Pop2 Chrd1	4 / 4	4	124			:
SynCp	House	5654	MA_Electro Pop2 Chrd1 CF2	4 / 4	4	124			:
SynCp	House	5655	MA_Electro Pop2 Chrd1 CF4	4 / 4	4	124			:
SynCp	House	5656	MA_Electro Pop2 Chrd1 CF8	4 / 4	8	123			:
SynCp	House	5657	MA_Electro Pop2 Chrd2	4 / 4	2	124			:
SynCp	House	5658	MA_Electro Pop2 Chrd2 CF8	4 / 4	8	124			:
SynCp	House	5659	MA_Pop Line 1	4 / 4	2	124			:
SynCp	House	5660	MA_Pop Line 2	4 / 4	2	124			:
SynCp	House	5661	MA_Pop Line 3	4 / 4	1	124			:
SynCp	House	5662	MA_90s Arp 1	4 / 4	2	140			:
SynCp	House	5663	MA_90s Arp 2	4 / 4	4	140			:
SynCp	House	5664	MA_90s Arp 3	4 / 4	2	140			:
SynCp	House	5665	MA_90s Arp 4	4 / 4	4	140			:
SynCp	House	5666	MA_90s Arp 5	4 / 4	2	140			:
SynCp	House	5667	MA_90s Arp 6	4 / 4	2	140			:
SynCp	House	5668	MA_90s Arp 7	4 / 4	2	140			:
SynCp	House	5669	MA_90s Arp 8	4 / 4	4	140			:
SynCp	House	5670	MA_80s Arp 1	4 / 4	2	140			:
SynCp	House	5671	MA_80s Arp 2	4 / 4	4	140			:
SynCp	House	5672	MA_80s Arp 3	4 / 4	2	140			:
SynCp	House	5673	MA_80s Arp 4	4 / 4	2	140			:
SynCp	House	5674	MA_80s Arp 5	4 / 4	2	140			:
SynCp	House	5675	MA_80s Arp 6	4 / 4	2	140			:
SynCp	House	5676	MA_80s Arp 7	4 / 4	2	140			:
SynCp	House	5677	MA_80s Arp 8	4 / 4	4	140			:
SynCp	House	5678	MA_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5679	MB_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5680	MC_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5681	MD_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5682	ME_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5683	MF_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5684	MG_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5685	MH_TropicalHouse1 Pluck _N	4 / 4	4	110			:
SynCp	House	5686	MA_UK Garage1 Riff _N	4 / 4	8	132			:
SynCp	House	5687	MB_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5688	MC_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5689	MD_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5690	MF_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5691	MG_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5692	MH_UK Garage1 Riff _N	4 / 4	4	132			:
SynCp	House	5693	MA_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5694	MB_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5695	MC_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5696	MD_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5697	ME_Pick It Up Synth _N	4 / 4	4	120			:
SynCp	House	5698	MF_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5699	MG_Pick It Up Synth _N	4 / 4	1	180			:
SynCp	House	5700	MH_Pick It Up Synth _N	4 / 4	4	180			:
SynCp	House	5701	MA_DanceLoop1 Synth _N	4 / 4	1	120			:
SynCp	House	5702	MA_DanceLoop2 Synth _N	4 / 4	1	120			:
SynCp	House	5703	MA_DanceLoop3 Synth _N	4 / 4	4	120			:
SynCp	House	5704	MA_DanceLoop4 Synth _N	4 / 4	2	120			:
SynCp	House	5705	MA_DanceLoop5 Synth _N	4 / 4	2	120			:
SynCp	House	5706	MA_NDanceLoop6 Synth _N	4 / 4	2	120			:
SynCp	House	5707	MA_DanceLoop7 Synth _N	4 / 4	2	120			:
SynCp	House	5708	FA_Riser Fill Synth _N	4 / 4	1	120			:
SynCp	House	5709	MA_SynRiff Elec 1	4 / 4	4	120			:
SynCp	House	5710	MA_SynRiff Elec 2	4 / 4	4	120			:
SynCp	House	5711	MA_SynRiff Elec 3	4 / 4	4	120			:
SynCp	House	5712	MA_SynChord8th01 _N	4 / 4	1	130			:
SynCp	House	5713	MA_SynChord8th01	4 / 4	1	130			:
SynCp	House	5714	MA_SynChord8th02 _N	4 / 4	1	130			:
SynCp	House	5715	MA_SynChord8th02	4 / 4	1	130			:
SynCp	House	5716	MA_SynChord8th03	4 / 4	1	130			:
SynCp	House	5717	MA_SynChord8th04	4 / 4	2	130			:
SynCp	House	5718	MA_SynChord8th05	4 / 4	4	120			:
SynCp	House	5719	MA_SynChord8th06	4 / 4	1	130			:
SynCp	House	5720	MA_SynChord8th07	4 / 4	1	130			:
SynCp	House	5721	MA_SynChord8th08	4 / 4	2	130			:
SynCp	House	5722	MA_SynChord8th09	4 / 4	2	132			:
SynCp	House	5723	MA_SynChord8th10	4 / 4	2	130			:
SynCp	House	5724	MA_SynChord8th11	4 / 4	2	130			:
SynCp	House	5725	MA_SynChord8th12 _N	4 / 4	2	130			:
SynCp	House	5726	MA_SynChord8th12	4 / 4	2	130			:
SynCp	House	5727	MA_SynChord8th13 _N	4 / 4	2	130			:
SynCp	House	5728	MA_SynChord8th13	4 / 4	2	130			:
SynCp	House	5729	MA_ClasscArp1-01 _N	4 / 4	2	128			:
SynCp	House	5730	MA_ClasscArp1-02 _N	4 / 4	2	128			:
SynCp	House	5731	MA_ClasscArp1-03 _N	4 / 4	2	128			:
SynCp	House	5732	MA_ClasscArp1-04 _N	4 / 4	2	128			:
SynCp	House	5733	MA_ClasscArp1-05 _N	4 / 4	2	128			:
SynCp	House	5734	MA_ClasscArp1-06 _N	4 / 4	8	128			:
SynCp	House	5735	MA_ClassicArp1-07	4 / 4	2	128			:
SynCp	House	5736	MA_ClasscArp1-08 _N	4 / 4	2	128			:
SynCp	House	5737	MA_ClasscArp1-09 _N	4 / 4	2	128			:
SynCp	House	5738	MA_ClasscArp1-10 _N	4 / 4	2	128			:
SynCp	House	5739	MA_SynthRiff5-01 _N	4 / 4	2	128			:
SynCp	House	5740	MA_SynthRiff5-01	4 / 4	2	128			:
SynCp	House	5741	MA_SynthRiff5-02 _N	4 / 4	4	128			:
SynCp	House	5742	MA_SynthRiff5-02	4 / 4	4	128			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	House	5743	MA_SynthRiff5-03 _N	4 / 4	4	128			:
SynCp	House	5744	MA_SynthRiff5-03	4 / 4	4	128			:
SynCp	House	5745	MA_SynthRiff5-04 _N	4 / 4	4	128			:
SynCp	House	5746	MA_SynthRiff5-04	4 / 4	4	128			:
SynCp	House	5747	MA_SynthRiff5-05 _N	4 / 4	4	128			:
SynCp	House	5748	MA_SynthRiff5-05	4 / 4	4	128			:
SynCp	House	5749	MA_SynthRiff5-06 _N	4 / 4	4	128			:
SynCp	House	5750	MA_SynthRiff5-06	4 / 4	4	128			:
SynCp	House	5751	MA_SynthRiff5-07 _N	4 / 4	4	128			:
SynCp	House	5752	MA_SynthRiff5-07	4 / 4	4	128			:
SynCp	House	5753	MA_SynthRiff5-08 _N	4 / 4	2	128			:
SynCp	House	5754	MA_SynthRiff5-08	4 / 4	2	128			:
SynCp	House	5755	MA_SynthRiff5-09 _N	4 / 4	2	128			:
SynCp	House	5756	MA_SynthRiff5-09	4 / 4	2	128			:
SynCp	House	5757	MA_SynthRiff5-10 _N	4 / 4	2	128			:
SynCp	House	5758	MA_SynthRiff5-10	4 / 4	2	128			:
SynCp	House	5759	MA_SynthRiff5-11 _N	4 / 4	2	128			:
SynCp	House	5760	MA_SynthRiff5-11	4 / 4	2	128			:
SynCp	House	5761	MA_SynthRiff5-12	4 / 4	2	128			:
SynCp	House	5762	MA_SynthRiff5-13 _N	4 / 4	4	120			:
SynCp	House	5763	MA_SynthRiff5-13	4 / 4	4	120			:
SynCp	House	5764	MA_SynthRiff5-14 _N	4 / 4	2	128			:
SynCp	House	5765	MA_Synth Chord01 _N	4 / 4	2	128			:
SynCp	House	5766	MA_Synth Chord01	4 / 4	2	128			:
SynCp	House	5767	MA_Synth Chord02 _N	4 / 4	2	128			:
SynCp	House	5768	MA_Synth Chord02	4 / 4	2	128			:
SynCp	House	5769	MA_Synth Chord03 _N	4 / 4	4	128			:
SynCp	House	5770	MA_Synth Chord03	4 / 4	4	128			:
SynCp	House	5771	MA_Synth Chord04 _N	4 / 4	4	128			:
SynCp	House	5772	MA_Synth Chord04	4 / 4	4	128			:
SynCp	House	5773	MA_Synth Chord05 _N	4 / 4	2	128			:
SynCp	House	5774	MA_Synth Chord05	4 / 4	2	128			:
SynCp	House	5775	MA_Synth Chord06	4 / 4	2	128			:
SynCp	House	5776	MA_Synth Chord07 _N	4 / 4	4	128			:
SynCp	House	5777	MA_Synth Chord07	4 / 4	4	128			:
SynCp	House	5778	MA_Synth Chord08 _N	4 / 4	4	150			:
SynCp	House	5779	MA_Synth Chord08	4 / 4	4	150			:
SynCp	House	5780	MA_Synth Chord09 _N	4 / 4	4	128			:
SynCp	House	5781	MA_Synth Chord09	4 / 4	4	128			:
SynCp	House	5782	MA_Synth Chord10 _N	4 / 4	4	128			:
SynCp	House	5783	MA_Synth Chord10	4 / 4	4	128			:
SynCp	House	5784	MA_SynTriplet01 _N	4 / 4	2	128			:
SynCp	House	5785	MA_SynTriplet01	4 / 4	2	128			:
SynCp	House	5786	MA_SynTriplet02 _N	4 / 4	2	128			:
SynCp	House	5787	MA_SynTriplet03 _N	4 / 4	4	128			:
SynCp	House	5788	MA_SynTriplet04 _N	4 / 4	2	128			:
SynCp	House	5789	MA_SynTriplet04	4 / 4	2	128			:
SynCp	House	5790	MA_SynTriplet05 _N	4 / 4	2	128			:
SynCp	House	5791	MA_SynTriplet05	4 / 4	2	128			:
SynCp	House	5792	MA_SynTriplet06	4 / 4	2	128			:
SynCp	House	5793	MA_SynTriplet07 _N	4 / 4	2	128			:
SynCp	House	5794	MA_SynTriplet07	4 / 4	2	128			:
SynCp	House	5795	MA_SynTriplet08 _N	4 / 4	2	128			:
SynCp	House	5796	MA_SynTriplet09 _N	4 / 4	2	128			:
SynCp	House	5797	MA_SynTriplet10 _N	4 / 4	2	128			:
SynCp	House	5798	MA_SynthRiff6-01 _N	4 / 4	4	128			:
SynCp	House	5799	MA_SynthRiff6-02	4 / 4	2	128			:
SynCp	House	5800	MA_SynthRiff6-03 _N	4 / 4	2	128			:
SynCp	House	5801	MA_SynthRiff6-04 _N	4 / 4	2	130			:
SynCp	House	5802	MA_SynthRiff6-05 _N	4 / 4	2	130			:
SynCp	House	5803	MA_SynthRiff6-05	4 / 4	2	130			:
SynCp	House	5804	MA_SynthRiff6-06	4 / 4	2	130			:
SynCp	House	5805	MA_SynthRiff6-07	4 / 4	2	128			:
SynCp	House	5806	MA_SynthRiff6-08 _N	4 / 4	2	128			:
SynCp	House	5807	MA_SynthRiff6-08	4 / 4	2	128			:
SynCp	House	5808	MA_SynthRiff6-09 _N	4 / 4	2	128			:
SynCp	House	5809	MA_SynthRiff6-09	4 / 4	2	128			:
SynCp	House	5810	MA_SynthRiff6-10 _N	4 / 4	2	128			:
SynCp	House	5811	MA_SynthRiff6-10	4 / 4	2	128			:
SynCp	House	5812	MA_16thPattern06	4 / 4	2	130			:
SynCp	House	5813	MA_16thPattern07	4 / 4	2	130			:
SynCp	House	5814	MA_16thPattern08	4 / 4	1	130			:
SynCp	House	5815	MA_16thPattern09	4 / 4	2	130			:
SynCp	House	5816	MA_16thPattern10 _N	4 / 4	2	130			:
SynCp	House	5817	MA_16thPattern11	4 / 4	2	130			:
SynCp	House	5818	MA_16thPattern12	4 / 4	2	130			:
SynCp	House	5819	MA_16thPattern13	4 / 4	2	130			:
SynCp	House	5820	MA_16thPattern14 _N	4 / 4	2	130			:
SynCp	House	5821	MA_16thPattern15 _N	4 / 4	4	130			:
SynCp	House	5822	MA_16th SynPercArp1	4 / 4	2	127			:
SynCp	House	5823	MA_16th SynPercArp2	4 / 4	2	127			:
SynCp	House	5824	MA_16th SynPercArp3	4 / 4	2	127			:
SynCp	House	5825	MA_16th SynPercArp4	4 / 4	2	127			:
SynCp	House	5826	MA_MelodicPluck08	4 / 4	2	128			:
SynCp	House	5827	MA_MelodcPluck09 _N	4 / 4	2	128			:
SynCp	House	5828	MA_MelodicPluck10	4 / 4	2	130			:
SynCp	House	5829	MA_SimpleNt 3-01_N	4 / 4	4	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	House	5830	MA_SimpleNt 3-01	4 / 4	4	130			:
SynCp	House	5831	MA_SyChrdRiff2-1 _N	4 / 4	4	130			:
SynCp	House	5832	MA_SyChrdRiff2-1	4 / 4	4	130			:
SynCp	House	5833	MA_SyChrdRiff2-2 _N	4 / 4	2	130			:
SynCp	House	5834	MA_SyChrdRiff2-2	4 / 4	2	130			:
SynCp	House	5835	MA_SynthRiff7-01 _N	4 / 4	2	130			:
SynCp	House	5836	MA_SynthRiff7-01	4 / 4	2	130			:
SynCp	House	5837	MA_SynthRiff7-02 _N	4 / 4	2	130			:
SynCp	House	5838	MA_SynthRiff7-02	4 / 4	2	130			:
SynCp	House	5839	MA_AnalogDrumChords	4 / 4	2	111			:
SynCp	House	5840	MA_Analog Lead	4 / 4	2	99			:
SynCp	House	5841	MA_Anthem Party Arp	4 / 4	4	113			:
SynCp	House	5842	MA_Atrium Lead	4 / 4	2	125			:
SynCp	House	5843	MA_Baby Jump Lead	4 / 4	2	120			:
SynCp	House	5844	MA_Hit Lead	4 / 4	2	140			:
SynCp	House	5845	MA_Bromeo Sequence	4 / 4	2	120			:
SynCp	House	5846	MA_Colors Sequence	4 / 4	2	128			:
SynCp	House	5847	MA_EmoDM Chords	4 / 4	4	120			:
SynCp	House	5848	MA_Epoque Lead _N	4 / 4	2	122			:
SynCp	House	5849	MA_FunkyWalkChords	4 / 4	2	112			:
SynCp	House	5850	MA_Funky Walk Lead	4 / 4	2	112			:
SynCp	House	5851	MA_In My House Seq	4 / 4	2	117			:
SynCp	House	5852	MA_Make Me Sing Arp	4 / 4	2	126			:
SynCp	House	5853	MA_Organa Arp	4 / 4	1	110			:
SynCp	House	5854	MA_Play Thing Arp	4 / 4	2	110			:
SynCp	House	5855	MA_More Air _N	4 / 4	2	130			:
SynCp	House	5856	MC1_Dream Dance	4 / 4	1	136			:
SynCp	House	5857	FC1_Dream Dance	4 / 4	1	136			:
SynCp	House	5858	MA2_Dream Dance	4 / 4	1	136			:
SynCp	House	5859	MD2_Dream Dance	4 / 4	1	136			:
SynCp	House	5860	FC2_Dream Dance	4 / 4	1	136			:
SynCp	House	5861	MB3_Dream Dance	4 / 4	1	136			:
SynCp	House	5862	MD1_Ibiza	4 / 4	2	135			:
SynCp	House	5863	IA1_Ibiza	4 / 4	8	135			:
SynCp	House	5864	MB2_Ibiza _N	4 / 4	2	135			:
SynCp	House	5865	MD2_Ibiza _N	4 / 4	2	135			:
SynCp	House	5866	MB3_Ibiza	4 / 4	2	135			:
SynCp	House	5867	MC3_Ibiza _N	4 / 4	2	135			:
SynCp	House	5868	MA_Retro Pop	4 / 4	1	126			:
SynCp	House	5869	MD_Retro Pop	4 / 4	2	126			:
SynCp	House	5870	FC_Retro Pop	4 / 4	1	100			:
SynCp	House	5871	IA_Dream Dance	4 / 4	2	136			:
SynCp	House	5872	MA_Ibiza	4 / 4	1	135			:
SynCp	House	5873	MB_Ibiza	4 / 4	2	135			:
SynCp	House	5874	MC_Ibiza	4 / 4	2	135			:
SynCp	House	5875	MD_Ibiza	4 / 4	2	135			:
SynCp	House	5876	IA_Ibiza	4 / 4	8	135			:
SynCp	House	5877	FA_Ibiza	4 / 4	1	135			:
SynCp	House	5878	FB_Ibiza	4 / 4	1	135			:
SynCp	House	5879	MB_Garage 2	4 / 4	2	127			:
SynCp	House	5880	MC_Garage 2	4 / 4	2	127			:
SynCp	House	5881	MD_Garage 2	4 / 4	2	127			:
SynCp	House	5882	IA_Garage 2	4 / 4	2	127			:
SynCp	House	5883	FA_Garage 2	4 / 4	2	127			:
SynCp	Techno	5884	MA_Dance Arp Break	4 / 4	2	126			:
SynCp	Techno	5885	MA_Dance Arp Filter	4 / 4	8	126			:
SynCp	Techno	5886	MA_New Basic Lp	4 / 4	4	126			:
SynCp	Techno	5887	MA_New Basic Filter	4 / 4	8	126			:
SynCp	Techno	5888	MA_PumpingChords Lp	4 / 4	1	126			:
SynCp	Techno	5889	MA_PumpingChrd Lp Filt	4 / 4	8	126			:
SynCp	Techno	5890	MA_PumpingChords Vari	4 / 4	4	126			:
SynCp	Techno	5891	MA_PumpingChrd Vari Filt	4 / 4	8	126			:
SynCp	Techno	5892	MA_FM-X 1 Exp _N	4 / 4	2	126			:
SynCp	Techno	5893	MA_FM-X 2 Exp _N	4 / 4	4	126			:
SynCp	Techno	5894	MA_FM-X 2 Exp+MW _N	4 / 4	4	126			:
SynCp	Techno	5895	MA_FM Metal Lp	4 / 4	1	120			:
SynCp	Techno	5896	MA_FM Metal Vari	4 / 4	4	120			:
SynCp	Techno	5897	MA_Break Chords Lp	4 / 4	1	126			:
SynCp	Techno	5898	MA_Break Chords Vari	4 / 4	4	126			:
SynCp	Techno	5899	MA_ClassicArp3-01	4 / 4	1	120			:
SynCp	Techno	5900	MA_ClassicArp3-02	4 / 4	1	120			:
SynCp	Techno	5901	MA_ClassicArp3-03	4 / 4	1	120			:
SynCp	Techno	5902	MA_ClassicArp3-04 _N	4 / 4	1	126			:
SynCp	Techno	5903	MA_ClassicArp3-05 _N	4 / 4	4	126			:
SynCp	Techno	5904	MA_FM Rough 1 Lp	4 / 4	1	120			:
SynCp	Techno	5905	MA_FM Rough 1 Filter	4 / 4	8	120			:
SynCp	Techno	5906	MA_FM Rough 2a	4 / 4	1	120			:
SynCp	Techno	5907	MA_FM Rough 2b Filter	4 / 4	8	120			:
SynCp	Techno	5908	MA_FM Rough 3	4 / 4	1	120			:
SynCp	Techno	5909	MA_TranceSyArp01	4 / 4	1	130			:
SynCp	Techno	5910	MA_TranceSyArp02	4 / 4	1	130			:
SynCp	Techno	5911	MA_TranceSyArp03 _N	4 / 4	4	130			:
SynCp	Techno	5912	MA_TranceSyArp03	4 / 4	4	130			:
SynCp	Techno	5913	MA_TranceSyArp04 _N	4 / 4	4	130			:
SynCp	Techno	5914	MA_TranceSyArp04	4 / 4	4	130			:
SynCp	Techno	5915	MA_TranceSyArp05 _N	4 / 4	4	130			:
SynCp	Techno	5916	MA_TranceSyArp05	4 / 4	4	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Techno	5917	MA_TranceSyArp06	4 / 4	1	130			:
SynCp	Techno	5918	MA_TranceSyArp07	4 / 4	1	130			:
SynCp	Techno	5919	MA_TranceSyArp08	4 / 4	1	130			:
SynCp	Techno	5920	MA_TranceSyArp09	4 / 4	1	130			:
SynCp	Techno	5921	MA_TranceSyArp10 _N	4 / 4	1	135			:
SynCp	Techno	5922	MA_TranceSyArp11 _N	4 / 4	1	130			:
SynCp	Techno	5923	MA_TranceSyArp12 _N	4 / 4	1	130			:
SynCp	Techno	5924	MA_TranceSyArp13 _N	4 / 4	1	130			:
SynCp	Techno	5925	MA_TranceSyArp14 _N	4 / 4	1	130			:
SynCp	Techno	5926	MA_TranceSyArp15	4 / 4	1	130			:
SynCp	Techno	5927	MA_TranceSyArp16	4 / 4	1	130			:
SynCp	Techno	5928	MA_TranceSyArp17	4 / 4	1	130			:
SynCp	Techno	5929	MA_TranceSyArp18	4 / 4	1	130			:
SynCp	Techno	5930	MA_TranceSyArp19	4 / 4	1	130			:
SynCp	Techno	5931	MA_TranceSyArp20	4 / 4	1	130			:
SynCp	Techno	5932	MA_SynthRiff4-01	4 / 4	2	128			:
SynCp	Techno	5933	MA_16thPattern01	4 / 4	1	130			:
SynCp	Techno	5934	MA_16thPattern02	4 / 4	2	130			:
SynCp	Techno	5935	MA_16thPattern03 _N	4 / 4	4	130			:
SynCp	Techno	5936	MA_16thPattern04 _N	4 / 4	4	130			:
SynCp	Techno	5937	MA_16thPattern05 _N	4 / 4	2	130			:
SynCp	Techno	5938	MA_Feelingz	4 / 4	1	90			:
SynCp	Techno	5939	MA_Brangelis _N	4 / 4	1	120			:
SynCp	Techno	5940	MA1_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5941	MB1_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5942	MC1_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5943	FA1_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5944	FB1_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5945	FC1_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5946	BA1_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5947	MA2_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5948	MB2_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5949	MC2_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5950	FA2_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5951	FB2_Trance 2 _C	4 / 4	8	135			:
SynCp	Techno	5952	FC2_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5953	BA2_Trance 2 _C	4 / 4	1	135			:
SynCp	Techno	5954	MA1_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5955	MB1_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5956	MC1_Trance 2	4 / 4	8	135			:
SynCp	Techno	5957	FA1_Trance 2 _N	4 / 4	1	135			:
SynCp	Techno	5958	FB1_Trance 2	4 / 4	8	135			:
SynCp	Techno	5959	BA1_Trance 2 _N	4 / 4	1	135			:
SynCp	Techno	5960	MA2_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5961	MB2_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5962	MC2_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5963	FA2_Trance 2 _N	4 / 4	1	135			:
SynCp	Techno	5964	FB2_Trance 2 _N	4 / 4	8	135			:
SynCp	Techno	5965	FC2_Trance 2	4 / 4	1	135			:
SynCp	Techno	5966	BA2_Trance 2 _N	4 / 4	1	135			:
SynCp	Techno	5967	MA_Trance 3 _C	4 / 4	2	140			:
SynCp	Techno	5968	MB_Trance 3 _C	4 / 4	2	140			:
SynCp	Techno	5969	MC_Trance 3 _C	4 / 4	3	140			:
SynCp	Techno	5970	FA_Trance 3 _C	4 / 4	2	140			:
SynCp	Techno	5971	FB_Trance 3 _C	4 / 4	2	140			:
SynCp	Techno	5972	FC_Trance 3 _C	4 / 4	4	140			:
SynCp	Techno	5973	BA_Trance 3 _C	4 / 4	1	140			:
SynCp	Techno	5974	MA_Trance 3 _N	4 / 4	2	140			:
SynCp	Techno	5975	MB_Trance 3 _N	4 / 4	2	140			:
SynCp	Techno	5976	MC_Trance 3 _N	4 / 4	3	140			:
SynCp	Techno	5977	FA_Trance 3 _N	4 / 4	2	140			:
SynCp	Techno	5978	FB_Trance 3 _N	4 / 4	2	140			:
SynCp	Techno	5979	FC_Trance 3 _N	4 / 4	4	140			:
SynCp	Techno	5980	BA_Trance 3 _N	4 / 4	1	140			:
SynCp	Techno	5981	MB1_Trance 5	4 / 4	1	140			:
SynCp	Techno	5982	MA2_Trance 5	4 / 4	4	140			:
SynCp	Techno	5983	MD2_Trance 5	4 / 4	4	140			:
SynCp	Techno	5984	IA3_Trance 5	4 / 4	1	140			:
SynCp	Techno	5985	FC3_Trance 5	4 / 4	1	140			:
SynCp	Techno	5986	MB4_Trance 5	4 / 4	4	140			:
SynCp	Techno	5987	FA4_Trance 5	4 / 4	4	140			:
SynCp	Techno	5988	FA5_Trance 5	4 / 4	4	140			:
SynCp	Techno	5989	FC5_Trance 5	4 / 4	1	140			:
SynCp	Techno	5990	MC6_Trance 5	4 / 4	4	140			:
SynCp	Techno	5991	MA_PsycheSeq1 _N	4 / 4	4	140			:
SynCp	Techno	5992	MA_PsycheSeq2 _N	4 / 4	1	140			:
SynCp	Techno	5993	MA_PsycheSeq3 _N	4 / 4	2	140			:
SynCp	Techno	5994	MA_PsycheSeq4 _N	4 / 4	4	140			:
SynCp	Techno	5995	MA_PsycheSeq5 _N	4 / 4	6	140			:
SynCp	Techno	5996	MA_TrancePhras1	4 / 4	1	130			:
SynCp	Techno	5997	MA_TrancePhras2	4 / 4	1	130			:
SynCp	Techno	5998	MA_TrancePhras3	4 / 4	1	130			:
SynCp	Techno	5999	MA_TrancePhras4	4 / 4	1	130			:
SynCp	Techno	6000	MA_TrancePhras5	4 / 4	1	130			:
SynCp	Techno	6001	MA_TrancePhras6	4 / 4	1	130			:
SynCp	Techno	6002	MA_TrancePhras7	4 / 4	1	130			:
SynCp	Techno	6003	MA_TrancePhras8	4 / 4	2	145			:
SynCp	Techno	6004	MA_TrancePhras9	4 / 4	1	145			:
SynCp	Techno	6005	MA_TrancePhrs10	4 / 4	2	145			:
SynCp	Techno	6006	MA_TrancePhrs11	4 / 4	2	145			:
SynCp	Techno	6007	MA_TrancePhrs12	4 / 4	2	145			:
SynCp	Techno	6008	MA_TrancePhrs13	4 / 4	2	145			:
SynCp	Techno	6009	MA_TrancePhrs14	4 / 4	1	145			:
SynCp	Techno	6010	MA_TrancePhrs15	4 / 4	1	145			:
SynCp	Techno	6011	MA_PsychePhras1	4 / 4	1	143			:
SynCp	Techno	6012	MA_PsychePhras2	4 / 4	1	143			:
SynCp	Techno	6013	MA_PsychePhras3 _N	4 / 4	2	143			:
SynCp	Techno	6014	MA_PsychePhras4 _N	4 / 4	2	143			:
SynCp	Techno	6015	MA_PsychePhras5 _N	4 / 4	2	143			:
SynCp	Techno	6016	MA_HyperTrance1 _N	4 / 4	1	143			:
SynCp	Techno	6017	MA_HyperTrance2 _N	4 / 4	2	143			:
SynCp	Techno	6018	MA_HyperTrance3 _N	4 / 4	1	143			:
SynCp	Techno	6019	MA_HyperTrance4 _N	4 / 4	1	143			:
SynCp	Techno	6020	MA_HyperTrance5 _N	4 / 4	1	143			:
SynCp	Techno	6021	MA1_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6022	MB1_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6023	MC1_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6024	MD1_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6025	ME1_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6026	MA2_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6027	MA2_TrnceVision AF2	4 / 4	1	134			:
SynCp	Techno	6028	MA2_TrnVision AF1&2	4 / 4	1	134			:
SynCp	Techno	6029	MB2_Trance Vision	4 / 4	1	134			:
SynCp	Techno	6030	MB2_TrnceVision AF1	4 / 4	1	134			:
SynCp	Techno	6031	MB2_TrnceVision AF2	4 / 4	4	134			:
SynCp	Techno	6032	MB2_TrnVision AF1&2	4 / 4	4	134			:
SynCp	Techno	6033	MA1_Dream Trance	4 / 4	1	140			:
SynCp	Techno	6034	MA1_DreamTrance AF1	4 / 4	1	140			:
SynCp	Techno	6035	MB1_Dream Trance	4 / 4	1	140			:
SynCp	Techno	6036	MC1_Dream Trance	4 / 4	1	140			:
SynCp	Techno	6037	MC1_DreamTrance AF1	4 / 4	1	140			:
SynCp	Techno	6038	MC1_DreamTrance AF2	4 / 4	1	140			:
SynCp	Techno	6039	MC1_DreamTrnc AF1&2	4 / 4	1	140			:
SynCp	Techno	6040	MA1_Electrix	4 / 4	1	119			:
SynCp	Techno	6041	MA1_Electrix AF1	4 / 4	1	119			:
SynCp	Techno	6042	MB1_Electrix	4 / 4	1	119			:
SynCp	Techno	6043	MA2_Electrix	4 / 4	1	119			:
SynCp	Techno	6044	MB2_Electrix	4 / 4	1	119			:
SynCp	Techno	6045	MA1_Cool Breakz	4 / 4	1	116			:
SynCp	Techno	6046	MA1_Cool Breakz AF1	4 / 4	1	116			:
SynCp	Techno	6047	MA1_Cool Breakz AF2	4 / 4	1	116			:
SynCp	Techno	6048	MB1_Cool Breakz	4 / 4	1	116			:
SynCp	Techno	6049	MA2_Cool Breakz	4 / 4	1	116			:
SynCp	Techno	6050	MA1_Synthlines	4 / 4	1	124			:
SynCp	Techno	6051	MA1_Synthlines AF1	4 / 4	1	124			:
SynCp	Techno	6052	MB1_Synthlines	4 / 4	1	124			:
SynCp	Techno	6053	MB1_Synthlines AF1	4 / 4	1	124			:
SynCp	Techno	6054	MB1_Synthlines AF2	4 / 4	1	124			:
SynCp	Techno	6055	MB1_Synthline AF1&2	4 / 4	1	124			:
SynCp	Techno	6056	MC1_Synthlines	4 / 4	1	124			:
SynCp	Techno	6057	MD1_Synthlines	4 / 4	1	124			:
SynCp	Techno	6058	ME1_Synthlines	4 / 4	4	124			:
SynCp	Techno	6059	MA2_Synthlines	4 / 4	1	124			:
SynCp	Techno	6060	MB2_Synthlines	4 / 4	1	124			:
SynCp	Techno	6061	MC2_Synthlines	4 / 4	1	124			:
SynCp	Techno	6062	MD2_Synthlines	4 / 4	1	124			:
SynCp	Techno	6063	MA3_Synthlines	4 / 4	1	124			:
SynCp	Techno	6064	MB3_Synthlines	4 / 4	1	124			:
SynCp	Techno	6065	MC3_Synthlines	4 / 4	1	124			:
SynCp	Techno	6066	MD3_Synthlines	4 / 4	1	124			:
SynCp	Techno	6067	MA1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6068	MB1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6069	MC1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6070	MD1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6071	ME1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6072	MF1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6073	MG1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6074	MH1_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6075	MA2_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6076	MB2_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6077	MC2_Acid Breaks	4 / 4	4	98			:
SynCp	Techno	6078	MD2_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6079	ME2_Acid Breaks	4 / 4	1	98			:
SynCp	Techno	6080	MF2_Acid Breaks	4 / 4	4	98			:
SynCp	Techno	6081	MF2_AcidBreak AF1&2	4 / 4	4	98			:
SynCp	Techno	6082	MA_T-Line Seq _N	4 / 4	1	140			:
SynCp	Techno	6083	MA_TeknoPhrs1 /1 _C	4 / 4	2	130			:
SynCp	Techno	6084	MA_TeknoPhrs1 /2 _C	4 / 4	1	130			:
SynCp	Techno	6085	MA_TeknoPhrs1 /3 _C	4 / 4	1	130			:
SynCp	Techno	6086	MA_TeknoPhrs1 /4 _C	4 / 4	1	130			:
SynCp	Techno	6087	MA_TeknoPhrs1 /5 _C	4 / 4	1	110			:
SynCp	Techno	6088	MA_TeknoPhrs1 /6 _C	4 / 4	1	100			:
SynCp	Techno	6089	MA_TeknoPhras2 /1	4 / 4	2	120			:
SynCp	Techno	6090	MA_TeknoPhras2 /2	4 / 4	2	120			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Techno	6091	MA_TeknoPhras2 /3	4 / 4	2	120			:
SynCp	Techno	6092	MA_TeknoAttack1 _N	4 / 4	2	143			:
SynCp	Techno	6093	MA_TeknoAttack2 _N	4 / 4	1	143			:
SynCp	Techno	6094	MA_TeknoAttack3 _N	4 / 4	1	143			:
SynCp	Techno	6095	MA_TeknoAttack4 _N	4 / 4	1	143			:
SynCp	Techno	6096	MA_TeknoAttack5 _N	4 / 4	1	143			:
SynCp	Techno	6097	MA_Acid A1	4 / 4	2	127			:
SynCp	Techno	6098	MA_Acid A2	4 / 4	2	127			:
SynCp	Techno	6099	MA_Acid A2 AF1	4 / 4	2	90			:
SynCp	Techno	6100	MA_Acid A3	4 / 4	2	127			:
SynCp	Techno	6101	MA_Acid A3 AF1	4 / 4	2	90			:
SynCp	Techno	6102	MA_Acid A4	4 / 4	2	127			:
SynCp	Techno	6103	MA_Acid A5	4 / 4	2	127			:
SynCp	Techno	6104	MA_Acid A6	4 / 4	2	127			:
SynCp	Techno	6105	MA_Acid A6 AF1	4 / 4	2	127			:
SynCp	Techno	6106	MA_Acid A6 AF2	4 / 4	2	127			:
SynCp	Techno	6107	MA_Acid B1	4 / 4	2	127			:
SynCp	Techno	6108	MA_Acid B2	4 / 4	2	127			:
SynCp	Techno	6109	MA_Acid B3	4 / 4	2	127			:
SynCp	Techno	6110	MA_Acid B4	4 / 4	2	127			:
SynCp	Techno	6111	MA_Acid B5	4 / 4	2	127			:
SynCp	Techno	6112	MA_Acid B6	4 / 4	2	127			:
SynCp	Techno	6113	MA_Acid C1	4 / 4	2	127			:
SynCp	Techno	6114	MA_Acid C2	4 / 4	2	127			:
SynCp	Techno	6115	MA_Acid C3	4 / 4	2	127			:
SynCp	Techno	6116	MA_Acid C4	4 / 4	2	127			:
SynCp	Techno	6117	MA_Acid C5	4 / 4	2	127			:
SynCp	Techno	6118	MA_Acid C6	4 / 4	2	127			:
SynCp	Techno	6119	MA_Electro1	4 / 4	1	130			:
SynCp	Techno	6120	MA_Electro2	4 / 4	1	130			:
SynCp	Techno	6121	MA_Electro3	4 / 4	1	130			:
SynCp	Techno	6122	MA_Electro3 AF2	4 / 4	1	123			:
SynCp	Techno	6123	MA_Electro4	4 / 4	1	130			:
SynCp	Techno	6124	MA_Electro5	4 / 4	1	130			:
SynCp	Techno	6125	MA_Electro6	4 / 4	1	130			:
SynCp	Techno	6126	MA_Electro7	4 / 4	1	130			:
SynCp	Techno	6127	MA_Electro8	4 / 4	1	130			:
SynCp	Techno	6128	MA_Electro9	4 / 4	1	130			:
SynCp	Techno	6129	MA_Electro10	4 / 4	1	130			:
SynCp	Techno	6130	MA_Electro10 AF2	4 / 4	1	123			:
SynCp	Techno	6131	MA_Electro11	4 / 4	1	130			:
SynCp	Techno	6132	MA_Electro12	4 / 4	1	130			:
SynCp	Techno	6133	MA_Electro13	4 / 4	1	130			:
SynCp	Techno	6134	MA_Electro14	4 / 4	1	130			:
SynCp	Techno	6135	MA_CompuBass1	4 / 4	1	130			:
SynCp	Techno	6136	MA_CompuBass2	4 / 4	1	130			:
SynCp	Techno	6137	MA_CompuBass2 AF2	4 / 4	8	134			:
SynCp	Techno	6138	MA_CompuBass3	4 / 4	1	130			:
SynCp	Techno	6139	MA_CompuBass4	4 / 4	1	130			:
SynCp	Techno	6140	MA_Digi Seq1 _N	4 / 4	2	106			:
SynCp	Techno	6141	MA_Digi Seq2 _N	4 / 4	2	106			:
SynCp	Techno	6142	MA_Digi Seq3 _N	4 / 4	2	106			:
SynCp	Techno	6143	MA_Digi Seq4 _N	4 / 4	1	106			:
SynCp	Techno	6144	MA_Digi Seq5 _N	4 / 4	1	106			:
SynCp	Techno	6145	MA_DigySeq1 _N	4 / 4	4	135			:
SynCp	Techno	6146	MA_DigySeq2 _N	4 / 4	2	135			:
SynCp	Techno	6147	MA_DigySeq3 _N	4 / 4	2	135			:
SynCp	Techno	6148	MA_DigySeq4 _N	4 / 4	2	135			:
SynCp	Techno	6149	MA_DigySeq5 _N	4 / 4	1	135			:
SynCp	Techno	6150	MA_Seq S&H1	4 / 4	4	120			:
SynCp	Techno	6151	MA_Seq S&H2	4 / 4	4	120			:
SynCp	Techno	6152	MA_Poly Arp1	4 / 4	1	120			:
SynCp	Techno	6153	MA_Poly Arp2	4 / 4	1	120			:
SynCp	Techno	6154	MA_Boiler1	4 / 4	1	120			:
SynCp	Techno	6155	MA_Boiler2	4 / 4	1	120			:
SynCp	Techno	6156	MA_Boiler3	4 / 4	1	120			:
SynCp	Techno	6157	MA_Boiler4	4 / 4	1	110			:
SynCp	Techno	6158	MA_Bees1	4 / 4	1	118			:
SynCp	Techno	6159	MA_Bees2	4 / 4	1	118			:
SynCp	Techno	6160	MA_Bees3	4 / 4	1	118			:
SynCp	Techno	6161	MA_Syncopa1	4 / 4	2	120			:
SynCp	Techno	6162	MA_Tek Echo1	4 / 4	2	120			:
SynCp	Techno	6163	MA_Super Arp	4 / 4	2	120			:
SynCp	Techno	6164	MA_Space Arp	4 / 4	2	120			:
SynCp	Techno	6165	MA_Step Line	4 / 4	1	120			:
SynCp	Techno	6166	MA_Acid Line	4 / 4	1	120			:
SynCp	Techno	6167	MA_Ana Seq	4 / 4	1	120			:
SynCp	Techno	6168	MA_Ascorbic	4 / 4	1	150			:
SynCp	Techno	6169	MA_Beeperz	4 / 4	2	104			:
SynCp	Techno	6170	MA_Doves	4 / 4	1	150			:
SynCp	Techno	6171	MA_Europluk	4 / 4	1	105			:
SynCp	Techno	6172	MA_Hardcore	4 / 4	3	150			:
SynCp	Techno	6173	MA_Harmo	4 / 4	1	150			:
SynCp	Techno	6174	MA_Lamb	4 / 4	1	125			:
SynCp	Techno	6175	MA_Ocean	4 / 4	1	120			:
SynCp	Techno	6176	MA_Orbit	4 / 4	1	140			:
SynCp	Techno	6177	MA_Pitzy	4 / 4	1	105			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Techno	6178	MA_Planet	4 / 4	1	120			:
SynCp	Techno	6179	MA_Poly Dance	4 / 4	1	120			:
SynCp	Techno	6180	MA_Popcorn	4 / 4	1	120			:
SynCp	Techno	6181	MA_Puls Line	4 / 4	2	120			:
SynCp	Techno	6182	MA_Simple	4 / 4	2	150			:
SynCp	Techno	6183	MA_Split Arp	4 / 4	1	120			:
SynCp	Techno	6184	MA_Step Seq	4 / 4	1	120			:
SynCp	Techno	6185	MA_SyncopaEcho	4 / 4	2	120			:
SynCp	Techno	6186	MA_Tek Bubble	4 / 4	1	128			:
SynCp	Techno	6187	MA_Thips	4 / 4	1	100			:
SynCp	Techno	6188	MA_Waggle	4 / 4	1	140			:
SynCp	Techno	6189	MA_TranceRtm1	4 / 4	4	135			:
SynCp	Techno	6190	MA_TranceRtm2	4 / 4	4	140			:
SynCp	Techno	6191	MA_TranceRtm3	4 / 4	4	140			:
SynCp	Techno	6192	MA_Trance Stab	4 / 4	2	140			:
SynCp	Techno	6193	MA_T-Line Chd	4 / 4	4	140			:
SynCp	Techno	6194	MA_Syncopa2	4 / 4	2	120			:
SynCp	Techno	6195	MA_Tek Echo2	4 / 4	2	120			:
SynCp	Techno	6196	MA_Fugue	4 / 4	2	120			:
SynCp	Techno	6197	MA_Rave Swp	4 / 4	4	135			:
SynCp	Techno	6198	MA_Rosync	4 / 4	1	120			:
SynCp	Techno	6199	MA_Synclavk	4 / 4	2	140			:
SynCp	Techno	6200	MA_HiFive	4 / 4	1	118			:
SynCp	Pop Rock	6201	MC_Snow Run _N	4 / 4	4	127			:
SynCp	Pop Rock	6202	MF_Club Finger _N	4 / 4	4	165			:
SynCp	Pop Rock	6203	MG_Rising Comp _N	4 / 4	4	146			:
SynCp	Pop Rock	6204	MA_BreakLoop2 Syn Comp _N	4 / 4	2	85			:
SynCp	Pop Rock	6205	MA_BreakLoop4 Syn Comp _N	4 / 4	4	95			:
SynCp	Pop Rock	6206	MA_BreakLoop7 Plucks _N	4 / 4	4	95			:
SynCp	Pop Rock	6207	MA_BreakLoop8 Plucks _N	4 / 4	1	100			:
SynCp	Pop Rock	6208	MA_BreakLoop10 Synth _N	4 / 4	2	100			:
SynCp	Pop Rock	6209	MA_BreakLoop12 Pluck _N	4 / 4	2	118			:
SynCp	Pop Rock	6210	MA_Tracker 1 Synth2 _N	4 / 4	1	170			:
SynCp	Pop Rock	6211	MA_Tracker 2 Synth2 _N	4 / 4	2	170			:
SynCp	Pop Rock	6212	MA_Tracker 3 Synth2 _N	4 / 4	1	170			:
SynCp	Pop Rock	6213	MA_Tracker 4 Synth2 _N	4 / 4	2	170			:
SynCp	Pop Rock	6214	MA_Tracker 8 Synth2 _N	4 / 4	4	170			:
SynCp	Pop Rock	6215	MA_Tracker 9 Synth2 _N	4 / 4	4	170			:
SynCp	D&B	6216	MA_Big Beat 1 _N	4 / 4	4	115			:
SynCp	D&B	6217	MB_Big Beat 1 _N	4 / 4	4	115			:
SynCp	D&B	6218	MC_Big Beat 1 _N	4 / 4	4	115			:
SynCp	D&B	6219	FA_Big Beat 1 _N	4 / 4	1	115			:
SynCp	D&B	6220	FB_Big Beat 1 _N	4 / 4	1	115			:
SynCp	D&B	6221	FC_Big Beat 1 _N	4 / 4	1	115			:
SynCp	D&B	6222	BA_Big Beat 1 _N	4 / 4	1	115			:
SynCp	D&B	6223	MA_Big Step1 _N	4 / 4	2	116			:
SynCp	D&B	6224	MA_Big Step2 _N	4 / 4	1	116			:
SynCp	D&B	6225	MA_Big Step3 _N	4 / 4	2	116			:
SynCp	D&B	6226	MA_Big Step4 _N	4 / 4	1	116			:
SynCp	D&B	6227	MA_Big Step5 _N	4 / 4	1	116			:
SynCp	D&B	6228	MA_Breakbeats 1 _N	4 / 4	4	115			:
SynCp	D&B	6229	MB_Breakbeats 1 _N	4 / 4	4	115			:
SynCp	D&B	6230	MC_Breakbeats 1 _N	4 / 4	2	115			:
SynCp	D&B	6231	FA_Breakbeats 1 _N	4 / 4	1	115			:
SynCp	D&B	6232	FB_Breakbeats 1 _N	4 / 4	1	115			:
SynCp	D&B	6233	FC_Breakbeats 1	4 / 4	1	115			:
SynCp	D&B	6234	BA_Breakbeats 1 _N	4 / 4	1	115			:
SynCp	D&B	6235	MA_Breakbeats 2 _N	4 / 4	4	88			:
SynCp	D&B	6236	MB_Breakbeats 2 _N	4 / 4	4	88			:
SynCp	D&B	6237	MC_Breakbeats 2 _N	4 / 4	4	88			:
SynCp	D&B	6238	FA_Breakbeats 2 _N	4 / 4	1	88			:
SynCp	D&B	6239	FB_Breakbeats 2 _N	4 / 4	1	88			:
SynCp	D&B	6240	FC_Breakbeats 2	4 / 4	1	88			:
SynCp	D&B	6241	BA_Breakbeats 2 _N	4 / 4	1	88			:
SynCp	Chill	6242	MA_SweetChillArp Lp	4 / 4	2	84			:
SynCp	Chill	6243	MA_SweetChillArp CF4+Pan	4 / 4	2	84			:
SynCp	Chill	6244	MA_SweetChillArp CF8+Pan	4 / 4	8	84			:
SynCp	Chill	6245	MA_Analog Keys Lp	4 / 4	2	84			:
SynCp	Chill	6246	MA_Analog Keys Pan8	4 / 4	2	84			:
SynCp	Chill	6247	MA_Analog Keys Pan16	4 / 4	2	84			:
SynCp	Chill	6248	MA_Chill Melody 1 _N	4 / 4	1	84			:
SynCp	Chill	6249	MA_Chill Melody 1 CF1 _N	4 / 4	1	84			:
SynCp	Chill	6250	MA_Chill Melody 2a _N	4 / 4	1	84			:
SynCp	Chill	6251	MA_Chill Melody 2b _N	4 / 4	1	84			:
SynCp	Chill	6252	MA_Chill Melody 3 _N	4 / 4	1	84			:
SynCp	Chill	6253	MA_Chill Melody 3 CF1 _N	4 / 4	1	84			:
SynCp	Chill	6254	MA_Hybrid Chords Pan8	4 / 4	1	84			:
SynCp	Chill	6255	MA_Hybrid Chords CF1S	4 / 4	1	84			:
SynCp	Chill	6256	MA_Hybrid Chords CF1H	4 / 4	1	84			:
SynCp	Chill	6257	MA_Hybrid Chords CF4+Pan	4 / 4	4	84			:
SynCp	Chill	6258	MA_Hybrid Chords CF8+Pan	4 / 4	8	84			:
SynCp	Chill	6259	MA_Trap City Synth _N	4 / 4	4	120			:
SynCp	Chill	6260	MB_Trap City Synth _N	4 / 4	4	120			:
SynCp	Chill	6261	MD_Trap City Synth _N	4 / 4	4	120			:
SynCp	Chill	6262	ME_Trap City Synth _N	4 / 4	4	120			:
SynCp	Chill	6263	MF_Trap City Synth _N	4 / 4	4	120			:
SynCp	Chill	6264	MG_Trap City Synth _N	4 / 4	4	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Chill	6265	MH_Trap City Synth _N	4 / 4	4	130			:
SynCp	Chill	6266	MI_Trap City Synth _N	4 / 4	4	130			:
SynCp	Chill	6267	MA_EDM Ballad Lead	4 / 4	4	120			:
SynCp	Chill	6268	MA_Squad Theme _N	4 / 4	1	120			:
SynCp	Chill	6269	MA_Arptelligence _N	4 / 4	1	120			:
SynCp	Chill	6270	MA_Wind Dancer _N	4 / 4	1	130			:
SynCp	Chill	6271	MA_Landing Gear _N	4 / 4	1	120			:
SynCp	Chill	6272	MA1_Ambient 1 _N	4 / 4	4	102			:
SynCp	Chill	6273	MB1_Ambient 1	4 / 4	4	102			:
SynCp	Chill	6274	MC1_Ambient 1 _N	4 / 4	4	102			:
SynCp	Chill	6275	FA1_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6276	FB1_Ambient 1	4 / 4	1	102			:
SynCp	Chill	6277	FC1_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6278	BA1_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6279	MB2_Ambient 1 _N	4 / 4	4	102			:
SynCp	Chill	6280	MC2_Ambient 1 _N	4 / 4	4	102			:
SynCp	Chill	6281	FB2_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6282	FC2_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6283	BA2_Ambient 1 _N	4 / 4	1	102			:
SynCp	Chill	6284	MA1_Ambient 2 _C	4 / 4	4	111			:
SynCp	Chill	6285	MB1_Ambient 2 _C	4 / 4	2	111			:
SynCp	Chill	6286	MC1_Ambient 2 _C	4 / 4	4	111			:
SynCp	Chill	6287	FB1_Ambient 2 _C	4 / 4	8	111			:
SynCp	Chill	6288	FC1_Ambient 2 _C	4 / 4	1	111			:
SynCp	Chill	6289	MA2_Ambient 2 _C	4 / 4	4	111			:
SynCp	Chill	6290	MC2_Ambient 2 _C	4 / 4	4	111			:
SynCp	Chill	6291	FA2_Ambient 2 _C	4 / 4	1	111			:
SynCp	Chill	6292	FB2_Ambient 2 _C	4 / 4	8	111			:
SynCp	Chill	6293	FC2_Ambient 2 _C	4 / 4	1	111			:
SynCp	Chill	6294	BA2_Ambient 2 _C	4 / 4	2	111			:
SynCp	Chill	6295	MA1_Ambient 2 _N	4 / 4	4	111			:
SynCp	Chill	6296	MB1_Ambient 2 _N	4 / 4	2	111			:
SynCp	Chill	6297	MC1_Ambient 2 _N	4 / 4	4	111			:
SynCp	Chill	6298	FB1_Ambient 2 _N	4 / 4	8	111			:
SynCp	Chill	6299	FC1_Ambient 2 _N	4 / 4	1	111			:
SynCp	Chill	6300	MA2_Ambient 2 _N	4 / 4	4	111			:
SynCp	Chill	6301	MC2_Ambient 2	4 / 4	4	111			:
SynCp	Chill	6302	FA2_Ambient 2 _N	4 / 4	1	111			:
SynCp	Chill	6303	FB2_Ambient 2 _N	4 / 4	8	111			:
SynCp	Chill	6304	FC2_Ambient 2 _N	4 / 4	1	111			:
SynCp	Chill	6305	BA2_Ambient 2 _N	4 / 4	2	111			:
SynCp	Chill	6306	MA1_Ambient 3	4 / 4	4	75			:
SynCp	Chill	6307	MA2_Ambient 3	4 / 4	4	75			:
SynCp	Chill	6308	MA3_Ambient 3	4 / 4	2	75			:
SynCp	Chill	6309	MA_Ambient 4	4 / 4	1	80			:
SynCp	Chill	6310	MA_Ambient 4 AF2	4 / 4	1	80			:
SynCp	Chill	6311	MC_Chill Out	4 / 4	4	79			:
SynCp	Chill	6312	MD_Chill Out	4 / 4	2	79			:
SynCp	Chill	6313	FB_Chill Out	4 / 4	1	79			:
SynCp	Chill	6314	MA_Synth Pop	4 / 4	1	90			:
SynCp	Chill	6315	MB_Synth Pop	4 / 4	1	90			:
SynCp	Chill	6316	MD_Synth Pop	4 / 4	1	90			:
SynCp	Chill	6317	IA_Synth Pop	4 / 4	1	90			:
SynCp	Chill	6318	FC_Synth Pop	4 / 4	1	90			:
SynCp	Chill	6319	MA_Chill Out	4 / 4	2	79			:
SynCp	Chill	6320	MB_Chill Out	4 / 4	2	79			:
SynCp	Chill	6321	FA_Chill Out	4 / 4	1	79			:
SynCp	Chill	6322	MA_ChillInChord1	4 / 4	1	90			:
SynCp	Chill	6323	MA_ChillInChord1 AF2	4 / 4	1	90			:
SynCp	Chill	6324	MA_ChillInChd1 AF1&2	4 / 4	1	90			:
SynCp	Chill	6325	MA_ChillInChord2	4 / 4	1	90			:
SynCp	Chill	6326	MA_ChillInChord2 AF1	4 / 4	1	90			:
SynCp	Chill	6327	MA_ChillInChord3	4 / 4	1	90			:
SynCp	Chill	6328	MA_ChillInChord4	4 / 4	1	90			:
SynCp	Chill	6329	MA_ChillInChord5	4 / 4	1	90			:
SynCp	Chill	6330	MA_ChillInChord6	4 / 4	1	90			:
SynCp	Chill	6331	MA_ChillInChord6 AF1	4 / 4	1	90			:
SynCp	Chill	6332	MA1_Eighties	4 / 4	1	120			:
SynCp	Chill	6333	MB1_Eighties	4 / 4	1	120			:
SynCp	Chill	6334	MC1_Eighties	4 / 4	1	120			:
SynCp	Chill	6335	MD1_Eighties	4 / 4	1	120			:
SynCp	Chill	6336	MA2_Eighties	4 / 4	1	120			:
SynCp	Chill	6337	MA2_Eighties AF1	4 / 4	1	120			:
SynCp	Chill	6338	MA2_Eighties AF2	4 / 4	1	120			:
SynCp	Chill	6339	MB2_Eighties	4 / 4	1	120			:
SynCp	Chill	6340	MB2_Eighties AF1	4 / 4	1	120			:
SynCp	Chill	6341	MA3_Eighties	4 / 4	1	120			:
SynCp	Chill	6342	MA3_Eighties AF1	4 / 4	1	120			:
SynCp	Chill	6343	MB3_Eighties	4 / 4	1	120			:
SynCp	Hip Hop	6344	MA_Trap Comp 1 _N	4 / 4	4	88			:
SynCp	Hip Hop	6345	MA_Trap Comp 2 _N	4 / 4	2	88			:
SynCp	Hip Hop	6346	MA_Trap Comp 3 _N	4 / 4	2	88			:
SynCp	Hip Hop	6347	MA_Trap Comp 4 _N	4 / 4	2	88			:
SynCp	Hip Hop	6348	MA_Trap Comp 5 _N	4 / 4	2	88			:
SynCp	Hip Hop	6349	MA_Trap Comp 6 _N	4 / 4	2	88			:
SynCp	Hip Hop	6350	MA_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6351	MB_Tricky Hip Hop Synth _N	4 / 4	4	92			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Hip Hop	6352	MC_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6353	MD_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6354	ME_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6355	MF_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6356	MG_Tricky Hip Hop Synth _N	4 / 4	4	92			:
SynCp	Hip Hop	6357	MH_Tricky Hip Hop Synth _N	4 / 4	2	92			:
SynCp	Hip Hop	6358	MA_Trap Hard Arp	4 / 4	2	107			:
SynCp	Hip Hop	6359	MA_2BZ4U	4 / 4	2	75			:
SynCp	Hip Hop	6360	MB_2BZ4U	4 / 4	2	75			:
SynCp	Hip Hop	6361	MC_2BZ4U	4 / 4	2	75			:
SynCp	Hip Hop	6362	MD_2BZ4U	4 / 4	2	75			:
SynCp	Hip Hop	6363	MA_PepRally	4 / 4	4	75			:
SynCp	Hip Hop	6364	MB_PepRally	4 / 4	4	75			:
SynCp	Hip Hop	6365	MC_Hip Hop 3 _N	4 / 4	2	104			:
SynCp	Hip Hop	6366	MD_Hip Hop 3	4 / 4	2	104			:
SynCp	Hip Hop	6367	FB_Hip Hop 3	4 / 4	1	104			:
SynCp	Hip Hop	6368	MA_Hip Rock 2 _C	4 / 4	4	132			:
SynCp	Hip Hop	6369	MB_Hip Rock 2 _C	4 / 4	4	132			:
SynCp	Hip Hop	6370	MC_Hip Rock 2 _C	4 / 4	4	132			:
SynCp	Hip Hop	6371	FA_Hip Rock 2 _C	4 / 4	1	132			:
SynCp	Hip Hop	6372	FB_Hip Rock 2 _C	4 / 4	1	132			:
SynCp	Hip Hop	6373	FC_Hip Rock 2 _C	4 / 4	1	132			:
SynCp	Hip Hop	6374	MA_Dancehall _C	4 / 4	4	103			:
SynCp	Hip Hop	6375	MB_Dancehall _C	4 / 4	4	103			:
SynCp	Hip Hop	6376	MD_Dancehall _C	4 / 4	4	103			:
SynCp	Hip Hop	6377	FA_Dancehall _C	4 / 4	1	103			:
SynCp	Hip Hop	6378	FB_Dancehall _C	4 / 4	1	103			:
SynCp	Hip Hop	6379	FD_Dancehall _C	4 / 4	1	103			:
SynCp	Hip Hop	6380	BA_Dancehall _C	4 / 4	1	103			:
SynCp	Hip Hop	6381	EA_Dancehall _C	4 / 4	3	103			:
SynCp	Hip Hop	6382	MA_Funky Chop	4 / 4	1	120			:
SynCp	Modern R&B	6383	MA_SynChord Sync 1	4 / 4	4	85			:
SynCp	Modern R&B	6384	MA_SynChord Sync 2	4 / 4	4	90			:
SynCp	Modern R&B	6385	MA_SynChord Sync 3	4 / 4	4	95			:
SynCp	Modern R&B	6386	MA_SynChord Sync 4	4 / 4	4	100			:
SynCp	Modern R&B	6387	MA_SynChord Sync 5	4 / 4	4	120			:
SynCp	Modern R&B	6388	MB_R&B Disco _N	4 / 4	2	110			:
SynCp	Modern R&B	6389	MC_R&B Disco _N	4 / 4	2	110			:
SynCp	Modern R&B	6390	MA_Chart R&B _C	4 / 4	4	130			:
SynCp	Modern R&B	6391	MB_Chart R&B _C	4 / 4	4	130			:
SynCp	Modern R&B	6392	MC_Chart R&B _C	4 / 4	4	130			:
SynCp	Modern R&B	6393	FA_Chart R&B _C	4 / 4	1	130			:
SynCp	Modern R&B	6394	FB_Chart R&B _C	4 / 4	1	130			:
SynCp	Modern R&B	6395	FC_Chart R&B _C	4 / 4	1	130			:
SynCp	Modern R&B	6396	BA_Chart R&B _C	4 / 4	1	130			:
SynCp	Modern R&B	6397	EA_Chart R&B _C	4 / 4	5	130			:
SynCp	Modern R&B	6398	EB_Chart R&B _C	4 / 4	10	130			:
SynCp	Modern R&B	6399	MC_New R&B 3 _N	4 / 4	2	90			:
SynCp	Modern R&B	6400	MD_New R&B 3	4 / 4	2	90			:
SynCp	Modern R&B	6401	FC_New R&B 3 _N	4 / 4	2	90			:
SynCp	Pop Rock	6402	MA_Atebits Rock Comp _N	4 / 4	4	120			:
SynCp	Pop Rock	6403	MB_Atebits Rock Comp _N	4 / 4	1	120			:
SynCp	Pop Rock	6404	MC_Atebits Rock Comp _N	4 / 4	4	120			:
SynCp	Pop Rock	6405	MD_Atebits Rock Comp _N	4 / 4	1	120			:
SynCp	Pop Rock	6406	ME_Atebits Rock Comp _N	4 / 4	2	120			:
SynCp	Pop Rock	6407	MF_Atebits Rock Comp _N	4 / 4	2	120			:
SynCp	Pop Rock	6408	MG_Atebits Rock Comp	4 / 4	4	120			:
SynCp	Pop Rock	6409	MH_Atebits Rock Comp _N	4 / 4	3	120			:
SynCp	Pop Rock	6410	MI_Atebits Rock Comp _N	4 / 4	2	120			:
SynCp	Pop Rock	6411	MA_Syn16 80s 1	4 / 4	4	120			:
SynCp	Pop Rock	6412	MA_Syn16 80s 2	4 / 4	4	120			:
SynCp	Pop Rock	6413	MA1_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6414	MB1_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6415	MC1_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6416	MD1_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6417	MA2_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6418	MA2_Electro Pop1 AF1	4 / 4	1	94			:
SynCp	Pop Rock	6419	MA2_Electro Pop1 AF2	4 / 4	4	94			:
SynCp	Pop Rock	6420	MB2_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6421	MA3_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6422	MB3_Electro Pop1	4 / 4	4	94			:
SynCp	Pop Rock	6423	MC3_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6424	MD3_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6425	ME3_Electro Pop1	4 / 4	1	94			:
SynCp	Pop Rock	6426	MA_Voxdance	4 / 4	1	90			:
SynCp	Pop Rock	6427	MA_Voxdance AF2	4 / 4	1	90			:
SynCp	Pop Rock	6428	MB_Voxdance	4 / 4	1	90			:
SynCp	Pop Rock	6429	MB_Voxdance AF1	4 / 4	1	90			:
SynCp	Pop Rock	6430	MA_Jumping	4 / 4	4	90			:
SynCp	Pop Rock	6431	MB_Jumping	4 / 4	4	90			:
SynCp	Pop Rock	6432	MB_Jumping AF1	4 / 4	1	90			:
SynCp	Pop Rock	6433	MB_Jumping AF2	4 / 4	4	90			:
SynCp	Pop Rock	6434	MA_80'sSynthRock _C	4 / 4	4	96			:
SynCp	Pop Rock	6435	MB_80'sSynthRock _C	4 / 4	4	96			:
SynCp	Pop Rock	6436	MC_80'sSynthRock _C	4 / 4	8	96			:
SynCp	Pop Rock	6437	FA_80'sSynthRock _C	4 / 4	1	96			:
SynCp	Pop Rock	6438	FB_80'sSynthRock _C	4 / 4	1	96			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	Pop Rock	6439	FC_80'sSynthRock _C	4 / 4	1	96			:
SynCp	Pop Rock	6440	BA_80'sSynthRock _C	4 / 4	1	96			:
SynCp	Pop Rock	6441	EA_80'sSynthRock _C	4 / 4	3	96			:
SynCp	Rock	6442	MA_AlternaRock2 _N	4 / 4	4	100			:
SynCp	Rock	6443	MB_AlternaRock2 _N	4 / 4	4	100			:
SynCp	Rock	6444	MC_AlternaRock2 _N	4 / 4	4	100			:
SynCp	Rock	6445	FA_AlternaRock2	4 / 4	1	100			:
SynCp	Rock	6446	FB_AlternaRock2 _N	4 / 4	1	100			:
SynCp	Rock	6447	FC_AlternaRock2 _N	4 / 4	1	100			:
SynCp	Rock	6448	BA_AlternaRock2 _N	4 / 4	2	100			:
SynCp	Latin	6449	MA_Latin House	4 / 4	4	138			:
SynCp	Latin	6450	MB_Latin House	4 / 4	2	138			:
SynCp	World	6451	MA_AsianDanceShf Synth _N	4 / 4	8	120			:
SynCp	World	6452	MB_AsianDanceShf Synth _N	4 / 4	4	120			:
SynCp	World	6453	MC_AsianDanceShf Synth _N	4 / 4	8	120			:
SynCp	World	6454	MD_AsianDanceShf Synth _N	4 / 4	16	120			:
SynCp	World	6455	MA_AfricanDanceShf Syn _N	4 / 4	2	120			:
SynCp	World	6456	MB_AfricanDanceShf Syn _N	4 / 4	8	120			:
SynCp	World	6457	MC_AfricanDanceShf Syn _N	4 / 4	8	120			:
SynCp	World	6458	MD_AfricanDanceShf Syn _N	4 / 4	8	120			:
SynCp	World	6459	MA_TurkishEuro2 _C	4 / 4	4	120			:
SynCp	World	6460	MB_TurkishEuro2 _C	4 / 4	4	120			:
SynCp	World	6461	MC_TurkishEuro2 _C	4 / 4	4	120			:
SynCp	World	6462	FA_TurkishEuro2 _C	4 / 4	1	120			:
SynCp	World	6463	FB_TurkishEuro2 _C	4 / 4	1	120			:
SynCp	World	6464	FC_TurkishEuro2 _C	4 / 4	1	120			:
SynCp	World	6465	BA_TurkishEuro2 _C	4 / 4	1	120			:
SynCp	World	6466	EA_TurkishEuro2 _C	4 / 4	3	120			:
SynCp	General	6467	1/16 Up Oct1	4 / 4	1	120			:
SynCp	General	6468	1/16 Up Oct2	4 / 4	1	120			:
SynCp	General	6469	1/16 Up Oct3	4 / 4	1	120			:
SynCp	General	6470	1/16 Up Oct4	4 / 4	1	120			:
SynCp	General	6471	1/16 Down Oct1	4 / 4	1	120			:
SynCp	General	6472	1/16 Down Oct2	4 / 4	1	120			:
SynCp	General	6473	1/16 Down Oct3	4 / 4	1	120			:
SynCp	General	6474	1/16 Down Oct4	4 / 4	1	120			:
SynCp	General	6475	1/16 Up/Down A Oct1	4 / 4	1	120			:
SynCp	General	6476	1/16 Up/Down A Oct2	4 / 4	1	120			:
SynCp	General	6477	1/16 Up/Down A Oct3	4 / 4	1	120			:
SynCp	General	6478	1/16 Up/Down A Oct4	4 / 4	1	120			:
SynCp	General	6479	1/16 Up/Down B Oct1	4 / 4	1	120			:
SynCp	General	6480	1/16 Up/Down B Oct2	4 / 4	1	120			:
SynCp	General	6481	1/16 Up/Down B Oct3	4 / 4	1	120			:
SynCp	General	6482	1/16 Up/Down B Oct4	4 / 4	1	120			:
SynCp	General	6483	1/16 Random Oct1	4 / 4	1	120			:
SynCp	General	6484	1/16 Random Oct2	4 / 4	1	120			:
SynCp	General	6485	1/16 Random Oct3	4 / 4	1	120			:
SynCp	General	6486	1/16 Random Oct4	4 / 4	1	120			:
SynCp	General	6487	1/16 Octave2 Up	4 / 4	1	120			:
SynCp	General	6488	1/16 Octave4 Up	4 / 4	1	120			:
SynCp	General	6489	1/16 Unison Up	4 / 4	1	120			:
SynCp	General	6490	1/16 Up & Alternate1	4 / 4	1	120			:
SynCp	General	6491	1/16 Up & Down 1	4 / 4	1	120			:
SynCp	General	6492	1/16 Up & Down 2	4 / 4	1	120			:
SynCp	General	6493	1/16 Up & Down 3	4 / 4	1	120			:
SynCp	General	6494	1/16 Up & Down 4	4 / 4	1	120			:
SynCp	General	6495	1/16 Up & Random 1	4 / 4	1	120			:
SynCp	General	6496	1/16 Up & Random 2	4 / 4	1	120			:
SynCp	General	6497	1/16 Up & Random 3	4 / 4	1	120			:
SynCp	General	6498	1/16 Up & Random 4	4 / 4	1	120			:
SynCp	General	6499	MA_ClasscArp2-01 _N	4 / 4	4	130			:
SynCp	General	6500	MA_ClassicArp2-01	4 / 4	4	130			:
SynCp	General	6501	MA_ClasscArp2-02 _N	4 / 4	4	130			:
SynCp	General	6502	MA_ClassicArp2-02	4 / 4	4	130			:
SynCp	General	6503	MA_ClasscArp2-03 _N	4 / 4	2	130			:
SynCp	General	6504	MA_ClassicArp2-03	4 / 4	2	130			:
SynCp	General	6505	MA_ClassicArp2-04	4 / 4	1	130			:
SynCp	General	6506	MA_ClassicArp2-05	4 / 4	1	130			:
SynCp	General	6507	MA_ClasscArp2-06 _N	4 / 4	4	130			:
SynCp	General	6508	MA_ClassicArp2-06	4 / 4	4	130			:
SynCp	General	6509	MA_ClassicArp2-07	4 / 4	1	130			:
SynCp	General	6510	MA_ClasscArp2-08 _N	4 / 4	1	130			:
SynCp	General	6511	MA_ClassicArp2-08	4 / 4	1	130			:
SynCp	General	6512	MA_ClasscArp2-09 _N	4 / 4	2	130			:
SynCp	General	6513	MA_ClassicArp2-09	4 / 4	2	130			:
SynCp	General	6514	MA_ClasscArp2-10 _N	4 / 4	1	130			:
SynCp	General	6515	MA_ClassicArp2-10	4 / 4	1	130			:
SynCp	General	6516	MA_ClasscArp2-11 _N	4 / 4	1	130			:
SynCp	General	6517	MA_ClassicArp2-11	4 / 4	1	130			:
SynCp	General	6518	MA_ClasscArp2-12 _N	4 / 4	2	130			:
SynCp	General	6519	MA_ClassicArp2-12	4 / 4	2	130			:
SynCp	General	6520	MA_ClasscArp2-13 _N	4 / 4	4	130			:
SynCp	General	6521	MA_ClassicArp2-13	4 / 4	4	130			:
SynCp	General	6522	MA_ClasscArp2-14 _N	4 / 4	2	130			:
SynCp	General	6523	MA_ClassicArp2-15	4 / 4	1	130			:
SynCp	General	6524	MA_ClassicArp2-16	4 / 4	1	130			:
SynCp	General	6525	MA_SynArp1	4 / 4	1	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	General	6526	MA_SynArp2	4 / 4	2	130			:
SynCp	General	6527	MA_SynArp3	4 / 4	1	130			:
SynCp	General	6528	MA_SynArp4	4 / 4	1	130			:
SynCp	General	6529	MA_SynArp5	4 / 4	1	130			:
SynCp	General	6530	MA_SynArp6	4 / 4	1	124			:
SynCp	General	6531	MA_SynArp7	4 / 4	1	120			:
SynCp	General	6532	MA_SynArp8	4 / 4	1	130			:
SynCp	General	6533	MA_SynArp9	4 / 4	1	130			:
SynCp	General	6534	MA_SynArp10	4 / 4	1	130			:
SynCp	General	6535	MA_SynArp11	4 / 4	2	130			:
SynCp	General	6536	MA_SynArp12	4 / 4	1	90			:
SynCp	General	6537	MA_SynArp13	4 / 4	2	124			:
SynCp	General	6538	MA_SynArp14	4 / 4	1	130			:
SynCp	General	6539	MA_SynArp15	4 / 4	1	130			:
SynCp	General	6540	MA_SynArp16	4 / 4	1	130			:
SynCp	General	6541	MA_SynArp17	4 / 4	1	90			:
SynCp	General	6542	MA_SynArp18	4 / 4	1	130			:
SynCp	General	6543	MA_SynArp19	4 / 4	1	120			:
SynCp	General	6544	MA_SynArp20	4 / 4	1	120			:
SynCp	General	6545	MA_SynArp21	4 / 4	1	124			:
SynCp	General	6546	MA_SynArp22	4 / 4	1	120			:
SynCp	General	6547	MA_SynArp23	4 / 4	1	138			:
SynCp	General	6548	MA_SynArp24	4 / 4	1	138			:
SynCp	General	6549	MA_SynArp25	4 / 4	1	120			:
SynCp	General	6550	MA_SynArp26	4 / 4	1	120			:
SynCp	General	6551	MA_SynArp27	4 / 4	1	120			:
SynCp	General	6552	MA_SynArp28	1 / 4	10	125			:
SynCp	General	6553	MA_SynArp29	4 / 4	5	120			:
SynCp	General	6554	MA_Melody1	4 / 4	1	70			:
SynCp	General	6555	MA_Melody2	4 / 4	1	120			:
SynCp	General	6556	MA_Melody3	4 / 4	1	70			:
SynCp	General	6557	MA_Melody4	4 / 4	1	70			:
SynCp	General	6558	MA_Melody5	4 / 4	1	70			:
SynCp	General	6559	MA_Melody6	4 / 4	1	70			:
SynCp	General	6560	MA_Melody7	4 / 4	1	70			:
SynCp	General	6561	MA_Melody8	4 / 4	1	70			:
SynCp	General	6562	MA_Melody9	4 / 4	1	70			:
SynCp	General	6563	MA_Melody10	4 / 4	1	70			:
SynCp	General	6564	MA_Melody11	4 / 4	1	70			:
SynCp	General	6565	MA_Melody12	4 / 4	1	70			:
SynCp	General	6566	MA_Melody13	4 / 4	1	70			:
SynCp	General	6567	MA_Melody14	4 / 4	1	70			:
SynCp	General	6568	MA_Melody15	4 / 4	1	70			:
SynCp	General	6569	MA_Melody16	4 / 4	1	70			:
SynCp	General	6570	MA_Melody17	4 / 4	1	70			:
SynCp	General	6571	MA_Melody17 AF1	4 / 4	1	119			:
SynCp	General	6572	MA_Melody17 AF2	4 / 4	1	119			:
SynCp	General	6573	MA_Melody18	4 / 4	1	70			:
SynCp	General	6574	MA_Melody19	4 / 4	1	70			:
SynCp	General	6575	MA_Melody20	4 / 4	1	70			:
SynCp	General	6576	MA_Melody21	4 / 4	1	70			:
SynCp	General	6577	MA_Melody22	4 / 4	1	70			:
SynCp	General	6578	MA_Melody23	4 / 4	1	70			:
SynCp	General	6579	MA_Melody24	4 / 4	1	70			:
SynCp	General	6580	MA_Melody25	4 / 4	1	70			:
SynCp	General	6581	MA_Melody26	4 / 4	1	70			:
SynCp	General	6582	MA_Melody27	4 / 4	1	70			:
SynCp	General	6583	MA_SynthPhrase1 _C	4 / 4	1	70			:
SynCp	General	6584	MA_SynthPhrase2 _C	4 / 4	1	70			:
SynCp	General	6585	MA_SynthPhrase3 _C	4 / 4	1	70			:
SynCp	General	6586	MA_SynthPhrase4 _C	4 / 4	1	70			:
SynCp	General	6587	MA_SynthPhrase5 _C	4 / 4	1	70			:
SynCp	General	6588	MA_SynthPhrase6 _C	4 / 4	1	70			:
SynCp	General	6589	MA_SynthPhrase7 _C	4 / 4	1	70			:
SynCp	General	6590	MA_SynthPhrase8 _C	4 / 4	1	70			:
SynCp	General	6591	MA_SynthPhrase9 _C	4 / 4	1	70			:
SynCp	General	6592	MA_SynthPhras10 _C	4 / 4	1	70			:
SynCp	General	6593	MA_SynthPhras11 _C	4 / 4	1	70			:
SynCp	General	6594	MA_SynthPhras12 _C	4 / 4	1	70			:
SynCp	General	6595	MA_SynthPhras13 _C	4 / 4	1	130			:
SynCp	General	6596	MA_SynthPhras14 _C	4 / 4	1	130			:
SynCp	General	6597	MA_SynthPhras15 _C	4 / 4	1	130			:
SynCp	General	6598	MA_SynthPhras16 _C	4 / 4	1	130			:
SynCp	General	6599	MA_SynthPhras17 _C	4 / 4	1	130			:
SynCp	General	6600	MA_SynthPhras18 _C	4 / 4	1	130			:
SynCp	General	6601	MA_SynthPhras19 _C	4 / 4	1	130			:
SynCp	General	6602	MA_SynthPhras20 _C	4 / 4	1	130			:
SynCp	General	6603	MA_SynthPhras21 _C	4 / 4	1	130			:
SynCp	General	6604	MA_SynthPhras22 _C	4 / 4	1	130			:
SynCp	General	6605	MA_SynthPhras23 _C	4 / 4	1	130			:
SynCp	General	6606	MA_SynthPhras24 _C	4 / 4	1	130			:
SynCp	General	6607	MA_SynthPhras25 _C	4 / 4	1	130			:
SynCp	General	6608	MA_SynthPhras26 _C	4 / 4	1	130			:
SynCp	General	6609	MA_SynthPhras27 _C	4 / 4	1	130			:
SynCp	General	6610	MA_SynthPhras28 _C	4 / 4	1	130			:
SynCp	General	6611	MA_SynthPhras29 _C	4 / 4	1	130			:
SynCp	General	6612	MA_SynthPhras30 _C	4 / 4	1	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
SynCp	General	6613	MA_SynthPhras31 _C	4 / 4	1	130			:
SynCp	General	6614	MA_SynthPhras32 _C	4 / 4	1	130			:
SynCp	General	6615	MA_SynthPhras33 _C	4 / 4	1	130			:
SynCp	General	6616	MA_SynthPhras34 _C	4 / 4	1	140			:
SynCp	General	6617	MA_SynthPhras35 _C	4 / 4	1	130			:
SynCp	General	6618	MA_SynthPhras36 _C	4 / 4	1	130			:
SynCp	General	6619	MA_SynthPhras37 _C	4 / 4	1	130			:
SynCp	General	6620	MA_SynthPhras38 _C	4 / 4	1	130			:
SynCp	General	6621	MA_SynthPhras39 _C	4 / 4	1	130			:
SynCp	General	6622	MA_SynthPhras40 _C	4 / 4	1	120			:
SynCp	General	6623	MA_SynthPhras41 _C	4 / 4	1	120			:
SynCp	General	6624	MA_SynthPhras42 _C	4 / 4	1	140			:
SynCp	General	6625	MA_SynthPhras43 _C	4 / 4	4	140			:
SynCp	General	6626	MA_SynthPhras44 _C	4 / 4	1	136			:
SynCp	General	6627	MA_SynthPhras45 _C	4 / 4	1	136			:
SynCp	General	6628	MA_SynthPhras46 _C	4 / 4	2	135			:
SynCp	General	6629	MA_SynthPhras47 _C	4 / 4	1	130			:
SynCp	General	6630	MA_SynthPhras48 _C	4 / 4	1	130			:
SynCp	General	6631	MA_SynthPhras49 _C	4 / 4	1	130			:
SynCp	General	6632	MA_SynthPhras50 _C	4 / 4	1	116			:
SynCp	General	6633	MA_SynthPhras51 _C	4 / 4	1	100			:
SynCp	General	6634	MA_SynthPhras52 _C	4 / 4	1	138			:
SynCp	General	6635	MA_Oct Seq1	4 / 4	1	130			:
SynCp	General	6636	MA_Oct Seq2	4 / 4	1	130			:
SynCp	General	6637	MA_Oct Seq3	4 / 4	1	130			:
SynCp	General	6638	MA_Oct Seq4	4 / 4	1	130			:
SynCp	General	6639	MA_Oct Seq5	4 / 4	1	130			:
SynCp	General	6640	MA_Oct Seq6	4 / 4	1	90			:
SynCp	General	6641	MA_Oct Seq7	4 / 4	1	90			:
SynCp	General	6642	MA_Oct Seq8	4 / 4	1	90			:
SynCp	General	6643	MA_Random Seq1	4 / 4	1	90			:
SynCp	General	6644	MA_Random Seq2	4 / 4	1	90			:
SynCp	General	6645	MA_Random Seq3	4 / 4	1	90			:
SynCp	General	6646	MA_RndmNotesSeq	4 / 4	1	70			:
SynCp	General	6647	MA_Vel Gruv1	4 / 4	1	134			:
SynCp	General	6648	MA_Vel Gruv2	4 / 4	1	134			:
SynCp	General	6649	MA_X-Sweep1	4 / 4	1	140			:
SynCp	General	6650	MA_X-Sweep2	4 / 4	1	140			:
SynCp	General	6651	MA_X-Sweep3	4 / 4	1	140			:
SynCp	General	6652	MA_Simple1	4 / 4	1	130			:
SynCp	General	6653	MA_Simple2	4 / 4	1	130			:
SynCp	General	6654	MA_Simple3	4 / 4	1	130			:
SynCp	General	6655	MA_Simple4	4 / 4	1	130			:
SynCp	General	6656	MA_Simple5	4 / 4	1	130			:
SynCp	General	6657	MA_Basic1	4 / 4	1	130			:
SynCp	General	6658	MA_Basic1 AF2	4 / 4	8	134			:
SynCp	General	6659	MA_Basic2	4 / 4	1	130			:
SynCp	General	6660	MA_Basic3	4 / 4	1	130			:
SynCp	General	6661	MA_FifthSQ1	4 / 4	1	130			:
SynCp	General	6662	MA_FifthSQ2	4 / 4	1	130			:
SynCp	General	6663	MA_FifthSQ3	4 / 4	1	130			:
SynCp	General	6664	MA_FifthSQ4	4 / 4	1	130			:
SynCp	General	6665	MA_FifthSQ5	4 / 4	1	130			:
SynCp	General	6666	MA_FifthSQ6	4 / 4	1	130			:
SynCp	General	6667	MA_MuteArp1	4 / 4	1	120			:
SynCp	General	6668	MA_MuteArp2	4 / 4	1	120			:
SynCp	General	6669	MA_Mute Line	4 / 4	1	134			:
SynCp	General	6670	MA_Chodal	4 / 4	2	150			:
SynCp	General	6671	MA_Wavetable8th	4 / 4	1	120			:
SynCp	General	6672	MA_Wavtable16th	4 / 4	1	90			:
SynCp	General	6673	MA_Syn Chord1	4 / 4	1	130			:
SynCp	General	6674	MA_Syn Chord2	4 / 4	1	90			:
SynCp	General	6675	MA_Syn Chord3	4 / 4	1	120			:
SynCp	General	6676	MA_Syn Chord4	4 / 4	1	130			:
SynCp	General	6677	MA_Syn Chord5	4 / 4	1	130			:
SynCp	General	6678	MA_Syn Chord6	4 / 4	1	130			:
SynCp	General	6679	MA_Syn Chord7	4 / 4	1	130			:
SynCp	General	6680	MA_Syn Chord8	4 / 4	1	90			:
SynCp	General	6681	MA_Syn Chord9	4 / 4	1	120			:
SynCp	General	6682	MA_Syn Chord10	4 / 4	1	116			:
SynCp	General	6683	MA_Syn Chord11	4 / 4	4	130			:
SynCp	General	6684	MA_Syn Chord12	4 / 4	1	124			:
SynCp	General	6685	MA_Syn Chord13	4 / 4	1	140			:
SynCp	General	6686	MA_Syn Chord14	4 / 4	2	130			:
SynCp	General	6687	MA_Syn Chord15	4 / 4	2	134			:
SynCp	General	6688	MA_Syn Chord16	4 / 4	1	138			:
SynCp	General	6689	MA_BassChord1	4 / 4	2	130			:
SynCp	General	6690	MA_BassChord2	4 / 4	2	130			:
SynCp	General	6691	MA_BassChord3	4 / 4	2	130			:
SynCp	General	6692	MA_BassChord4	4 / 4	2	130			:
SynCp	General	6693	MA_BassChord5	4 / 4	2	130			:
SynCp	General	6694	MA_BassChord6	4 / 4	2	130			:
SynCp	General	6695	MA_BassChord7	4 / 4	2	130			:
SynCp	General	6696	MA_BassChord8	4 / 4	2	130			:
SynCp	General	6697	MA_BassChord9	4 / 4	1	130			:
SynCp	General	6698	MA_BassChord10	4 / 4	1	130			:
SynCp	General	6699	MA_BassChord11	4 / 4	1	130			:
SynCp	General	6700	MA_BassChord12	4 / 4	1	130			:
SynCp	General	6701	MA_BassChord13	4 / 4	2	130			:
SynCp	General	6702	MA_BassChord14	4 / 4	1	130			:
SynCp	General	6703	MA_BassChord15	4 / 4	2	130			:
SynCp	General	6704	MA_BassChord16	4 / 4	1	130			:
SynCp	General	6705	MA_BassChord17	4 / 4	1	130			:
SynCp	General	6706	MA_BassChord18	4 / 4	2	130			:
SynCp	General	6707	MA_BassChord19	4 / 4	1	130			:
SynCp	General	6708	MA_BassChord20	4 / 4	1	130			:
SynCp	General	6709	MA_Chord AltB1	4 / 4	1	120			:
SynCp	General	6710	MA_Chord AltB2	4 / 4	1	120			:
SynCp	General	6711	MA_Chord AltB4	4 / 4	1	120			:
SynCp	General	6712	MA_ChordRandom1	4 / 4	1	120			:
SynCp	General	6713	MA_ChordRandom2	4 / 4	1	120			:
SynCp	General	6714	MA_ChordRandom4	4 / 4	1	120			:
CPerc	House	6715	MB_Reggaeton1 Steel Drum	4 / 4	4	90			Steel Drum
CPerc	House	6716	MD_Reggaeton1 Steel Drum	4 / 4	4	90			:
CPerc	House	6717	ME_Reggaeton1 Steel Drum	4 / 4	2	90			:
CPerc	House	6718	MG_Reggaeton1 Steel Drum	4 / 4	4	90			:
CPerc	House	6719	MH_Reggaeton1 Steel Drum	4 / 4	4	90			:
CPerc	House	6720	MA_TropicalHouse1 Marimba	4 / 4	3	110			Marimba
CPerc	House	6721	MB_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6722	MC_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6723	MD_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6724	ME_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6725	MF_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6726	MG_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	House	6727	MH_TropicalHouse1 Marimba	4 / 4	4	110			:
CPerc	Modern R&B	6728	FB_R&B Disco _N	4 / 4	1	110			Chromatic Perc.
CPerc	Modern R&B	6729	FC_R&B Disco _N	4 / 4	2	110			:
CPerc	Techno	6730	MC_Trance 5	4 / 4	4	140			:
CPerc	House	6731	MA_ChromPerc_01 _N	4 / 4	2	120			Marimba
CPerc	House	6732	MA_ChromPerc_01	4 / 4	2	120			:
CPerc	House	6733	MA_ChromPerc_02 _N	4 / 4	2	120			:
CPerc	House	6734	MA_ChromPerc_02	4 / 4	2	120			:
CPerc	House	6735	MA_ChromPerc_03 _N	4 / 4	2	120			:
CPerc	House	6736	MA_ChromPerc_03	4 / 4	2	120			:
CPerc	House	6737	MA_ChromPerc_04 _N	4 / 4	2	120			:
CPerc	House	6738	MA_ChromPerc_04	4 / 4	2	120			:
CPerc	House	6739	MA_ChromPerc_05 _N	4 / 4	4	120			:
CPerc	House	6740	MA_ChromPerc_06 _N	4 / 4	2	120			Steel Drum
CPerc	House	6741	MA_ChromPerc_06	4 / 4	2	120			:
CPerc	House	6742	MA_ChromPerc_07 _N	4 / 4	2	122			:
CPerc	House	6743	MA_ChromPerc_07	4 / 4	2	122			:
CPerc	House	6744	MA_ChromPerc_08 _N	4 / 4	2	122			:
CPerc	House	6745	MA_ChromPerc_08	4 / 4	2	122			:
CPerc	House	6746	MA_ChromPerc_09 _N	4 / 4	2	122			:
CPerc	House	6747	MA_ChromPerc_09	4 / 4	2	122			:
CPerc	House	6748	MA_ChromPerc_10 _N	4 / 4	2	122			:
CPerc	House	6749	MA_ChromPerc_10	4 / 4	2	122			:
CPerc	House	6750	MA_Dance 1 _N	4 / 4	2	120			Chromatic Perc.
CPerc	House	6751	MA_Dance 1	4 / 4	2	120			:
CPerc	House	6752	MA_Dance 2 _N	4 / 4	2	125			:
CPerc	House	6753	MA_Dance 2	4 / 4	2	125			:
CPerc	House	6754	MA_Dance 3 _N	4 / 4	2	120			:
CPerc	House	6755	MA_Dance 3	4 / 4	2	120			:
CPerc	House	6756	MA_Dance 4 _N	4 / 4	2	120			:
CPerc	House	6757	MA_Dance 4	4 / 4	2	120			:
CPerc	House	6758	MA_Dance 5 _N	4 / 4	2	125			:
CPerc	House	6759	MA_Dance 5	4 / 4	2	125			:
CPerc	House	6760	MA_In My House Bell	4 / 4	2	117			:
CPerc	Pop Rock	6761	MB_Coconuts Random _N	4 / 4	4	165			:
CPerc	Chill	6762	MA_Pitch Bell _N	4 / 4	1	130			:
CPerc	World	6763	MA_Ethnic1	6 / 4	5	118			:
CPerc	World	6764	MA_Ethnic2	7 / 4	3	120			:
CPerc	General	6765	MA_Synth Bell _N	4 / 4	2	90			:
CPerc	General	6766	MB_Synth Bell _N	4 / 4	4	90			:
CPerc	General	6767	MC_Synth Bell _N	4 / 4	2	90			:
CPerc	General	6768	MD_Synth Bell _N	4 / 4	4	90			:
CPerc	General	6769	ME_Synth Bell _N	4 / 4	4	90			:
CPerc	General	6770	EA_Synth Bell _N	4 / 4	4	90			:
CPerc	General	6771	MA_Tubular Bell _N	4 / 4	2	100			Tubular Bell
CPerc	General	6772	MB_Tubular Bell _N	4 / 4	2	100			:
CPerc	General	6773	MC_Tubular Bell _N	4 / 4	4	100			:
CPerc	General	6774	MD_Tubular Bell _N	4 / 4	2	100			:
CPerc	General	6775	ME_Tubular Bell _N	4 / 4	1	100			:
CPerc	General	6776	MA_Real Timpani _N	4 / 4	2	120			Real Timpani AF2 Mfl
CPerc	General	6777	MB_Real Timpani	4 / 4	2	120			:
CPerc	General	6778	MC_Real Timpani	4 / 4	3	120			:
CPerc	General	6779	MD_Real Timpani _N	4 / 4	1	120			:
CPerc	General	6780	ME_Real Timpani _N	4 / 4	3	120			:
CPerc	General	6781	MF_Real Timpani _N	4 / 4	6	120			:
CPerc	General	6782	MA_RealTimpn AF2 _N	4 / 4	2	110			:
CPerc	General	6783	MB_RealTimpn AF2 _N	4 / 4	1	110			:
CPerc	General	6784	MC_RealTimpn AF2 _N	4 / 4	2	110			:
CPerc	General	6785	MD_RealTimpn AF2 _N	4 / 4	2	110			:
CPerc	General	6786	ME_RealTimpn AF2 _N	4 / 4	2	110			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
CPerc	General	6787	Timpani 1	6 / 4	2	150			Timpani
CPerc	General	6788	Timpani 2	6 / 4	2	150			:
CPerc	General	6789	Timpani Roll	4 / 4	1	102			:
CPerc	General	6790	Mallet Roll1	4 / 4	2	120			Chromatic Perc.
CPerc	General	6791	Mallet Roll2	4 / 4	2	120			:
CPerc	General	6792	MOD1	4 / 4	1	120			:
CPerc	General	6793	MOD2	4 / 4	2	120			:
CPerc	General	6794	MOD3	4 / 4	1	120			:
CPerc	General	6795	Trill 1	4 / 4	1	120			:
CPerc	General	6796	Trill 2	4 / 4	2	120			:
CPerc	General	6797	Trill 3	4 / 4	2	120			:
CPerc	General	6798	Steel Drum1	4 / 4	1	160			Steel Drum
CPerc	General	6799	Steel Drum2	4 / 4	2	95			:
CPerc	General	6800	Bell Tree1	4 / 4	3	120			Chromatic Perc.
CPerc	General	6801	Bell Tree2	4 / 4	3	120			:
CPerc	General	6802	Cresendo	4 / 4	1	120			:
Dr/Pc	Rock	6803	MA_Rock Loop 1	4 / 4	4	137	○		Rock Stereo Kit 2
Dr/Pc	Rock	6804	MA_Rock Loop 2-1	4 / 4	4	162	○		:
Dr/Pc	Rock	6805	MA_Rock Loop 2-2	4 / 4	4	192	○		:
Dr/Pc	Rock	6806	MA_Rock Loop 3	4 / 4	4	184	○		Real Drums Kit
Dr/Pc	Rock	6807	MA_Rock Loop 4-1	4 / 4	4	92	○		Modern Rock Kit
Dr/Pc	Rock	6808	MA_Rock Loop 4-2	4 / 4	4	117	○		:
Dr/Pc	Rock	6809	MA_Rock Loop 5	4 / 4	4	122	○		:
Dr/Pc	Rock	6810	MA_Rock Loop 6	4 / 4	4	120	○		:
Dr/Pc	Rock	6811	MA_Rock Loop 7	4 / 4	4	130	○		Real Drums Kit
Dr/Pc	Rock	6812	MA_Rock Loop 8	4 / 4	4	170	○		:
Dr/Pc	Rock	6813	MA_Rock Loop 9-1	4 / 4	4	115	○		Hyper Standard Kit
Dr/Pc	Rock	6814	MA_Rock Loop 9-2	4 / 4	4	72	○		:
Dr/Pc	Rock	6815	MA_Rock Loop 9-3	4 / 4	4	130	○		Rock Stereo Kit 2
Dr/Pc	Rock	6816	MA_Rock Loop 10-1	4 / 4	4	120	○		Real Drums Kit
Dr/Pc	Rock	6817	MA_Rock Loop 10-2	4 / 4	4	120	○		Modern Rock Kit
Dr/Pc	Rock	6818	MA_Rock Loop 11	4 / 4	4	168	○		Real Drums Kit
Dr/Pc	Rock	6819	MA_Rock Loop 12	4 / 4	4	116	○		Hyper Standard Kit
Dr/Pc	Rock	6820	MA_Rock Loop 13	4 / 4	4	123	○		:
Dr/Pc	Rock	6821	MA_Rock Loop 14	4 / 4	4	129	○		Modern Rock Kit
Dr/Pc	Rock	6822	MA_AltRock Loop 1	4 / 4	4	140	○		Rock Stereo Kit 1
Dr/Pc	Rock	6823	MA_AltRock Loop 2	4 / 4	4	89	○		New Oak Custom Kit
Dr/Pc	Rock	6824	MA_AltRock Loop 3	4 / 4	4	115	○		:
Dr/Pc	Rock	6825	MA_AltRock Loop 4-1	4 / 4	4	79	○		Dry Standard Kit
Dr/Pc	Rock	6826	MA_AltRock Loop 4-2	4 / 4	4	69	○		BeechwoodSnare Kit
Dr/Pc	Rock	6827	MA_AltRock Loop 5-1	4 / 4	4	146	○		:
Dr/Pc	Rock	6828	MA_AltRock Loop 5-2	4 / 4	4	130	○		:
Dr/Pc	Rock	6829	MA_AltRock Loop 5-3	4 / 4	4	130	○		:
Dr/Pc	Rock	6830	MA_AltRock Loop 6	6 / 8	4	71	○		New Oak Custom Kit
Dr/Pc	Rock	6831	MA_AltRock Loop 7	4 / 4	4	136	○		:
Dr/Pc	Rock	6832	MA_AltRock Loop 8	4 / 4	4	120	○		BeechwoodSnare Kit
Dr/Pc	Rock	6833	MA_AltRock Loop 9	4 / 4	4	117	○		Hyper Standard Kit
Dr/Pc	Rock	6834	MA_AltRock Loop10-1	4 / 4	4	106	○		BeechwoodSnare Kit
Dr/Pc	Rock	6835	MA_AltRock Loop10-2	4 / 4	4	98	○		Modern Rock Kit
Dr/Pc	Rock	6836	MA_AltRock Loop11	4 / 4	4	127	○		BeechwoodSnare Kit
Dr/Pc	Rock	6837	MA_AltRock Loop12	4 / 4	4	127	○		PowerStandardKit 1
Dr/Pc	Rock	6838	MA_AltRock Loop13	4 / 4	4	120	○		Rock Stereo Kit 1
Dr/Pc	Rock	6839	MA_AltRock Loop14	3 / 4	4	92	○		NewMapleCustom Kit
Dr/Pc	Rock	6840	MA_AltRock Loop15	4 / 4	2	72	○		D'elo Kit
Dr/Pc	Rock	6841	MA_Metal Loop 1-1	4 / 4	4	260	○		Real Drums Kit
Dr/Pc	Rock	6842	MA_Metal Loop 1-2	4 / 4	4	170	○		:
Dr/Pc	Rock	6843	MA_Metal Loop 1-3	4 / 4	4	260	○		:
Dr/Pc	Rock	6844	MA_Metal Loop 2	4 / 4	4	146	○		:
Dr/Pc	Rock	6845	MA_Metal Loop 3	4 / 4	4	152	○		Rock Stereo Kit 1
Dr/Pc	Rock	6846	MA_Metal Loop 4	4 / 4	4	85	○		Modern Rock Kit
Dr/Pc	Rock	6847	MA_Metal Loop 5-1	4 / 4	4	93	○		Real Drums Kit
Dr/Pc	Rock	6848	MA_Metal Loop 5-2	4 / 4	4	94	○		:
Dr/Pc	Rock	6849	MA_Metal Loop 6	4 / 4	4	128	○		Modern Rock Kit
Dr/Pc	Rock	6850	MA_Metal Loop 7	4 / 4	4	145	○		Rock Stereo Kit 1
Dr/Pc	Rock	6851	MA_StandardRock	4 / 4	4	131	○		Power Standard Kit 2
Dr/Pc	Rock	6852	MB_StandardRock	4 / 4	4	131	○		:
Dr/Pc	Rock	6853	MC_StandardRock	4 / 4	4	131	○		:
Dr/Pc	Rock	6854	FA_StandardRock	4 / 4	1	131	○		:
Dr/Pc	Rock	6855	FB_StandardRock	4 / 4	1	131	○		:
Dr/Pc	Rock	6856	FC_StandardRock	4 / 4	1	131	○		:
Dr/Pc	Rock	6857	BA_StandardRock	4 / 4	1	131	○		:
Dr/Pc	Rock	6858	EA_StandardRock	4 / 4	4	131	○		:
Dr/Pc	Rock	6859	EB_StandardRock	4 / 4	6	131	○		:
Dr/Pc	Rock	6860	MA_Power Rock	4 / 4	4	120	○		Power Standard Kit 1
Dr/Pc	Rock	6861	MB_Power Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6862	MC_Power Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6863	FA_Power Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6864	FB_Power Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6865	FC_Power Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6866	BA_Power Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6867	EA_Power Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6868	EB_Power Rock	4 / 4	7	120	○		:
Dr/Pc	Rock	6869	MA_ContempRock	4 / 4	4	126	○		Power Standard Kit 2
Dr/Pc	Rock	6870	MB_ContempRock	4 / 4	4	126	○		:
Dr/Pc	Rock	6871	MC_ContempRock	4 / 4	4	126	○		:
Dr/Pc	Rock	6872	FA_ContempRock	4 / 4	1	126	○		:
Dr/Pc	Rock	6873	FB_ContempRock	4 / 4	1	126	○		:
Dr/Pc	Rock	6874	FC_ContempRock	4 / 4	1	126	○		:
Dr/Pc	Rock	6875	BA_ContempRock	4 / 4	1	126	○		:
Dr/Pc	Rock	6876	EA_ContempRock	4 / 4	4	126	○		:
Dr/Pc	Rock	6877	EB_ContempRock	4 / 4	4	126	○		:
Dr/Pc	Rock	6878	MA_Hard Rock	4 / 4	4	120	○		Power Standard Kit 1
Dr/Pc	Rock	6879	MB_Hard Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6880	MC_Hard Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6881	FA_Hard Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6882	FB_Hard Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6883	FC_Hard Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6884	BA_Hard Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6885	EA_Hard Rock	4 / 4	3	120	○		:
Dr/Pc	Rock	6886	EB_Hard Rock	4 / 4	6	120	○		:
Dr/Pc	Rock	6887	MA_70s Rock	4 / 4	4	130	○		Dry Standard Kit
Dr/Pc	Rock	6888	MB_70s Rock	4 / 4	4	130	○		:
Dr/Pc	Rock	6889	MC_70s Rock	4 / 4	4	130	○		:
Dr/Pc	Rock	6890	MD_70s Rock	4 / 4	4	130	○		:
Dr/Pc	Rock	6891	IA_70s Rock	4 / 4	1	130	○		:
Dr/Pc	Rock	6892	FA_70s Rock	4 / 4	1	130	○		:
Dr/Pc	Rock	6893	FB_70s Rock	4 / 4	1	130	○		:
Dr/Pc	Rock	6894	FC_70s Rock	4 / 4	2	130	○		:
Dr/Pc	Rock	6895	MA_Blues Rock	4 / 4	4	120	○		Power Standard Kit 1
Dr/Pc	Rock	6896	MB_Blues Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6897	MC_Blues Rock	4 / 4	4	120	○		:
Dr/Pc	Rock	6898	FA_Blues Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6899	FB_Blues Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6900	FC_Blues Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6901	BA_Blues Rock	4 / 4	1	120	○		:
Dr/Pc	Rock	6902	EA_Blues Rock	4 / 4	3	120	○		:
Dr/Pc	Rock	6903	EB_Blues Rock	4 / 4	5	120	○		:
Dr/Pc	Rock	6904	MA_RockShuffle	4 / 4	4	121	○		Power Standard Kit 2
Dr/Pc	Rock	6905	MB_RockShuffle	4 / 4	4	121	○		:
Dr/Pc	Rock	6906	MC_RockShuffle	4 / 4	4	121	○		:
Dr/Pc	Rock	6907	FA_RockShuffle	4 / 4	1	121	○		:
Dr/Pc	Rock	6908	FB_RockShuffle	4 / 4	1	121	○		:
Dr/Pc	Rock	6909	FC_RockShuffle	4 / 4	1	121	○		:
Dr/Pc	Rock	6910	BA_RockShuffle	4 / 4	1	121	○		:
Dr/Pc	Rock	6911	EA_RockShuffle	4 / 4	6	121	○		:
Dr/Pc	Rock	6912	MA_Rock & Roll	4 / 4	4	172	○		:
Dr/Pc	Rock	6913	MB_Rock & Roll	4 / 4	4	172	○		:
Dr/Pc	Rock	6914	MC_Rock & Roll	4 / 4	4	172	○		:
Dr/Pc	Rock	6915	FA_Rock & Roll	4 / 4	1	172	○		:
Dr/Pc	Rock	6916	FB_Rock & Roll	4 / 4	1	172	○		:
Dr/Pc	Rock	6917	FC_Rock & Roll	4 / 4	1	172	○		:
Dr/Pc	Rock	6918	BA_Rock & Roll	4 / 4	1	172	○		:
Dr/Pc	Rock	6919	EA_Rock & Roll	4 / 4	5	172	○		:
Dr/Pc	Rock	6920	EB_Rock & Roll	4 / 4	6	172	○		:
Dr/Pc	Rock	6921	MA1_AlternaRock1	4 / 4	4	97	○		Modern Rock Kit
Dr/Pc	Rock	6922	MB1_AlternaRock1	4 / 4	4	97	○		:
Dr/Pc	Rock	6923	MC1_AlternaRock1	4 / 4	4	97	○		:
Dr/Pc	Rock	6924	FA1_AlternaRock1	4 / 4	1	97	○		:
Dr/Pc	Rock	6925	FB1_AlternaRock1	4 / 4	1	97	○		:
Dr/Pc	Rock	6926	FC1_AlternaRock1	4 / 4	1	97	○		:
Dr/Pc	Rock	6927	BA1_AlternaRock1	4 / 4	1	97	○		:
Dr/Pc	Rock	6928	MA2_8Z Alterna1	4 / 4	4	97	○		8Z Romps
Dr/Pc	Rock	6929	MB2_8Z Alterna1	4 / 4	4	97	○		:
Dr/Pc	Rock	6930	MC2_8Z Alterna1	4 / 4	4	97	○		:
Dr/Pc	Rock	6931	FA2_8Z Alterna1	4 / 4	1	97	○		:
Dr/Pc	Rock	6932	FB2_8Z Alterna1	4 / 4	1	97	○		:
Dr/Pc	Rock	6933	FC2_8Z Alterna1	4 / 4	1	97	○		:
Dr/Pc	Rock	6934	BA2_8Z Alterna1	4 / 4	1	97	○		:
Dr/Pc	Rock	6935	MA_AlternaRock2	4 / 4	4	100	○		Rock Stereo Kit 2
Dr/Pc	Rock	6936	MB_AlternaRock2	4 / 4	4	100	○		:
Dr/Pc	Rock	6937	MC_AlternaRock2	4 / 4	4	100	○		:
Dr/Pc	Rock	6938	FA_AlternaRock2	4 / 4	1	100	○		:
Dr/Pc	Rock	6939	FB_AlternaRock2	4 / 4	1	100	○		:
Dr/Pc	Rock	6940	FC_AlternaRock2	4 / 4	1	100	○		:
Dr/Pc	Rock	6941	BA_AlternaRock2	4 / 4	2	100	○		:
Dr/Pc	Rock	6942	MA_Mondo Rock	4 / 4	2	94	○		:
Dr/Pc	Rock	6943	MB_Mondo Rock	4 / 4	2	94	○		:
Dr/Pc	Rock	6944	MC_Mondo Rock	4 / 4	2	94	○		:
Dr/Pc	Rock	6945	MD_Mondo Rock	4 / 4	4	94	○		:
Dr/Pc	Rock	6946	MA1_Xover Rock	4 / 4	2	100	○		Rock Stereo Kit 1
Dr/Pc	Rock	6947	MB1_Xover Rock	4 / 4	1	100	○		:
Dr/Pc	Rock	6948	MC1_Xover Rock	4 / 4	2	100	○		:
Dr/Pc	Rock	6949	MD1_Xover Rock	4 / 4	2	100	○		:
Dr/Pc	Rock	6950	IA1_Xover Rock	4 / 4	2	100	○		:
Dr/Pc	Rock	6951	FA1_Xover Rock	4 / 4	1	100	○		:
Dr/Pc	Rock	6952	FB1_Xover Rock	4 / 4	1	100	○		:
Dr/Pc	Rock	6953	FC1_Xover Rock	4 / 4	2	100	○		:
Dr/Pc	Rock	6954	MA_8Beat Rock	4 / 4	4	75	○		Power Standard Kit 2
Dr/Pc	Rock	6955	MB_8Beat Rock	4 / 4	4	75	○		:
Dr/Pc	Rock	6956	MC_8Beat Rock	4 / 4	4	75	○		:
Dr/Pc	Rock	6957	FA_8Beat Rock	4 / 4	1	75	○		:
Dr/Pc	Rock	6958	FB_8Beat Rock	4 / 4	1	75	○		:
Dr/Pc	Rock	6959	FC_8Beat Rock	4 / 4	1	75	○		:
Dr/Pc	Rock	6960	BA_8Beat Rock	4 / 4	1	75	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Rock	6961	MA_16Beat Rock	4 / 4	4	86	○		Rock Stereo Kit 2
Dr/Pc	Rock	6962	MB_16Beat Rock	4 / 4	4	86	○		:
Dr/Pc	Rock	6963	MC_16Beat Rock	4 / 4	4	86	○		:
Dr/Pc	Rock	6964	FA_16Beat Rock	4 / 4	1	86	○		:
Dr/Pc	Rock	6965	FB_16Beat Rock	4 / 4	1	86	○		:
Dr/Pc	Rock	6966	FC_16Beat Rock	4 / 4	1	86	○		:
Dr/Pc	Rock	6967	BA_16Beat Rock	4 / 4	1	86	○		:
Dr/Pc	Rock	6968	MA_ProgresRock1	4 / 4	4	110	○		Modern Rock Kit
Dr/Pc	Rock	6969	MB_ProgresRock1	4 / 4	3	110	○		:
Dr/Pc	Rock	6970	MC_ProgresRock1	4 / 4	4	110	○		:
Dr/Pc	Rock	6971	FA_ProgresRock1	4 / 4	1	110	○		:
Dr/Pc	Rock	6972	FB_ProgresRock1	4 / 4	1	110	○		:
Dr/Pc	Rock	6973	FC_ProgresRock1	4 / 4	1	110	○		:
Dr/Pc	Rock	6974	BA_ProgresRock1	4 / 4	1	110	○		:
Dr/Pc	Rock	6975	MA_ProgresRock2	4 / 4	4	120	○		Power Standard Kit 2
Dr/Pc	Rock	6976	MB_ProgresRock2	4 / 4	4	120	○		:
Dr/Pc	Rock	6977	MC_ProgresRock2	4 / 4	4	120	○		:
Dr/Pc	Rock	6978	FA_ProgresRock2	4 / 4	1	120	○		:
Dr/Pc	Rock	6979	FB_ProgresRock2	4 / 4	1	120	○		:
Dr/Pc	Rock	6980	FC_ProgresRock2	4 / 4	1	120	○		:
Dr/Pc	Rock	6981	BA_ProgresRock2	4 / 4	1	120	○		:
Dr/Pc	Rock	6982	MA_Maple Custom	4 / 4	4	150	○		MapleCustom Kit
Dr/Pc	Rock	6983	MB_Maple Custom	4 / 4	2	150	○		:
Dr/Pc	Rock	6984	MC_Maple Custom	4 / 4	4	150	○		:
Dr/Pc	Rock	6985	MD_Maple Custom	4 / 4	4	150	○		:
Dr/Pc	Rock	6986	FA_Maple Custom	4 / 4	2	150	○		:
Dr/Pc	Rock	6987	BA_Maple Custom	4 / 4	2	150	○		:
Dr/Pc	Rock	6988	EA_Maple Custom	4 / 4	7	150	○		:
Dr/Pc	Rock	6989	MA_Rock Ready	4 / 4	4	160	○		Rock Stereo Kit 1
Dr/Pc	Pop Rock	6990	MA_Atebits Rock	4 / 4	4	120	○		Atebits Kit Showcase
Dr/Pc	Pop Rock	6991	MB_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6992	MC_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6993	MD_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6994	ME_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6995	MF_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6996	MG_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6997	MH_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6998	MI_Atebits Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	6999	MA_8Beat Medium	4 / 4	4	105	○		Hyper Standard Kit
Dr/Pc	Pop Rock	7000	MB_8Beat Medium	4 / 4	4	105	○		:
Dr/Pc	Pop Rock	7001	MC_8Beat Medium	4 / 4	4	105	○		:
Dr/Pc	Pop Rock	7002	MD_8Beat Medium	4 / 4	4	105	○		:
Dr/Pc	Pop Rock	7003	FA_8Beat Medium	4 / 4	1	105	○		:
Dr/Pc	Pop Rock	7004	FB_8Beat Medium	4 / 4	1	105	○		:
Dr/Pc	Pop Rock	7005	FC_8Beat Medium	4 / 4	1	105	○		:
Dr/Pc	Pop Rock	7006	FD_8Beat Medium	4 / 4	1	105	○		:
Dr/Pc	Pop Rock	7007	EA_8Beat Medium	4 / 4	4	105	○		:
Dr/Pc	Pop Rock	7008	MA_8Beat Fast	4 / 4	4	140	○		Dry Standard Kit
Dr/Pc	Pop Rock	7009	MB_8Beat Fast	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7010	MC_8Beat Fast	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7011	MD_8Beat Fast	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7012	FA_8Beat Fast	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7013	FB_8Beat Fast	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7014	FC_8Beat Fast	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7015	FD_8Beat Fast	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7016	EA_8Beat Fast	4 / 4	5	140	○		:
Dr/Pc	Pop Rock	7017	MA_16Beat Medium	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7018	MB_16Beat Medium	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7019	MC_16Beat Medium	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7020	MD_16Beat Medium	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7021	FA_16Beat Medium	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7022	FB_16Beat Medium	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7023	FC_16Beat Medium	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7024	FD_16Beat Medium	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7025	EA_16Beat Medium	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7026	MA_GuitarPop Med	4 / 4	4	98	○		Brush Kit
Dr/Pc	Pop Rock	7027	MB_GuitarPop Med	4 / 4	4	98	○		:
Dr/Pc	Pop Rock	7028	MC_GuitarPop Med	4 / 4	4	98	○		:
Dr/Pc	Pop Rock	7029	MD_GuitarPop Med	4 / 4	4	98	○		:
Dr/Pc	Pop Rock	7030	FA_GuitarPop Med	4 / 4	1	98	○		:
Dr/Pc	Pop Rock	7031	FB_GuitarPop Med	4 / 4	1	98	○		:
Dr/Pc	Pop Rock	7032	FC_GuitarPop Med	4 / 4	1	98	○		:
Dr/Pc	Pop Rock	7033	FD_GuitarPop Med	4 / 4	1	98	○		:
Dr/Pc	Pop Rock	7034	EA_GuitarPop Med	4 / 4	3	98	○		:
Dr/Pc	Pop Rock	7035	MA_Pop Shuffle1	4 / 4	4	180	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7036	MB_Pop Shuffle1	4 / 4	4	180	○		:
Dr/Pc	Pop Rock	7037	MC_Pop Shuffle1	4 / 4	4	180	○		:
Dr/Pc	Pop Rock	7038	MD_Pop Shuffle1	4 / 4	4	180	○		:
Dr/Pc	Pop Rock	7039	FA_Pop Shuffle1	4 / 4	1	180	○		:
Dr/Pc	Pop Rock	7040	FB_Pop Shuffle1	4 / 4	1	180	○		:
Dr/Pc	Pop Rock	7041	FC_Pop Shuffle1	4 / 4	1	180	○		:
Dr/Pc	Pop Rock	7042	FD_Pop Shuffle1	4 / 4	1	180	○		:
Dr/Pc	Pop Rock	7043	EA_Pop Shuffle1	4 / 4	5	180	○		:
Dr/Pc	Pop Rock	7044	MA_Swing MOR Pop	4 / 4	4	94	○		Dry Standard Kit
Dr/Pc	Pop Rock	7045	MB_Swing MOR Pop	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7046	MC_Swing MOR Pop	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7047	MD_Swing MOR Pop	4 / 4	4	94	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Pop Rock	7048	FA_Swing MOR Pop	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7049	FB_Swing MOR Pop	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7050	FC_Swing MOR Pop	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7051	FD_Swing MOR Pop	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7052	EA_Swing MOR Pop	4 / 4	3	94	○		:
Dr/Pc	Pop Rock	7053	MA_12/8 Pop	6 / 4	4	90	○		Hyper Standard Kit
Dr/Pc	Pop Rock	7054	MB_12/8 Pop	6 / 4	4	90	○		:
Dr/Pc	Pop Rock	7055	MC_12/8 Pop	6 / 4	4	90	○		:
Dr/Pc	Pop Rock	7056	MD_12/8 Pop	6 / 4	4	90	○		:
Dr/Pc	Pop Rock	7057	FA_12/8 Pop	6 / 4	1	90	○		:
Dr/Pc	Pop Rock	7058	FB_12/8 Pop	6 / 4	1	90	○		:
Dr/Pc	Pop Rock	7059	FC_12/8 Pop	6 / 4	1	90	○		:
Dr/Pc	Pop Rock	7060	FD_12/8 Pop	6 / 4	1	90	○		:
Dr/Pc	Pop Rock	7061	EA_12/8 Pop	6 / 4	4	90	○		:
Dr/Pc	Pop Rock	7062	MA_Country 8Beat	4 / 4	4	82	○		Brush Kit
Dr/Pc	Pop Rock	7063	MB_Country 8Beat	4 / 4	4	82	○		:
Dr/Pc	Pop Rock	7064	MC_Country 8Beat	4 / 4	4	82	○		:
Dr/Pc	Pop Rock	7065	MD_Country 8Beat	4 / 4	4	82	○		:
Dr/Pc	Pop Rock	7066	FA_Country 8Beat	4 / 4	1	82	○		:
Dr/Pc	Pop Rock	7067	FB_Country 8Beat	4 / 4	1	82	○		:
Dr/Pc	Pop Rock	7068	FC_Country 8Beat	4 / 4	1	82	○		:
Dr/Pc	Pop Rock	7069	FD_Country 8Beat	4 / 4	1	82	○		:
Dr/Pc	Pop Rock	7070	EA_Country 8Beat	4 / 4	3	82	○		:
Dr/Pc	Pop Rock	7071	MA_Country Swing	4 / 4	4	182	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7072	MB_Country Swing	4 / 4	4	182	○		:
Dr/Pc	Pop Rock	7073	MC_Country Swing	4 / 4	4	182	○		:
Dr/Pc	Pop Rock	7074	MD_Country Swing	4 / 4	4	182	○		:
Dr/Pc	Pop Rock	7075	FA_Country Swing	4 / 4	1	182	○		:
Dr/Pc	Pop Rock	7076	FB_Country Swing	4 / 4	1	182	○		:
Dr/Pc	Pop Rock	7077	FC_Country Swing	4 / 4	1	182	○		:
Dr/Pc	Pop Rock	7078	FD_Country Swing	4 / 4	1	182	○		:
Dr/Pc	Pop Rock	7079	EA_Country Swing	4 / 4	5	182	○		:
Dr/Pc	Pop Rock	7080	MA_Country Waltz	3 / 4	4	144	○		Brush Kit
Dr/Pc	Pop Rock	7081	MB_Country Waltz	3 / 4	4	144	○		:
Dr/Pc	Pop Rock	7082	MC_Country Waltz	3 / 4	4	144	○		:
Dr/Pc	Pop Rock	7083	MD_Country Waltz	3 / 4	4	144	○		:
Dr/Pc	Pop Rock	7084	FA_Country Waltz	3 / 4	1	144	○		:
Dr/Pc	Pop Rock	7085	FB_Country Waltz	3 / 4	1	144	○		:
Dr/Pc	Pop Rock	7086	FC_Country Waltz	3 / 4	1	144	○		:
Dr/Pc	Pop Rock	7087	FD_Country Waltz	3 / 4	1	144	○		:
Dr/Pc	Pop Rock	7088	EA_Country Waltz	3 / 4	5	144	○		:
Dr/Pc	Pop Rock	7089	MA_Pop Rock 1	4 / 4	2	120	○		Rock Stereo Kit 2
Dr/Pc	Pop Rock	7090	MB_Pop Rock 1	4 / 4	2	120	○		:
Dr/Pc	Pop Rock	7091	MC_Pop Rock 1	4 / 4	2	120	○		:
Dr/Pc	Pop Rock	7092	MD_Pop Rock 1	4 / 4	2	120	○		:
Dr/Pc	Pop Rock	7093	MA_Pop Rock 2	4 / 4	2	126	○		Rock Stereo Kit 1
Dr/Pc	Pop Rock	7094	MB_Pop Rock 2	4 / 4	2	126	○		:
Dr/Pc	Pop Rock	7095	MC_Pop Rock 2	4 / 4	2	126	○		:
Dr/Pc	Pop Rock	7096	MD_Pop Rock 2	4 / 4	2	126	○		:
Dr/Pc	Pop Rock	7097	MA_Pop Rock 3	4 / 4	2	120	○		Rock Stereo Kit 2
Dr/Pc	Pop Rock	7098	MA_Pop Rock 4	4 / 4	2	115	○		:
Dr/Pc	Pop Rock	7099	MA_Guitar Pop 1	4 / 4	4	100	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7100	MB_Guitar Pop 1	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7101	MC_Guitar Pop 1	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7102	FA_Guitar Pop 1	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7103	FB_Guitar Pop 1	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7104	FC_Guitar Pop 1	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7105	BA_Guitar Pop 1	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7106	EA_Guitar Pop 1	4 / 4	3	100	○		:
Dr/Pc	Pop Rock	7107	EB_Guitar Pop 1	4 / 4	3	100	○		:
Dr/Pc	Pop Rock	7108	MA1_Guitar Pop 2	4 / 4	2	90	○		Dry Standard Kit
Dr/Pc	Pop Rock	7109	MB1_Guitar Pop 2	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7110	MC1_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7111	MD1_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7112	IA1_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7113	FA1_Guitar Pop 2	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7114	FB1_Guitar Pop 2	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7115	FC1_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7116	MC2_Guitar Pop 2	4 / 4	2	90	○		Latin Percussion Kit
Dr/Pc	Pop Rock	7117	MD2_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7118	FA2_Guitar Pop 2	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7119	FC2_Guitar Pop 2	4 / 4	2	90	○		:
Dr/Pc	Pop Rock	7120	MA_Acoustic Pop	4 / 4	4	110	○		Chill Out Kit
Dr/Pc	Pop Rock	7121	MB_Acoustic Pop	4 / 4	4	110	○		:
Dr/Pc	Pop Rock	7122	MC_Acoustic Pop	4 / 4	4	110	○		:
Dr/Pc	Pop Rock	7123	FA_Acoustic Pop	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7124	FB_Acoustic Pop	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7125	FC_Acoustic Pop	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7126	BA_Acoustic Pop	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7127	MA_FingerPickin	4 / 4	4	94	○		Dry Standard Kit
Dr/Pc	Pop Rock	7128	MB_FingerPickin	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7129	MC_FingerPickin	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7130	MD_FingerPickin	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7131	IA_FingerPickin/a	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7132	IA_FingerPickin/b	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7133	FA_FingerPickin	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7134	FB_FingerPickin	4 / 4	1	94	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Pop Rock	7135	FC_FingerPickin	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7136	MA_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7137	MB_Folk Rock/1	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7138	MD_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7139	IA_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7140	FA_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7141	FB_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7142	FC_Folk Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7143	MB_Folk Rock/2	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7144	MA_Worship Slow	4 / 4	4	75	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7145	MB_Worship Slow	4 / 4	4	75	○		:
Dr/Pc	Pop Rock	7146	MC_Worship Slow	4 / 4	4	75	○		:
Dr/Pc	Pop Rock	7147	FA_Worship Slow	4 / 4	1	75	○		:
Dr/Pc	Pop Rock	7148	FB_Worship Slow	4 / 4	1	75	○		:
Dr/Pc	Pop Rock	7149	FC_Worship Slow	4 / 4	1	75	○		:
Dr/Pc	Pop Rock	7150	BA_Worship Slow	4 / 4	1	75	○		:
Dr/Pc	Pop Rock	7151	EA_Worship Slow	4 / 4	4	75	○		:
Dr/Pc	Pop Rock	7152	EB_Worship Slow	4 / 4	4	75	○		:
Dr/Pc	Pop Rock	7153	MA_Worship Med	4 / 4	8	140	○		Brush Kit
Dr/Pc	Pop Rock	7154	MB_Worship Med	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7155	MC_Worship Med	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7156	FA_Worship Med	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7157	FB_Worship Med	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7158	FC_Worship Med	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7159	BA_Worship Med	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7160	EA_Worship Med	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7161	EB_Worship Med	4 / 4	4	140	○		:
Dr/Pc	Pop Rock	7162	MA_Worship Fast	4 / 4	8	114	○		Power Standard Kit 2
Dr/Pc	Pop Rock	7163	MB_Worship Fast	4 / 4	4	114	○		:
Dr/Pc	Pop Rock	7164	MC_Worship Fast	4 / 4	4	114	○		:
Dr/Pc	Pop Rock	7165	FA_Worship Fast	4 / 4	1	114	○		:
Dr/Pc	Pop Rock	7166	FB_Worship Fast	4 / 4	1	114	○		:
Dr/Pc	Pop Rock	7167	FC_Worship Fast	4 / 4	1	114	○		:
Dr/Pc	Pop Rock	7168	BA_Worship Fast	4 / 4	1	114	○		:
Dr/Pc	Pop Rock	7169	EA_Worship Fast	4 / 4	4	114	○		:
Dr/Pc	Pop Rock	7170	EB_Worship Fast	4 / 4	2	114	○		:
Dr/Pc	Pop Rock	7171	MA_New Country	4 / 4	2	118	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7172	MB_New Country	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	7173	MC_New Country	4 / 4	2	118	○		:
Dr/Pc	Pop Rock	7174	FA_New Country	4 / 4	1	118	○		:
Dr/Pc	Pop Rock	7175	FB_New Country	4 / 4	1	118	○		:
Dr/Pc	Pop Rock	7176	FC_New Country	4 / 4	1	118	○		:
Dr/Pc	Pop Rock	7177	BA_New Country	4 / 4	1	118	○		:
Dr/Pc	Pop Rock	7178	EA_New Country	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	7179	EB_New Country	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	7180	MA_VintageGtPop	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	7181	MB_VintageGtPop	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	7182	MC_VintageGtPop	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	7183	FA_VintageGtPop	4 / 4	1	148	○		:
Dr/Pc	Pop Rock	7184	FB_VintageGtPop	4 / 4	1	148	○		:
Dr/Pc	Pop Rock	7185	FC_VintageGtPop	4 / 4	1	148	○		:
Dr/Pc	Pop Rock	7186	BA_VintageGtPop	4 / 4	1	148	○		:
Dr/Pc	Pop Rock	7187	EA_VintageGtPop	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	7188	EB_VintageGtPop	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	7189	MA_WestCoastPop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7190	MB_WestCoastPop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7191	MC_WestCoastPop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7192	FA_WestCoastPop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7193	FB_WestCoastPop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7194	FC_WestCoastPop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7195	BA_WestCoastPop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7196	EA_WestCoastPop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7197	EB_WestCoastPop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7198	MA_Brit Pop	4 / 4	2	86	○		Brush Kit
Dr/Pc	Pop Rock	7199	MB_Brit Pop	4 / 4	2	86	○		:
Dr/Pc	Pop Rock	7200	MC_Brit Pop	4 / 4	2	86	○		:
Dr/Pc	Pop Rock	7201	FA_Brit Pop	4 / 4	1	86	○		:
Dr/Pc	Pop Rock	7202	FB_Brit Pop	4 / 4	1	86	○		:
Dr/Pc	Pop Rock	7203	FC_Brit Pop	4 / 4	1	86	○		:
Dr/Pc	Pop Rock	7204	BA_Brit Pop	4 / 4	1	86	○		:
Dr/Pc	Pop Rock	7205	EA_Brit Pop	4 / 4	4	86	○		:
Dr/Pc	Pop Rock	7206	EB_Brit Pop	4 / 4	4	86	○		:
Dr/Pc	Pop Rock	7207	MA_BritPopSwing	4 / 4	2	110	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7208	MB_BritPopSwing	4 / 4	2	110	○		:
Dr/Pc	Pop Rock	7209	MC_BritPopSwing	4 / 4	2	110	○		:
Dr/Pc	Pop Rock	7210	FA_BritPopSwing	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7211	FB_BritPopSwing	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7212	FC_BritPopSwing	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7213	BA_BritPopSwing	4 / 4	1	110	○		:
Dr/Pc	Pop Rock	7214	EA_BritPopSwing	4 / 4	4	110	○		:
Dr/Pc	Pop Rock	7215	EB_BritPopSwing	4 / 4	4	110	○		:
Dr/Pc	Pop Rock	7216	MA_Cool 8Beat	4 / 4	2	100	○		:
Dr/Pc	Pop Rock	7217	MB_Cool 8Beat	4 / 4	2	100	○		:
Dr/Pc	Pop Rock	7218	MC_Cool 8Beat	4 / 4	2	100	○		:
Dr/Pc	Pop Rock	7219	FA_Cool 8Beat	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7220	FB_Cool 8Beat	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7221	FC_Cool 8Beat	4 / 4	1	100	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Pop Rock	7222	BA_Cool 8Beat	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7223	EA_Cool 8Beat	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7224	EB_Cool 8Beat	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7225	MA_8Beat Basic	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7226	MB_8Beat Basic	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7227	MC_8Beat Basic	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7228	FA_8Beat Basic	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7229	FB_8Beat Basic	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7230	FC_8Beat Basic	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7231	BA_8Beat Basic	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7232	MA_8Beat Soft	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7233	MB_8Beat Soft	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7234	MC_8Beat Soft	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7235	FA_8Beat Soft	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7236	FB_8Beat Soft	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7237	FC_8Beat Soft	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7238	BA_8Beat Soft	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7239	MA_Soft Rock	4 / 4	4	120	○		Dry Standard Kit
Dr/Pc	Pop Rock	7240	MB_Soft Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7241	MC_Soft Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7242	MD_Soft Rock	4 / 4	4	120	○		:
Dr/Pc	Pop Rock	7243	IA_Soft Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7244	FA_Soft Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7245	FB_Soft Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7246	FC_Soft Rock	4 / 4	1	120	○		:
Dr/Pc	Pop Rock	7247	MA_BritRockPop	4 / 4	4	123	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7248	MB_BritRockPop	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	7249	MC_BritRockPop	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	7250	FA_BritRockPop	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7251	FB_BritRockPop	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7252	FC_BritRockPop	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7253	BA_BritRockPop	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7254	EA_BritRockPop	4 / 4	6	123	○		:
Dr/Pc	Pop Rock	7255	MA_80'sPopRock	4 / 4	4	111	○		Rock Stereo Kit 2
Dr/Pc	Pop Rock	7256	MB_80'sPopRock	4 / 4	4	111	○		:
Dr/Pc	Pop Rock	7257	MC_80'sPopRock	4 / 4	4	111	○		:
Dr/Pc	Pop Rock	7258	FA_80'sPopRock	4 / 4	1	111	○		:
Dr/Pc	Pop Rock	7259	FB_80'sPopRock	4 / 4	1	111	○		:
Dr/Pc	Pop Rock	7260	FC_80'sPopRock	4 / 4	1	111	○		:
Dr/Pc	Pop Rock	7261	BA_80'sPopRock	4 / 4	1	111	○		:
Dr/Pc	Pop Rock	7262	EA_80'sPopRock	4 / 4	7	111	○		:
Dr/Pc	Pop Rock	7263	MA_80'sSynthRock	4 / 4	4	96	○		Modern Rock Kit
Dr/Pc	Pop Rock	7264	MB_80'sSynthRock	4 / 4	4	96	○		:
Dr/Pc	Pop Rock	7265	MC_80'sSynthRock	4 / 4	8	96	○		:
Dr/Pc	Pop Rock	7266	FA_80'sSynthRock	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7267	FB_80'sSynthRock	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7268	FC_80'sSynthRock	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7269	BA_80'sSynthRock	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7270	EA_80'sSynthRock	4 / 4	3	96	○		:
Dr/Pc	Pop Rock	7271	MA_60sVintagePop	4 / 4	4	132	○		Jazz Kit
Dr/Pc	Pop Rock	7272	MB_60sVintagePop	4 / 4	4	132	○		:
Dr/Pc	Pop Rock	7273	MC_60sVintagePop	4 / 4	4	132	○		:
Dr/Pc	Pop Rock	7274	FA_60sVintagePop	4 / 4	1	132	○		:
Dr/Pc	Pop Rock	7275	FB_60sVintagePop	4 / 4	1	132	○		:
Dr/Pc	Pop Rock	7276	FC_60sVintagePop	4 / 4	1	132	○		:
Dr/Pc	Pop Rock	7277	BA_60sVintagePop	4 / 4	1	132	○		:
Dr/Pc	Pop Rock	7278	EA_60sVintagePop	4 / 4	2	132	○		:
Dr/Pc	Pop Rock	7279	MA_60sChartSwing	4 / 4	4	123	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7280	MB_60sChartSwing	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	7281	MC_60sChartSwing	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	7282	FA_60sChartSwing	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7283	FB_60sChartSwing	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7284	FC_60sChartSwing	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7285	BA_60sChartSwing	4 / 4	1	123	○		:
Dr/Pc	Pop Rock	7286	EA_60sChartSwing	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	7287	MA_16BeatBasic1	4 / 4	4	90	○		:
Dr/Pc	Pop Rock	7288	MB_16BeatBasic1	4 / 4	4	90	○		:
Dr/Pc	Pop Rock	7289	MC_16BeatBasic1	4 / 4	4	90	○		:
Dr/Pc	Pop Rock	7290	FA_16BeatBasic1	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7291	FB_16BeatBasic1	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7292	FC_16BeatBasic1	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7293	BA_16BeatBasic1	4 / 4	1	90	○		:
Dr/Pc	Pop Rock	7294	MA_16BeatBasic2	4 / 4	4	77	○		:
Dr/Pc	Pop Rock	7295	MB_16BeatBasic2	4 / 4	4	77	○		:
Dr/Pc	Pop Rock	7296	MC_16BeatBasic2	4 / 4	4	77	○		:
Dr/Pc	Pop Rock	7297	FA_16BeatBasic2	4 / 4	1	77	○		:
Dr/Pc	Pop Rock	7298	FB_16BeatBasic2	4 / 4	1	77	○		:
Dr/Pc	Pop Rock	7299	FC_16BeatBasic2	4 / 4	1	77	○		:
Dr/Pc	Pop Rock	7300	BA_16BeatBasic2	4 / 4	1	77	○		:
Dr/Pc	Pop Rock	7301	MA_16Beat Pop 1	4 / 4	4	103	○		:
Dr/Pc	Pop Rock	7302	MB_16Beat Pop 1	4 / 4	4	103	○		:
Dr/Pc	Pop Rock	7303	MC_16Beat Pop 1	4 / 4	4	103	○		:
Dr/Pc	Pop Rock	7304	FA_16Beat Pop 1	4 / 4	1	103	○		:
Dr/Pc	Pop Rock	7305	FB_16Beat Pop 1	4 / 4	1	103	○		:
Dr/Pc	Pop Rock	7306	FC_16Beat Pop 1	4 / 4	1	103	○		:
Dr/Pc	Pop Rock	7307	BA_16Beat Pop 1	4 / 4	1	103	○		:
Dr/Pc	Pop Rock	7308	MA_16Beat Pop 2	4 / 4	4	94	○		Analog T8 Kit

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Pop Rock	7309	MB_16Beat Pop 2	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7310	MC_16Beat Pop 2	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7311	FA_16Beat Pop 2	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7312	FB_16Beat Pop 2	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7313	FC_16Beat Pop 2	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7314	BA_16Beat Pop 2	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7315	MA_Piano Club	4 / 4	2	96	○		Hyper Standard Kit
Dr/Pc	Pop Rock	7316	MB_Piano Club	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7317	MC_Piano Club	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7318	MD_Piano Club	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7319	IA_Piano Club/a	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7320	IA_Piano Club/b	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7321	FA_Piano Club	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7322	FB_Piano Club	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7323	FC_Piano Club/a	4 / 4	2	96	○		:
Dr/Pc	Pop Rock	7324	FC_Piano Club/b	4 / 4	1	96	○		:
Dr/Pc	Pop Rock	7325	MA_Analog Pop	4 / 4	2	93	○		Analog T8 Kit
Dr/Pc	Pop Rock	7326	MB_Analog Pop	4 / 4	2	93	○		:
Dr/Pc	Pop Rock	7327	MC_Analog Pop	4 / 4	2	93	○		:
Dr/Pc	Pop Rock	7328	MD_Analog Pop	4 / 4	4	93	○		:
Dr/Pc	Pop Rock	7329	IA_Analog Pop	4 / 4	2	93	○		:
Dr/Pc	Pop Rock	7330	FA_Analog Pop	4 / 4	1	93	○		:
Dr/Pc	Pop Rock	7331	FB_Analog Pop	4 / 4	1	93	○		:
Dr/Pc	Pop Rock	7332	FC_Analog Pop	4 / 4	2	93	○		:
Dr/Pc	Pop Rock	7333	MA1_Psycho Beatz	4 / 4	4	94	○		Psychedelic Kit
Dr/Pc	Pop Rock	7334	MA2_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7335	MA3_Psycho Beatz	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7336	MB1_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7337	MB2_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7338	MB3_Psycho Beatz	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7339	MB4_Psycho Beatz	4 / 4	1	94	○		:
Dr/Pc	Pop Rock	7340	MC1_Psycho Beatz	4 / 4	2	94	○		:
Dr/Pc	Pop Rock	7341	MC2_Psycho Beatz	4 / 4	2	94	○		:
Dr/Pc	Pop Rock	7342	MC3_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7343	MC4_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7344	MD1_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7345	MD2_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7346	MD3_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7347	MD4_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7348	ME1_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7349	ME2_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7350	ME3_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7351	ME4_Psycho Beatz	4 / 4	4	94	○		:
Dr/Pc	Pop Rock	7352	MA_8Z RX11	4 / 4	1	140	○		8Z RX11
Dr/Pc	Pop Rock	7353	MB_8Z RX11	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7354	MC_8Z RX11	4 / 4	2	140	○		:
Dr/Pc	Pop Rock	7355	FA_8Z RX11	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7356	FB_8Z RX11	4 / 4	1	140	○		:
Dr/Pc	Pop Rock	7357	EA_8Z RX11	4 / 4	3	140	○		:
Dr/Pc	Pop Rock	7358	MA_6/8 Pop	4 / 4	4	100	○		Power Standard Kit 1
Dr/Pc	Pop Rock	7359	MB_6/8 Pop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7360	MC_6/8 Pop	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7361	FA_6/8 Pop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7362	FB_6/8 Pop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7363	FC_6/8 Pop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7364	BA_6/8 Pop	4 / 4	1	100	○		:
Dr/Pc	Pop Rock	7365	EA_6/8Pop	4 / 4	3	123	○		:
Dr/Pc	Pop Rock	7366	MA_Crazy Girl	4 / 4	4	100	○		Dancefloor Kit
Dr/Pc	Pop Rock	7367	MB_Crazy Girl	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7368	MC_Crazy Girl	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7369	MD_Crazy Girl	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	7370	MA_Pop Loop 1	4 / 4	4	125	○		D'elo Kit
Dr/Pc	Pop Rock	7371	MA_Pop Loop 2	4 / 4	4	129	○		T's EDM Kit
Dr/Pc	Ballad	7372	MA_8Beat Ballad1	4 / 4	4	103	○		Dry Standard Kit
Dr/Pc	Ballad	7373	MB_8Beat Ballad1	4 / 4	4	103	○		:
Dr/Pc	Ballad	7374	MC_8Beat Ballad1	4 / 4	4	103	○		:
Dr/Pc	Ballad	7375	MD_8Beat Ballad1	4 / 4	4	103	○		:
Dr/Pc	Ballad	7376	FA_8Beat Ballad1	4 / 4	1	103	○		:
Dr/Pc	Ballad	7377	FB_8Beat Ballad1	4 / 4	1	103	○		:
Dr/Pc	Ballad	7378	FC_8Beat Ballad1	4 / 4	1	103	○		:
Dr/Pc	Ballad	7379	FD_8Beat Ballad1	4 / 4	1	103	○		:
Dr/Pc	Ballad	7380	EA_8Beat Ballad1	4 / 4	4	103	○		:
Dr/Pc	Ballad	7381	MA_16Bt Ballad1	4 / 4	4	59	○		Hyper Standard Kit
Dr/Pc	Ballad	7382	MB_16Bt Ballad1	4 / 4	4	59	○		:
Dr/Pc	Ballad	7383	MC_16Bt Ballad1	4 / 4	4	59	○		:
Dr/Pc	Ballad	7384	MD_16Bt Ballad1	4 / 4	4	59	○		:
Dr/Pc	Ballad	7385	FA_16Bt Ballad1	4 / 4	1	59	○		:
Dr/Pc	Ballad	7386	FB_16Bt Ballad1	4 / 4	1	59	○		:
Dr/Pc	Ballad	7387	FC_16Bt Ballad1	4 / 4	1	59	○		:
Dr/Pc	Ballad	7388	FD_16Bt Ballad1	4 / 4	1	59	○		:
Dr/Pc	Ballad	7389	EA_16Bt Ballad1	4 / 4	3	59	○		:
Dr/Pc	Ballad	7390	MA_12/8 Ballad	4 / 4	4	60	○		Power Standard Kit 1
Dr/Pc	Ballad	7391	MB_12/8 Ballad	4 / 4	4	60	○		:
Dr/Pc	Ballad	7392	MC_12/8 Ballad	4 / 4	4	60	○		:
Dr/Pc	Ballad	7393	MD_12/8 Ballad	4 / 4	4	60	○		:
Dr/Pc	Ballad	7394	FA_12/8 Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7395	FB_12/8 Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7396	FC_12/8 Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7397	FD_12/8 Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7398	EA_12/8 Ballad	4 / 4	3	60	○		:
Dr/Pc	Ballad	7399	MA_Country Ballad	4 / 4	4	75	○		Brush Kit
Dr/Pc	Ballad	7400	MB_Country Ballad	4 / 4	4	75	○		:
Dr/Pc	Ballad	7401	MC_Country Ballad	4 / 4	4	75	○		:
Dr/Pc	Ballad	7402	MD_Country Ballad	4 / 4	4	75	○		:
Dr/Pc	Ballad	7403	FA_Country Ballad	4 / 4	1	75	○		:
Dr/Pc	Ballad	7404	FB_Country Ballad	4 / 4	1	75	○		:
Dr/Pc	Ballad	7405	FC_Country Ballad	4 / 4	1	75	○		:
Dr/Pc	Ballad	7406	FD_Country Ballad	4 / 4	1	75	○		:
Dr/Pc	Ballad	7407	EA_Country Ballad	4 / 4	3	75	○		:
Dr/Pc	Ballad	7408	MA_AnthemicRkBld	4 / 4	4	72	○		Hyper Standard Kit
Dr/Pc	Ballad	7409	MB_AnthemicRkBld	4 / 4	4	72	○		:
Dr/Pc	Ballad	7410	MC_AnthemicRkBld	4 / 4	4	72	○		:
Dr/Pc	Ballad	7411	MD_AnthemicRkBld	4 / 4	4	72	○		:
Dr/Pc	Ballad	7412	FA_AnthemicRkBld	4 / 4	1	72	○		:
Dr/Pc	Ballad	7413	FB_AnthemicRkBld	4 / 4	1	72	○		:
Dr/Pc	Ballad	7414	FC_AnthemicRkBld	4 / 4	1	72	○		:
Dr/Pc	Ballad	7415	FD_AnthemicRkBld	4 / 4	1	72	○		:
Dr/Pc	Ballad	7416	EA_AnthemicRkBld	4 / 4	3	72	○		:
Dr/Pc	Ballad	7417	MA_Eclectic Bld	4 / 4	4	84	○		Arabic Mixed Kit 1
Dr/Pc	Ballad	7418	MB_Eclectic Bld	4 / 4	4	84	○		:
Dr/Pc	Ballad	7419	MC_Eclectic Bld	4 / 4	4	84	○		:
Dr/Pc	Ballad	7420	MD_Eclectic Bld	4 / 4	4	84	○		:
Dr/Pc	Ballad	7421	FA_Eclectic Bld	4 / 4	1	84	○		:
Dr/Pc	Ballad	7422	FB_Eclectic Bld	4 / 4	1	84	○		:
Dr/Pc	Ballad	7423	FC_Eclectic Bld	4 / 4	1	84	○		:
Dr/Pc	Ballad	7424	FD_Eclectic Bld	4 / 4	1	84	○		:
Dr/Pc	Ballad	7425	EA_Eclectic Bld	4 / 4	4	84	○		:
Dr/Pc	Ballad	7426	MA_GuitarBallad	4 / 4	8	94	○		Power Standard Kit 1
Dr/Pc	Ballad	7427	MB_GuitarBallad	4 / 4	8	94	○		:
Dr/Pc	Ballad	7428	MC_GuitarBallad	4 / 4	8	94	○		:
Dr/Pc	Ballad	7429	FA_GuitarBallad	4 / 4	1	94	○		:
Dr/Pc	Ballad	7430	FB_GuitarBallad	4 / 4	1	94	○		:
Dr/Pc	Ballad	7431	FC_GuitarBallad	4 / 4	1	94	○		:
Dr/Pc	Ballad	7432	BA_GuitarBallad	4 / 4	1	94	○		:
Dr/Pc	Ballad	7433	EA_GuitarBallad	4 / 4	4	94	○		:
Dr/Pc	Ballad	7434	EB_GuitarBallad	4 / 4	4	94	○		:
Dr/Pc	Ballad	7435	MA_Unplugged 1	4 / 4	4	120	○		:
Dr/Pc	Ballad	7436	MB_Unplugged 1	4 / 4	4	120	○		:
Dr/Pc	Ballad	7437	MC_Unplugged 1	4 / 4	4	120	○		:
Dr/Pc	Ballad	7438	FA_Unplugged 1	4 / 4	1	120	○		:
Dr/Pc	Ballad	7439	FB_Unplugged 1	4 / 4	1	120	○		:
Dr/Pc	Ballad	7440	FC_Unplugged 1	4 / 4	1	120	○		:
Dr/Pc	Ballad	7441	BA_Unplugged 1	4 / 4	1	120	○		:
Dr/Pc	Ballad	7442	MA1_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7443	MB1_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7444	MC1_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7445	FA1_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7446	FB1_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7447	FC1_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7448	BA1_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7449	MA2_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7450	MB2_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7451	MC2_Unplugged 2	4 / 4	8	120	○		:
Dr/Pc	Ballad	7452	FA2_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7453	FB2_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7454	FC2_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7455	BA2_Unplugged 2	4 / 4	1	120	○		:
Dr/Pc	Ballad	7456	EA1_Unplugged 2	4 / 4	5	120	○		:
Dr/Pc	Ballad	7457	EB1_Unplugged 2	4 / 4	4	120	○		:
Dr/Pc	Ballad	7458	MA_Unplugged 3	4 / 4	4	113	○		Power Standard Kit 2
Dr/Pc	Ballad	7459	MB_Unplugged 3	4 / 4	4	113	○		:
Dr/Pc	Ballad	7460	MC_Unplugged 3	4 / 4	4	113	○		:
Dr/Pc	Ballad	7461	FA_Unplugged 3	4 / 4	1	113	○		:
Dr/Pc	Ballad	7462	FB_Unplugged 3	4 / 4	1	113	○		:
Dr/Pc	Ballad	7463	FC_Unplugged 3	4 / 4	1	113	○		:
Dr/Pc	Ballad	7464	BA_Unplugged 3	4 / 4	1	113	○		:
Dr/Pc	Ballad	7465	MA_Unplugged 4	4 / 4	4	120	○		Dry Standard Kit
Dr/Pc	Ballad	7466	MB_Unplugged 4	4 / 4	4	120	○		:
Dr/Pc	Ballad	7467	MC_Unplugged 4	4 / 4	4	120	○		:
Dr/Pc	Ballad	7468	MD_Unplugged 4	4 / 4	4	120	○		:
Dr/Pc	Ballad	7469	IA_Unplugged 4	4 / 4	1	120	○		:
Dr/Pc	Ballad	7470	FA_Unplugged 4	4 / 4	1	120	○		:
Dr/Pc	Ballad	7471	FB_Unplugged 4	4 / 4	1	120	○		:
Dr/Pc	Ballad	7472	FC_Unplugged 4	4 / 4	1	120	○		:
Dr/Pc	Ballad	7473	EA_Unplugged 4	4 / 4	4	120	○		:
Dr/Pc	Ballad	7474	EB_Unplugged 4	4 / 4	3	120	○		:
Dr/Pc	Ballad	7475	MA_8Beat Ballad2	4 / 4	4	101	○		Brush Kit
Dr/Pc	Ballad	7476	MB_8Beat Ballad2	4 / 4	4	101	○		:
Dr/Pc	Ballad	7477	MC_8Beat Ballad2	4 / 4	4	101	○		:
Dr/Pc	Ballad	7478	FA_8Beat Ballad2	4 / 4	1	101	○		:
Dr/Pc	Ballad	7479	FB_8Beat Ballad2	4 / 4	1	101	○		:
Dr/Pc	Ballad	7480	FC_8Beat Ballad2	4 / 4	1	101	○		:
Dr/Pc	Ballad	7481	BA_8Beat Ballad2	4 / 4	1	101	○		:
Dr/Pc	Ballad	7482	EA_8Beat Ballad2	4 / 4	5	101	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Ballad	7483	EB_8Beat Ballad2	4 / 4	5	101	○		:
Dr/Pc	Ballad	7484	MA_EP Ballad	4 / 4	2	60	○		Power Standard Kit 2
Dr/Pc	Ballad	7485	MB_EP Ballad	4 / 4	2	60	○		:
Dr/Pc	Ballad	7486	MC_EP Ballad	4 / 4	2	60	○		:
Dr/Pc	Ballad	7487	FA_EP Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7488	FB_EP Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7489	FC_EP Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7490	BA_EP Ballad	4 / 4	1	60	○		:
Dr/Pc	Ballad	7491	EA_EP Ballad	4 / 4	4	60	○		:
Dr/Pc	Ballad	7492	EB_EP Ballad	4 / 4	4	60	○		:
Dr/Pc	Ballad	7493	MA_Ballad 1	4 / 4	2	72	○		Hyper Standard Kit
Dr/Pc	Ballad	7494	MB_Ballad 1	4 / 4	2	72	○		:
Dr/Pc	Ballad	7495	MA_Ballad 2	4 / 4	2	72	○		:
Dr/Pc	Ballad	7496	MB_Ballad 2	4 / 4	2	72	○		:
Dr/Pc	Ballad	7497	MA_Ballad 3	4 / 4	2	72	○		:
Dr/Pc	Ballad	7498	MB_Ballad 3	4 / 4	1	72	○		:
Dr/Pc	Ballad	7499	MA_8Beat Slow	4 / 4	4	78	○		Power Standard Kit 2
Dr/Pc	Ballad	7500	MB_8Beat Slow	4 / 4	4	78	○		:
Dr/Pc	Ballad	7501	MC_8Beat Slow	4 / 4	4	78	○		:
Dr/Pc	Ballad	7502	FA_8Beat Slow	4 / 4	1	78	○		:
Dr/Pc	Ballad	7503	FB_8Beat Slow	4 / 4	1	78	○		:
Dr/Pc	Ballad	7504	FC_8Beat Slow	4 / 4	1	78	○		:
Dr/Pc	Ballad	7505	BA_8Beat Slow	4 / 4	1	78	○		:
Dr/Pc	Ballad	7506	MA_Slowfeel	4 / 4	1	74	○		Hyper Standard Kit
Dr/Pc	Ballad	7507	MB_Slowfeel	4 / 4	1	74	○		:
Dr/Pc	Ballad	7508	MC_Slowfeel	4 / 4	1	74	○		:
Dr/Pc	Ballad	7509	MD_Slowfeel	4 / 4	1	74	○		:
Dr/Pc	Ballad	7510	IA_Slowfeel	4 / 4	2	74	○		:
Dr/Pc	Ballad	7511	FA_Slowfeel	4 / 4	1	74	○		:
Dr/Pc	Ballad	7512	FB_Slowfeel	4 / 4	1	74	○		:
Dr/Pc	Ballad	7513	FC_Slowfeel	4 / 4	2	74	○		:
Dr/Pc	Ballad	7514	MA_16Bt Ballad2	4 / 4	4	75	○		Power Standard Kit 2
Dr/Pc	Ballad	7515	MB_16Bt Ballad2	4 / 4	4	75	○		:
Dr/Pc	Ballad	7516	MC_16Bt Ballad2	4 / 4	4	75	○		:
Dr/Pc	Ballad	7517	FA_16Bt Ballad2	4 / 4	1	75	○		:
Dr/Pc	Ballad	7518	FB_16Bt Ballad2	4 / 4	1	75	○		:
Dr/Pc	Ballad	7519	FC_16Bt Ballad2	4 / 4	1	75	○		:
Dr/Pc	Ballad	7520	BA_16Bt Ballad2	4 / 4	1	75	○		:
Dr/Pc	Ballad	7521	MA_16Bt Ballad3	4 / 4	2	64	○		Power Standard Kit 1
Dr/Pc	Ballad	7522	MB_16Bt Ballad3	4 / 4	2	64	○		:
Dr/Pc	Ballad	7523	MC_16Bt Ballad3	4 / 4	2	64	○		:
Dr/Pc	Ballad	7524	MD_16Bt Ballad3	4 / 4	2	64	○		:
Dr/Pc	Ballad	7525	ME_16Bt Ballad3	4 / 4	2	64	○		:
Dr/Pc	Ballad	7526	MF_16Bt Ballad3	4 / 4	2	64	○		:
Dr/Pc	Ballad	7527	BA_16Bt Ballad3	4 / 4	1	64	○		:
Dr/Pc	Ballad	7528	MA_ChillKitPop1	4 / 4	2	85	○		Chill Out Kit
Dr/Pc	Ballad	7529	MA_ChillKitPop2	4 / 4	2	85	○		:
Dr/Pc	Ballad	7530	MA_ChillKitPop3	4 / 4	2	85	○		:
Dr/Pc	Ballad	7531	MA_ChillKitPop4	4 / 4	2	85	○		:
Dr/Pc	Ballad	7532	MA_ChillKitPop5	4 / 4	2	85	○		:
Dr/Pc	Ballad	7533	MA_ChlKtBallad1	4 / 4	2	90	○		:
Dr/Pc	Ballad	7534	MB_ChlKtBallad1	4 / 4	2	90	○		:
Dr/Pc	Ballad	7535	MA_ChlKtBallad2	4 / 4	2	90	○		:
Dr/Pc	Ballad	7536	MB_ChlKtBallad2	4 / 4	2	90	○		:
Dr/Pc	Ballad	7537	MA_ChlKtBallad3	4 / 4	2	90	○		:
Dr/Pc	Ballad	7538	MA_ChlKtBallad4	4 / 4	2	90	○		:
Dr/Pc	Ballad	7539	MA_ChlKtBallad5	4 / 4	2	90	○		:
Dr/Pc	Ballad	7540	MA_Nu Jazzy	4 / 4	2	61	○		Nu Jazzy Kit
Dr/Pc	Ballad	7541	MB_Nu Jazzy	4 / 4	2	61	○		:
Dr/Pc	Ballad	7542	MC_Nu Jazzy	4 / 4	2	61	○		:
Dr/Pc	Ballad	7543	FA_Nu Jazzy	4 / 4	1	61	○		:
Dr/Pc	Ballad	7544	EA_Nu Jazzy	4 / 4	4	61	○		:
Dr/Pc	Ballad	7545	MA_6/8 Ballad	6 / 8	4	87	○		Power Standard Kit 2
Dr/Pc	Ballad	7546	MB_6/8 Ballad	6 / 8	4	87	○		:
Dr/Pc	Ballad	7547	MC_6/8 Ballad	6 / 8	4	87	○		:
Dr/Pc	Ballad	7548	FA_6/8 Ballad	6 / 8	1	87	○		:
Dr/Pc	Ballad	7549	FB_6/8 Ballad	6 / 8	1	87	○		:
Dr/Pc	Ballad	7550	FC_6/8 Ballad	6 / 8	1	87	○		:
Dr/Pc	Ballad	7551	BA_6/8 Ballad	6 / 8	1	87	○		:
Dr/Pc	Ballad	7552	EA_6/8 Ballad	6 / 8	6	87	○		:
Dr/Pc	Ballad	7553	EB_6/8 Ballad	6 / 8	6	87	○		:
Dr/Pc	Ballad	7554	MA_Pop Ballad	4 / 4	4	118	○		T's EDM Kit
Dr/Pc	Hip Hop	7555	MA_Trap	4 / 4	4	88	○		Goliath Trap Kit
Dr/Pc	Hip Hop	7556	MB_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7557	MC_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7558	MD_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7559	ME_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7560	MF_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7561	MG_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7562	MH_Trap	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7563	MA_LoFi Kit	4 / 4	4	76	○		LoFi Kit
Dr/Pc	Hip Hop	7564	MB_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7565	MC_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7566	MD_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7567	ME_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7568	MF_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7569	MG_LoFi Kit	4 / 4	4	76	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Hip Hop	7570	MH_LoFi Kit	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7571	MA_Tricky Hip Hop	4 / 4	4	92	○		Tricky Hip Hop Kit
Dr/Pc	Hip Hop	7572	MB_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7573	MC_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7574	MD_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7575	ME_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7576	MF_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7577	MG_Tricky Hip Hop	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7578	MH_Tricky Hip Hop	4 / 4	2	92	○		:
Dr/Pc	Hip Hop	7579	MA_Creepin	4 / 4	2	85	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7580	MA_D Boy	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7581	MB_D Boy	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7582	MA_Figueroa	4 / 4	4	97	○		:
Dr/Pc	Hip Hop	7583	MB_Figueroa	4 / 4	4	97	○		:
Dr/Pc	Hip Hop	7584	MA_Purple Drink	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7585	MB_Purple Drink	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7586	MA_Champ	4 / 4	2	123	○		:
Dr/Pc	Hip Hop	7587	MB_Champ	4 / 4	8	123	○		:
Dr/Pc	Hip Hop	7588	MA_Old Money	4 / 4	4	126	○		:
Dr/Pc	Hip Hop	7589	MB_Old Money	4 / 4	4	126	○		:
Dr/Pc	Hip Hop	7590	MA_Let's Get It	4 / 4	8	140	○		:
Dr/Pc	Hip Hop	7591	MB_Let's Get It	4 / 4	8	140	○		:
Dr/Pc	Hip Hop	7592	MA_On Tour	4 / 4	8	156	○		:
Dr/Pc	Hip Hop	7593	MB_On Tour	4 / 4	8	156	○		:
Dr/Pc	Hip Hop	7594	MA_Cookin Up	4 / 4	8	126	○		:
Dr/Pc	Hip Hop	7595	MB_Cookin Up	4 / 4	8	126	○		:
Dr/Pc	Hip Hop	7596	MA_Designer Belt	4 / 4	8	139	○		:
Dr/Pc	Hip Hop	7597	MB_Designer Belt	4 / 4	4	139	○		:
Dr/Pc	Hip Hop	7598	MA_Lydia	4 / 4	4	120	○		:
Dr/Pc	Hip Hop	7599	MB_Lydia	4 / 4	4	120	○		:
Dr/Pc	Hip Hop	7600	MA_Toyz R	4 / 4	8	146	○		:
Dr/Pc	Hip Hop	7601	MA_Tank Top	4 / 4	8	139	○		:
Dr/Pc	Hip Hop	7602	MA_Flower Swerve	4 / 4	2	87	○		:
Dr/Pc	Hip Hop	7603	MA_One Time	4 / 4	4	107	○		:
Dr/Pc	Hip Hop	7604	MA_Da Goose	4 / 4	4	130	○		Trap Kit
Dr/Pc	Hip Hop	7605	MA_Mood Lighting	4 / 4	4	65	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7606	MB_Mood Lighting	4 / 4	4	65	○		:
Dr/Pc	Hip Hop	7607	MC_Mood Lighting	4 / 4	4	65	○		:
Dr/Pc	Hip Hop	7608	MD_Mood Lighting	4 / 4	4	65	○		:
Dr/Pc	Hip Hop	7609	MA_Energy Drink	4 / 4	4	83	○		Break Kit
Dr/Pc	Hip Hop	7610	MB_Energy Drink	4 / 4	4	83	○		:
Dr/Pc	Hip Hop	7611	MC_Energy Drink	4 / 4	4	83	○		:
Dr/Pc	Hip Hop	7612	MD_Energy Drink	4 / 4	4	83	○		:
Dr/Pc	Hip Hop	7613	MA_Big Beat Hip Hop	4 / 4	4	85	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7614	MA_Nest	4 / 4	4	80	○		D'elo Kit
Dr/Pc	Hip Hop	7615	MA_People	4 / 4	4	93	○		:
Dr/Pc	Hip Hop	7616	MA_Soft Pants	4 / 4	4	165	○		:
Dr/Pc	Hip Hop	7617	MA_Banana	4 / 4	4	160	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7618	MA_Ruby Runner	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7619	MB_Ruby Runner	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7620	MA_No Love	4 / 4	4	130	○		HipHopMultipleKits
Dr/Pc	Hip Hop	7621	MA_Cocoa Butter	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7622	MA_What's Shakin	4 / 4	4	156	○		Trap Kit
Dr/Pc	Hip Hop	7623	MB_What's Shakin	4 / 4	4	156	○		:
Dr/Pc	Hip Hop	7624	MC_What's Shakin	4 / 4	4	156	○		:
Dr/Pc	Hip Hop	7625	MD_What's Shakin	4 / 4	4	156	○		:
Dr/Pc	Hip Hop	7626	MA_Destination	4 / 4	4	76	○		Downtempo HipHop Kit
Dr/Pc	Hip Hop	7627	MB_Destination	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7628	MC_Destination	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7629	MD_Destination	4 / 4	4	76	○		:
Dr/Pc	Hip Hop	7630	MA_The Jump	4 / 4	4	137	○		Trap Kit
Dr/Pc	Hip Hop	7631	MA_Sub Mello	4 / 4	4	142	○		:
Dr/Pc	Hip Hop	7632	MA_Bad Boy	4 / 4	4	93	○		DUB Kit
Dr/Pc	Hip Hop	7633	MA_Bad Girl	4 / 4	4	93	○		:
Dr/Pc	Hip Hop	7634	MA_Trap Loop 1	4 / 4	4	132	○		Trap Kit
Dr/Pc	Hip Hop	7635	MA_Trap Loop 2	4 / 4	4	118	○		:
Dr/Pc	Hip Hop	7636	MA_Trap Loop 3	4 / 4	4	119	○		:
Dr/Pc	Hip Hop	7637	MA_Trap Loop 4	4 / 4	4	137	○		:
Dr/Pc	Hip Hop	7638	MA_Clifford	4 / 4	4	160	○		EDM Kit
Dr/Pc	Hip Hop	7639	MB_Clifford	4 / 4	4	160	○		:
Dr/Pc	Hip Hop	7640	MA_Trigger	4 / 4	4	115	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7641	MA_Sap	4 / 4	4	125	○		Trap Kit
Dr/Pc	Hip Hop	7642	MA_Eye Shadow	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	7643	MA_A Strut	4 / 4	4	94	○		Electro Kit
Dr/Pc	Hip Hop	7644	MA_Samurai	4 / 4	4	125	○		House-Techno Kit
Dr/Pc	Hip Hop	7645	MA_Giggle	4 / 4	2	87	○		EDM Kit
Dr/Pc	Hip Hop	7646	MA_Draw The Line	4 / 4	1	85	○		T's EDM Kit
Dr/Pc	Hip Hop	7647	MA_Zodiac Sign	4 / 4	2	112	○		:
Dr/Pc	Hip Hop	7648	MB_Zodiac Sign	4 / 4	2	112	○		:
Dr/Pc	Hip Hop	7649	MA_Thy Self	4 / 4	4	96	○		Real Drums Kit
Dr/Pc	Hip Hop	7650	MB_Thy Self	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7651	MA_Cheer	4 / 4	4	90	○		Orchestra Kit
Dr/Pc	Hip Hop	7652	MA_Ain't My Fault	4 / 4	4	100	○		T's Hip Hop Kit
Dr/Pc	Hip Hop	7653	MA_All That Dough	4 / 4	4	142	○		:
Dr/Pc	Hip Hop	7654	MA_All The Way Up	4 / 4	4	164	○		:
Dr/Pc	Hip Hop	7655	MA_Big Buck	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7656	MA_Big Business	4 / 4	4	95	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Hip Hop	7657	MA_Clap Up	4 / 4	4	94	○		:
Dr/Pc	Hip Hop	7658	MA_CPT Kidd	4 / 4	4	114	○		:
Dr/Pc	Hip Hop	7659	MA_Dr. Rubber	4 / 4	4	83	○		:
Dr/Pc	Hip Hop	7660	MA_Flexin	4 / 4	4	87	○		:
Dr/Pc	Hip Hop	7661	MA_Habbits	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	7662	MA_Lil Mama	2 / 4	8	100	○		:
Dr/Pc	Hip Hop	7663	MA_My Way	4 / 4	4	128	○		:
Dr/Pc	Hip Hop	7664	MA_Roots 93	4 / 4	4	93	○		:
Dr/Pc	Hip Hop	7665	MA_Rumble Jungle	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7666	MA_Soldier Story	4 / 4	4	93	○		:
Dr/Pc	Hip Hop	7667	MA_Stomp Up	4 / 4	4	148	○		:
Dr/Pc	Hip Hop	7668	MA_TakeOvaThaCity 1	4 / 4	4	140	○		:
Dr/Pc	Hip Hop	7669	MA_TakeOvaThaCity 2	4 / 4	4	140	○		:
Dr/Pc	Hip Hop	7670	MA_Teddy 1	4 / 4	2	98	○		:
Dr/Pc	Hip Hop	7671	MA_Teddy 2	4 / 4	2	98	○		:
Dr/Pc	Hip Hop	7672	MA_Top Flight	4 / 4	4	130	○		:
Dr/Pc	Hip Hop	7673	MA_Swag Factory	4 / 4	4	90	○		Nu Hip Hop Kit 1
Dr/Pc	Hip Hop	7674	MA_U Kno I Got It	4 / 4	8	133	○		Analog T8 Kit
Dr/Pc	Hip Hop	7675	MA_Down The Line	4 / 4	2	80	○		Downtempo HipHop Kit
Dr/Pc	Hip Hop	7676	MA_Party Favor	4 / 4	2	80	○		:
Dr/Pc	Hip Hop	7677	MA_Hopscotch	4 / 4	4	84	○		:
Dr/Pc	Hip Hop	7678	MA_Into The Wild	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7679	MA_Laid Back	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7680	MA_The Stomp	4 / 4	1	87	○		:
Dr/Pc	Hip Hop	7681	MA_Slide In	4 / 4	4	88	○		:
Dr/Pc	Hip Hop	7682	MA_Mack Ave	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7683	MA_Prospect	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7684	MA_The Thump	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7685	MA_90s Baby	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7686	MA_90s Girl	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7687	MA_Down Lo	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7688	MA_Down Lower	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7689	MA_Turn It Up	4 / 4	2	92	○		:
Dr/Pc	Hip Hop	7690	MA_Init Half On It	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	7691	MA_Grassroots	4 / 4	2	105	○		:
Dr/Pc	Hip Hop	7692	MA_West Coast Money	4 / 4	1	110	○		:
Dr/Pc	Hip Hop	7693	MA_Darker Hits	4 / 4	4	135	○		:
Dr/Pc	Hip Hop	7694	MA_Freq License	4 / 4	2	135	○		:
Dr/Pc	Hip Hop	7695	MA_Hat Builder	4 / 4	1	135	○		:
Dr/Pc	Hip Hop	7696	MA_Jook Future	4 / 4	4	135	○		:
Dr/Pc	Hip Hop	7697	MA_Sub Strength	4 / 4	4	135	○		:
Dr/Pc	Hip Hop	7698	MA_Trouble	4 / 4	2	140	○		:
Dr/Pc	Hip Hop	7699	MA_Up	4 / 4	2	140	○		:
Dr/Pc	Hip Hop	7700	MA_Fire Sauce	4 / 4	4	142	○		:
Dr/Pc	Hip Hop	7701	MA_Flossin Hard	4 / 4	4	142	○		:
Dr/Pc	Hip Hop	7702	MA_Up Subz	4 / 4	4	142	○		:
Dr/Pc	Hip Hop	7703	MA_Baking Soda	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7704	MA_Burner	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7705	MA_Riser	4 / 4	4	150	○		:
Dr/Pc	Hip Hop	7706	MA_Feetwerk	4 / 4	4	160	○		:
Dr/Pc	Hip Hop	7707	MA_Super Snare	4 / 4	4	160	○		:
Dr/Pc	Hip Hop	7708	MA_Cracked	4 / 4	4	160	○		:
Dr/Pc	Hip Hop	7709	MA_Snapper	4 / 4	2	160	○		:
Dr/Pc	Hip Hop	7710	MA_2BZ4U	4 / 4	4	75	○		Nu Hip Hop Kit 2
Dr/Pc	Hip Hop	7711	MB_2BZ4U	4 / 4	4	75	○		:
Dr/Pc	Hip Hop	7712	MC_2BZ4U	4 / 4	4	75	○		:
Dr/Pc	Hip Hop	7713	MD_2BZ4U	4 / 4	4	75	○		:
Dr/Pc	Hip Hop	7714	MA_Bklyn	4 / 4	4	89	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7715	MB_Bklyn	4 / 4	4	89	○		:
Dr/Pc	Hip Hop	7716	MC_Bklyn	4 / 4	4	89	○		:
Dr/Pc	Hip Hop	7717	MD_Bklyn	4 / 4	4	89	○		:
Dr/Pc	Hip Hop	7718	ME_Bklyn	4 / 4	4	89	○		:
Dr/Pc	Hip Hop	7719	MF_Bklyn	4 / 4	4	89	○		:
Dr/Pc	Hip Hop	7720	MA_DirtySynth	4 / 4	4	85	○		Analog T8 Kit
Dr/Pc	Hip Hop	7721	MB_DirtySynth	4 / 4	4	85	○		:
Dr/Pc	Hip Hop	7722	MC_DirtySynth	4 / 4	4	85	○		:
Dr/Pc	Hip Hop	7723	MA_PepRally	4 / 4	2	75	○		Nu Hip Hop Kit 1
Dr/Pc	Hip Hop	7724	MB_PepRally	4 / 4	2	75	○		:
Dr/Pc	Hip Hop	7725	MC_PepRally	4 / 4	2	75	○		:
Dr/Pc	Hip Hop	7726	MD_PepRally	4 / 4	2	75	○		:
Dr/Pc	Hip Hop	7727	ME_PepRally	4 / 4	2	75	○		:
Dr/Pc	Hip Hop	7728	MA_HipHopEpic /1	4 / 4	2	85	○		Hip Hop Kit 4
Dr/Pc	Hip Hop	7729	MA_HipHopEpic /2	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7730	MA_HipHopEpic /3	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7731	MB_HipHopEpic /1	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7732	MB_HipHopEpic /2	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7733	MB_HipHopEpic /3	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7734	MC_HipHopEpic /1	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7735	MC_HipHopEpic /2	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7736	MC_HipHopEpic /3	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7737	MA1_New Hip Hop	4 / 4	2	85	○		Power Standard Kit 1
Dr/Pc	Hip Hop	7738	MB1_New Hip Hop	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7739	MC1_New Hip Hop	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7740	FA1_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7741	FB1_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7742	FC1_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7743	BA1_New Hip Hop	4 / 4	1	85	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Hip Hop	7744	EA1_New Hip Hop	4 / 4	3	85	○		:
Dr/Pc	Hip Hop	7745	EB1_New Hip Hop	4 / 4	3	85	○		:
Dr/Pc	Hip Hop	7746	MA2_New Hip Hop	4 / 4	2	85	○		Hip Hop Kit 2
Dr/Pc	Hip Hop	7747	MB2_New Hip Hop	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7748	MC2_New Hip Hop	4 / 4	2	85	○		:
Dr/Pc	Hip Hop	7749	FA2_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7750	FB2_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7751	FC2_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7752	BA2_New Hip Hop	4 / 4	1	85	○		:
Dr/Pc	Hip Hop	7753	EA2_New Hip Hop	4 / 4	3	85	○		:
Dr/Pc	Hip Hop	7754	EB2_New Hip Hop	4 / 4	3	85	○		:
Dr/Pc	Hip Hop	7755	MA_East Coast	4 / 4	2	103	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7756	MB_East Coast	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7757	MC_East Coast	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7758	MD_East Coast	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7759	FA_East Coast	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7760	FB_East Coast	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7761	FC_East Coast	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7762	FD_East Coast	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7763	MA1_West Coast	4 / 4	2	97	○		Hip Hop Kit 2
Dr/Pc	Hip Hop	7764	MB1_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7765	MC1_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7766	MD1_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7767	FA1_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7768	FB1_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7769	FC1_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7770	FD1_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7771	MA2_West Coast	4 / 4	2	97	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7772	MB2_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7773	MC2_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7774	MD2_West Coast	4 / 4	2	97	○		:
Dr/Pc	Hip Hop	7775	FA2_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7776	FB2_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7777	FC2_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7778	FD2_West Coast	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7779	MA1_South Rap 1	4 / 4	4	98	○		Belly Dance Kit
Dr/Pc	Hip Hop	7780	MB1_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7781	MC1_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7782	MD1_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7783	FA1_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7784	FB1_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7785	FC1_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7786	FD1_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7787	MA2_South Rap 1	4 / 4	4	98	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7788	MB2_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7789	MC2_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7790	MD2_South Rap 1	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7791	FA2_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7792	FB2_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7793	FC2_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7794	FD2_South Rap 1	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7795	MB1_South Rap 2	4 / 4	2	90	○		Hip Hop Kit 2
Dr/Pc	Hip Hop	7796	MC1_South Rap 2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7797	MD1_South Rap 2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7798	FA1_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7799	FB1_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7800	FC1_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7801	FD1_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7802	MA2_South Rap 2	4 / 4	2	90	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7803	MB2_South Rap 2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7804	MC2_South Rap 2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7805	MD2_South Rap 2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7806	FA2_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7807	FB2_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7808	FC2_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7809	FD2_South Rap 2	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7810	MA_Hip Hop 1	4 / 4	2	105	○		Hip Hop Kit 3
Dr/Pc	Hip Hop	7811	MB_Hip Hop 1	4 / 4	2	105	○		:
Dr/Pc	Hip Hop	7812	MC_Hip Hop 1	4 / 4	2	105	○		:
Dr/Pc	Hip Hop	7813	MD_Hip Hop 1	4 / 4	2	105	○		:
Dr/Pc	Hip Hop	7814	IA_Hip Hop 1	4 / 4	1	105	○		:
Dr/Pc	Hip Hop	7815	FA_Hip Hop 1	4 / 4	1	105	○		:
Dr/Pc	Hip Hop	7816	FB_Hip Hop 1	4 / 4	1	105	○		:
Dr/Pc	Hip Hop	7817	FC_Hip Hop 1	4 / 4	2	105	○		:
Dr/Pc	Hip Hop	7818	MA_Hip Hop 2	4 / 4	2	104	○		:
Dr/Pc	Hip Hop	7819	MB_Hip Hop 2	4 / 4	2	104	○		:
Dr/Pc	Hip Hop	7820	MC_Hip Hop 2	4 / 4	2	104	○		:
Dr/Pc	Hip Hop	7821	MD_Hip Hop 2	4 / 4	2	104	○		:
Dr/Pc	Hip Hop	7822	IA_Hip Hop 2	4 / 4	1	104	○		:
Dr/Pc	Hip Hop	7823	FA_Hip Hop 2	4 / 4	1	104	○		:
Dr/Pc	Hip Hop	7824	FB_Hip Hop 2	4 / 4	1	104	○		:
Dr/Pc	Hip Hop	7825	FC_Hip Hop 2	4 / 4	2	104	○		:
Dr/Pc	Hip Hop	7826	MA_Hip Hop 3	4 / 4	2	94	○		Break Kit
Dr/Pc	Hip Hop	7827	MB_Hip Hop 3	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7828	MC_Hip Hop 3	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7829	MD_Hip Hop 3	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7830	IA_Hip Hop 3	4 / 4	2	94	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Hip Hop	7831	FA_Hip Hop 3	4 / 4	1	94	○		:
Dr/Pc	Hip Hop	7832	FB_Hip Hop 3	4 / 4	1	94	○		:
Dr/Pc	Hip Hop	7833	FC_Hip Hop 3	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7834	MA_Hip Hop 4	4 / 4	2	96	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7835	MA1_Hip Hop 5	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7836	MB1_Hip Hop 5	4 / 4	4	103	○		:
Dr/Pc	Hip Hop	7837	MC1_Hip Hop 5	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7838	MD1_Hip Hop 5	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7839	FA1_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7840	FB1_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7841	FC1_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7842	FD1_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7843	MA2_Hip Hop 5	4 / 4	2	103	○		Nu Hip Hop Kit 2
Dr/Pc	Hip Hop	7844	MB2_Hip Hop 5	4 / 4	4	103	○		:
Dr/Pc	Hip Hop	7845	MC2_Hip Hop 5	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7846	MD2_Hip Hop 5	4 / 4	2	103	○		:
Dr/Pc	Hip Hop	7847	FA2_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7848	FB2_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7849	FC2_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7850	FD2_Hip Hop 5	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7851	MA_Hip Hop 6	4 / 4	4	96	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7852	MB_Hip Hop 6	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7853	MC_Hip Hop 6	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7854	FA_Hip Hop 6	4 / 4	1	96	○		:
Dr/Pc	Hip Hop	7855	FB_Hip Hop 6	4 / 4	1	96	○		:
Dr/Pc	Hip Hop	7856	FC_Hip Hop 6	4 / 4	1	96	○		:
Dr/Pc	Hip Hop	7857	BA_Hip Hop 6	4 / 4	1	96	○		:
Dr/Pc	Hip Hop	7858	MA1_Hip Break	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7859	MB1_Hip Break	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7860	MC1_Hip Break	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7861	FA1_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7862	FB1_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7863	FC1_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7864	BA1_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7865	MA2_Hip Break	4 / 4	4	98	○		Break Kit
Dr/Pc	Hip Hop	7866	MB2_Hip Break	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7867	MC2_Hip Break	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7868	FA2_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7869	FB2_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7870	FC2_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7871	BA2_Hip Break	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7872	MA_Hip Rock 1	4 / 4	4	90	○		Rock Stereo Kit 2
Dr/Pc	Hip Hop	7873	MB_Hip Rock 1	4 / 4	4	90	○		:
Dr/Pc	Hip Hop	7874	MC_Hip Rock 1	4 / 4	4	90	○		:
Dr/Pc	Hip Hop	7875	FA_Hip Rock 1	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7876	FB_Hip Rock 1	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7877	FC_Hip Rock 1	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7878	BA_Hip Rock 1	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7879	MA_Hip Rock 2	4 / 4	4	132	○		House Kit 2
Dr/Pc	Hip Hop	7880	MB_Hip Rock 2	4 / 4	4	132	○		:
Dr/Pc	Hip Hop	7881	MC_Hip Rock 2	4 / 4	4	132	○		:
Dr/Pc	Hip Hop	7882	FA_Hip Rock 2	4 / 4	1	132	○		:
Dr/Pc	Hip Hop	7883	FB_Hip Rock 2	4 / 4	1	132	○		:
Dr/Pc	Hip Hop	7884	FC_Hip Rock 2	4 / 4	1	132	○		:
Dr/Pc	Hip Hop	7885	BA_Hip Rock 2	4 / 4	1	132	○		:
Dr/Pc	Hip Hop	7886	MA1_Hip Reggae	4 / 4	4	92	○		House Kit 1
Dr/Pc	Hip Hop	7887	MB1_Hip Reggae	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7888	MC1_Hip Reggae	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7889	FA1_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7890	FB1_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7891	FC1_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7892	BA1_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7893	MA2_Hip Reggae	4 / 4	4	92	○		Latin Percussion Kit
Dr/Pc	Hip Hop	7894	MB2_Hip Reggae	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7895	MC2_Hip Reggae	4 / 4	4	92	○		:
Dr/Pc	Hip Hop	7896	FA2_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7897	FB2_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7898	FC2_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7899	BA2_Hip Reggae	4 / 4	1	92	○		:
Dr/Pc	Hip Hop	7900	MA1_Reggaeton 2	4 / 4	4	98	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7901	MB1_Reggaeton 2	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7902	MC1_Reggaeton 2	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7903	FA1_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7904	FB1_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7905	FC1_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7906	BA1_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7907	MA2_Reggaeton 2	4 / 4	4	98	○		Percussion Kit
Dr/Pc	Hip Hop	7908	MB2_Reggaeton 2	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7909	MC2_Reggaeton 2	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7910	FA2_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7911	FB2_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7912	FC2_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7913	BA2_Reggaeton 2	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7914	MA_Dancehall	4 / 4	4	103	○		Break Kit
Dr/Pc	Hip Hop	7915	MB_Dancehall	4 / 4	4	103	○		:
Dr/Pc	Hip Hop	7916	MD_Dancehall	4 / 4	4	103	○		:
Dr/Pc	Hip Hop	7917	FA_Dancehall	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7918	FB_Dancehall	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7919	FD_Dancehall	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7920	BA_Dancehall	4 / 4	1	103	○		:
Dr/Pc	Hip Hop	7921	EA_Dancehall	4 / 4	3	103	○		:
Dr/Pc	Hip Hop	7922	MA_Hip Ethnic 1	4 / 4	2	94	○		Hip Hop Kit 1
Dr/Pc	Hip Hop	7923	MB_Hip Ethnic 1	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7924	MC_Hip Ethnic 1	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7925	MD_Hip Ethnic 1	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7926	ME_Hip Ethnic 1	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7927	MF_Hip Ethnic 1	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7928	BA_Hip Ethnic 1	4 / 4	1	94	○		:
Dr/Pc	Hip Hop	7929	MA_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7930	MB_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7931	MC_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7932	MD_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7933	ME_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7934	MF_Hip Ethnic 2	4 / 4	2	110	○		:
Dr/Pc	Hip Hop	7935	BA_Hip Ethnic 2	4 / 4	1	110	○		:
Dr/Pc	Hip Hop	7936	MA_ClasicHipHop	4 / 4	2	90	○		Hip Hop Kit 3
Dr/Pc	Hip Hop	7937	MB_ClasicHipHop	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7938	MC_ClasicHipHop	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7939	MD_ClasicHipHop	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7940	IA_ClasicHipHop/1a	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	7941	IA_ClasicHipHop/1b	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7942	FA_ClasicHipHop	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7943	FB_ClasicHipHop	4 / 4	1	90	○		:
Dr/Pc	Hip Hop	7944	IA_ClasicHipHop/2	4 / 4	4	90	○		:
Dr/Pc	Hip Hop	7945	MA_i-Hop	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7946	MB_i-Hop	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7947	MC_i-Hop	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7948	MD_i-Hop	4 / 4	1	98	○		:
Dr/Pc	Hip Hop	7949	MA_Gangsta	4 / 4	2	98	○		Hip Hop Kit 4
Dr/Pc	Hip Hop	7950	MB_Gangsta	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7951	MC_Gangsta	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7952	MD_Gangsta	4 / 4	2	98	○		:
Dr/Pc	Hip Hop	7953	MA_Jazz Hop	4 / 4	2	106	○		Hip Hop Kit 2
Dr/Pc	Hip Hop	7954	MA_HipHop Loop1	4 / 4	4	97	○		Nu Hip Hop Kit 1
Dr/Pc	Hip Hop	7955	MA_HipHop Loop2	4 / 4	4	81	○		:
Dr/Pc	Hip Hop	7956	MA_HipHop Loop3	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7957	MA_HipHop Loop4	4 / 4	4	93	○		:
Dr/Pc	Hip Hop	7958	MA_HipHop Loop5	4 / 4	4	94	○		:
Dr/Pc	Hip Hop	7959	MA_HipHop Loop6	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	7960	MA_HipHop Loop7	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	7961	MA_HipHop Loop8	4 / 4	4	87	○		:
Dr/Pc	Hip Hop	7962	MA_HipHop Loop9	4 / 4	4	97	○		:
Dr/Pc	Hip Hop	7963	MA_HipHopLoop10	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	7964	MA_HipHopLoop11	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	7965	MA_HipHopLoop12	4 / 4	2	100	○		:
Dr/Pc	Hip Hop	7966	MA_HipHopLoop13	4 / 4	2	100	○		:
Dr/Pc	Hip Hop	7967	MA_HipHopLoop14	4 / 4	1	81	○		:
Dr/Pc	Hip Hop	7968	MA_HipHopLoop15	4 / 4	1	97	○		:
Dr/Pc	Hip Hop	7969	MA_HipHopLoop16	4 / 4	2	100	○		:
Dr/Pc	Hip Hop	7970	MA_HipHopLoop17	4 / 4	2	75	○		:
Dr/Pc	Hip Hop	7971	MA_HipHopLoop18	4 / 4	2	96	○		Illest Hip Hop Kit
Dr/Pc	Hip Hop	7972	MA_HipHopLoop19	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7973	MA_HipHopLoop20	4 / 4	3	96	○		:
Dr/Pc	Hip Hop	7974	MA_HipHopLoop21	4 / 4	2	93	○		:
Dr/Pc	Hip Hop	7975	MA_HipHopLoop22	4 / 4	2	80	○		:
Dr/Pc	Hip Hop	7976	MA_HipHopLoop23	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7977	MA_HipHopLoop24	4 / 4	2	92	○		:
Dr/Pc	Hip Hop	7978	MA_HipHopLoop25	4 / 4	2	96	○		:
Dr/Pc	Hip Hop	7979	MA_HipHopLoop26	4 / 4	4	86	○		:
Dr/Pc	Hip Hop	7980	MA_HipHopLoop27	4 / 4	2	95	○		:
Dr/Pc	Hip Hop	7981	MA_HipHopLoop28	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	7982	MA_HipHopLoop29	4 / 4	4	75	○		:
Dr/Pc	Hip Hop	7983	MA_HipHopLoop30	4 / 4	2	96	○		:
Dr/Pc	Hip Hop	7984	MA_HipHopLoop31	4 / 4	2	93	○		:
Dr/Pc	Hip Hop	7985	MA_HipHopLoop32	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	7986	MA_HipHopLoop33	4 / 4	2	100	○		:
Dr/Pc	Hip Hop	7987	MA_HipHopLoop34	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	7988	MA_HipHopLoop35	4 / 4	4	85	○		:
Dr/Pc	Hip Hop	7989	MA_HipHopLoop36	4 / 4	4	90	○		:
Dr/Pc	Hip Hop	7990	MA_HipHopLoop37	4 / 4	4	85	○		:
Dr/Pc	Hip Hop	7991	MA_HipHopLoop38	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7992	MA_HipHopLoop39	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	7993	MA_HipHopLoop40	4 / 4	2	100	○		:
Dr/Pc	Hip Hop	7994	MA_HipHopLoop41	4 / 4	2	96	○		:
Dr/Pc	Hip Hop	7995	MA_HipHopLoop42	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	7996	MA_HipHopLoop43	4 / 4	4	98	○		:
Dr/Pc	Hip Hop	7997	MA_HipHopLoop44	4 / 4	4	97	○		:
Dr/Pc	Hip Hop	7998	MA_HipHopLoop45	4 / 4	4	97	○		:
Dr/Pc	Hip Hop	7999	MA_HipHopLoop46	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	8000	MA_HipHopLoop47	4 / 4	4	100	○		:
Dr/Pc	Hip Hop	8001	MA_HipHopLoop48	4 / 4	4	85	○		:
Dr/Pc	Hip Hop	8002	MA_HipHopLoop49	4 / 4	2	88	○		:
Dr/Pc	Hip Hop	8003	MA_HipHopLoop50	4 / 4	4	86	○		:
Dr/Pc	Hip Hop	8004	MA_HipHopLoop51	4 / 4	4	97	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Hip Hop	8005	MA_HipHopLoop52	4 / 4	4	95	○		:
Dr/Pc	Hip Hop	8006	MA_HipHopLoop53	4 / 4	2	94	○		:
Dr/Pc	Hip Hop	8007	MA_HipHopLoop54	4 / 4	2	80	○		:
Dr/Pc	Hip Hop	8008	MA_HipHopLoop55	4 / 4	4	96	○		:
Dr/Pc	Hip Hop	8009	MA_HipHopLoop56	4 / 4	4	80	○		:
Dr/Pc	Hip Hop	8010	MA_HipHopLoop57	4 / 4	4	80	○		:
Dr/Pc	Hip Hop	8011	MA_HipHopLoop58	4 / 4	4	78	○		:
Dr/Pc	Hip Hop	8012	MA_HipHopLoop59	4 / 4	4	90	○		:
Dr/Pc	Hip Hop	8013	MA_ChillKitHip1	4 / 4	2	90	○		Chill Out Kit
Dr/Pc	Hip Hop	8014	MA_ChillKitHip2	4 / 4	2	90	○		8Z Chilly Breakz
Dr/Pc	Hip Hop	8015	MA_ChillKitHip3	4 / 4	2	90	○		Chill Out Kit
Dr/Pc	Hip Hop	8016	MA_ChillKitHip4	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	8017	MA_8Z HeavyHip1	4 / 4	2	90	○		8Z Glitch
Dr/Pc	Hip Hop	8018	MA_8Z HeavyHip2	4 / 4	2	90	○		:
Dr/Pc	Hip Hop	8019	MA_8Z ElectrHp1	4 / 4	4	90	○		8Z Heavy Hearts
Dr/Pc	Hip Hop	8020	MA_8Z ElectrHp2	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8021	MA_Love Song	4 / 4	4	91	○		T's Hip Hop Kit
Dr/Pc	Modern R&B	8022	MB_Love Song	4 / 4	4	91	○		:
Dr/Pc	Modern R&B	8023	MA_The Sidewalk	4 / 4	2	85	○		Downtempo HipHop Kit
Dr/Pc	Modern R&B	8024	MA_Sucka	4 / 4	4	96	○		D'elo Kit
Dr/Pc	Modern R&B	8025	MB_Sucka	4 / 4	4	96	○		:
Dr/Pc	Modern R&B	8026	MC_Sucka	4 / 4	4	96	○		:
Dr/Pc	Modern R&B	8027	MD_Sucka	4 / 4	4	96	○		:
Dr/Pc	Modern R&B	8028	MA_R'n'B Loop 1-1	4 / 4	4	75	○		T's Hip Hop Kit
Dr/Pc	Modern R&B	8029	MA_R'n'B Loop 1-2	4 / 4	4	80	○		:
Dr/Pc	Modern R&B	8030	MA_R'n'B Loop 2-1	4 / 4	4	141	○		DUB Kit
Dr/Pc	Modern R&B	8031	MA_R'n'B Loop 2-2	4 / 4	4	164	○		Trap Kit
Dr/Pc	Modern R&B	8032	MA_R'n'B Ballad	4 / 4	4	61	○		T's Hip Hop Kit
Dr/Pc	Modern R&B	8033	MA_Daily	4 / 4	4	140	○		:
Dr/Pc	Modern R&B	8034	MA_Galaxy	4 / 4	4	92	○		Trap Kit
Dr/Pc	Modern R&B	8035	MA_Port & Starboard	4 / 4	4	160	○		:
Dr/Pc	Modern R&B	8036	MB_Port & Starboard	4 / 4	4	160	○		:
Dr/Pc	Modern R&B	8037	MC_Port & Starboard	4 / 4	4	160	○		:
Dr/Pc	Modern R&B	8038	MA_Neo UK Soul	4 / 4	4	79	○		Hyper Standard Kit
Dr/Pc	Modern R&B	8039	MB_Neo UK Soul	4 / 4	4	79	○		:
Dr/Pc	Modern R&B	8040	MC_Neo UK Soul	4 / 4	4	79	○		:
Dr/Pc	Modern R&B	8041	MD_Neo UK Soul	4 / 4	4	79	○		:
Dr/Pc	Modern R&B	8042	FA_Neo UK Soul	4 / 4	1	79	○		:
Dr/Pc	Modern R&B	8043	FB_Neo UK Soul	4 / 4	1	79	○		:
Dr/Pc	Modern R&B	8044	FC_Neo UK Soul	4 / 4	1	79	○		:
Dr/Pc	Modern R&B	8045	FD_Neo UK Soul	4 / 4	1	79	○		:
Dr/Pc	Modern R&B	8046	EA_Neo UK Soul	4 / 4	3	79	○		:
Dr/Pc	Modern R&B	8047	MA_Slow & Easy	4 / 4	4	72	○		Power Standard Kit 1
Dr/Pc	Modern R&B	8048	MB_Slow & Easy	4 / 4	4	72	○		:
Dr/Pc	Modern R&B	8049	MC_Slow & Easy	4 / 4	4	72	○		:
Dr/Pc	Modern R&B	8050	FA_Slow & Easy	4 / 4	1	72	○		:
Dr/Pc	Modern R&B	8051	FB_Slow & Easy	4 / 4	1	72	○		:
Dr/Pc	Modern R&B	8052	FC_Slow & Easy	4 / 4	1	72	○		:
Dr/Pc	Modern R&B	8053	BA_Slow & Easy	4 / 4	1	72	○		:
Dr/Pc	Modern R&B	8054	EA_Slow & Easy	4 / 4	3	72	○		:
Dr/Pc	Modern R&B	8055	EB_Slow & Easy	4 / 4	4	72	○		:
Dr/Pc	Modern R&B	8056	MA_Pop Shuffle2	4 / 4	4	94	○		:
Dr/Pc	Modern R&B	8057	MB_Pop Shuffle2	4 / 4	4	94	○		:
Dr/Pc	Modern R&B	8058	MC_Pop Shuffle2	4 / 4	4	94	○		:
Dr/Pc	Modern R&B	8059	FA_Pop Shuffle2	4 / 4	1	94	○		:
Dr/Pc	Modern R&B	8060	FB_Pop Shuffle2	4 / 4	1	94	○		:
Dr/Pc	Modern R&B	8061	FC_Pop Shuffle2	4 / 4	1	94	○		:
Dr/Pc	Modern R&B	8062	BA_Pop Shuffle2	4 / 4	1	94	○		:
Dr/Pc	Modern R&B	8063	MA_Pop Shuffle3	4 / 4	4	80	○		R&B Kit 3
Dr/Pc	Modern R&B	8064	MB_Pop Shuffle3	4 / 4	4	80	○		:
Dr/Pc	Modern R&B	8065	MC_Pop Shuffle3	4 / 4	4	80	○		:
Dr/Pc	Modern R&B	8066	FA_Pop Shuffle3	4 / 4	1	80	○		:
Dr/Pc	Modern R&B	8067	FB_Pop Shuffle3	4 / 4	1	80	○		:
Dr/Pc	Modern R&B	8068	FC_Pop Shuffle3	4 / 4	1	80	○		:
Dr/Pc	Modern R&B	8069	BA_Pop Shuffle3	4 / 4	1	80	○		:
Dr/Pc	Modern R&B	8070	MA_R&B Disco	4 / 4	2	110	○		Dry Standard Kit
Dr/Pc	Modern R&B	8071	MB_R&B Disco	4 / 4	2	110	○		:
Dr/Pc	Modern R&B	8072	MC_R&B Disco	4 / 4	2	110	○		:
Dr/Pc	Modern R&B	8073	MD_R&B Disco	4 / 4	2	110	○		:
Dr/Pc	Modern R&B	8074	IA_R&B Disco	4 / 4	1	110	○		:
Dr/Pc	Modern R&B	8075	FA_R&B Disco	4 / 4	1	110	○		:
Dr/Pc	Modern R&B	8076	FB_R&B Disco	4 / 4	1	110	○		:
Dr/Pc	Modern R&B	8077	FC_R&B Disco	4 / 4	2	110	○		:
Dr/Pc	Modern R&B	8078	MA_Chart R&B	4 / 4	4	130	○		R&B Kit 1
Dr/Pc	Modern R&B	8079	MB_Chart R&B	4 / 4	4	130	○		:
Dr/Pc	Modern R&B	8080	MC_Chart R&B	4 / 4	4	130	○		:
Dr/Pc	Modern R&B	8081	FA_Chart R&B	4 / 4	1	130	○		:
Dr/Pc	Modern R&B	8082	FB_Chart R&B	4 / 4	1	130	○		:
Dr/Pc	Modern R&B	8083	FC_Chart R&B	4 / 4	1	130	○		:
Dr/Pc	Modern R&B	8084	BA_Chart R&B	4 / 4	1	130	○		:
Dr/Pc	Modern R&B	8085	EA_Chart R&B	4 / 4	5	130	○		:
Dr/Pc	Modern R&B	8086	EB_Chart R&B	4 / 4	10	130	○		:
Dr/Pc	Modern R&B	8087	MA1_ChartPop1	4 / 4	4	92	○		Hip Hop Kit 3
Dr/Pc	Modern R&B	8088	MB1_ChartPop1	4 / 4	4	92	○		:
Dr/Pc	Modern R&B	8089	MC1_ChartPop1	4 / 4	4	92	○		:
Dr/Pc	Modern R&B	8090	FA1_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8091	FB1_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8092	FC1_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8093	BA1_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8094	EA1_ChartPop1	4 / 4	3	92	○		:
Dr/Pc	Modern R&B	8095	EB1_ChartPop1	4 / 4	3	92	○		:
Dr/Pc	Modern R&B	8096	MA2_ChartPop1	4 / 4	4	92	○		Power Standard Kit 2
Dr/Pc	Modern R&B	8097	MB2_ChartPop1	4 / 4	4	92	○		:
Dr/Pc	Modern R&B	8098	MC2_ChartPop1	4 / 4	4	92	○		:
Dr/Pc	Modern R&B	8099	FA2_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8100	FB2_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8101	FC2_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8102	BA2_ChartPop1	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8103	EA2_ChartPop1	4 / 4	3	92	○		:
Dr/Pc	Modern R&B	8104	EB2_ChartPop1	4 / 4	3	92	○		:
Dr/Pc	Modern R&B	8105	MA1_ChartPop2	4 / 4	2	92	○		Hip Hop Kit 3
Dr/Pc	Modern R&B	8106	MB1_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8107	MC1_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8108	MD1_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8109	FA1_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8110	FC1_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8111	FD1_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8112	MA2_ChartPop2	4 / 4	2	92	○		Hip Hop Kit 1
Dr/Pc	Modern R&B	8113	MB2_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8114	MC2_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8115	MD2_ChartPop2	4 / 4	2	92	○		:
Dr/Pc	Modern R&B	8116	FA2_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8117	FB2_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8118	FC2_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8119	FD2_ChartPop2	4 / 4	1	92	○		:
Dr/Pc	Modern R&B	8120	MA1_R&B	4 / 4	2	83	○		Power Standard Kit 1
Dr/Pc	Modern R&B	8121	MB1_R&B	4 / 4	2	83	○		:
Dr/Pc	Modern R&B	8122	MC1_R&B	4 / 4	2	83	○		:
Dr/Pc	Modern R&B	8123	FA1_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8124	FB1_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8125	FC1_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8126	BA1_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8127	EA1_R&B	4 / 4	4	83	○		:
Dr/Pc	Modern R&B	8128	EB1_R&B	4 / 4	4	83	○		:
Dr/Pc	Modern R&B	8129	MA2_R&B	4 / 4	2	83	○		R&B Kit 1
Dr/Pc	Modern R&B	8130	MB2_R&B	4 / 4	2	83	○		:
Dr/Pc	Modern R&B	8131	MC2_R&B	4 / 4	2	83	○		:
Dr/Pc	Modern R&B	8132	FA2_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8133	FB2_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8134	FC2_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8135	BA2_R&B	4 / 4	1	83	○		:
Dr/Pc	Modern R&B	8136	EA2_R&B	4 / 4	4	83	○		:
Dr/Pc	Modern R&B	8137	EB2_R&B	4 / 4	4	83	○		:
Dr/Pc	Modern R&B	8138	MA1_New R&B 1	4 / 4	2	98	○		Power Standard Kit 1
Dr/Pc	Modern R&B	8139	MB1_New R&B 1	4 / 4	2	98	○		:
Dr/Pc	Modern R&B	8140	MC1_New R&B 1	4 / 4	2	98	○		:
Dr/Pc	Modern R&B	8141	FA1_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8142	FB1_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8143	FC1_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8144	BA1_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8145	EA1_New R&B 1	4 / 4	3	98	○		:
Dr/Pc	Modern R&B	8146	EB1_New R&B 1	4 / 4	4	98	○		:
Dr/Pc	Modern R&B	8147	MA2_New R&B 1	4 / 4	2	98	○		R&B Kit 2
Dr/Pc	Modern R&B	8148	MB2_New R&B 1	4 / 4	2	98	○		:
Dr/Pc	Modern R&B	8149	MC2_New R&B 1	4 / 4	2	98	○		:
Dr/Pc	Modern R&B	8150	FA2_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8151	FB2_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8152	FC2_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8153	BA2_New R&B 1	4 / 4	1	98	○		:
Dr/Pc	Modern R&B	8154	EA2_New R&B 1	4 / 4	3	98	○		:
Dr/Pc	Modern R&B	8155	EB2_New R&B 1	4 / 4	4	98	○		:
Dr/Pc	Modern R&B	8156	MA1_New R&B 2	4 / 4	1	97	○		Hip Hop Kit 3
Dr/Pc	Modern R&B	8157	MB1_New R&B 2	4 / 4	1	97	○		:
Dr/Pc	Modern R&B	8158	MC1_New R&B 2	4 / 4	1	97	○		:
Dr/Pc	Modern R&B	8159	MD1_New R&B 2	4 / 4	1	97	○		:
Dr/Pc	Modern R&B	8160	IA1_New R&B 2	4 / 4	2	97	○		:
Dr/Pc	Modern R&B	8161	FA1_New R&B 2	4 / 4	1	97	○		:
Dr/Pc	Modern R&B	8162	FB1_New R&B 2	4 / 4	1	97	○		:
Dr/Pc	Modern R&B	8163	FC1_New R&B 2	4 / 4	2	97	○		:
Dr/Pc	Modern R&B	8164	MA2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8165	MB2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8166	MC2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8167	MD2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8168	IA2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8169	FA2_New R&B 3	4 / 4	1	90	○		:
Dr/Pc	Modern R&B	8170	FB2_New R&B 3	4 / 4	1	90	○		:
Dr/Pc	Modern R&B	8171	FC2_New R&B 3	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8172	MA_Pop R&B	4 / 4	4	67	○		Hip Hop Kit 1
Dr/Pc	Modern R&B	8173	MB_Pop R&B	4 / 4	4	67	○		:
Dr/Pc	Modern R&B	8174	MC_Pop R&B	4 / 4	4	67	○		:
Dr/Pc	Modern R&B	8175	FA_Pop R&B	4 / 4	1	67	○		:
Dr/Pc	Modern R&B	8176	FB_Pop R&B	4 / 4	1	67	○		:
Dr/Pc	Modern R&B	8177	FC_Pop R&B	4 / 4	1	67	○		:
Dr/Pc	Modern R&B	8178	BA_Pop R&B	4 / 4	1	67	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Modern R&B	8179	MA_H-R&B Pop	4 / 4	4	140	○		R&B Kit 1
Dr/Pc	Modern R&B	8180	MB_H-R&B Pop	4 / 4	4	140	○		:
Dr/Pc	Modern R&B	8181	MC_H-R&B Pop	4 / 4	4	140	○		:
Dr/Pc	Modern R&B	8182	FA_H-R&B Pop	4 / 4	1	140	○		:
Dr/Pc	Modern R&B	8183	FB_H-R&B Pop	4 / 4	1	140	○		:
Dr/Pc	Modern R&B	8184	FC_H-R&B Pop	4 / 4	1	140	○		:
Dr/Pc	Modern R&B	8185	BA_H-R&B Pop	4 / 4	1	140	○		:
Dr/Pc	Modern R&B	8186	MA_J-R&B Pop	4 / 4	4	100	○		Hip Hop Kit 4
Dr/Pc	Modern R&B	8187	MB_J-R&B Pop	4 / 4	4	100	○		:
Dr/Pc	Modern R&B	8188	MC_J-R&B Pop	4 / 4	4	100	○		:
Dr/Pc	Modern R&B	8189	FA_J-R&B Pop	4 / 4	1	100	○		:
Dr/Pc	Modern R&B	8190	FB_J-R&B Pop	4 / 4	1	100	○		:
Dr/Pc	Modern R&B	8191	FC_J-R&B Pop	4 / 4	1	100	○		:
Dr/Pc	Modern R&B	8192	BA_J-R&B Pop	4 / 4	1	100	○		:
Dr/Pc	Modern R&B	8193	MA_R&B Ana Pop	4 / 4	4	95	○		Hip Hop Kit 1
Dr/Pc	Modern R&B	8194	MB_R&B Ana Pop	4 / 4	4	95	○		:
Dr/Pc	Modern R&B	8195	MC_R&B Ana Pop	4 / 4	4	95	○		:
Dr/Pc	Modern R&B	8196	FA_R&B Ana Pop	4 / 4	1	95	○		:
Dr/Pc	Modern R&B	8197	FB_R&B Ana Pop	4 / 4	1	95	○		:
Dr/Pc	Modern R&B	8198	FC_R&B Ana Pop	4 / 4	1	95	○		:
Dr/Pc	Modern R&B	8199	BA_R&B Ana Pop	4 / 4	1	95	○		:
Dr/Pc	Modern R&B	8200	MA_R&B Ballad 1	4 / 4	4	70	○		Hip Hop Kit 4
Dr/Pc	Modern R&B	8201	MB_R&B Ballad 1	4 / 4	4	70	○		:
Dr/Pc	Modern R&B	8202	MC_R&B Ballad 1	4 / 4	4	70	○		:
Dr/Pc	Modern R&B	8203	FA_R&B Ballad 1	4 / 4	1	70	○		:
Dr/Pc	Modern R&B	8204	FB_R&B Ballad 1	4 / 4	1	70	○		:
Dr/Pc	Modern R&B	8205	FC_R&B Ballad 1	4 / 4	1	70	○		:
Dr/Pc	Modern R&B	8206	BA_R&B Ballad 1	4 / 4	1	70	○		:
Dr/Pc	Modern R&B	8207	MA1_R&B Ballad 2	4 / 4	2	60	○		Hip Hop Kit 2
Dr/Pc	Modern R&B	8208	MB1_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8209	MC1_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8210	MD1_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8211	FA1_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8212	FB1_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8213	FC1_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8214	FD1_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8215	MA2_R&B Ballad 2	4 / 4	2	60	○		Hip Hop Kit 1
Dr/Pc	Modern R&B	8216	MB2_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8217	MC2_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8218	MD2_R&B Ballad 2	4 / 4	2	60	○		:
Dr/Pc	Modern R&B	8219	FA2_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8220	FB2_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8221	FC2_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8222	FD2_R&B Ballad 2	4 / 4	1	60	○		:
Dr/Pc	Modern R&B	8223	MA_R&B Ballad 3	4 / 4	4	113	○		R&B Kit 2
Dr/Pc	Modern R&B	8224	MB_R&B Ballad 3	4 / 4	4	113	○		:
Dr/Pc	Modern R&B	8225	MC_R&B Ballad 3	4 / 4	4	113	○		:
Dr/Pc	Modern R&B	8226	FA_R&B Ballad 3	4 / 4	1	113	○		:
Dr/Pc	Modern R&B	8227	FB_R&B Ballad 3	4 / 4	1	113	○		:
Dr/Pc	Modern R&B	8228	FC_R&B Ballad 3	4 / 4	1	113	○		:
Dr/Pc	Modern R&B	8229	BA_R&B Ballad 3	4 / 4	1	113	○		:
Dr/Pc	Modern R&B	8230	MA_6/8 R&B	4 / 4	2	61	○		Hip Hop Kit 3
Dr/Pc	Modern R&B	8231	MB_6/8 R&B	4 / 4	2	61	○		:
Dr/Pc	Modern R&B	8232	MC_6/8 R&B	4 / 4	2	61	○		:
Dr/Pc	Modern R&B	8233	MD_6/8 R&B	4 / 4	2	61	○		:
Dr/Pc	Modern R&B	8234	IA_6/8 R&B	4 / 4	2	61	○		:
Dr/Pc	Modern R&B	8235	FA_6/8 R&B	4 / 4	1	61	○		:
Dr/Pc	Modern R&B	8236	FB_6/8 R&B	4 / 4	1	61	○		:
Dr/Pc	Modern R&B	8237	FC_6/8 R&B	4 / 4	2	61	○		:
Dr/Pc	Modern R&B	8238	MA_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8239	MB_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8240	MC_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8241	MD_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8242	IA_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8243	FA_Smooth 1	4 / 4	1	115	○		:
Dr/Pc	Modern R&B	8244	FB_Smooth 1	4 / 4	1	115	○		:
Dr/Pc	Modern R&B	8245	FC_Smooth 1	4 / 4	2	115	○		:
Dr/Pc	Modern R&B	8246	MA_Smooth 2	4 / 4	4	64	○		Hip Hop Kit 1
Dr/Pc	Modern R&B	8247	MB_Smooth 2	4 / 4	4	64	○		:
Dr/Pc	Modern R&B	8248	MC_Smooth 2	4 / 4	4	64	○		:
Dr/Pc	Modern R&B	8249	MD_Smooth 2	4 / 4	4	64	○		:
Dr/Pc	Modern R&B	8250	MA_Flip Hop 1	4 / 4	2	132	○		Hip Hop Kit 3
Dr/Pc	Modern R&B	8251	MB_Flip Hop 1	4 / 4	2	132	○		:
Dr/Pc	Modern R&B	8252	MC_Flip Hop 1	4 / 4	2	132	○		:
Dr/Pc	Modern R&B	8253	MD_Flip Hop 1	4 / 4	2	132	○		:
Dr/Pc	Modern R&B	8254	IA_Flip Hop 1	4 / 4	2	132	○		:
Dr/Pc	Modern R&B	8255	FA_Flip Hop 1	4 / 4	1	132	○		:
Dr/Pc	Modern R&B	8256	FB_Flip Hop 1	4 / 4	1	132	○		:
Dr/Pc	Modern R&B	8257	FC_Flip Hop 1	4 / 4	4	132	○		:
Dr/Pc	Modern R&B	8258	MA_Flip Hop 2	4 / 4	4	125	○		:
Dr/Pc	Modern R&B	8259	MB_Flip Hop 2	4 / 4	4	125	○		:
Dr/Pc	Modern R&B	8260	MC_Flip Hop 2	4 / 4	4	125	○		:
Dr/Pc	Modern R&B	8261	MD_Flip Hop 2	4 / 4	4	125	○		:
Dr/Pc	Modern R&B	8262	MA_New Gospel	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8263	MB_New Gospel	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8264	MC_New Gospel	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8265	MD_New Gospel	4 / 4	2	90	○		:
Dr/Pc	Modern R&B	8266	IA_New Gospel	4 / 4	1	90	○		:
Dr/Pc	Modern R&B	8267	FA_New Gospel	4 / 4	1	90	○		:
Dr/Pc	Modern R&B	8268	FB_New Gospel	4 / 4	1	90	○		:
Dr/Pc	Modern R&B	8269	FC_New Gospel	4 / 4	2	90	○		:
Dr/Pc	Classic R&B	8270	MA1_StandrdDisco	4 / 4	4	120	○		Power Standard Kit 2
Dr/Pc	Classic R&B	8271	MB1_StandrdDisco	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8272	MC1_StandrdDisco	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8273	FA1_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8274	FB1_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8275	FC1_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8276	BA1_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8277	EA1_StandrdDisco	4 / 4	3	120	○		:
Dr/Pc	Classic R&B	8278	EB1_StandrdDisco	4 / 4	3	120	○		:
Dr/Pc	Classic R&B	8279	MA2_StandrdDisco	4 / 4	4	120	○		Pop Latin Kit
Dr/Pc	Classic R&B	8280	MB2_StandrdDisco	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8281	MC2_StandrdDisco	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8282	FA2_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8283	FB2_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8284	FC2_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8285	BA2_StandrdDisco	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8286	EA2_StandrdDisco	4 / 4	3	120	○		:
Dr/Pc	Classic R&B	8287	EB2_StandrdDisco	4 / 4	3	120	○		:
Dr/Pc	Classic R&B	8288	MA1_Retro Disco	4 / 4	4	108	○		Power Standard Kit 1
Dr/Pc	Classic R&B	8289	MB1_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8290	MC1_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8291	FA1_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8292	FB1_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8293	FC1_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8294	BA1_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8295	EA1_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8296	EB1_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8297	MA2_Retro Disco	4 / 4	4	108	○		Pop Latin Kit
Dr/Pc	Classic R&B	8298	MB2_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8299	MC2_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8300	FA2_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8301	FB2_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8302	FC2_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8303	BA2_Retro Disco	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8304	EA2_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8305	EB2_Retro Disco	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8306	MA1_70sCoolDisco	4 / 4	4	114	○		Power Standard Kit 1
Dr/Pc	Classic R&B	8307	MB1_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8308	MC1_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8309	FA1_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8310	FB1_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8311	FC1_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8312	BA1_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8313	EA1_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8314	EB1_70sCoolDisco	4 / 4	3	114	○		:
Dr/Pc	Classic R&B	8315	MA2_70sCoolDisco	4 / 4	4	114	○		Pop Latin Kit
Dr/Pc	Classic R&B	8316	MB2_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8317	MC2_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8318	FA2_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8319	FB2_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8320	FC2_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8321	BA2_70sCoolDisco	4 / 4	1	114	○		:
Dr/Pc	Classic R&B	8322	EA2_70sCoolDisco	4 / 4	4	114	○		:
Dr/Pc	Classic R&B	8323	EB2_70sCoolDisco	4 / 4	3	114	○		:
Dr/Pc	Classic R&B	8324	MA_Philly	4 / 4	2	100	○		Power Standard Kit 1
Dr/Pc	Classic R&B	8325	MB_Philly	4 / 4	2	100	○		:
Dr/Pc	Classic R&B	8326	MC_Philly	4 / 4	2	100	○		:
Dr/Pc	Classic R&B	8327	FA_Philly	4 / 4	1	100	○		:
Dr/Pc	Classic R&B	8328	FB_Philly	4 / 4	1	100	○		:
Dr/Pc	Classic R&B	8329	FC_Philly	4 / 4	1	100	○		:
Dr/Pc	Classic R&B	8330	BA_Philly	4 / 4	1	100	○		:
Dr/Pc	Classic R&B	8331	EA_Philly	4 / 4	4	100	○		:
Dr/Pc	Classic R&B	8332	EB_Philly	4 / 4	3	100	○		:
Dr/Pc	Classic R&B	8333	MA_Soul 1	4 / 4	2	116	○		:
Dr/Pc	Classic R&B	8334	MB_Soul 1	4 / 4	2	116	○		:
Dr/Pc	Classic R&B	8335	MC_Soul 1	4 / 4	2	116	○		:
Dr/Pc	Classic R&B	8336	FA_Soul 1	4 / 4	1	116	○		:
Dr/Pc	Classic R&B	8337	FB_Soul 1	4 / 4	1	116	○		:
Dr/Pc	Classic R&B	8338	FC_Soul 1	4 / 4	1	116	○		:
Dr/Pc	Classic R&B	8339	BA_Soul 1	4 / 4	1	116	○		:
Dr/Pc	Classic R&B	8340	EA_Soul 1	4 / 4	4	116	○		:
Dr/Pc	Classic R&B	8341	EB_Soul 1	4 / 4	3	116	○		:
Dr/Pc	Classic R&B	8342	MA_Soul 2	4 / 4	4	120	○		Dry Standard Kit
Dr/Pc	Classic R&B	8343	MB_Soul 2	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8344	MC_Soul 2	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8345	MD_Soul 2	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8346	IA_Soul 2	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8347	FA_Soul 2	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8348	FB_Soul 2	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8349	FC_Soul 2	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8350	MA1_Soul 3	4 / 4	4	88	○		Hip Hop Kit 3
Dr/Pc	Classic R&B	8351	MB1_Soul 3	4 / 4	4	88	○		:
Dr/Pc	Classic R&B	8352	MC1_Soul 3	4 / 4	4	88	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Classic R&B	8353	MD1_Soul 3	4 / 4	4	88	○		:
Dr/Pc	Classic R&B	8354	FA1_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8355	FB1_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8356	FC1_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8357	FD1_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8358	MA2_Soul 3	4 / 4	4	88	○		Hip Hop Kit 1
Dr/Pc	Classic R&B	8359	MB2_Soul 3	4 / 4	4	88	○		:
Dr/Pc	Classic R&B	8360	MC2_Soul 3	4 / 4	4	88	○		:
Dr/Pc	Classic R&B	8361	MD2_Soul 3	4 / 4	4	88	○		:
Dr/Pc	Classic R&B	8362	FA2_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8363	FB2_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8364	FC2_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8365	FD2_Soul 3	4 / 4	1	88	○		:
Dr/Pc	Classic R&B	8366	MA_70sChartSoul	4 / 4	2	108	○		Power Standard Kit 2
Dr/Pc	Classic R&B	8367	MB_70sChartSoul	4 / 4	2	108	○		:
Dr/Pc	Classic R&B	8368	MC_70sChartSoul	4 / 4	2	108	○		:
Dr/Pc	Classic R&B	8369	FA_70sChartSoul	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8370	FB_70sChartSoul	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8371	FC_70sChartSoul	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8372	BA_70sChartSoul	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8373	EA_70sChartSoul	4 / 4	5	108	○		:
Dr/Pc	Classic R&B	8374	EB_70sChartSoul	4 / 4	3	108	○		:
Dr/Pc	Classic R&B	8375	MA_Frankly Soul	4 / 4	4	120	○		Power Standard Kit 1
Dr/Pc	Classic R&B	8376	MB_Frankly Soul	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8377	MC_Frankly Soul	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8378	FA_Frankly Soul	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8379	FB_Frankly Soul	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8380	FC_Frankly Soul	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8381	BA_Frankly Soul	4 / 4	1	120	○		:
Dr/Pc	Classic R&B	8382	EA_Frankly Soul	4 / 4	3	120	○		:
Dr/Pc	Classic R&B	8383	EB_Frankly Soul	4 / 4	4	120	○		:
Dr/Pc	Classic R&B	8384	MA_Soul Beat	4 / 4	4	124	○		:
Dr/Pc	Classic R&B	8385	MB_Soul Beat	4 / 4	4	124	○		:
Dr/Pc	Classic R&B	8386	MC_Soul Beat	4 / 4	4	124	○		:
Dr/Pc	Classic R&B	8387	FA_Soul Beat	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8388	FB_Soul Beat	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8389	FC_Soul Beat	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8390	BA_Soul Beat	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8391	EA_Soul Beat	4 / 4	3	123	○		:
Dr/Pc	Classic R&B	8392	EB_Soul Beat	4 / 4	3	123	○		:
Dr/Pc	Classic R&B	8393	MA_Soul Band	4 / 4	4	129	○		Power Standard Kit 2
Dr/Pc	Classic R&B	8394	MB_Soul Band	4 / 4	4	129	○		:
Dr/Pc	Classic R&B	8395	MC_Soul Band	4 / 4	4	129	○		:
Dr/Pc	Classic R&B	8396	FA_Soul Band	4 / 4	1	129	○		:
Dr/Pc	Classic R&B	8397	FB_Soul Band	4 / 4	1	129	○		:
Dr/Pc	Classic R&B	8398	FC_Soul Band	4 / 4	1	129	○		:
Dr/Pc	Classic R&B	8399	BA_Soul Band	4 / 4	1	129	○		:
Dr/Pc	Classic R&B	8400	MA_Soul Shuffle	4 / 4	4	98	○		:
Dr/Pc	Classic R&B	8401	MB_Soul Shuffle	4 / 4	4	98	○		:
Dr/Pc	Classic R&B	8402	MC_Soul Shuffle	4 / 4	4	98	○		:
Dr/Pc	Classic R&B	8403	FA_Soul Shuffle	4 / 4	1	98	○		:
Dr/Pc	Classic R&B	8404	FB_Soul Shuffle	4 / 4	1	98	○		:
Dr/Pc	Classic R&B	8405	FC_Soul Shuffle	4 / 4	1	98	○		:
Dr/Pc	Classic R&B	8406	BA_Soul Shuffle	4 / 4	1	98	○		:
Dr/Pc	Classic R&B	8407	EA_Soul Shuffle	4 / 4	3	98	○		:
Dr/Pc	Classic R&B	8408	EB_Soul Shuffle	4 / 4	3	98	○		:
Dr/Pc	Classic R&B	8409	MA_Soul Swing	4 / 4	4	124	○		Power Standard Kit 1
Dr/Pc	Classic R&B	8410	MB_Soul Swing	4 / 4	4	124	○		:
Dr/Pc	Classic R&B	8411	MC_Soul Swing	4 / 4	4	124	○		:
Dr/Pc	Classic R&B	8412	FA_Soul Swing	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8413	FB_Soul Swing	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8414	FC_Soul Swing	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8415	BA_Soul Swing	4 / 4	1	124	○		:
Dr/Pc	Classic R&B	8416	EA_Soul Swing	4 / 4	3	123	○		:
Dr/Pc	Classic R&B	8417	EB_Soul Swing	4 / 4	5	123	○		:
Dr/Pc	Classic R&B	8418	MA_GospelBrothr	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8419	MB_GospelBrothr	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8420	MC_GospelBrothr	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8421	FA_GospelBrothr	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8422	FB_GospelBrothr	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8423	FC_GospelBrothr	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8424	BA_GospelBrothr	4 / 4	1	108	○		:
Dr/Pc	Classic R&B	8425	EA_GospelBrothr	4 / 4	4	108	○		:
Dr/Pc	Classic R&B	8426	EB_GospelBrothr	4 / 4	3	108	○		:
Dr/Pc	Classic R&B	8427	MA_Gospel	3 / 4	4	126	○		Dry Standard Kit
Dr/Pc	Classic R&B	8428	MB_Gospel	3 / 4	2	126	○		:
Dr/Pc	Funk	8429	MA_Modern Funk Drums	4 / 4	2	120	○		Neo Disco Kit
Dr/Pc	Funk	8430	MB_Modern Funk Drums	4 / 4	2	124	○		:
Dr/Pc	Funk	8431	MC_Modern Funk Drums	4 / 4	2	124	○		:
Dr/Pc	Funk	8432	MD_Modern Funk Drums	4 / 4	4	124	○		:
Dr/Pc	Funk	8433	ME_Modern Funk Drums	4 / 4	2	124	○		:
Dr/Pc	Funk	8434	MF_Modern Funk Drums	4 / 4	4	124	○		:
Dr/Pc	Funk	8435	MG_Modern Funk Drums	4 / 4	2	124	○		:
Dr/Pc	Funk	8436	MH_Modern Funk Drums	4 / 4	4	124	○		:
Dr/Pc	Funk	8437	MA_Moving Through	4 / 4	4	105	○		Break Kit
Dr/Pc	Funk	8438	MA_Urban Funk	4 / 4	4	115	○		Power Standard Kit 1
Dr/Pc	Funk	8439	MB_Urban Funk	4 / 4	4	115	○		:
Dr/Pc	Funk	8440	MC_Urban Funk	4 / 4	4	115	○		:
Dr/Pc	Funk	8441	MD_Urban Funk	4 / 4	4	115	○		:
Dr/Pc	Funk	8442	FA_Urban Funk	4 / 4	1	115	○		:
Dr/Pc	Funk	8443	FB_Urban Funk	4 / 4	1	115	○		:
Dr/Pc	Funk	8444	FC_Urban Funk	4 / 4	1	115	○		:
Dr/Pc	Funk	8445	FD_Urban Funk	4 / 4	1	115	○		:
Dr/Pc	Funk	8446	EA_Urban Funk	4 / 4	5	115	○		:
Dr/Pc	Funk	8447	MA_Funk 1	4 / 4	8	104	○		:
Dr/Pc	Funk	8448	MB_Funk 1	4 / 4	8	104	○		:
Dr/Pc	Funk	8449	MC_Funk 1	4 / 4	8	104	○		:
Dr/Pc	Funk	8450	FA_Funk 1	4 / 4	1	104	○		:
Dr/Pc	Funk	8451	FB_Funk 1	4 / 4	1	104	○		:
Dr/Pc	Funk	8452	FC_Funk 1	4 / 4	1	104	○		:
Dr/Pc	Funk	8453	BA_Funk 1	4 / 4	1	104	○		:
Dr/Pc	Funk	8454	EA_Funk 1	4 / 4	9	104	○		:
Dr/Pc	Funk	8455	EB_Funk 1	4 / 4	4	104	○		:
Dr/Pc	Funk	8456	MA_Funk 2 /1	4 / 4	4	107	○		Hyper Standard Kit
Dr/Pc	Funk	8457	MB_Funk 2 /1	4 / 4	4	107	○		:
Dr/Pc	Funk	8458	MC_Funk 2	4 / 4	4	107	○		:
Dr/Pc	Funk	8459	MD_Funk 2	4 / 4	4	107	○		:
Dr/Pc	Funk	8460	IA_Funk 2	4 / 4	4	107	○		:
Dr/Pc	Funk	8461	FA_Funk 2	4 / 4	1	107	○		:
Dr/Pc	Funk	8462	FB_Funk 2 /1	4 / 4	1	107	○		:
Dr/Pc	Funk	8463	FC_Funk 2 /1	4 / 4	1	107	○		:
Dr/Pc	Funk	8464	MA_Funk 2 /2	4 / 4	2	107	○		:
Dr/Pc	Funk	8465	MB_Funk 2 /2	4 / 4	4	107	○		:
Dr/Pc	Funk	8466	FB_Funk 2 /2	4 / 4	1	107	○		:
Dr/Pc	Funk	8467	FC_Funk 2 /2	4 / 4	1	107	○		:
Dr/Pc	Funk	8468	MA_Funk 3	4 / 4	2	132	○		Dry Standard Kit
Dr/Pc	Funk	8469	MB_Funk 3	4 / 4	2	132	○		:
Dr/Pc	Funk	8470	MC_Funk 3	4 / 4	4	132	○		:
Dr/Pc	Funk	8471	MD_Funk 3	4 / 4	4	132	○		:
Dr/Pc	Funk	8472	IA_Funk 3	4 / 4	1	132	○		:
Dr/Pc	Funk	8473	FA_Funk 3	4 / 4	1	132	○		:
Dr/Pc	Funk	8474	FB_Funk 3	4 / 4	1	132	○		:
Dr/Pc	Funk	8475	FC_Funk 3	4 / 4	2	132	○		:
Dr/Pc	Funk	8476	MA_Funk 4	4 / 4	2	110	○		:
Dr/Pc	Funk	8477	MB_Funk 4	4 / 4	2	110	○		:
Dr/Pc	Funk	8478	MC_Funk 4	4 / 4	4	110	○		:
Dr/Pc	Funk	8479	MD_Funk 4	4 / 4	4	110	○		:
Dr/Pc	Funk	8480	MA_Cool Funk	4 / 4	2	96	○		Hyper Standard Kit
Dr/Pc	Funk	8481	MB_Cool Funk	4 / 4	2	96	○		:
Dr/Pc	Funk	8482	MC_Cool Funk	4 / 4	2	96	○		:
Dr/Pc	Funk	8483	MD_Cool Funk	4 / 4	2	96	○		:
Dr/Pc	Funk	8484	IA_Cool Funk	4 / 4	2	96	○		:
Dr/Pc	Funk	8485	FA_Cool Funk	4 / 4	1	96	○		:
Dr/Pc	Funk	8486	FB_Cool Funk	4 / 4	1	96	○		:
Dr/Pc	Funk	8487	FC_Cool Funk	4 / 4	2	96	○		:
Dr/Pc	Funk	8488	MA_Funk PopRock	4 / 4	4	95	○		Power Standard Kit 1
Dr/Pc	Funk	8489	MB_Funk PopRock	4 / 4	4	95	○		:
Dr/Pc	Funk	8490	MC_Funk PopRock	4 / 4	4	95	○		:
Dr/Pc	Funk	8491	FA_Funk PopRock	4 / 4	1	95	○		:
Dr/Pc	Funk	8492	FB_Funk PopRock	4 / 4	1	95	○		:
Dr/Pc	Funk	8493	FC_Funk PopRock	4 / 4	1	95	○		:
Dr/Pc	Funk	8494	BA_Funk PopRock	4 / 4	1	95	○		:
Dr/Pc	Funk	8495	EA_Funk PopRock	4 / 4	4	94	○		:
Dr/Pc	Funk	8496	EB_Funk PopRock	4 / 4	3	94	○		:
Dr/Pc	Funk	8497	MA_Jazz Funk 1	4 / 4	4	120	○		:
Dr/Pc	Funk	8498	MB_Jazz Funk 1	4 / 4	4	120	○		:
Dr/Pc	Funk	8499	MC_Jazz Funk 1	4 / 4	4	120	○		:
Dr/Pc	Funk	8500	FA_Jazz Funk 1	4 / 4	1	120	○		:
Dr/Pc	Funk	8501	FB_Jazz Funk 1	4 / 4	1	120	○		:
Dr/Pc	Funk	8502	FC_Jazz Funk 1	4 / 4	1	120	○		:
Dr/Pc	Funk	8503	BA_Jazz Funk 1	4 / 4	1	120	○		:
Dr/Pc	Funk	8504	EA_Jazz Funk 1	4 / 4	3	120	○		:
Dr/Pc	Funk	8505	EB_Jazz Funk 1	4 / 4	3	120	○		:
Dr/Pc	Funk	8506	MA_Jazz Funk 2	4 / 4	4	120	○		Dry Standard Kit
Dr/Pc	Funk	8507	MB_Jazz Funk 2	4 / 4	4	120	○		:
Dr/Pc	Funk	8508	MC_Jazz Funk 2	4 / 4	4	120	○		:
Dr/Pc	Funk	8509	MD_Jazz Funk 2	4 / 4	4	120	○		:
Dr/Pc	Funk	8510	IA_Jazz Funk 2	4 / 4	2	120	○		:
Dr/Pc	Funk	8511	FA_Jazz Funk 2	4 / 4	1	120	○		:
Dr/Pc	Funk	8512	FB_Jazz Funk 2	4 / 4	1	120	○		:
Dr/Pc	Funk	8513	FC_Jazz Funk 2	4 / 4	1	120	○		:
Dr/Pc	Funk	8514	MA1_Jazz Funk 3	4 / 4	4	123	○		Hip Hop Kit 1
Dr/Pc	Funk	8515	MB1_Jazz Funk 3	4 / 4	4	123	○		:
Dr/Pc	Funk	8516	MC1_Jazz Funk 3	4 / 4	4	123	○		:
Dr/Pc	Funk	8517	MD1_Jazz Funk 3	4 / 4	2	123	○		:
Dr/Pc	Funk	8518	FA1_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8519	FB1_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8520	FC1_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8521	FD1_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8522	MA2_Jazz Funk 3	4 / 4	4	123	○		Latin Percussion Kit
Dr/Pc	Funk	8523	MB2_Jazz Funk 3	4 / 4	4	123	○		:
Dr/Pc	Funk	8524	MC2_Jazz Funk 3	4 / 4	4	123	○		:
Dr/Pc	Funk	8525	MD2_Jazz Funk 3	4 / 4	2	123	○		:
Dr/Pc	Funk	8526	FA2_Jazz Funk 3	4 / 4	1	123	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Funk	8527	FB2_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8528	FC2_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8529	FD2_Jazz Funk 3	4 / 4	1	123	○		:
Dr/Pc	Funk	8530	MA_Jazz Pop	4 / 4	2	102	○		Power Standard Kit 1
Dr/Pc	Funk	8531	MB_Jazz Pop	4 / 4	2	102	○		:
Dr/Pc	Funk	8532	MC_Jazz Pop	4 / 4	2	102	○		:
Dr/Pc	Funk	8533	FA_Jazz Pop	4 / 4	1	102	○		:
Dr/Pc	Funk	8534	FB_Jazz Pop	4 / 4	1	102	○		:
Dr/Pc	Funk	8535	FC_Jazz Pop	4 / 4	1	102	○		:
Dr/Pc	Funk	8536	BA_Jazz Pop	4 / 4	1	102	○		:
Dr/Pc	Funk	8537	MA_Club Jazz 1	4 / 4	4	125	○		:
Dr/Pc	Funk	8538	MB_Club Jazz 1	4 / 4	4	125	○		:
Dr/Pc	Funk	8539	MC_Club Jazz 1	4 / 4	4	125	○		:
Dr/Pc	Funk	8540	FA_Club Jazz 1	4 / 4	1	125	○		:
Dr/Pc	Funk	8541	FB_Club Jazz 1	4 / 4	1	125	○		:
Dr/Pc	Funk	8542	FC_Club Jazz 1	4 / 4	1	125	○		:
Dr/Pc	Funk	8543	BA_Club Jazz 1	4 / 4	1	125	○		:
Dr/Pc	Funk	8544	MA_Club Jazz 2	4 / 4	4	92	○		:
Dr/Pc	Funk	8545	MB_Club Jazz 2	4 / 4	4	92	○		:
Dr/Pc	Funk	8546	MC_Club Jazz 2	4 / 4	4	92	○		:
Dr/Pc	Funk	8547	FA_Club Jazz 2	4 / 4	1	92	○		:
Dr/Pc	Funk	8548	FB_Club Jazz 2	4 / 4	1	92	○		:
Dr/Pc	Funk	8549	FC_Club Jazz 2	4 / 4	1	92	○		:
Dr/Pc	Funk	8550	BA_Club Jazz 2	4 / 4	1	92	○		:
Dr/Pc	Funk	8551	MA_Gospel Funk	4 / 4	4	106	○		:
Dr/Pc	Funk	8552	MB_Gospel Funk	4 / 4	4	106	○		:
Dr/Pc	Funk	8553	MC_Gospel Funk	4 / 4	4	106	○		:
Dr/Pc	Funk	8554	FA_Gospel Funk	4 / 4	1	106	○		:
Dr/Pc	Funk	8555	FB_Gospel Funk	4 / 4	1	106	○		:
Dr/Pc	Funk	8556	FC_Gospel Funk	4 / 4	1	106	○		:
Dr/Pc	Funk	8557	BA_Gospel Funk	4 / 4	1	106	○		:
Dr/Pc	Funk	8558	EA_Gospel Funk	4 / 4	4	106	○		:
Dr/Pc	Funk	8559	EB_Gospel Funk	4 / 4	3	106	○		:
Dr/Pc	Funk	8560	MA_Funk Disco	4 / 4	2	126	○		Power Standard Kit 2
Dr/Pc	Funk	8561	MB_Funk Disco	4 / 4	2	126	○		:
Dr/Pc	Funk	8562	MC_Funk Disco	4 / 4	2	126	○		:
Dr/Pc	Funk	8563	FA_Funk Disco	4 / 4	1	126	○		:
Dr/Pc	Funk	8564	FB_Funk Disco	4 / 4	1	126	○		:
Dr/Pc	Funk	8565	FC_Funk Disco	4 / 4	1	126	○		:
Dr/Pc	Funk	8566	BA_Funk Disco	4 / 4	1	126	○		:
Dr/Pc	Funk	8567	EA_Funk Disco	4 / 4	4	126	○		:
Dr/Pc	Funk	8568	EB_Funk Disco	4 / 4	3	126	○		:
Dr/Pc	Funk	8569	MA_70sDiscoFunk	4 / 4	4	112	○		Power Standard Kit 1
Dr/Pc	Funk	8570	MB_70sDiscoFunk	4 / 4	4	112	○		:
Dr/Pc	Funk	8571	MC_70sDiscoFunk	4 / 4	4	112	○		:
Dr/Pc	Funk	8572	FA_70sDiscoFunk	4 / 4	1	112	○		:
Dr/Pc	Funk	8573	FB_70sDiscoFunk	4 / 4	1	112	○		:
Dr/Pc	Funk	8574	FC_70sDiscoFunk	4 / 4	1	112	○		:
Dr/Pc	Funk	8575	BA_70sDiscoFunk	4 / 4	1	112	○		:
Dr/Pc	Funk	8576	EA_70sDiscoFunk	4 / 4	4	112	○		:
Dr/Pc	Funk	8577	EB_70sDiscoFunk	4 / 4	3	112	○		:
Dr/Pc	Funk	8578	MA_Oak Custom	4 / 4	2	114	○		OakCustom Kit
Dr/Pc	Funk	8579	MB_Oak Custom	4 / 4	2	114	○		:
Dr/Pc	Funk	8580	MC_Oak Custom	4 / 4	2	114	○		:
Dr/Pc	Funk	8581	FB_Oak Custom	4 / 4	1	114	○		:
Dr/Pc	Funk	8582	FC_Oak Custom	4 / 4	1	114	○		:
Dr/Pc	Funk	8583	EA_Oak Custom	4 / 4	4	114	○		:
Dr/Pc	Funk	8584	MA_Chewy Break	4 / 4	4	101	○		Downtempo HipHop Kit
Dr/Pc	Funk	8585	MA_Funk I Like	4 / 4	4	132	○		:
Dr/Pc	Funk	8586	MA_24K Gold	4 / 4	4	106	○		:
Dr/Pc	Funk	8587	MA_My Style	4 / 4	4	112	○		T's Hip Hop Kit
Dr/Pc	Techno	8588	MA_Straight Dance	4 / 4	4	126	○		Straight Dance Kit
Dr/Pc	Techno	8589	MB_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8590	MC_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8591	MD_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8592	ME_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8593	MF_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8594	MG_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8595	MH_Straight Dance	4 / 4	4	126	○		:
Dr/Pc	Techno	8596	MA1_8Z Undergrnd	4 / 4	4	100	○		8Z Noize Xpress
Dr/Pc	Techno	8597	MB1_8Z Undergrnd	4 / 4	4	100	○		:
Dr/Pc	Techno	8598	MC1_8Z Undergrnd	4 / 4	4	100	○		:
Dr/Pc	Techno	8599	FA1_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8600	FB1_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8601	FC1_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8602	BA1_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8603	MA2_8Z Undergrnd	4 / 4	4	100	○		8Z Oxidized
Dr/Pc	Techno	8604	MB2_8Z Undergrnd	4 / 4	4	100	○		:
Dr/Pc	Techno	8605	MC2_8Z Undergrnd	4 / 4	4	100	○		:
Dr/Pc	Techno	8606	FA2_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8607	FB2_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8608	FC2_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8609	BA2_8Z Undergrnd	4 / 4	1	100	○		:
Dr/Pc	Techno	8610	MA3_Underground	4 / 4	4	100	○		Acid Kit
Dr/Pc	Techno	8611	MB3_Underground	4 / 4	4	100	○		:
Dr/Pc	Techno	8612	MC3_Underground	4 / 4	4	100	○		:
Dr/Pc	Techno	8613	FA3_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8614	FB3_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8615	FC3_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8616	BA3_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8617	MA4_Underground	4 / 4	4	100	○		Hard Kit
Dr/Pc	Techno	8618	MB4_Underground	4 / 4	4	100	○		:
Dr/Pc	Techno	8619	MC4_Underground	4 / 4	4	100	○		:
Dr/Pc	Techno	8620	FA4_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8621	FB4_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8622	FC4_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8623	BA4_Underground	4 / 4	1	100	○		:
Dr/Pc	Techno	8624	MA_8Z Destruct	4 / 4	4	115	○		8Z Destruct
Dr/Pc	Techno	8625	MB_8Z Destruct	4 / 4	4	115	○		:
Dr/Pc	Techno	8626	MC_8Z Destruct	4 / 4	4	115	○		:
Dr/Pc	Techno	8627	MD_8Z Destruct	4 / 4	4	115	○		:
Dr/Pc	Techno	8628	ME_8Z Destruct	4 / 4	2	115	○		:
Dr/Pc	Techno	8629	MA_8Z Jarrin	4 / 4	2	105	○		8Z Jarrin
Dr/Pc	Techno	8630	MB_8Z Jarrin	4 / 4	4	105	○		:
Dr/Pc	Techno	8631	MC_8Z Jarrin	4 / 4	4	105	○		:
Dr/Pc	Techno	8632	MD_8Z Jarrin	4 / 4	4	105	○		:
Dr/Pc	Techno	8633	ME_8Z Jarrin	4 / 4	1	105	○		:
Dr/Pc	Techno	8634	MA_8Z Romps	4 / 4	4	125	○		8Z Romps
Dr/Pc	Techno	8635	MB_8Z Romps	4 / 4	4	125	○		:
Dr/Pc	Techno	8636	MC_8Z Romps	4 / 4	4	125	○		:
Dr/Pc	Techno	8637	MD_8Z Romps	4 / 4	4	125	○		:
Dr/Pc	Techno	8638	ME_8Z Romps	4 / 4	2	125	○		:
Dr/Pc	Techno	8639	MA_Dub Element	4 / 4	2	120	○		8Z Dub Element
Dr/Pc	Techno	8640	MB_Dub Element	4 / 4	2	120	○		:
Dr/Pc	Techno	8641	MC_Dub Element	4 / 4	2	120	○		:
Dr/Pc	Techno	8642	FA_Dub Element	4 / 4	1	120	○		:
Dr/Pc	Techno	8643	FB_Dub Element	4 / 4	2	120	○		:
Dr/Pc	Techno	8644	FC_Dub Element	4 / 4	1	120	○		:
Dr/Pc	Techno	8645	BA_Dub Element	4 / 4	1	120	○		:
Dr/Pc	Techno	8646	MA_Electronica1	4 / 4	1	118	○		Tekno Kit
Dr/Pc	Techno	8647	MA_Electronica2	4 / 4	1	118	○		Analog T9 Kit
Dr/Pc	Techno	8648	MA_8Z Heartbrek	4 / 4	4	90	○		8Z Heavy Hearts
Dr/Pc	Techno	8649	MA_Techno 1	4 / 4	4	135	○		House Kit 2
Dr/Pc	Techno	8650	MB_Techno 1	4 / 4	8	135	○		:
Dr/Pc	Techno	8651	MC_Techno 1	4 / 4	8	135	○		:
Dr/Pc	Techno	8652	FA_Techno 1	4 / 4	1	135	○		:
Dr/Pc	Techno	8653	FB_Techno 1	4 / 4	1	135	○		:
Dr/Pc	Techno	8654	FC_Techno 1	4 / 4	1	135	○		:
Dr/Pc	Techno	8655	BA_Techno 1	4 / 4	4	135	○		:
Dr/Pc	Techno	8656	MA_Techno 2	4 / 4	4	137	○		Trance Kit
Dr/Pc	Techno	8657	MB_Techno 2	4 / 4	4	137	○		:
Dr/Pc	Techno	8658	FA_Techno 2	4 / 4	1	137	○		:
Dr/Pc	Techno	8659	FB_Techno 2	4 / 4	2	137	○		:
Dr/Pc	Techno	8660	FC_Techno 2	4 / 4	2	137	○		:
Dr/Pc	Techno	8661	MA1_8Z Trance 1	4 / 4	8	142	○		8Z Psychedelic 1
Dr/Pc	Techno	8662	MB1_8Z Trance 1	4 / 4	4	142	○		:
Dr/Pc	Techno	8663	MC1_8Z Trance 1	4 / 4	16	142	○		:
Dr/Pc	Techno	8664	FA1_8Z Trance 1	4 / 4	2	142	○		:
Dr/Pc	Techno	8665	FB1_8Z Trance 1	4 / 4	8	142	○		:
Dr/Pc	Techno	8666	FC1_8Z Trance 1	4 / 4	8	142	○		:
Dr/Pc	Techno	8667	BA1_8Z Trance 1	4 / 4	1	142	○		:
Dr/Pc	Techno	8668	MA2_Trance 1	4 / 4	8	142	○		Psychedelic Kit
Dr/Pc	Techno	8669	MB2_Trance 1	4 / 4	4	142	○		:
Dr/Pc	Techno	8670	MC2_Trance 1	4 / 4	16	142	○		:
Dr/Pc	Techno	8671	FA2_Trance 1	4 / 4	2	142	○		:
Dr/Pc	Techno	8672	FB2_Trance 1	4 / 4	8	142	○		:
Dr/Pc	Techno	8673	FC2_Trance 1	4 / 4	8	142	○		:
Dr/Pc	Techno	8674	BA2_Trance 1	4 / 4	1	142	○		:
Dr/Pc	Techno	8675	MA_Trance 2	4 / 4	8	135	○		Trance Kit
Dr/Pc	Techno	8676	MB_Trance 2	4 / 4	8	135	○		:
Dr/Pc	Techno	8677	MC_Trance 2	4 / 4	8	135	○		:
Dr/Pc	Techno	8678	FA_Trance 2	4 / 4	1	135	○		:
Dr/Pc	Techno	8679	FB_Trance 2	4 / 4	8	135	○		:
Dr/Pc	Techno	8680	FC_Trance 2	4 / 4	1	135	○		:
Dr/Pc	Techno	8681	BA_Trance 2	4 / 4	1	135	○		:
Dr/Pc	Techno	8682	MA_8Z Trance 3	4 / 4	2	140	○		8Z Psychedelic 1
Dr/Pc	Techno	8683	MB_8Z Trance 3	4 / 4	2	140	○		:
Dr/Pc	Techno	8684	MC_8Z Trance 3	4 / 4	3	140	○		:
Dr/Pc	Techno	8685	FA_8Z Trance 3	4 / 4	2	140	○		:
Dr/Pc	Techno	8686	FB_8Z Trance 3	4 / 4	2	140	○		:
Dr/Pc	Techno	8687	FC_8Z Trance 3	4 / 4	4	140	○		:
Dr/Pc	Techno	8688	BA_8Z Trance 3	4 / 4	1	140	○		:
Dr/Pc	Techno	8689	MA_Trance 4	4 / 4	4	130	○		Analog T8 Kit
Dr/Pc	Techno	8690	MB_Trance 4	4 / 4	2	130	○		:
Dr/Pc	Techno	8691	MC_Trance 4	4 / 4	4	130	○		:
Dr/Pc	Techno	8692	FA_Trance 4	4 / 4	4	130	○		:
Dr/Pc	Techno	8693	FC_Trance 4	4 / 4	4	130	○		:
Dr/Pc	Techno	8694	BA_Trance 4	4 / 4	2	130	○		:
Dr/Pc	Techno	8695	MA_Trance 5	4 / 4	4	140	○		Analog T9 Kit
Dr/Pc	Techno	8696	MB_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8697	MC_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8698	MD_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8699	IA_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8700	FA_Trance 5	4 / 4	4	140	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Techno	8701	FB_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8702	FC_Trance 5	4 / 4	4	140	○		:
Dr/Pc	Techno	8703	ME_Trance 5/Bd1	4 / 4	4	140	○		:
Dr/Pc	Techno	8704	ME_Trance 5/Bd2	4 / 4	4	140	○		:
Dr/Pc	Techno	8705	ME_Trance 5/Bd3	4 / 4	4	140	○		:
Dr/Pc	Techno	8706	ME_Trance 5/Bd4	4 / 4	4	140	○		:
Dr/Pc	Techno	8707	ME_Trance 5/Hh1	4 / 4	4	140	○		:
Dr/Pc	Techno	8708	ME_Trance 5/Hh2	4 / 4	2	140	○		:
Dr/Pc	Techno	8709	ME_Trance 5/Hh3	4 / 4	1	140	○		:
Dr/Pc	Techno	8710	ME_Trance 5/Hh4	4 / 4	1	140	○		:
Dr/Pc	Techno	8711	ME_Trance 5/Hh5	4 / 4	1	140	○		:
Dr/Pc	Techno	8712	ME_Trance 5/Hh6	4 / 4	1	140	○		:
Dr/Pc	Techno	8713	ME_Trance 5/Hh7	4 / 4	1	140	○		:
Dr/Pc	Techno	8714	ME_Trance 5/Clp	4 / 4	4	140	○		:
Dr/Pc	Techno	8715	FD_Trance 5/Sdf	4 / 4	4	140	○		:
Dr/Pc	Techno	8716	MA1_PsycheTrance	4 / 4	4	143	○		Psychedelic Kit
Dr/Pc	Techno	8717	MB1_PsycheTrance	4 / 4	2	143	○		:
Dr/Pc	Techno	8718	MC1_PsycheTrance	4 / 4	2	143	○		:
Dr/Pc	Techno	8719	MD1_PsycheTrance	4 / 4	4	143	○		:
Dr/Pc	Techno	8720	ME1_PsycheTrance	4 / 4	4	143	○		:
Dr/Pc	Techno	8721	MF1_PsycheTrance	4 / 4	4	143	○		:
Dr/Pc	Techno	8722	FA1_PsycheTrance	4 / 4	1	143	○		:
Dr/Pc	Techno	8723	FB1_PsycheTrance	4 / 4	1	143	○		:
Dr/Pc	Techno	8724	FC1_PsycheTrance	4 / 4	1	143	○		:
Dr/Pc	Techno	8725	BA1_PsycheTrance	4 / 4	4	143	○		:
Dr/Pc	Techno	8726	MA2_8Z Psyche	4 / 4	2	140	○		8Z Psychedelic 1
Dr/Pc	Techno	8727	MB2_8Z Psyche	4 / 4	2	140	○		:
Dr/Pc	Techno	8728	MC2_8Z Psyche	4 / 4	2	140	○		:
Dr/Pc	Techno	8729	FA2_8Z Psyche	4 / 4	1	140	○		:
Dr/Pc	Techno	8730	FB2_8Z Psyche	4 / 4	1	140	○		:
Dr/Pc	Techno	8731	FC2_8Z Psyche	4 / 4	1	140	○		:
Dr/Pc	Techno	8732	BA2_8Z Psyche	4 / 4	2	140	○		:
Dr/Pc	Techno	8733	MA3_8Z Psyche	4 / 4	1	135	○		8Z Psychedelic 2
Dr/Pc	Techno	8734	MB3_8Z Psyche	4 / 4	1	135	○		:
Dr/Pc	Techno	8735	MC3_8Z Psyche	4 / 4	2	135	○		:
Dr/Pc	Techno	8736	FA3_8Z Psyche	4 / 4	2	135	○		:
Dr/Pc	Techno	8737	FB3_8Z Psyche	4 / 4	1	135	○		:
Dr/Pc	Techno	8738	FC3_8Z Psyche	4 / 4	1	135	○		:
Dr/Pc	Techno	8739	BA3_8Z Psyche	4 / 4	1	135	○		:
Dr/Pc	Techno	8740	MA_Trance Kit 1	4 / 4	4	136	○		Trance Kit
Dr/Pc	Techno	8741	MA_Trance Kit 2	4 / 4	4	136	○		:
Dr/Pc	Techno	8742	MA_Trance Kit 3	4 / 4	4	136	○		:
Dr/Pc	Techno	8743	MA_Trance Kit 4	4 / 4	4	136	○		:
Dr/Pc	Techno	8744	MA_Trance Kit 5	4 / 4	4	136	○		:
Dr/Pc	Techno	8745	MA_Trance Kit 6	4 / 4	4	136	○		:
Dr/Pc	Techno	8746	MA_Trance Kit 7	4 / 4	1	136	○		:
Dr/Pc	Techno	8747	MA_Trance Kit 8	4 / 4	2	136	○		:
Dr/Pc	Techno	8748	MA_Trance Kit 9	4 / 4	2	136	○		:
Dr/Pc	Techno	8749	MA_Trance Kit10	4 / 4	2	136	○		:
Dr/Pc	Techno	8750	MA_Trance Kit11	4 / 4	2	136	○		:
Dr/Pc	Techno	8751	MA_Trance Kit12	4 / 4	4	136	○		:
Dr/Pc	Techno	8752	MA_8Z TrancBsc1	4 / 4	1	136	○		8Z Trance Basics
Dr/Pc	Techno	8753	MA_8Z TrancBsc2	4 / 4	1	136	○		:
Dr/Pc	Techno	8754	MA_8Z TrancBsc3	4 / 4	1	136	○		:
Dr/Pc	Techno	8755	MA_8Z TrancBsc4	4 / 4	1	136	○		:
Dr/Pc	Techno	8756	MA_8Z TrancBsc5	4 / 4	4	136	○		:
Dr/Pc	Techno	8757	MA_Trance Club1	4 / 4	1	128	○		Trance Kit
Dr/Pc	Techno	8758	MA_Trance Club2	4 / 4	1	128	○		:
Dr/Pc	Techno	8759	MA_Trance Club3	4 / 4	1	128	○		:
Dr/Pc	Techno	8760	MA_Trance Club4	4 / 4	1	128	○		:
Dr/Pc	Techno	8761	MA_Trance Club5	4 / 4	1	128	○		:
Dr/Pc	Techno	8762	MA_Trance Club6	4 / 4	1	128	○		:
Dr/Pc	Techno	8763	MA_Trance Vision	4 / 4	4	134	○		8Z Trance Basics 2
Dr/Pc	Techno	8764	MB_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8765	MC_Trance Vision	4 / 4	8	134	○		:
Dr/Pc	Techno	8766	MD_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8767	ME_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8768	MF_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8769	MG_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8770	MH_Trance Vision	4 / 4	4	134	○		:
Dr/Pc	Techno	8771	MA_Dream Trance	4 / 4	4	140	○		:
Dr/Pc	Techno	8772	MB_Dream Trance	4 / 4	4	140	○		:
Dr/Pc	Techno	8773	MC_Dream Trance	4 / 4	4	140	○		:
Dr/Pc	Techno	8774	MD_Dream Trance	4 / 4	4	140	○		:
Dr/Pc	Techno	8775	MA_MagneticTrance	4 / 4	4	130	○		8Z Jarrin
Dr/Pc	Techno	8776	MB_MagneticTrance	4 / 4	4	130	○		:
Dr/Pc	Techno	8777	MC_MagneticTrance	4 / 4	4	130	○		:
Dr/Pc	Techno	8778	MD_MagneticTrance	4 / 4	4	130	○		:
Dr/Pc	Techno	8779	MA_Electrix	4 / 4	2	119	○		Wacko Kit
Dr/Pc	Techno	8780	MB_Electrix	4 / 4	2	119	○		:
Dr/Pc	Techno	8781	MC_Electrix	4 / 4	2	119	○		:
Dr/Pc	Techno	8782	MD_Electrix	4 / 4	2	119	○		:
Dr/Pc	Techno	8783	ME_Electrix	4 / 4	2	119	○		:
Dr/Pc	Techno	8784	FA_Electrix	4 / 4	1	119	○		:
Dr/Pc	Techno	8785	MA_Cool Breakz	4 / 4	2	116	○		8Z Tom Heartz
Dr/Pc	Techno	8786	MB_Cool Breakz	4 / 4	2	116	○		:
Dr/Pc	Techno	8787	MC_Cool Breakz	4 / 4	2	116	○		:
Dr/Pc	Techno	8788	FA_Cool Breakz	4 / 4	2	116	○		:
Dr/Pc	Techno	8789	FB_Cool Breakz	4 / 4	2	116	○		:
Dr/Pc	Techno	8790	FC_Cool Breakz	4 / 4	2	116	○		:
Dr/Pc	Techno	8791	MA_8Z ErlyLoFi1	4 / 4	1	136	○		8Z Early Lo-Fi
Dr/Pc	Techno	8792	MA_8Z ErlyLoFi2	4 / 4	1	136	○		:
Dr/Pc	Techno	8793	MA_8Z ErlyLoFi3	4 / 4	1	136	○		:
Dr/Pc	Techno	8794	MA_8Z ErlyLoFi4	4 / 4	1	136	○		:
Dr/Pc	Techno	8795	MA_8Z ErlyLoFi5	4 / 4	1	136	○		:
Dr/Pc	Techno	8796	MA_8Z NoizeXpr1	4 / 4	4	136	○		8Z Noize Xpress
Dr/Pc	Techno	8797	MA_8Z NoizeXpr2	4 / 4	4	136	○		:
Dr/Pc	Techno	8798	MA_8Z NoizeXpr3	4 / 4	4	136	○		:
Dr/Pc	Techno	8799	MA_8Z NoizeXpr4	4 / 4	4	136	○		:
Dr/Pc	Techno	8800	MA_8Z NoizeXpr5	4 / 4	4	136	○		:
Dr/Pc	Techno	8801	MA_8Z ReversBt1	4 / 4	1	136	○		8Z Reverse Beatz
Dr/Pc	Techno	8802	MA_8Z ReversBt2	4 / 4	1	136	○		:
Dr/Pc	Techno	8803	MA_8Z ReversBt3	4 / 4	1	136	○		:
Dr/Pc	Techno	8804	MA_8Z ReversBt4	4 / 4	1	136	○		:
Dr/Pc	Techno	8805	MA_8Z CrushDnc1	4 / 4	2	136	○		8Z Crush Dance
Dr/Pc	Techno	8806	MA_8Z CrushDnc2	4 / 4	2	136	○		:
Dr/Pc	Techno	8807	MA_8Z CrushDnc3	4 / 4	4	136	○		:
Dr/Pc	Techno	8808	MA_8Z CrushDnc4	4 / 4	2	136	○		:
Dr/Pc	Techno	8809	MA_8Z CrushDnc5	4 / 4	4	136	○		:
Dr/Pc	Techno	8810	MA_16thMelodicPerc1	4 / 4	2	140	○		Hip Hop Kit 1
Dr/Pc	Techno	8811	MA_16thMelodicPerc2	4 / 4	2	140	○		:
Dr/Pc	Techno	8812	MA_16thMelodicPerc3	4 / 4	2	140	○		:
Dr/Pc	Techno	8813	MA_16thMelodicPerc4	4 / 4	2	140	○		:
Dr/Pc	House	8814	MA_Cool Club	4 / 4	4	120	○		Norman
Dr/Pc	House	8815	MB_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8816	MC_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8817	MD_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8818	ME_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8819	MF_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8820	MG_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8821	MH_Cool Club	4 / 4	4	120	○		:
Dr/Pc	House	8822	MA_80s Drums	4 / 4	4	140	○		80s Drum Machine Kit
Dr/Pc	House	8823	MB_80s Drums	4 / 4	4	140	○		:
Dr/Pc	House	8824	MC_80s Drums	4 / 4	2	140	○		:
Dr/Pc	House	8825	MD_80s Drums	4 / 4	4	140	○		:
Dr/Pc	House	8826	ME_80s Drums	4 / 4	2	140	○		:
Dr/Pc	House	8827	MF_80s Drums	4 / 4	2	140	○		:
Dr/Pc	House	8828	MG_80s Drums	4 / 4	2	140	○		:
Dr/Pc	House	8829	MH_80s Drums	4 / 4	4	88	○		:
Dr/Pc	House	8830	MA_Reggaeton 1	4 / 4	2	90	○		Dancefloor Kit
Dr/Pc	House	8831	MB_Reggaeton 1	4 / 4	4	90	○		:
Dr/Pc	House	8832	MC_Reggaeton 1	4 / 4	2	90	○		:
Dr/Pc	House	8833	MD_Reggaeton 1	4 / 4	4	90	○		:
Dr/Pc	House	8834	ME_Reggaeton 1	4 / 4	2	90	○		:
Dr/Pc	House	8835	MF_Reggaeton 1	4 / 4	4	90	○		:
Dr/Pc	House	8836	MG_Reggaeton 1	4 / 4	4	90	○		:
Dr/Pc	House	8837	MH_Reggaeton 1	4 / 4	4	90	○		:
Dr/Pc	House	8838	MA_Tropical House 1	4 / 4	8	110	○		HouseCompressedKit
Dr/Pc	House	8839	MB_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8840	MC_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8841	MD_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8842	ME_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8843	MF_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8844	MG_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8845	MH_Tropical House 1	4 / 4	4	110	○		:
Dr/Pc	House	8846	MA_UK Garage 1	4 / 4	8	132	○		Garage Kit
Dr/Pc	House	8847	MB_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8848	MC_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8849	MD_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8850	ME_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8851	MF_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8852	MG_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8853	MH_UK Garage 1	4 / 4	4	132	○		:
Dr/Pc	House	8854	MA_Pick It Up	4 / 4	4	180	○		Pick It Up
Dr/Pc	House	8855	MB_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8856	MC_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8857	MD_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8858	ME_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8859	MF_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8860	MG_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8861	MH_Pick It Up	4 / 4	4	180	○		:
Dr/Pc	House	8862	MA_Dance Loop 1	4 / 4	2	120	○		Rackmount Bass
Dr/Pc	House	8863	MA_Dance Loop 2	4 / 4	4	120	○		:
Dr/Pc	House	8864	MA_Dance Loop 3	4 / 4	2	120	○		:
Dr/Pc	House	8865	MA_Dance Loop 4	4 / 4	2	120	○		:
Dr/Pc	House	8866	MA_Dance Loop 5	4 / 4	2	120	○		:
Dr/Pc	House	8867	MA_Dance Loop 6	4 / 4	2	120	○		:
Dr/Pc	House	8868	MA_Dance Loop 7	4 / 4	2	120	○		:
Dr/Pc	House	8869	FA_Riser Fill	4 / 4	2	120	○		:
Dr/Pc	House	8870	MA_EDM Chart 1-1	4 / 4	4	122	○		Dancefloor Kit
Dr/Pc	House	8871	MA_EDM Chart 2-1	4 / 4	4	120	○		T's EDM Kit
Dr/Pc	House	8872	MA_EDM Chart 2-2	4 / 4	4	93	○		Dancefloor Kit
Dr/Pc	House	8873	MA_EDM Chart 3-1	4 / 4	4	80	○		DUB Kit
Dr/Pc	House	8874	MA_EDM Chart 4-1	4 / 4	3	102	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	House	8875	MA_EDM Chart 4-2	4 / 4	2	96	O		:
Dr/Pc	House	8876	MA_EDM Chart 4-3	4 / 4	2	96	O		:
Dr/Pc	House	8877	MA_EDM Chart 5-1	4 / 4	4	129	O		Dancefloor Kit
Dr/Pc	House	8878	MA_EDM Chart 5-2	4 / 4	4	97	O		:
Dr/Pc	House	8879	MA_EDM Chart 6	4 / 4	4	75	O		T's EDM Kit
Dr/Pc	House	8880	MA_EDM Chart 7	4 / 4	4	113	O		:
Dr/Pc	House	8881	MA_EDM Electro 1	4 / 4	4	145	O		:
Dr/Pc	House	8882	MA_EDM Electro 2	4 / 4	4	146	O		:
Dr/Pc	House	8883	MA_EDM Electro 3	4 / 4	4	123	O		:
Dr/Pc	House	8884	MA_EDM Electro 4	4 / 4	4	123	O		Electro Kit
Dr/Pc	House	8885	MA_Strobo Cop	4 / 4	4	120	O		T's EDM Kit
Dr/Pc	House	8886	MB_Strobo Cop	4 / 4	4	120	O		:
Dr/Pc	House	8887	MC_Strobo Cop	4 / 4	4	120	O		:
Dr/Pc	House	8888	MD_Strobo Cop	4 / 4	4	120	O		:
Dr/Pc	House	8889	MA_Garnier Street	4 / 4	4	123	O		Electro Kit
Dr/Pc	House	8890	MA_Love Town	4 / 4	2	122	O		:
Dr/Pc	House	8891	MA_Deep Lo	4 / 4	2	126	O		T's Hip Hop Kit
Dr/Pc	House	8892	MA_Who's House	4 / 4	1	122	O		EDM Kit
Dr/Pc	House	8893	MA_Shoot 4 TheStars	4 / 4	1	122	O		House-Techno Kit
Dr/Pc	House	8894	MA_EDM Garage 1	4 / 4	4	123	O		Dancefloor Kit
Dr/Pc	House	8895	MA_EDM Garage 2	4 / 4	4	123	O		:
Dr/Pc	House	8896	MA_EDM Garage 3	4 / 4	4	123	O		Electro Kit
Dr/Pc	House	8897	MA_EDM Urban 1	4 / 4	4	104	O		T's EDM Kit
Dr/Pc	House	8898	MA_EDM Urban 2	4 / 4	2	87	O		Electro Kit
Dr/Pc	House	8899	MA_EDM Urban 3	4 / 4	1	87	O		:
Dr/Pc	House	8900	MA_Tropical House 2	4 / 4	4	102	O		House-Techno Kit
Dr/Pc	House	8901	MA_Tropical House 3	4 / 4	4	100	O		:
Dr/Pc	House	8902	MA_Tropical House 4	4 / 4	4	105	O		:
Dr/Pc	House	8903	MA_Tropical House 5	4 / 4	4	115	O		Dancefloor Kit
Dr/Pc	House	8904	MA_Island Breeze	4 / 4	2	100	O		DUB Kit
Dr/Pc	House	8905	MA_Chill Water	4 / 4	4	93	O		Downtempo HipHop Kit
Dr/Pc	House	8906	MA_The Crew	4 / 4	2	102	O		Trap Kit
Dr/Pc	House	8907	MA_Smoke Screen	4 / 4	2	109	O		Electro Kit
Dr/Pc	House	8908	MA_The Stomp Three	4 / 4	2	89	O		T's Hip Hop Kit
Dr/Pc	House	8909	MA_EDM DanceHall 1	4 / 4	4	98	O		DUB Kit
Dr/Pc	House	8910	MA_EDM DanceHall 2	4 / 4	4	100	O		House-Techno Kit
Dr/Pc	House	8911	MA_EDM DanceHall 3	4 / 4	4	100	O		:
Dr/Pc	House	8912	MA_Readhead	4 / 4	4	97	O		Electro Kit
Dr/Pc	House	8913	MA_Island 1	4 / 4	4	100	O		T's Hip Hop Kit
Dr/Pc	House	8914	MA_Island 2	4 / 4	4	100	O		:
Dr/Pc	House	8915	MA_Island 3	4 / 4	4	100	O		:
Dr/Pc	House	8916	MA_Slouch	4 / 4	4	89	O		:
Dr/Pc	House	8917	MA_The Stomp Two	4 / 4	2	90	O		:
Dr/Pc	House	8918	MA_The Job	4 / 4	4	93	O		DUB Kit
Dr/Pc	House	8919	MA_Festival Dance	4 / 4	2	115	O		Dancefloor Kit
Dr/Pc	House	8920	MA_Future Retro	4 / 4	4	84	O		Electro Kit
Dr/Pc	House	8921	MA_You	4 / 4	4	78	O		European EDM Kit 2
Dr/Pc	House	8922	MB_You	4 / 4	4	77	O		:
Dr/Pc	House	8923	MA_Hospital	4 / 4	4	120	O		T's Hip Hop Kit
Dr/Pc	House	8924	MA_Origin	4 / 4	4	110	O		:
Dr/Pc	House	8925	MA_hehe	4 / 4	4	130	O		T's EDM Kit
Dr/Pc	House	8926	MA_EDM Drum 01	4 / 4	1	130	O		European EDM Kit 1
Dr/Pc	House	8927	MA_EDM Drum 02	4 / 4	1	130	O		:
Dr/Pc	House	8928	MA_EDM Drum 03	4 / 4	2	130	O		:
Dr/Pc	House	8929	MA_EDM Drum 04	4 / 4	2	130	O		:
Dr/Pc	House	8930	MA_EDM Drum 05	4 / 4	2	130	O		:
Dr/Pc	House	8931	MA_EDM Drum 06	4 / 4	2	130	O		:
Dr/Pc	House	8932	MA_EDM Drum 07	4 / 4	2	130	O		:
Dr/Pc	House	8933	MA_EDM Drum 08	4 / 4	2	130	O		:
Dr/Pc	House	8934	MA_EDM Drum 09	4 / 4	2	130	O		:
Dr/Pc	House	8935	MA_EDM Drum 10	4 / 4	2	130	O		:
Dr/Pc	House	8936	MA_EDM Drum 11	4 / 4	2	130	O		:
Dr/Pc	House	8937	MA_EDM Drum 12	4 / 4	2	130	O		:
Dr/Pc	House	8938	MA_EDM Drum 13	4 / 4	2	130	O		:
Dr/Pc	House	8939	MA_Dance Floor 1-1	4 / 4	1	130	O		:
Dr/Pc	House	8940	MA_Dance Floor 1-2	4 / 4	1	130	O		:
Dr/Pc	House	8941	MA_Dance Floor 1-3	4 / 4	1	130	O		:
Dr/Pc	House	8942	MA_Dance Floor 1-4	4 / 4	1	130	O		:
Dr/Pc	House	8943	MA_Dance Floor 1-5	4 / 4	1	130	O		:
Dr/Pc	House	8944	MA_Dance Floor 2-1	4 / 4	1	130	O		:
Dr/Pc	House	8945	MA_Dance Floor 2-2	4 / 4	1	130	O		:
Dr/Pc	House	8946	MA_Dance Floor 2-3	4 / 4	1	130	O		:
Dr/Pc	House	8947	MA_Dance Floor 2-4	4 / 4	1	130	O		:
Dr/Pc	House	8948	MA_Dance Floor 2-5	4 / 4	1	130	O		:
Dr/Pc	House	8949	MA_Dance Floor 3-1	4 / 4	1	130	O		:
Dr/Pc	House	8950	MA_Dance Floor 3-2	4 / 4	1	130	O		:
Dr/Pc	House	8951	MA_Dance Floor 3-3	4 / 4	1	130	O		:
Dr/Pc	House	8952	MA_Dance Floor 3-4	4 / 4	1	130	O		:
Dr/Pc	House	8953	MA_Dance Floor 3-5	4 / 4	1	130	O		:
Dr/Pc	House	8954	MA_16th Perc Arp 1	4 / 4	2	160	O		Nu Hip Hop Kit 2
Dr/Pc	House	8955	MA_16th Perc Arp 2	4 / 4	2	160	O		:
Dr/Pc	House	8956	MA_16th Perc Arp 3	4 / 4	2	160	O		:
Dr/Pc	House	8957	MA_16th Perc Arp 4	4 / 4	2	160	O		:
Dr/Pc	House	8958	MA_Drums perc 1-1	4 / 4	2	128	O		House Compressed Kit
Dr/Pc	House	8959	MA_Drums perc 1-2	4 / 4	2	128	O		:
Dr/Pc	House	8960	MA_Drums perc 2-1	4 / 4	2	128	O		:
Dr/Pc	House	8961	MA_Drums perc 2-2	4 / 4	2	128	O		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	House	8962	MA_Drums perc 3-1	4 / 4	2	130	O		Human Kit
Dr/Pc	House	8963	MA_Drums perc 3-2	4 / 4	2	130	O		:
Dr/Pc	House	8964	MA_Drums perc 3-3	4 / 4	2	130	O		:
Dr/Pc	House	8965	MA_Drums perc 3-4	4 / 4	2	130	O		:
Dr/Pc	House	8966	MA_Take It Away	4 / 4	4	110	O		House Kit 1
Dr/Pc	House	8967	MA_Straight Up	4 / 4	4	120	O		:
Dr/Pc	House	8968	MA_The Count	4 / 4	4	125	O		:
Dr/Pc	House	8969	MA_Clap Em	4 / 4	4	128	O		:
Dr/Pc	House	8970	MA_Hamtramck Funk	4 / 4	4	130	O		:
Dr/Pc	House	8971	MA_4 Here Or 2 Go	4 / 4	4	124	O		Nu Hip Hop Kit 1
Dr/Pc	House	8972	MA_Dollar Break	4 / 4	1	84	O		EDM Kit
Dr/Pc	House	8973	MA_Bakin	4 / 4	2	122	O		:
Dr/Pc	House	8974	MA_Bookin	4 / 4	1	122	O		:
Dr/Pc	House	8975	MA_Berlin	4 / 4	4	128	O		:
Dr/Pc	House	8976	MA_River Tech	4 / 4	4	128	O		:
Dr/Pc	House	8977	MA_Shake Down	4 / 4	4	128	O		:
Dr/Pc	House	8978	MA_Smackin	4 / 4	2	128	O		:
Dr/Pc	House	8979	MA_Snare Roll	4 / 4	4	128	O		:
Dr/Pc	House	8980	MA_Snare Stalker	4 / 4	4	150	O		:
Dr/Pc	House	8981	MA_UpSweeper	4 / 4	4	128	O		:
Dr/Pc	House	8982	MA_One Bar Jay	4 / 4	1	133	O		:
Dr/Pc	House	8983	MA_Swing Set	4 / 4	2	133	O		:
Dr/Pc	House	8984	MA_Chopper	4 / 4	2	140	O		:
Dr/Pc	House	8985	MA_Derb Sterp 1	4 / 4	1	140	O		:
Dr/Pc	House	8986	MA_Derb Sterp 2	4 / 4	2	140	O		:
Dr/Pc	House	8987	MA_Lightness	4 / 4	2	140	O		:
Dr/Pc	House	8988	MA_Snake Step	4 / 4	4	140	O		:
Dr/Pc	House	8989	MA_Octo Cooler	4 / 4	4	150	O		:
Dr/Pc	House	8990	MA_Hands Off	4 / 4	2	125	O		House-Techno Kit
Dr/Pc	House	8991	MA_Hands On	4 / 4	2	125	O		:
Dr/Pc	House	8992	MA_Hat Swag	4 / 4	2	128	O		:
Dr/Pc	House	8993	MA_Beat Stealer	4 / 4	2	128	O		:
Dr/Pc	House	8994	MA_Beatbox	4 / 4	2	128	O		:
Dr/Pc	House	8995	MA_Broken Chair	4 / 4	2	128	O		:
Dr/Pc	House	8996	MA_Clap 2 This	4 / 4	2	128	O		:
Dr/Pc	House	8997	MA_Cream Filled	4 / 4	4	128	O		:
Dr/Pc	House	8998	MA_Just The BD	4 / 4	2	128	O		:
Dr/Pc	House	8999	MA_Just The BD & SD	4 / 4	2	128	O		:
Dr/Pc	House	9000	MA_MarvinOscillator	4 / 4	2	128	O		:
Dr/Pc	House	9001	MA_Snare Builder	4 / 4	2	128	O		:
Dr/Pc	House	9002	MA_Straight Knock	4 / 4	2	128	O		:
Dr/Pc	House	9003	MA_Street Creep	4 / 4	2	128	O		:
Dr/Pc	House	9004	MA_Street Sweep	4 / 4	4	128	O		:
Dr/Pc	House	9005	MA_Strobe Drums	4 / 4	1	128	O		:
Dr/Pc	House	9006	MA_The Bottom	4 / 4	2	128	O		:
Dr/Pc	House	9007	MA_Tom Foolery One	4 / 4	2	128	O		:
Dr/Pc	House	9008	MA_Tom Foolery Two	4 / 4	2	128	O		:
Dr/Pc	House	9009	MA_Wood Funk	4 / 4	2	128	O		:
Dr/Pc	House	9010	MA_Work The Buttons	4 / 4	2	128	O		:
Dr/Pc	House	9011	MA_Try Not Three	4 / 4	2	115	O		Electro Kit
Dr/Pc	House	9012	MA_Try Not Two	4 / 4	1	115	O		:
Dr/Pc	House	9013	MA_All Systems Go	4 / 4	1	118	O		:
Dr/Pc	House	9014	MA_Work That	4 / 4	1	118	O		:
Dr/Pc	House	9015	MA_Wreck New Jack	4 / 4	2	118	O		:
Dr/Pc	House	9016	MA_Wreck No Kick	4 / 4	1	118	O		:
Dr/Pc	House	9017	MA_Pacific Beat	4 / 4	2	122	O		:
Dr/Pc	House	9018	MA_Sprague Beat	4 / 4	2	122	O		:
Dr/Pc	House	9019	MA_Gratiot Beat	4 / 4	1	125	O		:
Dr/Pc	House	9020	MA_Hard Motion	4 / 4	1	125	O		:
Dr/Pc	House	9021	MA_Gators	4 / 4	2	125	O		:
Dr/Pc	House	9022	MA_Lasers	4 / 4	2	125	O		:
Dr/Pc	House	9023	MA_Raiders	4 / 4	1	125	O		:
Dr/Pc	House	9024	MA_Rogue Beug	4 / 4	1	125	O		:
Dr/Pc	House	9025	MA_Spanish Frog	4 / 4	2	125	O		:
Dr/Pc	House	9026	MA_Zap Maverick	4 / 4	1	125	O		:
Dr/Pc	House	9027	MA_Zap Nation	4 / 4	1	125	O		:
Dr/Pc	House	9028	MA_Clap 2 TheFuture	4 / 4	2	130	O		:
Dr/Pc	House	9029	MA_Lay It Down	4 / 4	2	130	O		:
Dr/Pc	House	9030	MA_Movin Up	4 / 4	1	130	O		:
Dr/Pc	House	9031	MA_Burning Up	4 / 4	4	128	O		T's EDM Kit
Dr/Pc	House	9032	MA_All Together 1	4 / 4	4	128	O		:
Dr/Pc	House	9033	MA_All Together 2	4 / 4	4	128	O		:
Dr/Pc	House	9034	MA_B2L	4 / 4	4	122	O		:
Dr/Pc	House	9035	MA_Cassette Deck	4 / 4	4	130	O		:
Dr/Pc	House	9036	MA_Like To Build	4 / 4	4	130	O		:
Dr/Pc	House	9037	MA_MausTrap	4 / 4	4	130	O		:
Dr/Pc	House	9038	MA_MotorSKills	4 / 4	4	135	O		:
Dr/Pc	House	9039	MA_UpJUmp	4 / 4	4	128	O		:
Dr/Pc	House	9040	MA_Dream Dance	4 / 4	4	136	O		House Kit 1
Dr/Pc	House	9041	MC_Dream Dance	4 / 4	4	136	O		:
Dr/Pc	House	9042	MD_Dream Dance	4 / 4	4	136	O		:
Dr/Pc	House	9043	IA_Dream Dance	4 / 4	4	136	O		:
Dr/Pc	House	9044	ME_Dream Dance/Bd1	4 / 4	4	136	O		:
Dr/Pc	House	9045	ME_Dream Dance/Bd2	4 / 4	1	136	O		:
Dr/Pc	House	9046	ME_Dream Dance/Bd3	4 / 4	4	136	O		:
Dr/Pc	House	9047	ME_Dream Dance/Bd4	4 / 4	4	136	O		:
Dr/Pc	House	9048	ME_Dream Dance/Bd5	4 / 4	4	136	O		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	House	9049	ME_Dream Dance/Hh1	4 / 4	1	136	○		:
Dr/Pc	House	9050	ME_Dream Dance/Hh2	4 / 4	4	136	○		:
Dr/Pc	House	9051	ME_Dream Dance/Hh3	4 / 4	2	136	○		:
Dr/Pc	House	9052	ME_Dream Dance/Hh4	4 / 4	4	136	○		Analog T8 Kit
Dr/Pc	House	9053	ME_Dream Dance/Clp	4 / 4	4	136	○		House Kit 1
Dr/Pc	House	9054	ME_Dream Dance/Pc1	4 / 4	4	136	○		Percussion Kit
Dr/Pc	House	9055	ME_Dream Dance/Pc2	4 / 4	2	136	○		Analog T8 Kit
Dr/Pc	House	9056	ME_Dream Dance/Pc3	4 / 4	4	136	○		:
Dr/Pc	House	9057	FA_Dream Dance/Sdf	4 / 4	4	136	○		House Kit 1
Dr/Pc	House	9058	MA1_Ibiza	4 / 4	2	135	○		:
Dr/Pc	House	9059	MB1_Ibiza	4 / 4	2	135	○		:
Dr/Pc	House	9060	MC1_Ibiza	4 / 4	2	135	○		:
Dr/Pc	House	9061	MD1_Ibiza	4 / 4	2	135	○		:
Dr/Pc	House	9062	IA1_Ibiza	4 / 4	8	135	○		:
Dr/Pc	House	9063	FA1_Ibiza	4 / 4	1	135	○		:
Dr/Pc	House	9064	FB1_Ibiza	4 / 4	1	135	○		:
Dr/Pc	House	9065	FC1_Ibiza	4 / 4	2	135	○		:
Dr/Pc	House	9066	MA2_Ibiza	4 / 4	2	135	○		Dry Standard Kit
Dr/Pc	House	9067	FB2_Ibiza	4 / 4	1	135	○		Dry Standard Kit (PB Range=24)
Dr/Pc	House	9068	MA_Retro Pop	4 / 4	1	126	○		House Kit 1
Dr/Pc	House	9069	MC_Retro Pop	4 / 4	2	126	○		:
Dr/Pc	House	9070	FC_Retro Pop	4 / 4	1	126	○		:
Dr/Pc	House	9071	MA_Euro Teck	4 / 4	2	140	○		Tekno Kit
Dr/Pc	House	9072	MB_Euro Teck	4 / 4	2	140	○		:
Dr/Pc	House	9073	MC_Euro Teck	4 / 4	2	140	○		:
Dr/Pc	House	9074	MD_Euro Teck	4 / 4	2	140	○		:
Dr/Pc	House	9075	ME_Euro Teck	4 / 4	2	140	○		:
Dr/Pc	House	9076	MA_Disco House	4 / 4	4	126	○		Acid Kit
Dr/Pc	House	9077	MB_Disco House	4 / 4	4	126	○		:
Dr/Pc	House	9078	MC_Disco House	4 / 4	4	126	○		:
Dr/Pc	House	9079	FA_Disco House	4 / 4	1	126	○		:
Dr/Pc	House	9080	FB_Disco House	4 / 4	1	126	○		:
Dr/Pc	House	9081	FC_Disco House	4 / 4	1	126	○		:
Dr/Pc	House	9082	BA_Disco House	4 / 4	1	126	○		:
Dr/Pc	House	9083	MA1_Club House	4 / 4	1	128	○		House Kit 1
Dr/Pc	House	9084	MB1_Club House	4 / 4	1	128	○		:
Dr/Pc	House	9085	MC1_Club House	4 / 4	1	128	○		:
Dr/Pc	House	9086	MD1_Club House	4 / 4	1	128	○		:
Dr/Pc	House	9087	IA1_Club House	4 / 4	2	128	○		:
Dr/Pc	House	9088	FA1_Club House	4 / 4	1	128	○		:
Dr/Pc	House	9089	FB1_Club House	4 / 4	1	128	○		:
Dr/Pc	House	9090	FC1_Club House	4 / 4	2	128	○		:
Dr/Pc	House	9091	MD2_Club House	4 / 4	1	128	○		Hyper Standard Kit
Dr/Pc	House	9092	IA2_Club House	4 / 4	1	128	○		House Kit 1
Dr/Pc	House	9093	FB2_Club House	4 / 4	1	128	○		Hyper Standard Kit
Dr/Pc	House	9094	MA_House 1	4 / 4	2	123	○		Analog T9 Kit
Dr/Pc	House	9095	MA_House 2	4 / 4	1	123	○		Garage Kit
Dr/Pc	House	9096	MA_House 3	4 / 4	2	127	○		:
Dr/Pc	House	9097	MA_House 4	4 / 4	2	130	○		Hip Hop Kit 3
Dr/Pc	House	9098	MB_House 4	4 / 4	2	130	○		:
Dr/Pc	House	9099	MC_House 4	4 / 4	2	130	○		:
Dr/Pc	House	9100	MA_House 5	4 / 4	4	120	○		House Kit 1
Dr/Pc	House	9101	MB_House 5	4 / 4	1	120	○		:
Dr/Pc	House	9102	MC_House 5	4 / 4	1	120	○		:
Dr/Pc	House	9103	MD_House 5	4 / 4	1	120	○		:
Dr/Pc	House	9104	MA_House 6	4 / 4	1	120	○		:
Dr/Pc	House	9105	MB_House 6	4 / 4	1	120	○		:
Dr/Pc	House	9106	MC_House 6	4 / 4	1	120	○		:
Dr/Pc	House	9107	MA_House 7	4 / 4	1	120	○		:
Dr/Pc	House	9108	MB_House 7	4 / 4	1	120	○		:
Dr/Pc	House	9109	MA_House 8	4 / 4	2	120	○		:
Dr/Pc	House	9110	MA_House 9	4 / 4	4	120	○		:
Dr/Pc	House	9111	MA_House 10	4 / 4	1	120	○		:
Dr/Pc	House	9112	MB_House 10	4 / 4	1	120	○		:
Dr/Pc	House	9113	MA_House 11	4 / 4	1	120	○		:
Dr/Pc	House	9114	MB_House 11	4 / 4	1	120	○		:
Dr/Pc	House	9115	MC_House 11	4 / 4	1	120	○		:
Dr/Pc	House	9116	MA_House 12	4 / 4	2	120	○		:
Dr/Pc	House	9117	MA_House 13	4 / 4	2	120	○		:
Dr/Pc	House	9118	MA_House 14	4 / 4	1	123	○		:
Dr/Pc	House	9119	MA_House 15	4 / 4	2	128	○		:
Dr/Pc	House	9120	MA_Garage 1	4 / 4	2	130	○		Garage Kit
Dr/Pc	House	9121	MA_Garage 2	4 / 4	2	127	○		House Kit 1
Dr/Pc	House	9122	MB_Garage 2	4 / 4	2	127	○		:
Dr/Pc	House	9123	MC_Garage 2	4 / 4	2	127	○		:
Dr/Pc	House	9124	MD_Garage 2	4 / 4	2	127	○		:
Dr/Pc	House	9125	IA_Garage 2/a	4 / 4	1	127	○		:
Dr/Pc	House	9126	IA_Garage 2/b	4 / 4	1	127	○		:
Dr/Pc	House	9127	FA_Garage 2	4 / 4	1	127	○		:
Dr/Pc	House	9128	FC_Garage 2	4 / 4	2	127	○		:
Dr/Pc	House	9129	MA_UK Garage 2	4 / 4	1	135	○		Garage Kit
Dr/Pc	House	9130	MA_UK Garage 3	4 / 4	1	135	○		:
Dr/Pc	House	9131	MA_UK Garage 4	4 / 4	1	138	○		:
Dr/Pc	House	9132	MA_UK Garage 5	4 / 4	2	138	○		:
Dr/Pc	House	9133	MA_UK Garage 6	4 / 4	1	138	○		:
Dr/Pc	House	9134	MA_UK Garage 7	4 / 4	4	130	○		House Kit 1
Dr/Pc	House	9135	MB_UK Garage 7	4 / 4	4	130	○		:
Dr/Pc	House	9136	MC_UK Garage 7	4 / 4	4	130	○		:
Dr/Pc	House	9137	MA_2 Step	4 / 4	2	120	○		:
Dr/Pc	Pop Rock	9138	MA_Electro Pop2	4 / 4	4	124	○		Electro Pop SPLIT
Dr/Pc	Pop Rock	9139	MB_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9140	MC_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9141	MD_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9142	ME_Electro Pop2	4 / 4	4	123	○		:
Dr/Pc	Pop Rock	9143	MF_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9144	MG_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9145	MH_Electro Pop2	4 / 4	4	124	○		:
Dr/Pc	Pop Rock	9146	MA_Flashbulb Kit	4 / 4	8	165	○		The Flashbulb Kit
Dr/Pc	Pop Rock	9147	MB_Flashbulb Kit	4 / 4	4	165	○		:
Dr/Pc	Pop Rock	9148	MC_Flashbulb Kit	4 / 4	4	127	○		:
Dr/Pc	Pop Rock	9149	MD_Flashbulb Kit	4 / 4	4	148	○		:
Dr/Pc	Pop Rock	9150	ME_Flashbulb Kit	4 / 4	4	165	○		:
Dr/Pc	Pop Rock	9151	MF_Flashbulb Kit	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	9152	MG_Flashbulb Kit	4 / 4	4	146	○		:
Dr/Pc	Pop Rock	9153	MH_Flashbulb Kit	4 / 4	8	165	○		:
Dr/Pc	Pop Rock	9154	MA_Break Loop 1	4 / 4	4	85	○		Open Bass
Dr/Pc	Pop Rock	9155	MA_Break Loop 2	4 / 4	4	85	○		:
Dr/Pc	Pop Rock	9156	MA_Break Loop 3	4 / 4	2	85	○		:
Dr/Pc	Pop Rock	9157	MA_Break Loop 4	4 / 4	4	95	○		:
Dr/Pc	Pop Rock	9158	MA_Break Loop 5	4 / 4	4	95	○		:
Dr/Pc	Pop Rock	9159	MA_Break Loop 6	4 / 4	4	95	○		:
Dr/Pc	Pop Rock	9160	MA_Break Loop 7	4 / 4	4	95	○		:
Dr/Pc	Pop Rock	9161	MA_Break Loop 8	4 / 4	2	100	○		:
Dr/Pc	Pop Rock	9162	MA_Break Loop 9	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	9163	MA_Break Loop 10	4 / 4	4	100	○		:
Dr/Pc	Pop Rock	9164	MA_Break Loop 11	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	9165	MA_Break Loop 12	4 / 4	4	118	○		:
Dr/Pc	Pop Rock	9166	MA_Tracker 1	4 / 4	4	170	○		Tracker Showcase
Dr/Pc	Pop Rock	9167	MA_Tracker 2	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9168	MA_Tracker 3	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9169	MA_Tracker 4	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9170	MA_Tracker 5	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9171	MA_Tracker 6	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9172	MA_Tracker 7	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9173	MA_Tracker 8	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9174	MA_Tracker 9	4 / 4	4	170	○		:
Dr/Pc	Pop Rock	9175	MA_Tracker 10	4 / 4	4	170	○		:
Dr/Pc	D&B	9176	MA_The Foot	4 / 4	1	75	○		T's Hip Hop Kit
Dr/Pc	D&B	9177	MA_EDM DrumStep 1	4 / 4	4	115	○		Break Kit
Dr/Pc	D&B	9178	MA_EDM DrumStep 2-1	4 / 4	4	174	○		T's EDM Kit
Dr/Pc	D&B	9179	MA_EDM DrumStep 2-2	4 / 4	4	160	○		:
Dr/Pc	D&B	9180	MA_EDM DrumStep 2-3	4 / 4	4	176	○		:
Dr/Pc	D&B	9181	MA_EDM DrumStep 3-1	4 / 4	4	174	○		Dancefloor Kit
Dr/Pc	D&B	9182	MA_EDM DrumStep 3-2	4 / 4	4	174	○		:
Dr/Pc	D&B	9183	MA_EDM DubStep 1	4 / 4	4	152	○		DUB Kit
Dr/Pc	D&B	9184	MA_EDM DubStep 2	4 / 4	4	150	○		Dancefloor Kit
Dr/Pc	D&B	9185	MA_EDM DubStep 3	4 / 4	4	150	○		:
Dr/Pc	D&B	9186	MA_Grime 1	4 / 4	4	139	○		Trap Kit
Dr/Pc	D&B	9187	MA_Grime 2	4 / 4	4	140	○		:
Dr/Pc	D&B	9188	MA_Grime 3	4 / 4	4	129	○		:
Dr/Pc	D&B	9189	MA_Grime 4	4 / 4	4	140	○		:
Dr/Pc	D&B	9190	MA_Grime 5	4 / 4	4	140	○		House-Techno Kit
Dr/Pc	D&B	9191	MA_Grime 6	4 / 4	4	140	○		:
Dr/Pc	D&B	9192	MA_Future Bass 1-1	4 / 4	4	102	○		Trap Kit
Dr/Pc	D&B	9193	MA_Future Bass 1-2	4 / 4	4	102	○		:
Dr/Pc	D&B	9194	MA_Future Bass 1-3	4 / 4	4	103	○		EDM Kit
Dr/Pc	D&B	9195	MA_Future Bass 2-1	4 / 4	4	80	○		Trap Kit
Dr/Pc	D&B	9196	MA_Future Bass 2-2	4 / 4	4	69	○		:
Dr/Pc	D&B	9197	MA_Future Bass HH 1	4 / 4	4	92	○		Dancefloor Kit
Dr/Pc	D&B	9198	MA_Future Bass HH 2	4 / 4	4	100	○		:
Dr/Pc	D&B	9199	MA_Amad	4 / 4	4	160	○		Trap Kit
Dr/Pc	D&B	9200	MA_Complextro Dr 1	4 / 4	4	140	○		Psychedelic Dub Kit
Dr/Pc	D&B	9201	MA_Complextro Dr 2	4 / 4	4	140	○		:
Dr/Pc	D&B	9202	MA_Complextro Dr 3	4 / 4	4	140	○		:
Dr/Pc	D&B	9203	MA_Complextro Dr 4	4 / 4	4	140	○		:
Dr/Pc	D&B	9204	MA_Complextro Dr 5	4 / 4	4	140	○		:
Dr/Pc	D&B	9205	MA_Complextro Dr 6	4 / 4	4	140	○		:
Dr/Pc	D&B	9206	MA_PsychoDub Dr 1	4 / 4	4	140	○		:
Dr/Pc	D&B	9207	MA_PsychoDub Dr 2	4 / 4	4	140	○		:
Dr/Pc	D&B	9208	MA_PsychoDub Dr 3	4 / 4	4	140	○		:
Dr/Pc	D&B	9209	MA_PsychoDub Dr 4	4 / 4	4	140	○		:
Dr/Pc	D&B	9210	MA_PsychoDub Dr 5	4 / 4	4	140	○		:
Dr/Pc	D&B	9211	MA_PsychoDub Dr 6	4 / 4	4	140	○		:
Dr/Pc	D&B	9212	MA_DubStep Basic 1A	4 / 4	4	140	○		:
Dr/Pc	D&B	9213	MA_DubStep Basic 1B	4 / 4	4	140	○		:
Dr/Pc	D&B	9214	MA_DubStep Basic 2	4 / 4	4	140	○		:
Dr/Pc	D&B	9215	MA_DubStep Basic 3A	4 / 4	4	140	○		:
Dr/Pc	D&B	9216	MA_DubStep Basic 3B	4 / 4	4	140	○		:
Dr/Pc	D&B	9217	MA_DubStep Basic 3C	4 / 4	4	140	○		:
Dr/Pc	D&B	9218	MA_DubStep Basic 4A	4 / 4	4	140	○		:
Dr/Pc	D&B	9219	MA_DubStep Basic 4B	4 / 4	4	140	○		:
Dr/Pc	D&B	9220	MA_DubStep Basic 5	4 / 4	4	140	○		:
Dr/Pc	D&B	9221	MA_DubStep Basic 6	4 / 4	4	140	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	D&B	9222	MA_DubStep Basic 7	4 / 4	4	140	○		:
Dr/Pc	D&B	9223	MA_DubStep Basic 8A	4 / 4	4	140	○		:
Dr/Pc	D&B	9224	MA_DubStep Basic 8B	4 / 4	4	140	○		:
Dr/Pc	D&B	9225	MA_DubStep Basic 8C	4 / 4	4	140	○		:
Dr/Pc	D&B	9226	MA_Drums perc 4	4 / 4	2	160	○		Distorted Kit
Dr/Pc	D&B	9227	MA_Drums perc 5	4 / 4	2	160	○		:
Dr/Pc	D&B	9228	MA_Drums perc 6	4 / 4	2	160	○		:
Dr/Pc	D&B	9229	MA_Drums perc 7	4 / 4	2	160	○		:
Dr/Pc	D&B	9230	MA_Drums perc 8	4 / 4	2	175	○		:
Dr/Pc	D&B	9231	MA_Drums perc 9	4 / 4	2	160	○		:
Dr/Pc	D&B	9232	MA_Drums perc 10	4 / 4	2	175	○		:
Dr/Pc	D&B	9233	MA_Drums perc 11-1	4 / 4	2	175	○		:
Dr/Pc	D&B	9234	MA_Drums perc 11-2	4 / 4	2	175	○		:
Dr/Pc	D&B	9235	MA_Bass Drop	4 / 4	4	101	○		T's EDM Kit
Dr/Pc	D&B	9236	MA_On Fleek 1	4 / 4	4	104	○		:
Dr/Pc	D&B	9237	MA_On Fleek 2	4 / 4	4	104	○		:
Dr/Pc	D&B	9238	MA_Trap Hard	4 / 4	4	106	○		:
Dr/Pc	D&B	9239	MA_TrpGod	4 / 4	4	160	○		:
Dr/Pc	D&B	9240	MA_Electro Boo	4 / 4	4	125	○		Synth Pop Kit
Dr/Pc	D&B	9241	MA_Roll Away	4 / 4	8	155	○		Dance Snares
Dr/Pc	D&B	9242	MA_Basic Dubz	4 / 4	4	140	○		Electronic Type Kit
Dr/Pc	D&B	9243	MA_Brake Fast	4 / 4	4	140	○		:
Dr/Pc	D&B	9244	MA_Havoc	4 / 4	2	140	○		:
Dr/Pc	D&B	9245	MA_Hobbs Riddim	4 / 4	4	140	○		:
Dr/Pc	D&B	9246	MA_Jefferson Dub	4 / 4	1	140	○		:
Dr/Pc	D&B	9247	MA_Knocksmith	4 / 4	2	140	○		:
Dr/Pc	D&B	9248	MA_Light Rail	4 / 4	4	140	○		:
Dr/Pc	D&B	9249	MA_Lord of theRides	4 / 4	4	140	○		:
Dr/Pc	D&B	9250	MA_MB1F Dub	4 / 4	2	140	○		:
Dr/Pc	D&B	9251	MA_Ring Master	4 / 4	2	140	○		:
Dr/Pc	D&B	9252	MA_Roller	4 / 4	2	140	○		:
Dr/Pc	D&B	9253	MA_Sea Light	4 / 4	2	140	○		:
Dr/Pc	D&B	9254	MA_Space Twerk	4 / 4	4	140	○		:
Dr/Pc	D&B	9255	MA_Tom Bomb	4 / 4	2	140	○		:
Dr/Pc	D&B	9256	MA_Tom's Beat	4 / 4	1	140	○		:
Dr/Pc	D&B	9257	MA_Tribe Whylin	4 / 4	2	140	○		:
Dr/Pc	D&B	9258	MA_Vapor	4 / 4	2	140	○		:
Dr/Pc	D&B	9259	MA_Big Beat 1	4 / 4	4	115	○		Break Kit
Dr/Pc	D&B	9260	MB_Big Beat 1	4 / 4	4	115	○		:
Dr/Pc	D&B	9261	MC_Big Beat 1	4 / 4	4	115	○		:
Dr/Pc	D&B	9262	FA_Big Beat 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9263	FB_Big Beat 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9264	FC_Big Beat 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9265	BA_Big Beat 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9266	MA1_Big Beat 2	4 / 4	4	145	○		:
Dr/Pc	D&B	9267	MB1_Big Beat 2	4 / 4	8	145	○		:
Dr/Pc	D&B	9268	MC1_Big Beat 2	4 / 4	4	145	○		:
Dr/Pc	D&B	9269	FA1_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9270	FB1_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9271	FC1_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9272	BA1_Big Beat 2	4 / 4	2	145	○		:
Dr/Pc	D&B	9273	MA2_Big Beat 2	4 / 4	4	145	○		Trance Kit
Dr/Pc	D&B	9274	MB2_Big Beat 2	4 / 4	8	145	○		:
Dr/Pc	D&B	9275	MC2_Big Beat 2	4 / 4	4	145	○		:
Dr/Pc	D&B	9276	FA2_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9277	FB2_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9278	FC2_Big Beat 2	4 / 4	1	145	○		:
Dr/Pc	D&B	9279	BA2_Big Beat 2	4 / 4	2	145	○		:
Dr/Pc	D&B	9280	MA_Big Beat 3	4 / 4	2	120	○		Big Kit
Dr/Pc	D&B	9281	MB_Big Beat 3	4 / 4	1	120	○		:
Dr/Pc	D&B	9282	MA_Big Beat 4	4 / 4	1	138	○		:
Dr/Pc	D&B	9283	MA_Big Beat 5	4 / 4	1	128	○		:
Dr/Pc	D&B	9284	MA_Big Beat 6	4 / 4	4	120	○		Rock Stereo Kit 2
Dr/Pc	D&B	9285	MA_Big Beat 7	4 / 4	4	136	○		Big Kit
Dr/Pc	D&B	9286	MA_Big Beat 8	4 / 4	1	135	○		:
Dr/Pc	D&B	9287	MA_Big Beat 9	4 / 4	1	132	○		:
Dr/Pc	D&B	9288	MA_Big Beat 10	4 / 4	2	124	○		:
Dr/Pc	D&B	9289	MA_Big Beat 11	4 / 4	1	120	○		:
Dr/Pc	D&B	9290	MA_Break Trance	4 / 4	1	130	○		Tekno Kit
Dr/Pc	D&B	9291	MA1_Breakbeats 1	4 / 4	4	115	○		Break Kit
Dr/Pc	D&B	9292	MB1_Breakbeats 1	4 / 4	4	115	○		:
Dr/Pc	D&B	9293	MC1_Breakbeats 1	4 / 4	2	115	○		:
Dr/Pc	D&B	9294	FA1_Breakbeats 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9295	FB1_Breakbeats 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9296	FC1_Breakbeats 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9297	BA1_Breakbeats 1	4 / 4	1	115	○		:
Dr/Pc	D&B	9298	MA2_8Z Breakbt1	4 / 4	4	115	○		8Z Jarrin
Dr/Pc	D&B	9299	MB2_8Z Breakbt1	4 / 4	4	115	○		:
Dr/Pc	D&B	9300	MC2_8Z Breakbt1	4 / 4	2	115	○		:
Dr/Pc	D&B	9301	FA2_8Z Breakbt1	4 / 4	1	115	○		:
Dr/Pc	D&B	9302	FB2_8Z Breakbt1	4 / 4	1	115	○		:
Dr/Pc	D&B	9303	FC2_8Z Breakbt1	4 / 4	1	115	○		:
Dr/Pc	D&B	9304	BA2_8Z Breakbt1	4 / 4	1	115	○		:
Dr/Pc	D&B	9305	MA1_Breakbeats 2	4 / 4	4	88	○		Drum'n'Bass Kit
Dr/Pc	D&B	9306	MB1_Breakbeats 2	4 / 4	4	88	○		:
Dr/Pc	D&B	9307	MC1_Breakbeats 2	4 / 4	4	88	○		:
Dr/Pc	D&B	9308	FA1_Breakbeats 2	4 / 4	1	88	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	D&B	9309	FB1_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9310	FC1_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9311	BA1_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9312	MA2_Breakbeats 2	4 / 4	4	88	○		Big Kit
Dr/Pc	D&B	9313	MB2_Breakbeats 2	4 / 4	4	88	○		:
Dr/Pc	D&B	9314	MC2_Breakbeats 2	4 / 4	4	88	○		:
Dr/Pc	D&B	9315	FA2_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9316	FB2_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9317	FC2_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9318	BA2_Breakbeats 2	4 / 4	1	88	○		:
Dr/Pc	D&B	9319	MA_Lo Beat 1	4 / 4	2	140	○		Break Kit
Dr/Pc	D&B	9320	MA_Lo Beat 2	4 / 4	2	130	○		:
Dr/Pc	D&B	9321	MA_Lo Beat 3	4 / 4	1	122	○		:
Dr/Pc	D&B	9322	MA_Lo Beat 4	4 / 4	1	115	○		:
Dr/Pc	D&B	9323	MA_Lo Beat 5	4 / 4	4	180	○		:
Dr/Pc	D&B	9324	MA_Lo Beat 6	4 / 4	1	87	○		:
Dr/Pc	D&B	9325	MA_Abstract	4 / 4	2	86	○		Hip Hop Kit 2
Dr/Pc	D&B	9326	MA_Drum'n'Bass1	4 / 4	1	170	○		Jungle Kit
Dr/Pc	D&B	9327	MA_Drum'n'Bass2	4 / 4	2	165	○		:
Dr/Pc	D&B	9328	MA_Drum'n'Bass3	4 / 4	2	154	○		Drum'n'Bass Kit
Dr/Pc	D&B	9329	MB_Drum'n'Bass3	4 / 4	2	154	○		:
Dr/Pc	D&B	9330	MC_Drum'n'Bass3	4 / 4	2	154	○		:
Dr/Pc	D&B	9331	MD_Drum'n'Bass3	4 / 4	1	154	○		:
Dr/Pc	D&B	9332	ME_Drum'n'Bass3	4 / 4	2	154	○		:
Dr/Pc	D&B	9333	MA_Drum'n'Bass4	4 / 4	1	170	○		:
Dr/Pc	Chill	9334	MA_Airy Chill	4 / 4	4	84	○		Airy Chill Kit
Dr/Pc	Chill	9335	MB_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9336	MC_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9337	MD_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9338	ME_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9339	MF_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9340	MG_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9341	MH_Airy Chill	4 / 4	4	84	○		:
Dr/Pc	Chill	9342	MA_Trap City	4 / 4	4	120	○		Trap City Kit
Dr/Pc	Chill	9343	MB_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9344	MC_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9345	MD_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9346	ME_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9347	MF_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9348	MG_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9349	MH_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9350	MI_Trap City	4 / 4	4	120	○		:
Dr/Pc	Chill	9351	MA_Until 1995	4 / 4	4	95	○		Nu Hip Hop Kit 1
Dr/Pc	Chill	9352	MA_Sub Plot	4 / 4	4	135	○		Chill Out Kit
Dr/Pc	Chill	9353	MA_Dub Equipment	4 / 4	4	140	○		Human Kit
Dr/Pc	Chill	9354	MA_Stunt Double	4 / 4	4	142	○		Ambient Kit
Dr/Pc	Chill	9355	MA_ChillStep	4 / 4	4	140	○		T's EDM Kit
Dr/Pc	Chill	9356	MA_ChillTrap	4 / 4	4	135	○		:
Dr/Pc	Chill	9357	MA_Show Me Baby	4 / 4	4	130	○		:
Dr/Pc	Chill	9358	MA_Ambient 1	4 / 4	4	102	○		Break Kit
Dr/Pc	Chill	9359	MB_Ambient 1	4 / 4	4	102	○		:
Dr/Pc	Chill	9360	MC_Ambient 1	4 / 4	4	102	○		:
Dr/Pc	Chill	9361	FA_Ambient 1	4 / 4	1	102	○		:
Dr/Pc	Chill	9362	FB_Ambient 1	4 / 4	1	102	○		:
Dr/Pc	Chill	9363	FC_Ambient 1	4 / 4	1	102	○		:
Dr/Pc	Chill	9364	BA_Ambient 1	4 / 4	1	102	○		:
Dr/Pc	Chill	9365	MA_Ambient 2	4 / 4	4	111	○		Belly Dance Kit
Dr/Pc	Chill	9366	MB_Ambient 2	4 / 4	2	111	○		:
Dr/Pc	Chill	9367	MC_Ambient 2	4 / 4	4	111	○		:
Dr/Pc	Chill	9368	FA_Ambient 2	4 / 4	1	111	○		:
Dr/Pc	Chill	9369	FB_Ambient 2	4 / 4	8	111	○		:
Dr/Pc	Chill	9370	FC_Ambient 2	4 / 4	1	111	○		:
Dr/Pc	Chill	9371	BA_Ambient 2	4 / 4	2	111	○		:
Dr/Pc	Chill	9372	MA1_Ambient 3	4 / 4	4	88	○		Hard Kit
Dr/Pc	Chill	9373	MB1_Ambient 3	4 / 4	4	88	○		:
Dr/Pc	Chill	9374	MC1_Ambient 3	4 / 4	4	88	○		:
Dr/Pc	Chill	9375	FA1_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9376	FB1_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9377	FC1_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9378	BA1_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9379	MA3_Ambient 3	4 / 4	4	88	○		Pop Latin Kit
Dr/Pc	Chill	9380	MB3_Ambient 3	4 / 4	4	88	○		:
Dr/Pc	Chill	9381	MC3_Ambient 3	4 / 4	4	88	○		:
Dr/Pc	Chill	9382	FA3_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9383	FB3_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9384	FC3_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9385	BA3_Ambient 3	4 / 4	1	88	○		:
Dr/Pc	Chill	9386	MA1_Chill Out	4 / 4	2	79	○		Dry Standard Kit
Dr/Pc	Chill	9387	MB1_Chill Out	4 / 4	2	79	○		:
Dr/Pc	Chill	9388	MC1_Chill Out	4 / 4	4	79	○		:
Dr/Pc	Chill	9389	MD1_Chill Out	4 / 4	2	79	○		:
Dr/Pc	Chill	9390	IA1_Chill Out	4 / 4	1	79	○		:
Dr/Pc	Chill	9391	FA1_Chill Out	4 / 4	1	79	○		:
Dr/Pc	Chill	9392	FB1_Chill Out	4 / 4	1	79	○		:
Dr/Pc	Chill	9393	FC1_Chill Out	4 / 4	4	79	○		:
Dr/Pc	Chill	9394	MA2_Chill Out	4 / 4	2	79	○		Break Kit
Dr/Pc	Chill	9395	MB2_Chill Out	4 / 4	2	79	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Chill	9396	MC2_Chill Out	4 / 4	4	79	O		:
Dr/Pc	Chill	9397	MD2_Chill Out	4 / 4	2	79	O		:
Dr/Pc	Chill	9398	IA2_Chill Out	4 / 4	4	79	O		:
Dr/Pc	Chill	9399	FA2_Chill Out	4 / 4	1	79	O		:
Dr/Pc	Chill	9400	FB2_Chill Out	4 / 4	1	79	O		:
Dr/Pc	Chill	9401	FC2_Chill Out	4 / 4	4	79	O		:
Dr/Pc	Chill	9402	MA_ChillKit1 /1	4 / 4	4	85	O		Chill Out Kit
Dr/Pc	Chill	9403	MA_ChillKit1 /2	4 / 4	4	85	O		:
Dr/Pc	Chill	9404	MA_ChillKit1 /3	4 / 4	4	85	O		:
Dr/Pc	Chill	9405	MA_ChillKit1 /4	4 / 4	4	85	O		:
Dr/Pc	Chill	9406	MA_ChillKit1 /5	4 / 4	4	85	O		:
Dr/Pc	Chill	9407	MA_ChillKit2 /1	4 / 4	4	85	O		:
Dr/Pc	Chill	9408	MA_ChillKit2 /2	4 / 4	4	85	O		:
Dr/Pc	Chill	9409	MA_ChillKit2 /3	4 / 4	4	85	O		:
Dr/Pc	Chill	9410	MA_ChillKit2 /4	4 / 4	4	85	O		:
Dr/Pc	Chill	9411	MA_ChlOutBreak1	4 / 4	4	85	O		:
Dr/Pc	Chill	9412	MA_ChlOutBreak2	4 / 4	4	85	O		:
Dr/Pc	Chill	9413	MA_ChlOutBreak3	4 / 4	4	85	O		:
Dr/Pc	Chill	9414	MA_ChlOutBreak4	4 / 4	4	85	O		:
Dr/Pc	Chill	9415	MA_8Z ChillBrk1	4 / 4	4	85	O		8Z Chilly Breakz
Dr/Pc	Chill	9416	MA_8Z ChillBrk2	4 / 4	4	85	O		:
Dr/Pc	Chill	9417	MA_8Z ChillBrk3	4 / 4	4	85	O		:
Dr/Pc	Chill	9418	MA_8Z ChillBrk4	4 / 4	4	85	O		:
Dr/Pc	Chill	9419	MA_8Z ChillBrk5	4 / 4	4	85	O		:
Dr/Pc	Chill	9420	MA_ClassicAmbi1	4 / 4	8	85	O		Chill Out Kit
Dr/Pc	Chill	9421	MA_ClassicAmbi2	4 / 4	1	85	O		:
Dr/Pc	Chill	9422	MA_ChillOutSoft	4 / 4	1	85	O		:
Dr/Pc	Chill	9423	MA_ChillOutHard	4 / 4	2	85	O		:
Dr/Pc	Chill	9424	MA_Pop Breaks 1	4 / 4	2	90	O		:
Dr/Pc	Chill	9425	MA_8Z PopBreak2	4 / 4	4	90	O		8Z Glitch
Dr/Pc	Chill	9426	MA_8Z PopBreak3	4 / 4	4	90	O		:
Dr/Pc	Chill	9427	MA_8Z GatedBt1	4 / 4	4	85	O		8Z Gated Beatz
Dr/Pc	Chill	9428	MA_8Z GatedBt2	4 / 4	4	85	O		:
Dr/Pc	Chill	9429	MA_8Z GatedBt3	4 / 4	4	85	O		:
Dr/Pc	Chill	9430	MA_8Z GatedBt4	4 / 4	4	85	O		:
Dr/Pc	Chill	9431	MA_8Z GatedBt5	4 / 4	4	85	O		:
Dr/Pc	Chill	9432	MA_8Z HeavyHrt1	4 / 4	4	85	O		8Z Heavy Hearts
Dr/Pc	Chill	9433	MA_8Z HeavyHrt2	4 / 4	4	85	O		:
Dr/Pc	Chill	9434	MA_8Z HeavyHrt3	4 / 4	4	85	O		:
Dr/Pc	Chill	9435	MA_8Z HeavyHrt4	4 / 4	4	85	O		:
Dr/Pc	Chill	9436	MA_8Z HeavyHrt5	4 / 4	4	85	O		:
Dr/Pc	Chill	9437	MA1_Synth Pop1	4 / 4	4	90	O		House Kit 1
Dr/Pc	Chill	9438	MB1_Synth Pop1	4 / 4	4	90	O		:
Dr/Pc	Chill	9439	MC1_Synth Pop1	4 / 4	4	90	O		:
Dr/Pc	Chill	9440	MD1_Synth Pop1	4 / 4	4	90	O		:
Dr/Pc	Chill	9441	FC1_Synth Pop1	4 / 4	4	90	O		:
Dr/Pc	Chill	9442	MC2_Synth Pop1	4 / 4	2	90	O		:
Dr/Pc	Chill	9443	MD2_Synth Pop1	4 / 4	2	90	O		:
Dr/Pc	Chill	9444	FC2_Synth Pop1	4 / 4	4	90	O		:
Dr/Pc	Chill	9445	ME3_Synth Pop1	4 / 4	2	90	O		Hip Hop Kit 3
Dr/Pc	Chill	9446	ME4_Synth Pop1	4 / 4	2	90	O		House Kit 1
Dr/Pc	Chill	9447	MA_Synth Pop2	4 / 4	2	90	O		Synth Pop Kit
Dr/Pc	Chill	9448	MB_Synth Pop2	4 / 4	2	90	O		:
Dr/Pc	Chill	9449	MC_Synth Pop2	4 / 4	2	90	O		:
Dr/Pc	Chill	9450	MD_Synth Pop2	4 / 4	2	90	O		:
Dr/Pc	Chill	9451	ME_Synth Pop2	4 / 4	2	90	O		:
Dr/Pc	Chill	9452	MA_8Z Static	4 / 4	2	90	O		8Z Static
Dr/Pc	Chill	9453	MB_8Z Static	4 / 4	2	90	O		:
Dr/Pc	Chill	9454	MC_8Z Static	4 / 4	2	90	O		:
Dr/Pc	Chill	9455	MD_8Z Static	4 / 4	2	90	O		:
Dr/Pc	Chill	9456	BA_8Z Static	4 / 4	1	90	O		:
Dr/Pc	Chill	9457	BB_8Z Static	4 / 4	1	90	O		:
Dr/Pc	Chill	9458	MA_Pop Chill Out	4 / 4	4	99	O		D'elo Kit
Dr/Pc	Chill	9459	MA_Fill Time	4 / 4	4	115	O		BeechwoodSnare Kit
Dr/Pc	Jazz	9460	MA_AcousticJazz	4 / 4	4	204	O		Dry Standard Kit
Dr/Pc	Jazz	9461	MB_AcousticJazz	4 / 4	4	204	O		:
Dr/Pc	Jazz	9462	MC_AcousticJazz	4 / 4	4	204	O		:
Dr/Pc	Jazz	9463	MD_AcousticJazz	4 / 4	4	204	O		:
Dr/Pc	Jazz	9464	IA_AcousticJazz	4 / 4	4	204	O		:
Dr/Pc	Jazz	9465	FA_AcousticJazz	4 / 4	1	204	O		:
Dr/Pc	Jazz	9466	FB_AcousticJazz	4 / 4	1	204	O		:
Dr/Pc	Jazz	9467	FC_AcousticJazz	4 / 4	4	204	O		:
Dr/Pc	Jazz	9468	MA1_Modern Jazz	4 / 4	16	218	O		Power Standard Kit 1
Dr/Pc	Jazz	9469	MB1_Modern Jazz	4 / 4	16	218	O		:
Dr/Pc	Jazz	9470	MC1_Modern Jazz	4 / 4	16	218	O		:
Dr/Pc	Jazz	9471	FA1_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9472	FB1_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9473	FC1_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9474	BA1_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9475	EA1_Modern Jazz	4 / 4	6	218	O		:
Dr/Pc	Jazz	9476	EB1_Modern Jazz	4 / 4	7	218	O		:
Dr/Pc	Jazz	9477	MA2_Modern Jazz	4 / 4	16	218	O		Pop Latin Kit
Dr/Pc	Jazz	9478	MB2_Modern Jazz	4 / 4	16	218	O		:
Dr/Pc	Jazz	9479	MC2_Modern Jazz	4 / 4	16	218	O		:
Dr/Pc	Jazz	9480	FA2_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9481	FB2_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9482	FC2_Modern Jazz	4 / 4	1	218	O		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Jazz	9483	BA2_Modern Jazz	4 / 4	1	218	O		:
Dr/Pc	Jazz	9484	EA2_Modern Jazz	4 / 4	6	218	O		:
Dr/Pc	Jazz	9485	EB2_Modern Jazz	4 / 4	7	218	O		:
Dr/Pc	Jazz	9486	MA_JazzGtrClub	4 / 4	8	142	O		Brush Kit
Dr/Pc	Jazz	9487	MB_JazzGtrClub	4 / 4	8	142	O		:
Dr/Pc	Jazz	9488	MC_JazzGtrClub	4 / 4	8	142	O		:
Dr/Pc	Jazz	9489	FA_JazzGtrClub	4 / 4	1	142	O		:
Dr/Pc	Jazz	9490	FB_JazzGtrClub	4 / 4	1	142	O		:
Dr/Pc	Jazz	9491	FC_JazzGtrClub	4 / 4	1	142	O		:
Dr/Pc	Jazz	9492	BA_JazzGtrClub	4 / 4	1	142	O		:
Dr/Pc	Jazz	9493	EA_JazzGtrClub	4 / 4	6	142	O		:
Dr/Pc	Jazz	9494	MA_Bebop	4 / 4	4	152	O		Dry Standard Kit
Dr/Pc	Jazz	9495	MB_Bebop	4 / 4	4	152	O		:
Dr/Pc	Jazz	9496	MA_JazzWaltzMed	3 / 4	8	180	O		Power Standard Kit 1
Dr/Pc	Jazz	9497	MB_JazzWaltzMed	3 / 4	8	180	O		:
Dr/Pc	Jazz	9498	MC_JazzWaltzMed	3 / 4	8	180	O		:
Dr/Pc	Jazz	9499	FA_JazzWaltzMed	3 / 4	1	180	O		:
Dr/Pc	Jazz	9500	FB_JazzWaltzMed	3 / 4	1	180	O		:
Dr/Pc	Jazz	9501	FC_JazzWaltzMed	3 / 4	1	180	O		:
Dr/Pc	Jazz	9502	BA_JazzWaltzMed	3 / 4	1	180	O		:
Dr/Pc	Jazz	9503	EA_JazzWaltzMed	3 / 4	7	180	O		:
Dr/Pc	Jazz	9504	MA_R&R Shuffle	4 / 4	4	192	O		:
Dr/Pc	Jazz	9505	MB_R&R Shuffle	4 / 4	4	192	O		:
Dr/Pc	Jazz	9506	MC_R&R Shuffle	4 / 4	4	192	O		:
Dr/Pc	Jazz	9507	FA_R&R Shuffle	4 / 4	1	192	O		:
Dr/Pc	Jazz	9508	FB_R&R Shuffle	4 / 4	1	192	O		:
Dr/Pc	Jazz	9509	FC_R&R Shuffle	4 / 4	1	192	O		:
Dr/Pc	Jazz	9510	BA_R&R Shuffle	4 / 4	1	192	O		:
Dr/Pc	Jazz	9511	EA_R&R Shuffle	4 / 4	5	192	O		:
Dr/Pc	Jazz	9512	EB_R&R Shuffle	4 / 4	5	192	O		:
Dr/Pc	Jazz	9513	MA_ShuffleBlues	4 / 4	4	115	O		Power Standard Kit 2
Dr/Pc	Jazz	9514	MB_ShuffleBlues	4 / 4	4	115	O		:
Dr/Pc	Jazz	9515	MC_ShuffleBlues	4 / 4	4	115	O		:
Dr/Pc	Jazz	9516	FA_ShuffleBlues	4 / 4	1	115	O		:
Dr/Pc	Jazz	9517	FB_ShuffleBlues	4 / 4	1	115	O		:
Dr/Pc	Jazz	9518	FC_ShuffleBlues	4 / 4	1	115	O		:
Dr/Pc	Jazz	9519	BA_ShuffleBlues	4 / 4	1	115	O		:
Dr/Pc	Jazz	9520	EA_ShuffleBlues	4 / 4	5	115	O		:
Dr/Pc	Jazz	9521	EB_ShuffleBlues	4 / 4	6	115	O		:
Dr/Pc	Jazz	9522	MA_Slow Blues 1	4 / 4	2	49	O		:
Dr/Pc	Jazz	9523	MB_Slow Blues 1	4 / 4	2	49	O		:
Dr/Pc	Jazz	9524	MC_Slow Blues 1	4 / 4	2	49	O		:
Dr/Pc	Jazz	9525	FA_Slow Blues 1	4 / 4	1	49	O		:
Dr/Pc	Jazz	9526	FB_Slow Blues 1	4 / 4	1	49	O		:
Dr/Pc	Jazz	9527	FC_Slow Blues 1	4 / 4	1	49	O		:
Dr/Pc	Jazz	9528	BA_Slow Blues 1	4 / 4	1	49	O		:
Dr/Pc	Jazz	9529	EA_Slow Blues 1	4 / 4	3	49	O		:
Dr/Pc	Jazz	9530	EB_Slow Blues 1	4 / 4	3	49	O		:
Dr/Pc	Jazz	9531	MA_Slow Blues 2	4 / 4	4	72	O		Modern Rock Kit
Dr/Pc	Jazz	9532	MB_Slow Blues 2	4 / 4	4	72	O		:
Dr/Pc	Jazz	9533	MC_Slow Blues 2	4 / 4	4	72	O		:
Dr/Pc	Jazz	9534	FA_Slow Blues 2	4 / 4	1	72	O		:
Dr/Pc	Jazz	9535	FB_Slow Blues 2	4 / 4	1	72	O		:
Dr/Pc	Jazz	9536	FC_Slow Blues 2	4 / 4	1	72	O		:
Dr/Pc	Jazz	9537	BA_Slow Blues 2	4 / 4	1	72	O		:
Dr/Pc	Jazz	9538	MA_Piano Boogie	4 / 4	8	160	O		Power Standard Kit 2
Dr/Pc	Jazz	9539	MB_Piano Boogie	4 / 4	4	160	O		:
Dr/Pc	Jazz	9540	MC_Piano Boogie	4 / 4	4	160	O		:
Dr/Pc	Jazz	9541	FA_Piano Boogie	4 / 4	1	160	O		:
Dr/Pc	Jazz	9542	FB_Piano Boogie	4 / 4	1	160	O		:
Dr/Pc	Jazz	9543	FC_Piano Boogie	4 / 4	1	160	O		:
Dr/Pc	Jazz	9544	BA_Piano Boogie	4 / 4	1	160	O		:
Dr/Pc	Jazz	9545	EA_Piano Boogie	4 / 4	5	160	O		:
Dr/Pc	Jazz	9546	EB_Piano Boogie	4 / 4	5	160	O		:
Dr/Pc	Jazz	9547	MA_Jazz Loop 1	4 / 4	4	128	O		NewMapleCustom Kit
Dr/Pc	Jazz	9548	MA_Jazz Loop 2	4 / 4	4	103	O		Real Brushes Kit
Dr/Pc	Jazz	9549	MA_Jazz Loop 3	4 / 4	4	88	O		Jazz Kit
Dr/Pc	Jazz	9550	MA_Jazz Loop 4-1	4 / 4	4	78	O		:
Dr/Pc	Jazz	9551	MA_Jazz Loop 4-2	4 / 4	4	91	O		:
Dr/Pc	Latin	9552	MA1_Salsa 1	4 / 4	4	177	O		Power Standard Kit 1
Dr/Pc	Latin	9553	MB1_Salsa 1	4 / 4	4	177	O		:
Dr/Pc	Latin	9554	MC1_Salsa 1	4 / 4	4	177	O		:
Dr/Pc	Latin	9555	FA1_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9556	FB1_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9557	FC1_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9558	BA1_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9559	EA1_Salsa 1	4 / 4	5	177	O		:
Dr/Pc	Latin	9560	EB1_Salsa 1	4 / 4	5	177	O		:
Dr/Pc	Latin	9561	MA2_Salsa 1	4 / 4	4	177	O		Pop Latin Kit
Dr/Pc	Latin	9562	MB2_Salsa 1	4 / 4	4	177	O		:
Dr/Pc	Latin	9563	MC2_Salsa 1	4 / 4	4	177	O		:
Dr/Pc	Latin	9564	FA2_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9565	FB2_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9566	FC2_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9567	BA2_Salsa 1	4 / 4	1	177	O		:
Dr/Pc	Latin	9568	EA2_Salsa 1	4 / 4	5	177	O		:
Dr/Pc	Latin	9569	EB2_Salsa 1	4 / 4	5	177	O		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Latin	9570	MA1_Salsa 2	4 / 4	2	123	○		Dry Standard Kit
Dr/Pc	Latin	9571	MB1_Salsa 2	4 / 4	2	123	○		:
Dr/Pc	Latin	9572	MC1_Salsa 2	4 / 4	2	123	○		:
Dr/Pc	Latin	9573	MD1_Salsa 2	4 / 4	4	123	○		:
Dr/Pc	Latin	9574	IA1_Salsa 2/a	4 / 4	2	123	○		:
Dr/Pc	Latin	9575	IA1_Salsa 2/b	4 / 4	2	123	○		:
Dr/Pc	Latin	9576	FA1_Salsa 2	4 / 4	1	123	○		:
Dr/Pc	Latin	9577	FB1_Salsa 2	4 / 4	1	123	○		:
Dr/Pc	Latin	9578	FC1_Salsa 2	4 / 4	2	123	○		:
Dr/Pc	Latin	9579	MA2_Salsa 2	4 / 4	4	123	○		Pop Latin Kit
Dr/Pc	Latin	9580	MB2_Salsa 2	4 / 4	4	123	○		:
Dr/Pc	Latin	9581	MC2_Salsa 2	4 / 4	4	123	○		:
Dr/Pc	Latin	9582	MD2_Salsa 2	4 / 4	4	123	○		:
Dr/Pc	Latin	9583	IA2_Salsa 2	4 / 4	4	123	○		:
Dr/Pc	Latin	9584	FA2_Salsa 2	4 / 4	1	123	○		:
Dr/Pc	Latin	9585	FB2_Salsa 2	4 / 4	1	123	○		:
Dr/Pc	Latin	9586	FC2_Salsa 2	4 / 4	2	123	○		:
Dr/Pc	Latin	9587	MA1_AfroCuban	4 / 4	4	200	○		Power Standard Kit 1
Dr/Pc	Latin	9588	MB1_AfroCuban	4 / 4	4	200	○		:
Dr/Pc	Latin	9589	MC1_AfroCuban	4 / 4	4	200	○		:
Dr/Pc	Latin	9590	FA1_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9591	FB1_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9592	FC1_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9593	BA1_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9594	EA1_AfroCuban	4 / 4	6	200	○		:
Dr/Pc	Latin	9595	EB1_AfroCuban	4 / 4	5	200	○		:
Dr/Pc	Latin	9596	MA2_AfroCuban	4 / 4	4	200	○		Pop Latin Kit
Dr/Pc	Latin	9597	MB2_AfroCuban	4 / 4	4	200	○		:
Dr/Pc	Latin	9598	MC2_AfroCuban	4 / 4	4	200	○		:
Dr/Pc	Latin	9599	FA2_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9600	FB2_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9601	FC2_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9602	BA2_AfroCuban	4 / 4	1	200	○		:
Dr/Pc	Latin	9603	EA2_AfroCuban	4 / 4	6	200	○		:
Dr/Pc	Latin	9604	EB2_AfroCuban	4 / 4	5	200	○		:
Dr/Pc	Latin	9605	MA1_Montuno	4 / 4	2	100	○		Dry Standard Kit
Dr/Pc	Latin	9606	MB1_Montuno	4 / 4	2	100	○		:
Dr/Pc	Latin	9607	MC1_Montuno	4 / 4	2	100	○		:
Dr/Pc	Latin	9608	MD1_Montuno	4 / 4	2	100	○		:
Dr/Pc	Latin	9609	IA1_Montuno	4 / 4	2	100	○		:
Dr/Pc	Latin	9610	FA1_Montuno	4 / 4	1	100	○		:
Dr/Pc	Latin	9611	FB1_Montuno	4 / 4	1	100	○		:
Dr/Pc	Latin	9612	FC1_Montuno	4 / 4	2	100	○		:
Dr/Pc	Latin	9613	MA2_Montuno	4 / 4	4	100	○		Latin Percussion Kit
Dr/Pc	Latin	9614	MB2_Montuno	4 / 4	4	100	○		:
Dr/Pc	Latin	9615	MC2_Montuno	4 / 4	4	100	○		:
Dr/Pc	Latin	9616	MD2_Montuno	4 / 4	4	100	○		:
Dr/Pc	Latin	9617	IA2_Montuno	4 / 4	4	100	○		:
Dr/Pc	Latin	9618	FA2_Montuno	4 / 4	1	100	○		:
Dr/Pc	Latin	9619	FB2_Montuno	4 / 4	1	100	○		:
Dr/Pc	Latin	9620	FC2_Montuno	4 / 4	4	100	○		:
Dr/Pc	Latin	9621	MA1_Samba1	4 / 4	4	106	○		Brazil Kit 2
Dr/Pc	Latin	9622	MB1_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9623	MC1_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9624	MD1_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9625	FA1_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9626	FB1_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9627	FC1_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9628	FD1_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9629	MA2_Samba1	4 / 4	4	106	○		Real Brushes Kit
Dr/Pc	Latin	9630	MB2_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9631	MC2_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9632	MD2_Samba1	4 / 4	4	106	○		:
Dr/Pc	Latin	9633	FA2_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9634	FB2_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9635	FC2_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9636	FD2_Samba1	4 / 4	1	106	○		:
Dr/Pc	Latin	9637	MA1_Samba2	4 / 4	4	118	○		Brazil Kit 2
Dr/Pc	Latin	9638	MB1_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9639	MC1_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9640	MD1_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9641	FA1_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9642	FB1_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9643	FC1_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9644	FD1_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9645	MA2_Samba2	4 / 4	4	118	○		Real Brushes Kit
Dr/Pc	Latin	9646	MB2_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9647	MC2_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9648	MD2_Samba2	4 / 4	4	118	○		:
Dr/Pc	Latin	9649	FA2_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9650	FB2_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9651	FC2_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9652	FD2_Samba2	4 / 4	1	118	○		:
Dr/Pc	Latin	9653	MA1_Brazil Samba	4 / 4	4	96	○		Power Standard Kit 1
Dr/Pc	Latin	9654	MB1_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9655	MC1_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9656	FA1_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9657	FB1_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9658	FC1_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9659	BA1_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9660	EA1_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9661	EB1_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9662	MA2_Brazil Samba	4 / 4	4	96	○		Pop Latin Kit
Dr/Pc	Latin	9663	MB2_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9664	MC2_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9665	FA2_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9666	FB2_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9667	FC2_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9668	BA2_Brazil Samba	4 / 4	1	96	○		:
Dr/Pc	Latin	9669	EA2_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9670	EB2_Brazil Samba	4 / 4	4	96	○		:
Dr/Pc	Latin	9671	MA_Samba	4 / 4	4	120	○		Dry Standard Kit
Dr/Pc	Latin	9672	MB_Samba	4 / 4	4	120	○		:
Dr/Pc	Latin	9673	MC_Samba	4 / 4	4	120	○		:
Dr/Pc	Latin	9674	MD_Samba	4 / 4	4	120	○		:
Dr/Pc	Latin	9675	IA_Samba	4 / 4	2	120	○		:
Dr/Pc	Latin	9676	FA_Samba	4 / 4	1	120	○		:
Dr/Pc	Latin	9677	FB_Samba	4 / 4	1	120	○		:
Dr/Pc	Latin	9678	FC_Samba	4 / 4	2	120	○		:
Dr/Pc	Latin	9679	MA_Bomba	4 / 4	4	99	○		Pop Latin Kit
Dr/Pc	Latin	9680	MB_Bomba	4 / 4	4	99	○		:
Dr/Pc	Latin	9681	MC_Bomba	4 / 4	4	99	○		:
Dr/Pc	Latin	9682	FA_Bomba	4 / 4	1	99	○		:
Dr/Pc	Latin	9683	FB_Bomba	4 / 4	1	99	○		:
Dr/Pc	Latin	9684	FC_Bomba	4 / 4	1	99	○		:
Dr/Pc	Latin	9685	BA_Bomba	4 / 4	1	99	○		:
Dr/Pc	Latin	9686	EA_Bomba	4 / 4	3	99	○		:
Dr/Pc	Latin	9687	EB_Bomba	4 / 4	3	99	○		:
Dr/Pc	Latin	9688	MA1_Bossa Fast	4 / 4	4	180	○		Brazil Kit 1
Dr/Pc	Latin	9689	MB1_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9690	MC1_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9691	MD1_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9692	FA1_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9693	FB1_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9694	FC1_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9695	FD1_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9696	MA2_Bossa Fast	4 / 4	4	180	○		Real Brushes Kit
Dr/Pc	Latin	9697	MB2_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9698	MC2_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9699	MD2_Bossa Fast	4 / 4	4	180	○		:
Dr/Pc	Latin	9700	FA2_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9701	FB2_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9702	FC2_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9703	FD2_Bossa Fast	4 / 4	1	180	○		:
Dr/Pc	Latin	9704	MA1_Bossa Slow	4 / 4	4	90	○		Brazil Kit 1
Dr/Pc	Latin	9705	MB1_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9706	MC1_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9707	MD1_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9708	FA1_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9709	FB1_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9710	FC1_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9711	FD1_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9712	MA2_Bossa Slow	4 / 4	4	90	○		Real Brushes Kit
Dr/Pc	Latin	9713	MB2_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9714	MC2_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9715	MD2_Bossa Slow	4 / 4	4	90	○		:
Dr/Pc	Latin	9716	FA2_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9717	FB2_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9718	FC2_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9719	FD2_Bossa Slow	4 / 4	1	90	○		:
Dr/Pc	Latin	9720	MA1_Bossa	4 / 4	4	124	○		Brush Kit
Dr/Pc	Latin	9721	MB1_Bossa	4 / 4	4	124	○		:
Dr/Pc	Latin	9722	MC1_Bossa	4 / 4	4	124	○		:
Dr/Pc	Latin	9723	FA1_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9724	FB1_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9725	FC1_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9726	BA1_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9727	EA1_Bossa	4 / 4	4	123	○		:
Dr/Pc	Latin	9728	EB1_Bossa	4 / 4	4	123	○		:
Dr/Pc	Latin	9729	MA2_Bossa	4 / 4	4	124	○		:
Dr/Pc	Latin	9730	MB2_Bossa	4 / 4	4	124	○		:
Dr/Pc	Latin	9731	MC2_Bossa	4 / 4	4	124	○		:
Dr/Pc	Latin	9732	FA2_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9733	FB2_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9734	FC2_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9735	BA2_Bossa	4 / 4	1	124	○		:
Dr/Pc	Latin	9736	EA2_Bossa	4 / 4	4	123	○		:
Dr/Pc	Latin	9737	EB2_Bossa	4 / 4	4	123	○		:
Dr/Pc	Latin	9738	MA_Merengue	4 / 4	4	130	○		Pop Latin Kit
Dr/Pc	Latin	9739	MB_Merengue	4 / 4	4	130	○		:
Dr/Pc	Latin	9740	MC_Merengue	4 / 4	4	130	○		:
Dr/Pc	Latin	9741	FA_Merengue	4 / 4	1	130	○		:
Dr/Pc	Latin	9742	FB_Merengue	4 / 4	1	130	○		:
Dr/Pc	Latin	9743	FC_Merengue	4 / 4	1	130	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	Latin	9744	BA_Merengue	4 / 4	1	130	○		:
Dr/Pc	Latin	9745	EA_Merengue	4 / 4	3	130	○		:
Dr/Pc	Latin	9746	EB_Merengue	4 / 4	3	130	○		:
Dr/Pc	Latin	9747	MA_Guaguanco	4 / 4	4	120	○		:
Dr/Pc	Latin	9748	MB_Guaguanco	4 / 4	4	120	○		:
Dr/Pc	Latin	9749	MC_Guaguanco	4 / 4	4	120	○		:
Dr/Pc	Latin	9750	FA_Guaguanco	4 / 4	1	120	○		:
Dr/Pc	Latin	9751	FB_Guaguanco	4 / 4	1	120	○		:
Dr/Pc	Latin	9752	FC_Guaguanco	4 / 4	1	120	○		:
Dr/Pc	Latin	9753	BA_Guaguanco	4 / 4	1	120	○		:
Dr/Pc	Latin	9754	EA_Guaguanco	4 / 4	3	120	○		:
Dr/Pc	Latin	9755	EB_Guaguanco	4 / 4	3	120	○		:
Dr/Pc	Latin	9756	MA_Latin	4 / 4	4	120	○		Latin Percussion Kit
Dr/Pc	Latin	9757	MB_Latin	4 / 4	4	120	○		:
Dr/Pc	Latin	9758	MC_Latin	4 / 4	4	120	○		:
Dr/Pc	Latin	9759	MD_Latin	4 / 4	4	120	○		:
Dr/Pc	Latin	9760	ME_Latin	4 / 4	4	120	○		:
Dr/Pc	Latin	9761	MA_Latin Rock	4 / 4	2	120	○		Dry Standard Kit
Dr/Pc	Latin	9762	MB_Latin Rock	4 / 4	2	120	○		:
Dr/Pc	Latin	9763	MC_Latin Rock	4 / 4	2	120	○		:
Dr/Pc	Latin	9764	MD_Latin Rock	4 / 4	4	120	○		:
Dr/Pc	Latin	9765	IA_Latin Rock	4 / 4	2	120	○		:
Dr/Pc	Latin	9766	FA_Latin Rock	4 / 4	1	120	○		:
Dr/Pc	Latin	9767	FB_Latin Rock	4 / 4	1	120	○		:
Dr/Pc	Latin	9768	FC_Latin Rock	4 / 4	1	120	○		:
Dr/Pc	Latin	9769	MA1_Disco Latin	4 / 4	4	100	○		:
Dr/Pc	Latin	9770	MB1_Disco Latin	4 / 4	4	100	○		:
Dr/Pc	Latin	9771	MC1_Disco Latin	4 / 4	4	100	○		:
Dr/Pc	Latin	9772	FA1_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9773	FB1_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9774	FC1_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9775	BA1_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9776	MA2_Disco Latin	4 / 4	4	100	○		Latin Percussion Kit
Dr/Pc	Latin	9777	MB2_Disco Latin	4 / 4	4	100	○		:
Dr/Pc	Latin	9778	MC2_Disco Latin	4 / 4	4	100	○		:
Dr/Pc	Latin	9779	FA2_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9780	FB2_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9781	FC2_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9782	BA2_Disco Latin	4 / 4	1	100	○		:
Dr/Pc	Latin	9783	MA_Latin House	4 / 4	4	138	○		House Kit 1
Dr/Pc	Latin	9784	FB_Latin House	4 / 4	4	138	○		:
Dr/Pc	Latin	9785	FC_Latin House	4 / 4	4	138	○		:
Dr/Pc	Latin	9786	MA_Cajon Latin 1	4 / 4	2	152	○		Bodhran&Cajon Kit
Dr/Pc	Latin	9787	MA_Cajon Latin 2	4 / 4	8	152	○		:
Dr/Pc	Latin	9788	MA_Cajon Latin 3	4 / 4	4	152	○		:
Dr/Pc	Latin	9789	MA_Cajon Latin 4	4 / 4	4	152	○		:
Dr/Pc	Latin	9790	MA_Cajon Latin 5	4 / 4	2	152	○		:
Dr/Pc	Latin	9791	MA_Cajon Latin 6	4 / 4	2	152	○		:
Dr/Pc	Latin	9792	MA_Cajon Latin 7	4 / 4	2	152	○		:
Dr/Pc	Latin	9793	MA_Cajon Latin 8	4 / 4	2	152	○		:
Dr/Pc	Latin	9794	MA_Latin Loop 1	4 / 4	4	136	○		Pop Latin Kit
Dr/Pc	Latin	9795	MA_Latin Loop 2	4 / 4	4	128	○		:
Dr/Pc	World	9796	MA_Asian Dance Shuffle	4 / 4	2	120	○		Psychedelic Dub Kit
Dr/Pc	World	9797	MB_Asian Dance Shuffle	4 / 4	4	120	○		:
Dr/Pc	World	9798	MC_Asian Dance Shuffle	4 / 4	8	120	○		:
Dr/Pc	World	9799	MD_Asian Dance Shuffle	4 / 4	4	120	○		:
Dr/Pc	World	9800	MA_African Dance Shuffle	4 / 4	4	120	○		:
Dr/Pc	World	9801	MB_African Dance Shuffle	4 / 4	8	120	○		:
Dr/Pc	World	9802	MC_African Dance Shuffle	4 / 4	8	120	○		:
Dr/Pc	World	9803	MD_African Dance Shuffle	4 / 4	8	120	○		:
Dr/Pc	World	9804	MA_ReggaeShffle	4 / 4	4	90	○		Power Standard Kit 1
Dr/Pc	World	9805	MB_ReggaeShffle	4 / 4	4	90	○		:
Dr/Pc	World	9806	MC_ReggaeShffle	4 / 4	4	90	○		:
Dr/Pc	World	9807	FA_ReggaeShffle	4 / 4	1	90	○		:
Dr/Pc	World	9808	FB_ReggaeShffle	4 / 4	1	90	○		:
Dr/Pc	World	9809	FC_ReggaeShffle	4 / 4	1	90	○		:
Dr/Pc	World	9810	BA_ReggaeShffle	4 / 4	1	90	○		:
Dr/Pc	World	9811	EA_ReggaeShffle	4 / 4	3	90	○		:
Dr/Pc	World	9812	EB_ReggaeShffle	4 / 4	4	90	○		:
Dr/Pc	World	9813	MA_Jumbo Reggae	4 / 4	4	100	○		Trance Kit
Dr/Pc	World	9814	MB_Jumbo Reggae	4 / 4	4	100	○		:
Dr/Pc	World	9815	MC_Jumbo Reggae	4 / 4	4	100	○		:
Dr/Pc	World	9816	FA_Jumbo Reggae	4 / 4	1	100	○		:
Dr/Pc	World	9817	FB_Jumbo Reggae	4 / 4	1	100	○		:
Dr/Pc	World	9818	FC_Jumbo Reggae	4 / 4	1	100	○		:
Dr/Pc	World	9819	BA_Jumbo Reggae	4 / 4	1	100	○		:
Dr/Pc	World	9820	EA_Jumbo Reggae	4 / 4	3	100	○		:
Dr/Pc	World	9821	EB_Jumbo Reggae	4 / 4	3	100	○		:
Dr/Pc	World	9822	MA1_Reggae 1	4 / 4	4	102	○		Dry Standard Kit
Dr/Pc	World	9823	MB1_Reggae 1	4 / 4	4	102	○		:
Dr/Pc	World	9824	MC1_Reggae 1	4 / 4	4	80	○		:
Dr/Pc	World	9825	MD1_Reggae 1	4 / 4	4	90	○		:
Dr/Pc	World	9826	IA1_Reggae 1	4 / 4	4	102	○		:
Dr/Pc	World	9827	FA1_Reggae 1	4 / 4	1	96	○		:
Dr/Pc	World	9828	FB1_Reggae 1	4 / 4	1	102	○		:
Dr/Pc	World	9829	FC1_Reggae 1	4 / 4	4	96	○		:
Dr/Pc	World	9830	MA2_Reggae 1	4 / 4	4	102	○		Percussion Kit

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	9831	MB2_Reggae 1	4 / 4	4	102	○		:
Dr/Pc	World	9832	MC2_Reggae 1	4 / 4	4	80	○		:
Dr/Pc	World	9833	MD2_Reggae 1	4 / 4	4	90	○		:
Dr/Pc	World	9834	IA2_Reggae 1	4 / 4	4	102	○		:
Dr/Pc	World	9835	FC2_Reggae 1	4 / 4	4	96	○		:
Dr/Pc	World	9836	MA_Reggae 2	4 / 4	2	92	○		Dry Standard Kit
Dr/Pc	World	9837	MB_Reggae 2	4 / 4	2	92	○		:
Dr/Pc	World	9838	MC_Reggae 2	4 / 4	2	92	○		:
Dr/Pc	World	9839	MD_Reggae 2	4 / 4	2	92	○		:
Dr/Pc	World	9840	IA_Reggae 2/a	4 / 4	1	92	○		:
Dr/Pc	World	9841	IA_Reggae 2/b	4 / 4	1	92	○		:
Dr/Pc	World	9842	FA_Reggae 2	4 / 4	1	92	○		:
Dr/Pc	World	9843	FB_Reggae 2	4 / 4	1	92	○		:
Dr/Pc	World	9844	FC_Reggae 2	4 / 4	1	92	○		:
Dr/Pc	World	9845	MA1_RumbaFlamenc	4 / 4	4	106	○		Power Standard Kit 1
Dr/Pc	World	9846	MB1_RumbaFlamenc	4 / 4	4	106	○		:
Dr/Pc	World	9847	MC1_RumbaFlamenc	4 / 4	4	106	○		:
Dr/Pc	World	9848	FA1_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9849	FB1_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9850	FC1_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9851	BA1_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9852	EA1_RumbaFlamenc	4 / 4	3	106	○		:
Dr/Pc	World	9853	EB1_RumbaFlamenc	4 / 4	3	106	○		:
Dr/Pc	World	9854	MA2_RumbaFlamenc	4 / 4	4	106	○		Pop Latin Kit
Dr/Pc	World	9855	MB2_RumbaFlamenc	4 / 4	4	106	○		:
Dr/Pc	World	9856	MC2_RumbaFlamenc	4 / 4	4	106	○		:
Dr/Pc	World	9857	FA2_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9858	FB2_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9859	FC2_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9860	BA2_RumbaFlamenc	4 / 4	1	106	○		:
Dr/Pc	World	9861	EA2_RumbaFlamenc	4 / 4	3	106	○		:
Dr/Pc	World	9862	EB2_RumbaFlamenc	4 / 4	3	106	○		:
Dr/Pc	World	9863	MA_Spanish Pop	4 / 4	2	120	○		Hyper Standard Kit
Dr/Pc	World	9864	MB_Spanish Pop	4 / 4	2	120	○		:
Dr/Pc	World	9865	MC_Spanish Pop	4 / 4	2	120	○		:
Dr/Pc	World	9866	MD_Spanish Pop	4 / 4	2	120	○		:
Dr/Pc	World	9867	MA_ModBluegrass	4 / 4	4	121	○		Power Standard Kit 2
Dr/Pc	World	9868	MB_ModBluegrass	4 / 4	4	121	○		:
Dr/Pc	World	9869	MC_ModBluegrass	4 / 4	4	121	○		:
Dr/Pc	World	9870	FA_ModBluegrass	4 / 4	1	121	○		:
Dr/Pc	World	9871	FB_ModBluegrass	4 / 4	1	121	○		:
Dr/Pc	World	9872	FC_ModBluegrass	4 / 4	1	121	○		:
Dr/Pc	World	9873	BA_ModBluegrass	4 / 4	1	121	○		:
Dr/Pc	World	9874	EA_ModBluegrass	4 / 4	6	121	○		:
Dr/Pc	World	9875	IA_Spanish Pop/a	4 / 4	1	120	○		Hyper Standard Kit
Dr/Pc	World	9876	IA_Spanish Pop/b	4 / 4	1	120	○		:
Dr/Pc	World	9877	FA_Spanish Pop	4 / 4	1	120	○		:
Dr/Pc	World	9878	FB_Spanish Pop	4 / 4	1	120	○		:
Dr/Pc	World	9879	FC_Spanish Pop	4 / 4	1	120	○		:
Dr/Pc	World	9880	MA_Irish Hymn	3 / 4	4	70	○		Power Standard Kit 2
Dr/Pc	World	9881	MB_Irish Hymn	3 / 4	4	70	○		:
Dr/Pc	World	9882	MC_Irish Hymn	3 / 4	4	70	○		:
Dr/Pc	World	9883	FA_Irish Hymn	3 / 4	1	70	○		:
Dr/Pc	World	9884	FB_Irish Hymn	3 / 4	1	70	○		:
Dr/Pc	World	9885	FC_Irish Hymn	3 / 4	1	70	○		:
Dr/Pc	World	9886	BA_Irish Hymn	3 / 4	1	70	○		:
Dr/Pc	World	9887	EA_Irish Hymn	3 / 4	5	70	○		:
Dr/Pc	World	9888	EB_Irish Hymn	3 / 4	5	70	○		:
Dr/Pc	World	9889	MA1_Turkish Pop	4 / 4	4	101	○		Arabic Mixed Kit 1
Dr/Pc	World	9890	MB1_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9891	MC1_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9892	MD1_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9893	FA1_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9894	FB1_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9895	FC1_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9896	FD1_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9897	MA2_Turkish Pop	4 / 4	4	101	○		Hip Hop Kit 1
Dr/Pc	World	9898	MB2_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9899	MC2_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9900	MD2_Turkish Pop	4 / 4	4	101	○		:
Dr/Pc	World	9901	FA2_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9902	FB2_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9903	FC2_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9904	FD2_Turkish Pop	4 / 4	1	101	○		:
Dr/Pc	World	9905	MA1_TurkishDance	4 / 4	4	130	○		Arabic Mixed Kit 1
Dr/Pc	World	9906	MB1_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9907	MC1_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9908	MD1_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9909	FA1_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9910	FB1_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9911	FC1_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9912	FD1_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9913	MA2_TurkishDance	4 / 4	4	130	○		Hip Hop Kit 1
Dr/Pc	World	9914	MB2_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9915	MC2_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9916	MD2_TurkishDance	4 / 4	4	130	○		:
Dr/Pc	World	9917	FA2_TurkishDance	4 / 4	1	130	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	9918	FB2_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9919	FC2_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9920	FD2_TurkishDance	4 / 4	1	130	○		:
Dr/Pc	World	9921	MA1_Turkish	4 / 4	2	105	○		Arabic Mixed Kit 1
Dr/Pc	World	9922	MB1_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9923	MC1_Turkish	9 / 8	2	125	○		:
Dr/Pc	World	9924	MD1_Turkish	9 / 8	2	125	○		:
Dr/Pc	World	9925	ME1_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9926	MF1_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9927	IA1_Turkish/a	4 / 4	1	86	○		:
Dr/Pc	World	9928	IA1_Turkish/b	4 / 4	1	86	○		:
Dr/Pc	World	9929	FA1_Turkish	4 / 4	1	120	○		:
Dr/Pc	World	9930	MA2_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9931	MB2_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9932	MC2_Turkish	9 / 8	2	125	○		:
Dr/Pc	World	9933	MD2_Turkish	9 / 8	2	125	○		:
Dr/Pc	World	9934	ME2_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9935	MF2_Turkish	4 / 4	2	105	○		:
Dr/Pc	World	9936	IA_Turkish/a	4 / 4	1	86	○		:
Dr/Pc	World	9937	IA_Turkish/b	4 / 4	1	86	○		:
Dr/Pc	World	9938	FA2_Turkish	4 / 4	1	120	○		:
Dr/Pc	World	9939	MA1_TurkishEuro1	4 / 4	4	112	○		Analog T9 Kit
Dr/Pc	World	9940	MB1_TurkishEuro1	4 / 4	4	112	○		:
Dr/Pc	World	9941	MC1_TurkishEuro1	4 / 4	4	112	○		:
Dr/Pc	World	9942	FA1_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9943	FB1_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9944	FC1_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9945	BA1_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9946	EA1_TurkishEuro1	4 / 4	3	112	○		:
Dr/Pc	World	9947	MA2_TurkishEuro1	4 / 4	4	112	○		Turkish Kit
Dr/Pc	World	9948	MB2_TurkishEuro1	4 / 4	4	112	○		:
Dr/Pc	World	9949	MC2_TurkishEuro1	4 / 4	4	112	○		:
Dr/Pc	World	9950	FA2_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9951	FB2_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9952	FC2_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9953	BA2_TurkishEuro1	4 / 4	1	112	○		:
Dr/Pc	World	9954	EA2_TurkishEuro1	4 / 4	3	112	○		:
Dr/Pc	World	9955	MA1_TurkishEuro2	4 / 4	4	120	○		Nu Hip Hop Kit 1
Dr/Pc	World	9956	MB1_TurkishEuro2	4 / 4	4	120	○		:
Dr/Pc	World	9957	MC1_TurkishEuro2	4 / 4	4	120	○		:
Dr/Pc	World	9958	FA1_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9959	FB1_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9960	FC1_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9961	BA1_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9962	EA1_TurkishEuro2	4 / 4	3	120	○		:
Dr/Pc	World	9963	MA2_TurkishEuro2	4 / 4	4	120	○		Turkish Kit
Dr/Pc	World	9964	MB2_TurkishEuro2	4 / 4	4	120	○		:
Dr/Pc	World	9965	MC2_TurkishEuro2	4 / 4	4	120	○		:
Dr/Pc	World	9966	FA2_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9967	FB2_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9968	FC2_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9969	BA2_TurkishEuro2	4 / 4	1	120	○		:
Dr/Pc	World	9970	EA2_TurkishEuro2	4 / 4	3	120	○		:
Dr/Pc	World	9971	MA1_Chaabi Hawzi	4 / 4	2	100	○		New Khaligi Kit 2
Dr/Pc	World	9972	MB1_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9973	MC1_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9974	MD1_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9975	FA1_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9976	FB1_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9977	FC1_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9978	FD1_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9979	MA2_Chaabi Hawzi	4 / 4	2	100	○		Arabic Mixed Kit 2
Dr/Pc	World	9980	MB2_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9981	MC2_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9982	MD2_Chaabi Hawzi	4 / 4	2	100	○		:
Dr/Pc	World	9983	FA2_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9984	FB2_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9985	FC2_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9986	FD2_Chaabi Hawzi	4 / 4	1	100	○		:
Dr/Pc	World	9987	MA1_Chaoui Zendali	4 / 4	2	100	○		New Maghrebi Kit
Dr/Pc	World	9988	MB1_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9989	MC1_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9990	MD1_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9991	FB1_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	9992	FD1_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	9993	MA2_Chaoui Zendali	4 / 4	2	100	○		Real Drums Kit
Dr/Pc	World	9994	MB2_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9995	MC2_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9996	MD2_Chaoui Zendali	4 / 4	2	100	○		:
Dr/Pc	World	9997	FA2_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	9998	FB2_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	9999	FC2_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	10000	FD2_Chaoui Zendali	4 / 4	1	100	○		:
Dr/Pc	World	10001	MA1_Ray Alaoui	4 / 4	2	100	○		New Maghrebi Kit
Dr/Pc	World	10002	MB1_Ray Alaoui	4 / 4	2	100	○		:
Dr/Pc	World	10003	MC1_Ray Alaoui	4 / 4	2	100	○		:
Dr/Pc	World	10004	MD1_Ray Alaoui	4 / 4	2	100	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	10005	MA2_Ray Alaoui	4 / 4	2	100	○		Real Drums Kit
Dr/Pc	World	10006	MB2_Ray Alaoui	4 / 4	2	100	○		:
Dr/Pc	World	10007	MC2_Ray Alaoui	4 / 4	2	100	○		:
Dr/Pc	World	10008	MD2_Ray Alaoui	4 / 4	2	100	○		:
Dr/Pc	World	10009	FA2_Ray Alaoui	4 / 4	1	100	○		:
Dr/Pc	World	10010	FB2_Ray Alaoui	4 / 4	1	100	○		:
Dr/Pc	World	10011	FC2_Ray Alaoui	4 / 4	1	100	○		:
Dr/Pc	World	10012	FD2_Ray Alaoui	4 / 4	1	100	○		:
Dr/Pc	World	10013	MA1_Kabyle	4 / 4	2	130	○		New Maghrebi Kit
Dr/Pc	World	10014	MB1_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10015	MC1_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10016	MD1_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10017	FA1_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10018	FB1_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10019	FC1_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10020	FD1_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10021	MA2_Kabyle	4 / 4	2	130	○		Iranian Mix Kit
Dr/Pc	World	10022	MB2_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10023	MC2_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10024	MD2_Kabyle	4 / 4	2	130	○		:
Dr/Pc	World	10025	FA2_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10026	FB2_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10027	FC2_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10028	FD2_Kabyle	4 / 4	1	130	○		:
Dr/Pc	World	10029	MA1_Atbah	3 / 4	8	132	○		New Khaligi Kit 1
Dr/Pc	World	10030	MB1_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10031	MC1_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10032	MD1_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10033	FA1_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10034	FB1_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10035	FC1_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10036	FD1_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10037	MA2_Atbah	3 / 4	8	132	○		Analog T9 Kit
Dr/Pc	World	10038	MB2_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10039	MC2_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10040	MD2_Atbah	3 / 4	8	132	○		:
Dr/Pc	World	10041	FA2_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10042	FB2_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10043	FC2_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10044	FD2_Atbah	3 / 4	1	132	○		:
Dr/Pc	World	10045	MA1_Khebaiti 4/4	4 / 4	4	79	○		New Khaligi Kit 1
Dr/Pc	World	10046	MB1_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10047	MC1_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10048	MD1_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10049	FA1_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10050	FB1_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10051	FC1_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10052	FD1_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10053	MA2_Khebaiti 4/4	4 / 4	4	79	○		Analog T9 Kit
Dr/Pc	World	10054	MB2_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10055	MC2_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10056	MD2_Khebaiti 4/4	4 / 4	4	79	○		:
Dr/Pc	World	10057	FA2_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10058	FB2_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10059	FC2_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10060	FD2_Khebaiti 4/4	4 / 4	1	79	○		:
Dr/Pc	World	10061	MA1_Bandari UAE	4 / 4	4	83	○		New Khaligi Kit 2
Dr/Pc	World	10062	MB1_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10063	MC1_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10064	MD1_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10065	FA1_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10066	FB1_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10067	FC1_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10068	FD1_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10069	MA2_Bandari UAE	4 / 4	4	83	○		Hip Hop Kit 1
Dr/Pc	World	10070	MB2_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10071	MC2_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10072	MD2_Bandari UAE	4 / 4	4	83	○		:
Dr/Pc	World	10073	FA2_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10074	FB2_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10075	FC2_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10076	FD2_Bandari UAE	4 / 4	1	83	○		:
Dr/Pc	World	10077	MA1_Shaaby	4 / 4	4	104	○		New Arabic Kit 1
Dr/Pc	World	10078	MB1_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10079	MC1_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10080	MD1_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10081	FA1_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10082	FB1_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10083	FC1_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10084	MA2_Shaaby	4 / 4	4	104	○		Analog T9 Kit
Dr/Pc	World	10085	MB2_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10086	MC2_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10087	MD2_Shaaby	4 / 4	4	104	○		:
Dr/Pc	World	10088	FA2_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10089	FB2_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10090	FC2_Shaaby	4 / 4	1	104	○		:
Dr/Pc	World	10091	FD2_Shaaby	4 / 4	1	104	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	10092	MA1_Rengi Persian	4 / 4	2	131	○		New Iranian Kit 1
Dr/Pc	World	10093	MB1_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10094	MC1_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10095	MD1_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10096	FA1_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10097	FB1_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10098	FC1_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10099	FD1_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10100	MA2_Rengi Persian	4 / 4	2	131	○		Analog T9 Kit
Dr/Pc	World	10101	MB2_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10102	MC2_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10103	MD2_Rengi Persian	4 / 4	4	131	○		:
Dr/Pc	World	10104	FA2_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10105	FB2_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10106	FC2_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10107	FD2_Rengi Persian	4 / 4	1	131	○		:
Dr/Pc	World	10108	MA1_3/4 Persian	4 / 4	2	75	○		New Iranian Kit 1
Dr/Pc	World	10109	MB1_3/4 Persian	4 / 4	2	75	○		:
Dr/Pc	World	10110	MC1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10111	MD1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10112	FA1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10113	FB1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10114	FC1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10115	FD1_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10116	MA2_3/4 Persian	4 / 4	2	75	○		Real Drums Kit
Dr/Pc	World	10117	MB2_3/4 Persian	4 / 4	2	75	○		:
Dr/Pc	World	10118	MC2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10119	MD2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10120	FA2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10121	FB2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10122	FC2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10123	FD2_3/4 Persian	4 / 4	1	75	○		:
Dr/Pc	World	10124	MA1_Azari Atma	4 / 4	2	131	○		New Iranian Kit 1
Dr/Pc	World	10125	MB1_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10126	MC1_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10127	MD1_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10128	FA1_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10129	FB1_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10130	FC1_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10131	FD1_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10132	MA2_Azari Atma	4 / 4	2	131	○		Analog T9 Kit
Dr/Pc	World	10133	MB2_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10134	MC2_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10135	MD2_Azari Atma	4 / 4	2	131	○		:
Dr/Pc	World	10136	FA2_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10137	FB2_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10138	FC2_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10139	FD2_Azari Atma	4 / 4	1	131	○		:
Dr/Pc	World	10140	MA1_Bandari 1	4 / 4	1	131	○		New Arabic Kit 1
Dr/Pc	World	10141	MB1_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10142	MC1_Bandari 1	4 / 4	4	131	○		:
Dr/Pc	World	10143	MD1_Bandari 1	4 / 4	4	131	○		:
Dr/Pc	World	10144	FA1_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10145	FB1_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10146	FC1_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10147	FD1_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10148	MA2_Bandari 1	4 / 4	1	131	○		Analog T9 Kit
Dr/Pc	World	10149	MB2_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10150	MC2_Bandari 1	4 / 4	4	131	○		:
Dr/Pc	World	10151	MD2_Bandari 1	4 / 4	4	131	○		:
Dr/Pc	World	10152	FA2_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10153	FB2_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10154	FC2_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10155	FD2_Bandari 1	4 / 4	1	131	○		:
Dr/Pc	World	10156	MA1_Bandari 2	4 / 4	2	131	○		New Iranian Kit 1
Dr/Pc	World	10157	MB1_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10158	MC1_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10159	MD1_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10160	FA1_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10161	FB1_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10162	FC1_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10163	FD1_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10164	MA2_Bandari 2	4 / 4	2	131	○		Arabic Mixed Kit 2
Dr/Pc	World	10165	MB2_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10166	MC2_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10167	MD2_Bandari 2	4 / 4	4	131	○		:
Dr/Pc	World	10168	FA2_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10169	FB2_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10170	FC2_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10171	FD2_Bandari 2	4 / 4	1	131	○		:
Dr/Pc	World	10172	MA1_Zarb Style	4 / 4	1	135	○		New Iranian Kit 1
Dr/Pc	World	10173	MB1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10174	MC1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10175	MD1_Zarb Style	4 / 4	4	135	○		:
Dr/Pc	World	10176	FA1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10177	FB1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10178	FC1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10179	FD1_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10180	MA2_Zarb Style	4 / 4	1	135	○		Arabic Mixed Kit 2
Dr/Pc	World	10181	MB2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10182	MC2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10183	MD2_Zarb Style	4 / 4	4	135	○		:
Dr/Pc	World	10184	FA2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10185	FB2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10186	FC2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10187	FD2_Zarb Style	4 / 4	1	135	○		:
Dr/Pc	World	10188	MA1_Saeidy 1	4 / 4	2	120	○		Hip Hop Kit 3
Dr/Pc	World	10189	MB1_Saeidy 1	4 / 4	2	120	○		:
Dr/Pc	World	10190	MC1_Saeidy 1	4 / 4	4	120	○		:
Dr/Pc	World	10191	FA1_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10192	FB1_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10193	FC1_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10194	BA1_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10195	EA1_Saeidy 1	4 / 4	4	120	○		:
Dr/Pc	World	10196	MA2_Saeidy 1	4 / 4	2	120	○		Turkish Kit
Dr/Pc	World	10197	MB2_Saeidy 1	4 / 4	2	120	○		:
Dr/Pc	World	10198	MC2_Saeidy 1	4 / 4	4	120	○		:
Dr/Pc	World	10199	FA2_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10200	FB2_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10201	FC2_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10202	BA2_Saeidy 1	4 / 4	1	120	○		:
Dr/Pc	World	10203	EA2_Saeidy 1	4 / 4	4	120	○		:
Dr/Pc	World	10204	MA1_Saeidy 2	4 / 4	2	100	○		New Arabic Kit 1
Dr/Pc	World	10205	MB1_Saeidy 2	4 / 4	2	100	○		:
Dr/Pc	World	10206	MC1_Saeidy 2	4 / 4	2	100	○		:
Dr/Pc	World	10207	MD1_Saeidy 2	4 / 4	4	100	○		:
Dr/Pc	World	10208	FA1_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10209	FB1_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10210	FC1_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10211	FD1_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10212	MA2_Saeidy 2	4 / 4	2	100	○		Arabic Mixed Kit 2
Dr/Pc	World	10213	MB2_Saeidy 2	4 / 4	2	100	○		:
Dr/Pc	World	10214	MC2_Saeidy 2	4 / 4	2	100	○		:
Dr/Pc	World	10215	MD2_Saeidy 2	4 / 4	4	100	○		:
Dr/Pc	World	10216	FA2_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10217	FB2_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10218	FC2_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10219	FD2_Saeidy 2	4 / 4	1	100	○		:
Dr/Pc	World	10220	MA1_Baladi	4 / 4	2	107	○		New Arabic Kit 1
Dr/Pc	World	10221	MB1_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10222	MC1_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10223	MD1_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10224	FA1_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10225	FB1_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10226	FC1_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10227	FD1_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10228	MA2_Baladi	4 / 4	2	107	○		Arabic Mixed Kit 2
Dr/Pc	World	10229	MB2_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10230	MC2_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10231	MD2_Baladi	4 / 4	2	107	○		:
Dr/Pc	World	10232	FA2_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10233	FB2_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10234	FC2_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10235	FD2_Baladi	4 / 4	1	107	○		:
Dr/Pc	World	10236	MA1_Katakoufti	4 / 4	4	120	○		New Arabic Kit 1
Dr/Pc	World	10237	MB1_Katakoufti	4 / 4	4	120	○		:
Dr/Pc	World	10238	MC1_Katakoufti	4 / 4	2	120	○		:
Dr/Pc	World	10239	MD1_Katakoufti	4 / 4	2	120	○		:
Dr/Pc	World	10240	FA1_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10241	FB1_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10242	FC1_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10243	FD1_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10244	MA2_Katakoufti	4 / 4	4	120	○		Arabic Mixed Kit 2
Dr/Pc	World	10245	MB2_Katakoufti	4 / 4	4	120	○		:
Dr/Pc	World	10246	MC2_Katakoufti	4 / 4	2	120	○		:
Dr/Pc	World	10247	MD2_Katakoufti	4 / 4	2	120	○		:
Dr/Pc	World	10248	FA2_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10249	FB2_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10250	FC2_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10251	FD2_Katakoufti	4 / 4	1	120	○		:
Dr/Pc	World	10252	MA1_6/8 Soudasi	6 / 4	1	110	○		New Arabic Kit 1
Dr/Pc	World	10253	MB1_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10254	MC1_6/8 Soudasi	6 / 4	2	110	○		:
Dr/Pc	World	10255	MD1_6/8 Soudasi	6 / 4	2	110	○		:
Dr/Pc	World	10256	FA1_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10257	FB1_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10258	FC1_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10259	FD1_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10260	MA2_6/8 Soudasi	6 / 4	1	110	○		Arabic Mixed Kit 2
Dr/Pc	World	10261	MB2_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10262	MC2_6/8 Soudasi	6 / 4	2	110	○		:
Dr/Pc	World	10263	MD2_6/8 Soudasi	6 / 4	2	110	○		:
Dr/Pc	World	10264	FA2_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10265	FB2_6/8 Soudasi	6 / 4	1	110	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	10266	FC2_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10267	FD2_6/8 Soudasi	6 / 4	1	110	○		:
Dr/Pc	World	10268	MA1_Maghrebi Asri	4 / 4	2	98	○		New Maghrebi Kit
Dr/Pc	World	10269	MB1_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10270	MC1_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10271	MD1_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10272	FA1_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10273	FB1_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10274	FC1_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10275	FD1_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10276	MA2_Maghrebi Asri	4 / 4	2	98	○		Power Standard Kit 1
Dr/Pc	World	10277	MB2_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10278	MC2_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10279	MD2_Maghrebi Asri	4 / 4	2	98	○		:
Dr/Pc	World	10280	FA2_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10281	FB2_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10282	FC2_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10283	FD2_Maghrebi Asri	4 / 4	1	98	○		:
Dr/Pc	World	10284	MA1_Chaabi Morocco	4 / 4	2	120	○		New Maghrebi Kit
Dr/Pc	World	10285	MB1_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10286	MC1_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10287	MD1_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10288	FA1_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10289	FB1_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10290	FC1_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10291	FD1_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10292	MA2_Chaabi Morocco	4 / 4	2	120	○		Arabic Mixed Kit 2
Dr/Pc	World	10293	MB2_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10294	MC2_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10295	MD2_Chaabi Morocco	4 / 4	2	120	○		:
Dr/Pc	World	10296	FA2_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10297	FB2_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10298	FC2_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10299	FD2_Chaabi Morocco	4 / 4	1	120	○		:
Dr/Pc	World	10300	MA1_Chaabi Zayani	4 / 4	2	120	○		New Maghrebi Kit
Dr/Pc	World	10301	MB1_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10302	MC1_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10303	MD1_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10304	FA1_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10305	FB1_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10306	FC1_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10307	FD1_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10308	MA2_Chaabi Zayani	4 / 4	2	120	○		Real Drums Kit
Dr/Pc	World	10309	MB2_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10310	MC2_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10311	MD2_Chaabi Zayani	4 / 4	2	120	○		:
Dr/Pc	World	10312	FA2_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10313	FB2_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10314	FC2_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10315	FD2_Chaabi Zayani	4 / 4	1	120	○		:
Dr/Pc	World	10316	MA1_Bounawara	4 / 4	2	150	○		New Maghrebi Kit
Dr/Pc	World	10317	MB1_Bounawara	4 / 4	2	150	○		:
Dr/Pc	World	10318	MC1_Bounawara	4 / 4	4	150	○		:
Dr/Pc	World	10319	MD1_Bounawara	4 / 4	4	150	○		:
Dr/Pc	World	10320	FA1_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10321	FB1_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10322	FC1_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10323	FD1_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10324	MA2_Bounawara	4 / 4	2	150	○		Arabic Mixed Kit 2
Dr/Pc	World	10325	MB2_Bounawara	4 / 4	2	150	○		:
Dr/Pc	World	10326	MC2_Bounawara	4 / 4	4	150	○		:
Dr/Pc	World	10327	MD2_Bounawara	4 / 4	4	150	○		:
Dr/Pc	World	10328	FA2_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10329	FB2_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10330	FC2_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10331	FD2_Bounawara	4 / 4	1	150	○		:
Dr/Pc	World	10332	MA1_Ghita	6 / 8	2	145	○		New Maghrebi Kit
Dr/Pc	World	10333	MB1_Ghita	6 / 8	2	145	○		:
Dr/Pc	World	10334	MC1_Ghita	6 / 8	2	145	○		:
Dr/Pc	World	10335	MD1_Ghita	6 / 8	4	145	○		:
Dr/Pc	World	10336	FA1_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10337	FB1_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10338	FC1_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10339	FD1_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10340	MA2_Ghita	6 / 8	2	145	○		Arabic Mixed Kit 2
Dr/Pc	World	10341	MB2_Ghita	6 / 8	2	145	○		:
Dr/Pc	World	10342	MC2_Ghita	6 / 8	2	145	○		:
Dr/Pc	World	10343	MD2_Ghita	6 / 8	4	145	○		:
Dr/Pc	World	10344	FA2_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10345	FB2_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10346	FC2_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10347	FD2_Ghita	6 / 8	1	145	○		:
Dr/Pc	World	10348	MA_PercussionMaster	4 / 4	2	110	○		Perc Master Kit
Dr/Pc	World	10349	MB_PercussionMaster	4 / 4	2	110	○		:
Dr/Pc	World	10350	MC_PercussionMaster	4 / 4	2	110	○		:
Dr/Pc	World	10351	MD_PercussionMaster	4 / 4	2	110	○		:
Dr/Pc	World	10352	ME_PercussionMaster	4 / 4	4	110	○		:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Dr/Pc	World	10353	MA_8Z Djembe	4 / 4	2	100	○		8Z Djembe
Dr/Pc	World	10354	MB_8Z Djembe	4 / 4	2	100	○		:
Dr/Pc	World	10355	MC_8Z Djembe	4 / 4	2	100	○		:
Dr/Pc	World	10356	MD_8Z Djembe	4 / 4	2	100	○		:
Dr/Pc	World	10357	BA_8Z Djembe	4 / 4	2	100	○		:
Dr/Pc	World	10358	BB_8Z Djembe	4 / 4	2	100	○		:
Dr/Pc	World	10359	MA_8Z Cajon	4 / 4	2	110	○		8Z Cajon
Dr/Pc	World	10360	MB_8Z Cajon	4 / 4	2	110	○		:
Dr/Pc	World	10361	MC_8Z Cajon	4 / 4	2	110	○		:
Dr/Pc	World	10362	MD_8Z Cajon	4 / 4	2	110	○		:
Dr/Pc	World	10363	EA_8Z Cajon	4 / 4	3	110	○		:
Dr/Pc	World	10364	MA_Japan	4 / 4	4	103	○		Japan Kit
Dr/Pc	World	10365	MB_Japan	4 / 4	4	103	○		:
Dr/Pc	World	10366	MC_Japan	4 / 4	4	103	○		:
Dr/Pc	World	10367	MD_Japan	4 / 4	2	103	○		:
Dr/Pc	World	10368	EA_Japan	4 / 4	4	103	○		:
Dr/Pc	World	10369	MA_Due Time	4 / 4	4	115	○		BeechwoodSnare Kit
Dr/Pc	General	10370	MA_Cajon 1	4 / 4	2	152	○		Bodhran&Cajon Kit
Dr/Pc	General	10371	MA_Cajon 2	4 / 4	2	152	○		:
Dr/Pc	General	10372	MA_Cajon 3	4 / 4	4	152	○		:
Dr/Pc	General	10373	MA_Cajon 4	4 / 4	4	152	○		:
Dr/Pc	General	10374	MA_Cajon 5	4 / 4	4	152	○		:
Dr/Pc	General	10375	MA_Cajon 6	4 / 4	2	152	○		:
Dr/Pc	General	10376	MA_Cajon Swing 1	4 / 4	2	152	○		:
Dr/Pc	General	10377	MA_Cajon Swing 2	4 / 4	2	152	○		:
Dr/Pc	General	10378	MA_Cajon Swing 3	4 / 4	8	152	○		:
Dr/Pc	General	10379	MA_6/8 Bodhran 1	4 / 4	2	120	○		:
Dr/Pc	General	10380	MA_6/8 Bodhran 2	4 / 4	4	120	○		:
Dr/Pc	General	10381	MA_6/8 Bodhran 3	4 / 4	8	147	○		:
Dr/Pc	General	10382	MA_6/8 Bodhran 4	4 / 4	8	147	○		:
Dr/Pc	General	10383	MA_6/8 Bones 1	4 / 4	2	120	○		Bones&Spoons Kit
Dr/Pc	General	10384	MA_6/8 Bones 2	4 / 4	2	120	○		:
Dr/Pc	General	10385	MA_6/8 Bones 3	4 / 4	2	120	○		:
Dr/Pc	General	10386	MA_6/8 Bones 4	4 / 4	2	120	○		:
Dr/Pc	General	10387	MA_6/8 Spoons 1	4 / 4	2	120	○		:
Dr/Pc	General	10388	MA_6/8 Spoons 2	4 / 4	2	120	○		:
Dr/Pc	General	10389	MA_6/8 Spoons 3	4 / 4	2	120	○		:
Dr/Pc	General	10390	MA_6/8 Spoons 4	4 / 4	4	147	○		:
Dr/Pc	General	10391	MA_Orchestra	4 / 4	4	102	○		Orchestra Kit
Dr/Pc	General	10392	MC_Orchestra	4 / 4	8	102	○		:
Dr/Pc	General	10393	MD_Orchestra	4 / 4	4	102	○		:
Dr/Pc	General	10394	FA_Orchestra	4 / 4	1	102	○		:
Dr/Pc	General	10395	MA_Nu Orchestra	4 / 4	4	120	○		Nu Orchestra Kit
Dr/Pc	General	10396	MB_Nu Orchestra	4 / 4	4	120	○		:
Dr/Pc	General	10397	MC_Nu Orchestra	4 / 4	4	120	○		:
Dr/Pc	General	10398	MD_Nu Orchestra	4 / 4	2	120	○		:
Dr/Pc	General	10399	ME_Nu Orchestra	4 / 4	1	120	○		:
Dr/Pc	General	10400	MF_Nu Orchestra	4 / 4	4	120	○		:
Dr/Pc	General	10401	8Beat Slice1	4 / 4	1	135	○		Power Standard Kit 1
Dr/Pc	General	10402	8Beat Slice2	4 / 4	1	135	○		:
Dr/Pc	General	10403	8Beat Slice3	4 / 4	1	135	○		:
Dr/Pc	General	10404	16BeatSlice1	4 / 4	1	135	○		:
Dr/Pc	General	10405	16BeatSlice2	4 / 4	1	135	○		:
Dr/Pc	General	10406	1Bar Slice	4 / 4	1	135	○		:
Dr/Pc	General	10407	1BarRndSlice	4 / 4	1	135	○		:
Dr/Pc	General	10408	Roll 1	4 / 4	1	120	○		:
Dr/Pc	General	10409	Roll 2	4 / 4	1	120	○		:
Dr/Pc	General	10410	Roll 3	4 / 4	1	120	○		:
Dr/Pc	General	10411	Roll 4	4 / 4	1	120	○		:
Dr/Pc	General	10412	Linear	4 / 4	1	120	○		:
Dr/Pc	General	10413	Side Chain - 1/4	4 / 4	1	130			Bass Drum
S.FX	Rock	10414	FA2_Xover Rock	4 / 4	1	100			Scratches
S.FX	Rock	10415	FC2_Xover Rock	4 / 4	1	100			:
S.FX	Techno	10416	MA_Sp SFX	4 / 4	4	100			Special SFXs
S.FX	Techno	10417	MB_Sp SFX	4 / 4	4	100			:
S.FX	Techno	10418	MC_Sp SFX	4 / 4	2	100			:
S.FX	Techno	10419	FA_Sp SFX	4 / 4	1	100			:
S.FX	Techno	10420	FB_Sp SFX	4 / 4	2	100			:
S.FX	Techno	10421	FC_Sp SFX	4 / 4	2	100			:
S.FX	Techno	10422	BA_Sp SFX	4 / 4	1	100			:
S.FX	Chill	10423	MA2_Ambient 3	4 / 4	4	88			SFX Kit
S.FX	Chill	10424	MB2_Ambient 3	4 / 4	4	88			:
S.FX	Chill	10425	MC2_Ambient 3	4 / 4	4	88			:
S.FX	Chill	10426	FA2_Ambient 3	4 / 4	1	88			:
S.FX	Chill	10427	FB2_Ambient 3	4 / 4	1	88			:
S.FX	Chill	10428	FC2_Ambient 3	4 / 4	1	88			:
S.FX	Chill	10429	BA2_Ambient 3	4 / 4	1	88			:
M.FX	Hip Hop	10430	IA_Hip Hop 2	4 / 4	1	94			Vinyl Hit
M.FX	Hip Hop	10431	FC_Hip Hop 2 _N	4 / 4	2	94			:
M.FX	Modern R&B	10432	MA_J-R&B Pop _C	4 / 4	4	100			New Stab
M.FX	Modern R&B	10433	MB_J-R&B Pop _C	4 / 4	4	100			:
M.FX	Modern R&B	10434	MC_J-R&B Pop _C	4 / 4	4	100			:
M.FX	Modern R&B	10435	FA_J-R&B Pop _C	4 / 4	1	100			:
M.FX	Modern R&B	10436	FC_J-R&B Pop _C	4 / 4	1	100			:
M.FX	Modern R&B	10437	BA_J-R&B Pop _C	4 / 4	1	100			:
M.FX	Techno	10438	MA1_Techno 1 _N	4 / 4	4	135			Thinking of You
M.FX	Techno	10439	MB1_Techno 1 _N	4 / 4	8	135			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
M.FX	Techno	10440	MC1_Techno 1 _N	4 / 4	8	135			:
M.FX	Techno	10441	FA1_Techno 1 _N	4 / 4	1	135			:
M.FX	Techno	10442	FB1_Techno 1 _N	4 / 4	1	135			:
M.FX	Techno	10443	BA1_Techno 1 _N	4 / 4	4	135			:
M.FX	D&B	10444	MA_ComplxtroSQ01 _N	4 / 4	2	140			Mega Complextro
M.FX	D&B	10445	MA_ComplxtroSQ02 _N	4 / 4	2	140			:
M.FX	D&B	10446	MA_ComplxtroSQ03 _N	4 / 4	2	140			:
M.FX	D&B	10447	MA_ComplxtroSQ04 _N	4 / 4	2	140			:
M.FX	D&B	10448	MA_ComplxtroSQ05 _N	4 / 4	2	140			:
M.FX	D&B	10449	MA_ComplxtroSQ06 _N	4 / 4	2	140			:
M.FX	D&B	10450	MA_ComplxtroSQ07 _N	4 / 4	2	140			:
M.FX	D&B	10451	MA_ComplxtroSQ08 _N	4 / 4	2	140			:
M.FX	D&B	10452	MA_ComplxtroSQ09 _N	4 / 4	2	140			:
M.FX	D&B	10453	MA_ComplxtroSQ10 _N	4 / 4	2	140			:
M.FX	D&B	10454	MA_ComplxtroSQ11 _N	4 / 4	2	140			:
M.FX	D&B	10455	MA_ComplxtroSQ12 _N	4 / 4	2	140			:
M.FX	D&B	10456	MA_ComplxtroSQ13 _N	4 / 4	2	140			:
M.FX	D&B	10457	MA_ComplxtroSQ14 _N	4 / 4	2	140			:
M.FX	D&B	10458	MA_ComplxtroSQ15 _N	4 / 4	2	140			:
M.FX	D&B	10459	MA_ComplxtroSQ16 _N	4 / 4	2	140			:
M.FX	D&B	10460	MA_ComplxtroSQ17 _N	4 / 4	2	140			:
M.FX	D&B	10461	MA_ComplxtroSQ18 _N	4 / 4	2	140			:
M.FX	D&B	10462	MA_ComplxtroSQ19 _N	4 / 4	2	140			:
M.FX	D&B	10463	MA_ComplxtroSQ20 _N	4 / 4	2	140			:
M.FX	D&B	10464	MA_ComplxtroSQ21 _N	4 / 4	2	140			:
M.FX	D&B	10465	MA_ComplxtroSQ22 _N	4 / 4	2	140			:
M.FX	D&B	10466	MA_ComplxtroBs01 _N	4 / 4	2	140			:
M.FX	D&B	10467	MA_ComplxtroBs02 _N	4 / 4	2	140			:
M.FX	D&B	10468	MA_ComplxtroBs03 _N	4 / 4	2	140			:
M.FX	D&B	10469	MA_ComplxtroBs04 _N	4 / 4	2	140			:
M.FX	D&B	10470	MA_ComplxtroBs05 _N	4 / 4	2	140			:
M.FX	D&B	10471	MA_ComplxtroBs06 _N	4 / 4	4	140			:
M.FX	D&B	10472	MA_ComplxtroBs07 _N	4 / 4	4	140			:
M.FX	D&B	10473	MA_ComplxtroBs08 _N	4 / 4	2	140			:
M.FX	D&B	10474	MA_ComplxtroBs09 _N	4 / 4	2	140			:
M.FX	D&B	10475	MA_ComplxtroBs10 _N	4 / 4	2	140			:
M.FX	Chill	10476	MA_Ambient 5	4 / 4	4	112			Deep Motion AF1&2
M.FX	Chill	10477	MA_Ambient 5 AF1	4 / 4	4	112			:
M.FX	Chill	10478	MA_Ambient 5 AF1&2	4 / 4	4	112			:
M.FX	General	10479	Util Whole Note	4 / 4	1	120			Musical FX
M.FX	General	10480	Util Whole Note Mono	4 / 4	1	120			:
M.FX	General	10481	Util Whole Half	4 / 4	2	120			:
Ethnc	World	10482	MA_Harmonium _N	4 / 4	2	140			India Harmonium
Ethnc	World	10483	MB_Harmonium _N	4 / 4	2	140			:
Ethnc	World	10484	MC_Harmonium _N	4 / 4	2	140			:
Ethnc	World	10485	MD_Harmonium _N	4 / 4	2	140			:
Ethnc	World	10486	ME_Harmonium _N	4 / 4	2	140			:
Ethnc	World	10487	MA_ModBluegrass _C	4 / 4	4	121			Banjo
Ethnc	World	10488	MB_ModBluegrass _C	4 / 4	4	121			:
Ethnc	World	10489	MC_ModBluegrass _C	4 / 4	4	121			:
Ethnc	World	10490	FA_ModBluegrass _C	4 / 4	1	121			:
Ethnc	World	10491	FB_ModBluegrass _C	4 / 4	1	121			:
Ethnc	World	10492	FC_ModBluegrass _C	4 / 4	1	121			:
Ethnc	World	10493	BA_ModBluegrass _C	4 / 4	1	121			:
Ethnc	World	10494	EA_ModBluegrass _C	4 / 4	6	121			:
Ethnc	World	10495	MB1_Turkish _N	4 / 4	2	105			Kotoun
Ethnc	World	10496	MD1_Turkish _N	9 / 8	2	125			:
Ethnc	World	10497	ME1_Turkish _N	4 / 4	2	105			:
Ethnc	World	10498	IA1_Turkish _N	4 / 4	2	86			:
Ethnc	World	10499	MF2_Turkish _N	4 / 4	2	105			Kanun
Ethnc	World	10500	MA3_Turkish _N	4 / 4	2	105			Bouzuki
Ethnc	World	10501	MA_Sitar _N	4 / 4	2	140			Sitar
Ethnc	World	10502	MB_Sitar _N	4 / 4	2	140			:
Ethnc	World	10503	MC_Sitar _N	4 / 4	2	140			:
Ethnc	World	10504	MD_Sitar _N	4 / 4	2	140			:
Ethnc	World	10505	ME_Sitar _N	4 / 4	2	140			:
Ethnc	World	10506	MA_Sitar Gliss _N	4 / 4	3	120			:
Ethnc	World	10507	MB_Sitar Gliss _N	4 / 4	3	120			:
Ethnc	World	10508	MA_Berimbau _N	4 / 4	4	110			Berimbau
Ethnc	World	10509	MB_Berimbau _N	4 / 4	2	110			:
Ethnc	World	10510	MC_Berimbau _N	4 / 4	4	110			:
Ethnc	World	10511	MD_Berimbau _N	4 / 4	4	110			:
Ethnc	World	10512	ME_Berimbau _N	4 / 4	2	110			:
Ethnc	World	10513	MA1_Turkish _N	4 / 4	2	105			Ney
Ethnc	World	10514	MF1_Turkish _N	4 / 4	2	105			:
Ct/Hb	Comb	10515	MA_Hybrid1	4 / 4	1	130			Syn Comp/Lead/Pad
Ct/Hb	Comb	10516	MA_Hybrid2	4 / 4	1	130			:
Ct/Hb	Comb	10517	MA_Hybrid3	4 / 4	1	130			:
Ct/Hb	Comb	10518	MA_Hybrid4	4 / 4	1	130			:
Ct/Hb	Comb	10519	MA_Hybrid5	4 / 4	1	95			:
Ct/Hb	Comb	10520	MA_Hybrid6	4 / 4	1	130			:
Ct/Hb	Comb	10521	MA_Hybrid7	4 / 4	1	130			:
Ct/Hb	Comb	10522	MA_Hybrid8	4 / 4	1	90			:
Ct/Hb	Comb	10523	MA_Hybrid9	4 / 4	1	130			:
Ct/Hb	Comb	10524	MA_Hybrid10	4 / 4	1	130			:
Ct/Hb	Comb	10525	MA_Hybrid11	4 / 4	1	130			:
Ct/Hb	Comb	10526	MA_Hybrid12	4 / 4	1	90			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Ct/Hb	Comb	10527	MA_Hybrid13	4 / 4	1	130			:
Ct/Hb	Comb	10528	MA_Hybrid14	4 / 4	1	130			:
Ct/Hb	Comb	10529	MA_Hybrid15	4 / 4	1	130			:
Ct/Hb	Comb	10530	MA_Hybrid16	4 / 4	1	106			:
Ct/Hb	Comb	10531	MA_Hybrid17	4 / 4	1	130			:
Ct/Hb	Comb	10532	MA_Hybrid18	4 / 4	1	110			:
Ct/Hb	Comb	10533	MA_Hybrid19	4 / 4	1	100			:
Ct/Hb	Comb	10534	MA_Hybrid20	4 / 4	1	116			:
Ct/Hb	Comb	10535	MA_Hybrid1CF1	4 / 4	1	130			:
Ct/Hb	Comb	10536	MA_Hybrid1CF2	4 / 4	1	130			:
Ct/Hb	Comb	10537	MA_Hybrid1CF3	4 / 4	1	130			:
Ct/Hb	Comb	10538	MA_Hybrid1CF3 AF1&2	4 / 4	1	84			:
Ct/Hb	Comb	10539	MA_Hybrid1CF4	4 / 4	1	130			:
Ct/Hb	Comb	10540	MA_Hybrid3 CF	4 / 4	1	120			:
Ct/Hb	Comb	10541	MA_Hybrid21CF	4 / 4	1	100			:
Ct/Hb	Comb	10542	MA_Hybrid21CF AF1	4 / 4	1	119			:
Ct/Hb	Comb	10543	MA_Hybrid21CF AF2	4 / 4	1	119			:
Ct/Hb	Comb	10544	MA_Hybrid21CF AF1&2	4 / 4	1	119			:
Ct/Hb	Comb	10545	MA_Hybrid22CF	4 / 4	1	138			:
Ct/Hb	Comb	10546	MA_Hybrid23CF	4 / 4	1	130			:
Ct/Hb	Comb	10547	MA_Hybrid24CF	4 / 4	1	130			:
Ct/Hb	Comb	10548	MA_Hybrid24CF AF2	4 / 4	1	84			:
Ct/Hb	Comb	10549	MA_Hybrid25CF	4 / 4	1	96			:
Ct/Hb	Comb	10550	MA_Parade	4 / 4	2	120			:
Ct/Hb	Comb	10551	MA_SynPop Comb1	4 / 4	4	90			:
Ct/Hb	Comb	10552	MA_SynPop Comb2	4 / 4	4	90			:
Ct/Hb	Comb	10553	MA_Trancy1 _N	4 / 4	1	140			:
Ct/Hb	Comb	10554	MA_Trancy2	4 / 4	4	140			:
Ct/Hb	Comb	10555	MA_Trancy3	4 / 4	16	140			:
Ct/Hb	Zone	10556	MA_2Z_Comb SQ1	4 / 4	2	90			:
Ct/Hb	Zone	10557	MA_2Z_Comb SQ2	4 / 4	1	70			:
Ct/Hb	Zone	10558	MA_2Z_Comb SQ3	4 / 4	1	90			:
Ct/Hb	Zone	10559	MA_2Z_Comb SQ4	4 / 4	1	130			:
Ct/Hb	Zone	10560	MA_2Z_Comb SQ5	4 / 4	2	130			:
Ct/Hb	Zone	10561	MA_2Z_Comb SQ6	4 / 4	2	130			:
Ct/Hb	Zone	10562	MA_2Z_Comb SQ7	4 / 4	1	130			:
Ct/Hb	Zone	10563	MA_2Z_Comb SQ8	4 / 4	1	70			:
Ct/Hb	Zone	10564	MA_2Z_Comb SQ9	4 / 4	2	130			:
Ct/Hb	Zone	10565	MA_2Z_Comb SQ10	4 / 4	2	70			:
Ct/Hb	Zone	10566	MA_2Z_Comb SQ11	4 / 4	1	70			:
Ct/Hb	Zone	10567	MA_2Z_Comb SQ12	4 / 4	1	70			:
Ct/Hb	Zone	10568	MA_2Z_Comb SQ13	4 / 4	2	90			:
Ct/Hb	Zone	10569	MA_4Z_HybVel1	4 / 4	1	96			:
Ct/Hb	Zone	10570	MA_4Z_HybVel2	4 / 4	1	96			:
Ct/Hb	Zone	10571	MA_4Z_HybVel3	4 / 4	1	96			:
Ct/Hb	Zone	10572	MA_4Z_HybVel4	4 / 4	1	96			:
Ct/Hb	Zone	10573	MA_4Z_HybVel5	4 / 4	1	96			:
Ct/Hb	Zone	10574	MA_4Z_HybVel6	4 / 4	1	96			:
Ct/Hb	Zone	10575	MA_4Z_HybVel7	4 / 4	1	96			:
Ct/Hb	Zone	10576	MA_4Z_HybVel7 AF1&2	4 / 4	1	123			:
Ct/Hb	Zone	10577	MA_4Z_HybVel8	4 / 4	1	96			:
Ct/Hb	Zone	10578	MA_4Z_HybVel9	4 / 4	2	120			:
Ct/Hb	Zone	10579	MA_4Z_HybVel10	4 / 4	2	120			:
Ct/Hb	Zone	10580	MA_4Z_HybVel11	4 / 4	2	120			:
Ct/Hb	Zone	10581	MA_4Z_HybVel12	4 / 4	2	120			:
Ct/Hb	Zone	10582	MA_4Z_HybVel13	4 / 4	2	120			:
Ct/Hb	Zone	10583	MA_4Z_HybVel14	4 / 4	2	120			:
Ct/Hb	Zone	10584	MA_4Z_HybVel15	4 / 4	2	120			:
Ct/Hb	Zone	10585	MA_4Z_HybVel16	4 / 4	2	120			:
Ct/Hb	Zone	10586	MA_4Z_4Zone1A	4 / 4	2	130			:
Ct/Hb	Zone	10587	MA_4Z_4Zone1B	4 / 4	2	130			:
Ct/Hb	Zone	10588	MA_4Z_4Zone1C	4 / 4	2	130			:
Ct/Hb	Zone	10589	MA_4Z_4Zone1D	4 / 4	2	130			:
Ct/Hb	Zone	10590	MA_4Z_4Zone1E	4 / 4	2	130			:
Ct/Hb	Zone	10591	MA_4Z_4Zone2A	4 / 4	1	130			:
Ct/Hb	Zone	10592	MA_4Z_4Zone2B	4 / 4	1	130			:
Ct/Hb	Zone	10593	MA_4Z_4Zone2C	4 / 4	1	130			:
Ct/Hb	Zone	10594	MA_4Z_4Zone2D	4 / 4	1	130			:
Ct/Hb	Zone	10595	MA_4Z_4Zone2E	4 / 4	1	130			:
Ct/Hb	Zone	10596	MA_4Z_4Zone3A	4 / 4	1	70			:
Ct/Hb	Zone	10597	MA_4Z_4Zone3B	4 / 4	1	94			:
Ct/Hb	Zone	10598	MA_4Z_4Zone3C	4 / 4	1	94			:
Ct/Hb	Zone	10599	MA_4Z_4Zone3D	4 / 4	1	94			:
Ct/Hb	Zone	10600	MA_4Z_4Zone3E	4 / 4	1	94			:
Ct/Hb	Zone	10601	MA_4Z_4Zone4A	4 / 4	1	70			:
Ct/Hb	Zone	10602	MA_4Z_4Zone4B	4 / 4	1	70			:
Ct/Hb	Zone	10603	MA_4Z_4Zone4C	4 / 4	1	70			:
Ct/Hb	Zone	10604	MA_4Z_4Zone4D	4 / 4	1	70			:
Ct/Hb	Zone	10605	MA_4Z_4Zone4E	4 / 4	1	70			:
Ct/Hb	Zone	10606	MA_4Z_4Zone5A	4 / 4	1	70			:
Ct/Hb	Zone	10607	MA_4Z_4Zone5B	4 / 4	1	70			:
Ct/Hb	Zone	10608	MA_4Z_4Zone5C	4 / 4	1	70			:
Ct/Hb	Zone	10609	MA_4Z_4Zone5D	4 / 4	1	70			:
Ct/Hb	Zone	10610	MA_4Z_4Zone5E	4 / 4	1	70			:
Ct/Hb	Zone	10611	MA_4Z_HybPrc1	4 / 4	1	130			:
Ct/Hb	Zone	10612	MA_4Z_HybPrc2	4 / 4	1	130			:
Ct/Hb	Zone	10613	MA_4Z_HybPrc3	4 / 4	1	130			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Ct/Hb	Zone	10614	MA_4Z_HybPrc4	4 / 4	1	130			:
Ct/Hb	Zone	10615	MA_4Z_HybPrc5	4 / 4	1	130			:
Ct/Hb	Zone	10616	MA_4Z_HybPrc6	4 / 4	1	130			:
Ct/Hb	Zone	10617	MA_4Z_HybPrc7	4 / 4	1	130			:
Ct/Hb	Zone	10618	MA_4Z_HybPrc8	4 / 4	1	90			:
Ct/Hb	Zone	10619	MA_4Z_HybPrc9	4 / 4	1	90			:
Ct/Hb	Zone	10620	MA_4Z_HybPrc10	4 / 4	1	90			:
Ct/Hb	Zone	10621	MA_4Z_Ice 1 _N	1 / 4	4	130			:
Ct/Hb	Zone	10622	MA_4Z_Ice 2 _N	1 / 4	8	130			:
Ct/Hb	Zone	10623	MA_4Z_Ice 3	1 / 4	4	140			:
Ct/Hb	Zone	10624	MA_4Z_Ice 4	1 / 4	8	130			:
Ct/Hb	Zone	10625	MA_4Z_Ice 5	1 / 4	8	130			:
Ct/Hb	Zone	10626	MA_4Z_Ice 6	1 / 4	8	130			:
Ct/Hb	Zone	10627	MA_4Z_Ice 7	1 / 4	8	130			:
Ct/Hb	Zone	10628	MA_4Z_Ice 8	1 / 4	8	130			:
Ct/Hb	Zone	10629	MA_4Z_Ice 9	1 / 4	4	140			:
Ct/Hb	Zone	10630	MA_4Z_Ice 10	1 / 4	4	140			:
Ct/Hb	Zone	10631	MA_4Z_RndmBeat1	4 / 4	8	90			:
Ct/Hb	Zone	10632	MA_4Z_RndmBeat2	4 / 4	8	90			:
Ct/Hb	Zone	10633	MA_4Z_RndmBeat3	4 / 4	2	90			:
Ct/Hb	Zone	10634	MA_4Z_RndmBeat4	4 / 4	2	90			:
Ct/Hb	Zone	10635	MA_4Z_RndmBeat5	4 / 4	2	90			:
Ct/Hb	Zone	10636	MA_4Z_RndmBeat6	4 / 4	8	90			:
Ct/Hb	Zone	10637	MA_4Z_RndmBeat7	4 / 4	8	90			:
Ct/Hb	Zone	10638	MA_4Z_Bend	4 / 4	1	120			:
Ct/Hb	Zone	10639	MA_8Z_8ZoneArp 1A	4 / 4	1	56			:
Ct/Hb	Zone	10640	MA_8Z_8ZoneArp 1B	4 / 4	1	56			:
Ct/Hb	Zone	10641	MA_8Z_8ZoneArp 1C	4 / 4	1	56			:
Ct/Hb	Zone	10642	MA_8Z_8ZoneArp 1D	4 / 4	1	56			:
Ct/Hb	Zone	10643	MA_8Z_8ZoneArp 1E	4 / 4	1	56			:
Ct/Hb	Zone	10644	MA_8Z_8ZoneArpH 1A	4 / 4	2	112			:
Ct/Hb	Zone	10645	MA_8Z_8ZoneArpH 1B	4 / 4	2	112			:
Ct/Hb	Zone	10646	MA_8Z_8ZoneArpH 1C	4 / 4	2	112			:
Ct/Hb	Zone	10647	MA_8Z_8ZoneArpH 1D	4 / 4	2	112			:
Ct/Hb	Zone	10648	MA_8Z_8ZoneArpH 1E	4 / 4	2	112			:
Ct/Hb	Zone	10649	MA_8Z_8ZoneArp 2A	4 / 4	1	112			:
Ct/Hb	Zone	10650	MA_8Z_8ZoneArp 2B	4 / 4	1	112			:
Ct/Hb	Zone	10651	MA_8Z_8ZoneArp 2C	4 / 4	1	112			:
Ct/Hb	Zone	10652	MA_8Z_8ZoneArp 2D	4 / 4	1	112			:
Ct/Hb	Zone	10653	MA_8Z_8ZoneArp 2E	4 / 4	1	112			:
Ct/Hb	Zone	10654	MA_8Z_8ZoneArp 3A	4 / 4	1	140			:
Ct/Hb	Zone	10655	MA_8Z_8ZoneArp 3B	4 / 4	1	140			:
Ct/Hb	Zone	10656	MA_8Z_8ZoneArp 3C	4 / 4	1	140			:
Ct/Hb	Zone	10657	MA_8Z_8ZoneArp 3D	4 / 4	1	140			:
Ct/Hb	Zone	10658	MA_8Z_8ZoneArp 3E	4 / 4	1	140			:
Ct/Hb	Z.Pad	10659	MA_PadL_Pad SeqL1	4 / 4	2	108			:
Ct/Hb	Z.Pad	10660	MA_PadL_Pad SeqL2	4 / 4	2	104			:
Ct/Hb	Z.Pad	10661	MA_PadL_Pad SeqL3	4 / 4	2	104			:
Ct/Hb	Z.Pad	10662	MA_PadL_Pad SeqL4	4 / 4	2	104			:
Ct/Hb	Z.Pad	10663	MA_PadL_Pad SeqL5	4 / 4	1	108			:
Ct/Hb	Z.Pad	10664	MA_PadL_Pad SeqL6	4 / 4	2	90			:
Ct/Hb	Z.Pad	10665	MA_PadL_Pad SeqL7	4 / 4	2	90			:
Ct/Hb	Z.Pad	10666	MA_PadL_Pad SeqL8	4 / 4	1	90			:
Ct/Hb	Z.Pad	10667	MA_PadL_Pad SeqL9	4 / 4	1	90			:
Ct/Hb	Z.Pad	10668	MA_PadL_Pad SeqL10	4 / 4	1	145			:
Ct/Hb	Z.Pad	10669	MA_PadL_Pad SeqL11	4 / 4	1	130			:
Ct/Hb	Z.Pad	10670	MA_PadL_Pad SeqL12	4 / 4	2	130			:
Ct/Hb	Z.Pad	10671	MA_PadL_Pad SeqL13	4 / 4	1	90			:
Ct/Hb	Z.Pad	10672	MA_PadL_Pad SeqL14	4 / 4	1	90			:
Ct/Hb	Z.Pad	10673	MA_PadH_Pad Seq1	4 / 4	1	70			:
Ct/Hb	Z.Pad	10674	MA_PadH_Pad Seq2	4 / 4	1	70			:
Ct/Hb	Z.Pad	10675	MA_PadH_Pad Seq3	4 / 4	1	70			:
Ct/Hb	Z.Pad	10676	MA_PadH_Pad Seq4	4 / 4	1	90			:
Ct/Hb	Z.Pad	10677	MA_PadH_Pad Seq5	4 / 4	1	124			:
Ct/Hb	Z.Pad	10678	MA_PadH_Pad Seq6	4 / 4	1	56			:
Ct/Hb	Z.Pad	10679	MA_PadH_Pad Seq7	4 / 4	2	145			:
Ct/Hb	Z.Pad	10680	MA_PadH_Pad Seq8	4 / 4	2	145			:
Ct/Hb	Z.Pad	10681	MA_PadH_Pad Seq9	4 / 4	1	145			:
Ct/Hb	Z.Pad	10682	MA_PadH_Pad Seq10	4 / 4	2	145			:
Ct/Hb	Z.Pad	10683	MA_PadH_Pad Seq11	4 / 4	2	145			:
Ct/Hb	Z.Pad	10684	MA_PadH_Pad Seq12	4 / 4	2	145			:
Ct/Hb	Z.Pad	10685	MA_PadH_Pad Seq13	4 / 4	2	145			:
Ct/Hb	Z.Pad	10686	MA_PadH_Pad Seq14	4 / 4	1	145			:
Ct/Hb	Z.Pad	10687	MA_PadH_Pad Seq15	4 / 4	2	145			:
Ct/Hb	Z.Pad	10688	MA_PadH_Pad Seq16	4 / 4	2	145			:
Ct/Hb	Z.Pad	10689	MA_PadH_Pad Seq17	4 / 4	2	145			:
Ct/Hb	Z.Pad	10690	MA_PadH_Pad Seq18	4 / 4	1	145			:
Ct/Hb	Z.Pad	10691	MA_PadH_Pad Seq19	4 / 4	1	145			:
Ct/Hb	Filter	10692	Gate Cut1	4 / 4	4	120			(CC#10,71,74)
Ct/Hb	Filter	10693	Gate Cut2	4 / 4	1	120			(CC#74)
Ct/Hb	Filter	10694	Gate Cut3	4 / 4	8	120			(CC#71,74)
Ct/Hb	Filter	10695	CC-Dive1	4 / 4	4	130			:
Ct/Hb	Filter	10696	CC-Dive2	4 / 4	2	130			:
Ct/Hb	Filter	10697	FilterWave1	4 / 4	4	105			:
Ct/Hb	Filter	10698	FilterWave2	4 / 4	4	105			:
Ct/Hb	Filter	10699	Filter 16	4 / 4	1	153			(CC#74)
Ct/Hb	Filter	10700	Filter 32	4 / 4	1	153			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Ct/Hb	Filter	10701	Filter 3to3	4 / 4	2	153			:
Ct/Hb	Filter	10702	Filter3Delay	4 / 4	1	153			:
Ct/Hb	Filter	10703	Filter Fill1	4 / 4	1	153			:
Ct/Hb	Filter	10704	Filter Fill2	4 / 4	1	153			:
Ct/Hb	Filter	10705	Filter Fill3	4 / 4	1	153			:
Ct/Hb	Filter	10706	Filter Fill4	4 / 4	1	153			:
Ct/Hb	Filter	10707	MC_Hip Hop 2	4 / 4	2	94			(CC#71,74)
Ct/Hb	Filter	10708	FB_Hip Hop 2	4 / 4	1	94			:
Ct/Hb	Filter	10709	IA_Trance 5 _N	4 / 4	4	140			(CC#74)
Ct/Hb	Filter	10710	MA1_Acid Breaks	4 / 4	1	98			(CC#10,74)
Ct/Hb	Filter	10711	IA_Dream Dance	4 / 4	4	136			(CC#74)
Ct/Hb	Filter	10712	MC_Club House	4 / 4	2	128			(CC#71,74)
Ct/Hb	Filter	10713	FA_Club House	4 / 4	1	128			(CC#71)
Ct/Hb	Filter	10714	MB_Garage 2	4 / 4	2	127			(CC#74)
Ct/Hb	Filter	10715	MC_Garage 2	4 / 4	2	127			:
Ct/Hb	Filter	10716	FA_Garage 2	4 / 4	1	127			:
Ct/Hb	Filter	10717	MA_Chill Out	4 / 4	2	79			:
Ct/Hb	Filter	10718	MD_Chill Out	4 / 4	2	79			(CC#11,74)
Ct/Hb	Filter	10719	IA_Chill Out	4 / 4	4	79			(CC#74)
Ct/Hb	Filter	10720	FB_Chill Out	4 / 4	1	79			:
Ct/Hb	Filter	10721	MA_Ambient 3	4 / 4	2	75			(CC#71,74)
Ct/Hb	Filter	10722	MA_Ambient 3 AF1	4 / 4	2	75			:
Ct/Hb	Filter	10723	MA_Ambient 3 AF2	4 / 4	2	75			:
Ct/Hb	Filter	10724	MB_Ambient 3	4 / 4	4	75			(CC#74)
Ct/Hb	Filter	10725	MB_Ambient 3 AF1	4 / 4	4	75			:
Ct/Hb	Filter	10726	MB_Ambient 3 AF2	4 / 4	4	75			:
Ct/Hb	Filter	10727	MC_Ambient 3	4 / 4	2	75			(CC#71,74)
Ct/Hb	Filter	10728	MC_Ambient 3 AF1	4 / 4	2	75			:
Ct/Hb	Filter	10729	MC_Ambient 3 AF2	4 / 4	2	75			:
Ct/Hb	Filter	10730	Wobble 1	4 / 4	1	120			(CC#74)
Ct/Hb	Filter	10731	Wobble 2	4 / 4	1	120			:
Ct/Hb	Filter	10732	Wobble 3	4 / 4	1	120			:
Ct/Hb	Filter	10733	Wobble 4	4 / 4	2	120			:
Ct/Hb	Filter	10734	Wobble 5	4 / 4	2	120			(CC#10,11,74)
Ct/Hb	Exprs	10735	GateL1	4 / 4	1	134			(CC#11)
Ct/Hb	Exprs	10736	GateL2	4 / 4	1	134			:
Ct/Hb	Exprs	10737	GateL3	4 / 4	1	134			:
Ct/Hb	Exprs	10738	GateL4	4 / 4	1	134			:
Ct/Hb	Exprs	10739	GateL5	4 / 4	1	134			:
Ct/Hb	Exprs	10740	GateL6	4 / 4	1	134			:
Ct/Hb	Exprs	10741	GateL7	4 / 4	1	134			:
Ct/Hb	Exprs	10742	GateL8	4 / 4	1	134			:
Ct/Hb	Exprs	10743	GateL9	4 / 4	1	134			:
Ct/Hb	Exprs	10744	GateL10	4 / 4	1	134			:
Ct/Hb	Exprs	10745	GateL11	4 / 4	1	134			:
Ct/Hb	Exprs	10746	GateL12	4 / 4	1	134			:
Ct/Hb	Exprs	10747	GateL13	4 / 4	1	134			:
Ct/Hb	Exprs	10748	GateL14	4 / 4	1	134			:
Ct/Hb	Exprs	10749	GateL15	4 / 4	1	134			:
Ct/Hb	Exprs	10750	GateL16	4 / 4	1	134			:
Ct/Hb	Exprs	10751	GateL17	4 / 4	1	134			:
Ct/Hb	Exprs	10752	GateL18	4 / 4	1	134			:
Ct/Hb	Exprs	10753	GateL19	4 / 4	1	134			:
Ct/Hb	Exprs	10754	GateL20	4 / 4	1	134			:
Ct/Hb	Exprs	10755	GateM1	4 / 4	1	134			:
Ct/Hb	Exprs	10756	GateM2	4 / 4	1	134			:
Ct/Hb	Exprs	10757	GateM3	4 / 4	1	134			:
Ct/Hb	Exprs	10758	GateM4	4 / 4	1	134			:
Ct/Hb	Exprs	10759	GateM5	4 / 4	1	134			:
Ct/Hb	Exprs	10760	GateM6	4 / 4	1	134			:
Ct/Hb	Exprs	10761	GateM7	4 / 4	1	134			:
Ct/Hb	Exprs	10762	GateM8	4 / 4	1	134			:
Ct/Hb	Exprs	10763	GateM9	4 / 4	1	134			:
Ct/Hb	Exprs	10764	GateM10	4 / 4	1	134			:
Ct/Hb	Exprs	10765	GateM11	4 / 4	1	134			:
Ct/Hb	Exprs	10766	GateM12	4 / 4	1	134			:
Ct/Hb	Exprs	10767	GateM13	4 / 4	1	134			:
Ct/Hb	Exprs	10768	GateM14	4 / 4	1	134			:
Ct/Hb	Exprs	10769	GateM15	4 / 4	1	134			:
Ct/Hb	Exprs	10770	GateM16	4 / 4	1	134			:
Ct/Hb	Exprs	10771	GateM17	4 / 4	1	134			:
Ct/Hb	Exprs	10772	GateM18	4 / 4	1	134			:
Ct/Hb	Exprs	10773	GateM19	4 / 4	1	134			:
Ct/Hb	Exprs	10774	GateM20	4 / 4	1	134			:
Ct/Hb	Exprs	10775	GateS1	4 / 4	1	134			:
Ct/Hb	Exprs	10776	GateS2	4 / 4	1	134			:
Ct/Hb	Exprs	10777	GateS3	4 / 4	1	134			:
Ct/Hb	Exprs	10778	GateS4	4 / 4	1	134			:
Ct/Hb	Exprs	10779	GateS5	4 / 4	1	134			:
Ct/Hb	Exprs	10780	GateS6	4 / 4	1	134			:
Ct/Hb	Exprs	10781	GateS7	4 / 4	1	134			:
Ct/Hb	Exprs	10782	GateS8	4 / 4	1	134			:
Ct/Hb	Exprs	10783	GateS9	4 / 4	1	134			:
Ct/Hb	Exprs	10784	GateS10	4 / 4	1	134			:
Ct/Hb	Exprs	10785	GateS11	4 / 4	1	134			:
Ct/Hb	Exprs	10786	GateS12	4 / 4	1	134			:
Ct/Hb	Exprs	10787	GateS13	4 / 4	1	134			:

Main Category	Sub Category	Arp No.	Name	Time Signature	Length	Original Tempo	Accent	Random SFX	Sound Type
Ct/Hb	Exprs	10788	GateS14	4 / 4	1	134			:
Ct/Hb	Exprs	10789	GateS15	4 / 4	1	134			:
Ct/Hb	Exprs	10790	GateS16	4 / 4	1	134			:
Ct/Hb	Exprs	10791	GateS17	4 / 4	1	134			:
Ct/Hb	Exprs	10792	GateS18	4 / 4	1	134			:
Ct/Hb	Exprs	10793	GateS19	4 / 4	1	134			:
Ct/Hb	Exprs	10794	GateS20	4 / 4	1	134			:
Ct/Hb	Exprs	10795	LevSawDown	4 / 4	1	90			:
Ct/Hb	Exprs	10796	SlicePhrase1	4 / 4	1	153			:
Ct/Hb	Exprs	10797	SlicePhrase2	4 / 4	1	153			:
Ct/Hb	Exprs	10798	SlicePhrase3	4 / 4	1	153			:
Ct/Hb	Exprs	10799	SlicePhrase4	4 / 4	1	153			:
Ct/Hb	Exprs	10800	SlicePhrase5	4 / 4	4	153			:
Ct/Hb	Exprs	10801	SlicePhrase6	4 / 4	4	153			:
Ct/Hb	Exprs	10802	SlicePhrase7	4 / 4	4	153			:
Ct/Hb	Exprs	10803	SlicePhrase8	4 / 4	4	153			:
Ct/Hb	Exprs	10804	Slice 16	4 / 4	1	153			:
Ct/Hb	Exprs	10805	Slice 32	4 / 4	1	155			:
Ct/Hb	Exprs	10806	Slice to3	4 / 4	1	153			:
Ct/Hb	Exprs	10807	Slice 3Delay	4 / 4	1	153			:
Ct/Hb	Exprs	10808	Slice Fill1	4 / 4	1	153			:
Ct/Hb	Exprs	10809	Slice Fill2	4 / 4	2	153			:
Ct/Hb	Exprs	10810	Slice Fill3	4 / 4	2	153			:
Ct/Hb	Exprs	10811	Slice Fill4	4 / 4	2	153			:
Ct/Hb	Exprs	10812	MA_Dream Trance	4 / 4	1	140			:
Ct/Hb	Exprs	10813	MA_Dream Trance AF1	4 / 4	1	140			:
Ct/Hb	Exprs	10814	MB_Dream Trance	4 / 4	1	140			:
Ct/Hb	Exprs	10815	MB_Dream Trance AF2	4 / 4	1	140			:
Ct/Hb	Exprs	10816	Pumping&Notes S	4 / 4	1	120			:
Ct/Hb	Exprs	10817	Pumping&Notes M	4 / 4	1	120			:
Ct/Hb	Exprs	10818	Pumping&Notes L	4 / 4	1	120			:
Ct/Hb	Exprs	10819	Pumping&Notes P	4 / 4	1	120			(CC#10,11)
Ct/Hb	Exprs	10820	PumpingCtrl S	4 / 4	1	120			(CC#11)
Ct/Hb	Exprs	10821	PumpingCtrl M	4 / 4	1	120			:
Ct/Hb	Exprs	10822	PumpingCtrl L	4 / 4	1	120			:
Ct/Hb	Exprs	10823	PumpingCtrl P	4 / 4	1	120			(CC#10,11)
Ct/Hb	Pan	10824	Pan Efx4CRL	4 / 4	1	153			(CC#10)
Ct/Hb	Pan	10825	Pan Efx4LCR	4 / 4	1	153			:
Ct/Hb	Pan	10826	Pan Efx4RLC	4 / 4	1	153			:
Ct/Hb	Pan	10827	Pan Efx8+LR	4 / 4	1	153			:
Ct/Hb	Pan	10828	Pan Efx16CRL	4 / 4	1	153			:
Ct/Hb	Pan	10829	Pan Efx16RL	4 / 4	1	153			:
Ct/Hb	Pan	10830	Pan Ef16RL>C	4 / 4	1	153			:
Ct/Hb	Pan	10831	Pan 16RL>WRL	4 / 4	2	153			:
Ct/Hb	Pan	10832	MB_Hip Hop 2	4 / 4	2	94			:
Ct/Hb	Pan	10833	MB_New Gospel	4 / 4	2	90			(CC#10,11)
Ct/Hb	Pan	10834	MC_New Gospel	4 / 4	2	90			:
Ct/Hb	Pan	10835	IA_New Gospel	4 / 4	1	90			:
Ct/Hb	Pan	10836	IA_Club House	4 / 4	2	128			(CC#10)
Ct/Hb	Mod	10837	Mod Control	4 / 4	4	64			(CC#1)
Ct/Hb	Mod	10838	Mod ControlU	4 / 4	4	90			:
Ct/Hb	PBend	10839	Bend Vibrato	4 / 4	4	120			(PB, PB Range=12)
Ct/Hb	PBend	10840	BottleDwVib	4 / 4	4	120			:
Ct/Hb	PBend	10841	BottleUpVib	4 / 4	4	120			:
Ct/Hb	PBend	10842	HammerVib	4 / 4	4	120			:
Ct/Hb	PBend	10843	PullingVib1	4 / 4	4	120			:
Ct/Hb	PBend	10844	PullingVib2	4 / 4	4	120			:
Ct/Hb	PBend	10845	SlideVibrato	4 / 4	4	120			:
Ct/Hb	PBend	10846	U/D ChoknVib	4 / 4	4	120			:
Ct/Hb	PBend	10847	Trill 4	4 / 4	4	120			:
Ct/Hb	PBend	10848	Trill 5	4 / 4	4	120			:
Ct/Hb	PBend	10849	Vibrato1	4 / 4	4	120			:
Ct/Hb	PBend	10850	Vibrato2	4 / 4	4	120			:
Ct/Hb	PBend	10851	Choking Vib	4 / 4	4	120			:
Ct/Hb	PBend	10852	Arm Down	4 / 4	4	120			:
Ct/Hb	PBend	10853	ThrobFx	4 / 4	4	100			(PB, PB Range=24)
Ct/Hb	PBend	10854	PitchEffect1	4 / 4	1	153			:
Ct/Hb	PBend	10855	PitchEffect2	4 / 4	1	153			:
Ct/Hb	PBend	10856	PitchEffect3	4 / 4	1	153			:
Ct/Hb	PBend	10857	PitchEffect4	4 / 4	1	153			:
Ct/Hb	PBend	10858	PitchEffect5	4 / 4	1	153			(PB, PB Range=12)
Ct/Hb	PBend	10859	PitchEffect6	4 / 4	1	153			(PB, PB Range=24)
Ct/Hb	PBend	10860	PitchEffect7	4 / 4	1	153			:
Ct/Hb	PBend	10861	PitchEffect8	4 / 4	2	153			:
Ct/Hb	Assign	10862	AS1Env1	4 / 4	1	90			(CC#16)
Ct/Hb	Assign	10863	AS1Env2	4 / 4	1	90			:
Ct/Hb	Assign	10864	AS1Env3	4 / 4	1	90			:
Ct/Hb	Assign	10865	AS1Env4	4 / 4	1	90			:
Ct/Hb	Assign	10866	AS1Env5	4 / 4	1	90			:
Ct/Hb	Assign	10867	AS1Env6	4 / 4	1	90			:
Ct/Hb	Assign	10868	AS1Env7	4 / 4	1	90			:
Ct/Hb	Assign	10869	AS1Env8	4 / 4	1	90			:
Ct/Hb	Assign	10870	AS1Tri+1	4 / 4	1	150			:
Ct/Hb	Assign	10871	AS1Tri-1	4 / 4	1	90			:
Ct/Hb	Assign	10872	AS1TriF1	4 / 4	1	90			:
Ct/Hb	Assign	10873	AS1Tri+4	4 / 4	4	90			:
Ct/Hb	Assign	10874	AS1Tri-4	4 / 4	4	90			:
Ct/Hb	Assign	10875	AS1TriF4	4 / 4	4	90			:
Ct/Hb	Assign	10876	AS1Tri+8	4 / 4	8	90			:
Ct/Hb	Assign	10877	AS1Tri-8	4 / 4	8	90			:
Ct/Hb	Assign	10878	AS1TriF8	4 / 4	8	90			:
Ct/Hb	Assign	10879	AS1Up+1	4 / 4	1	90			:
Ct/Hb	Assign	10880	AS1Dw+1	4 / 4	1	90			:
Ct/Hb	Assign	10881	AS1SawDw	4 / 4	1	90			:
Ct/Hb	Assign	10882	AS2Env1	4 / 4	1	90			(CC#17)
Ct/Hb	Assign	10883	AS2Env2	4 / 4	1	90			:
Ct/Hb	Assign	10884	AS2Env3	4 / 4	1	90			:
Ct/Hb	Assign	10885	AS2Env4	4 / 4	1	90			:
Ct/Hb	Assign	10886	AS2Env5	4 / 4	1	90			:
Ct/Hb	Assign	10887	AS2Env6	4 / 4	1	90			:
Ct/Hb	Assign	10888	AS2Env7	4 / 4	1	90			:
Ct/Hb	Assign	10889	AS2Env8	4 / 4	1	90			:
Ct/Hb	Assign	10890	AS2Tri+1	4 / 4	1	90			:
Ct/Hb	Assign	10891	AS2Tri-1	4 / 4	1	90			:
Ct/Hb	Assign	10892	AS2TriF1	4 / 4	1	90			:
Ct/Hb	Assign	10893	AS2Tri+4	4 / 4	4	90			:
Ct/Hb	Assign	10894	AS2Tri-4	4 / 4	4	90			:
Ct/Hb	Assign	10895	AS2TriF4	4 / 4	4	90			:
Ct/Hb	Assign	10896	AS2Tri+8	4 / 4	8	90			:
Ct/Hb	Assign	10897	AS2Tri-8	4 / 4	8	90			:
Ct/Hb	Assign	10898	AS2TriF8	4 / 4	8	90			:
Ct/Hb	Assign	10899	AS2Up+1	4 / 4	1	90			:
Ct/Hb	Assign	10900	AS2Dw+1	4 / 4	1	90			:
Ct/Hb	Assign	10901	AS2SawDw	4 / 4	1	90			:
Ct/Hb	Assign	10902	MA2_Acid Breaks	4 / 4	1	98			:
Ct/Hb	Assign	10903	MB2_Acid Breaks	4 / 4	4	98			(CC#10,17,74)
Ct/Hb	General	10904	Mute 4/4	4 / 4	1	120			(no event)
Ct/Hb	General	10905	Mute 1/4	1 / 4	1	120			:
Ct/Hb	General	10906	Mute 2/4	2 / 4	1	120			:
Ct/Hb	General	10907	Mute 3/4	3 / 4	1	120			:
Ct/Hb	General	10908	Mute 5/4	5 / 4	1	120			:
Ct/Hb	General	10909	Mute 6/4	6 / 4	1	120			:
Ct/Hb	General	10910	Mute 7/4	7 / 4	1	120			:
Ct/Hb	General	10911	Mute 6/8	6 / 8	1	120			:
Ct/Hb	General	10912	Mute 1/8	1 / 8	1	120			:
Ct/Hb	General	10913	Mute 2/8	2 / 8	1	120			:
Ct/Hb	General	10914	Mute 3/8	3 / 8	1	120			:
Ct/Hb	General	10915	Mute 4/8	4 / 8	1	120			:
Ct/Hb	General	10916	Mute 5/8	5 / 8	1	120			:
Ct/Hb	General	10917	Mute 7/8	7 / 8	1	120			:
Ct/Hb	General	10918	Mute 8/8	8 / 8	1	120			:
Ct/Hb	General	10919	Mute 9/8	9 / 8	1	120			:
Ct/Hb	General	10920	Mute 10/8	10 / 8	1	120			:
Ct/Hb	General	10921	Mute 11/8	11 / 8	1	120			:
Ct/Hb	General	10922	Mute 12/8	12 / 8	1	120			:

Effect Type List

Category		Effect Type Name	Side Chain/ Modulator	Type (HEX)		MODX M						
	Short name			MSB	LSB	REV	VAR	InsA	InsB	ADIns	VCM Rotary	Mas
	---	NO EFFECT		00	00	0	0					
	---	THRU		00	00			0	0	0	0	
REVERB												
	REV	HD HALL		01	03	1						
	REV	REV-X HALL		01	00	2						
	REV	R3 HALL		01	01	3						
	REV	SPX HALL		01	02	4	1	1	1	1		
	REV	HD ROOM		01	13	5						
	REV	REV-X ROOM		01	10	6						
	REV	R3 ROOM		01	11	7						
	REV	SPX ROOM		01	12	8	2	2	2	2		
	REV	HD PLATE		01	21	9						
	REV	R3 PLATE		01	20	10						
	REV	SPX STAGE		01	30	11	3	3	3	3		
	REV	SPACE SIMULATOR		01	40	12						
	REV	GATED REVERB		01	50		4	4	4	4		
	REV	REVERSE REVERB		01	58		5	5	5	5		
	REV	SHIMMER REVERB		01	60	13						
DELAY												
	DLY	CROSS DELAY		02	00		6	6	6	6		
	DLY	TEMPO CROSS DELAY		02	10		7	7	7	7		
	DLY	TEMPO DELAY MONO		02	20		8	8	8	8		
	DLY	TEMPO DELAY STEREO		02	28		9	9	9	9		
	DLY	CONTROL DELAY		02	30		10	10	10	10		
	DLY	DELAY LR		02	40		11	11	11	11		0
	DLY	DELAY LCR		02	50		12	12	12	12		
	DLY	ANALOG DELAY RETRO		02	60		13	13	13	13		
	DLY	ANALOG DELAY MODERN		02	68		14	14	14	14		
CHORUS												
	CHO	G CHORUS		03	00		15	15	15	15		
	CHO	2 MODULATOR		03	10		16	16	16	16		
	CHO	SPX CHORUS		03	20		17	17	17	17		
	CHO	SYMPHONIC		03	30		18	18	18	18		
	CHO	ENSEMBLE DETUNE		03	40		19	19	19	19		
	CHO	GS1 ENSEMBLE & TREMOLO		03	50		20	20	20	20		
FLANGER												
	FLG	VCM FLANGER		04	00		21	21	21	21		
	FLG	CLASSIC FLANGER		04	10		22	22	22	22		
	FLG	TEMPO FLANGER		04	20		23	23	23	23		
	FLG	DYNAMIC FLANGER	●	04	30		24	24	24	24		
	FLG	CONTROL FLANGER		04	08		25	25	25	25		
PHASER												
	PHA	VCM PHASER MONO		05	00		26	26	26	26		
	PHA	VCM PHASER STEREO		05	10		27	27	27	27		
	PHA	TEMPO PHASER		05	20		28	28	28	28		
	PHA	DYNAMIC PHASER	●	05	30		29	29	29	29		
	PHA	CONTROL PHASER		05	18		30	30	30	30		
TOREMOLO&ROTARY												
	T&R	AUTO PAN		06	00		31	31	31	31		
	T&R	TREMOLO		06	10		32	32	32	32		
	T&R	ROTARY SPEAKER 1		06	20		33	33	33	33		
	T&R	ROTARY SPEAKER 2		06	30		34	34	34	34		
	T&R	VCM ROTARY SPEAKER CLASSIC		06	40						1	
	T&R	VCM ROTARY SPEAKER OVERDRIVE		06	41						2	
	T&R	VCM ROTARY SPEAKER STUDIO		06	42						3	
DISTORTION												
	DST	AMP SIMULATOR 1		07	00		35	35	35	35		
	DST	AMP SIMULATOR 2		07	10		36	36	36	36		
	DST	COMP DISTORTION		07	20		37	37	37	37		
	DST	COMP DISTORTION DELAY		07	30		38	38	38	38		1
	DST	US COMBO		07	40		39	39	39	39		
	DST	JAZZ COMBO		07	41		40	40	40	40		
	DST	US HIGH GAIN		07	42		41	41	41	41		
	DST	BRITISH LEAD		07	43		42	42	42	42		
	DST	MULTI FX		07	44		43	43	43	43		
	DST	SMALL STEREO		07	45		44	44	44	44		
	DST	BRITISH COMBO		07	46		45	45	45	45		
	DST	BRITISH LEGEND		07	47		46	46	46	46		
COMPRESSOR												
	CMP	VCM COMPRESSOR 376	●	08	00		47	47	47	47		2
	CMP	CLASSIC COMPRESSOR	●	08	10		48	48	48	48		
	CMP	MULTI BAND COMP	●	08	20		49	49	49	49		3
	CMP	UNI COMP DOWN	●	08	30		50	50	50	50		4
	CMP	UNI COMP UP	●	08	38		51	51	51	51		5
	CMP	PARALLEL COMP		08	40		52	52	52	52		6
	CMP	M/S EQ COMPRESSOR		08	50		53	53	53	53		7
WAH												
	WAH	VCM AUTO WAH		0A	00		54	54	54	54		
	WAH	VCM TOUCH WAH		0A	10		55	55	55	55		
	WAH	VCM PEDAL WAH		0A	20		56	56	56	56		

Category		Effect Type Name	Side Chain/ Modulator	Type (HEX)		MODX M						
	Short name			MSB	LSB	REV	VAR	InsA	InsB	ADIns	VCM Rotary	Mas
LO-FI												
	L-F	LO-FI		0B	00		57	57	57	57		8
	L-F	NOISY		0B	10		58	58	58	58		
	L-F	DIGITAL TURNTABLE		0B	20		59	59	59	59		
	L-F	BIT CRUSHER		0B	30		60	60	60	60		9
TECH												
	TEC	RING MODULATOR	●	0C	00		61	61	61	61		10
	TEC	CS RING MODULATOR		0C	08		62	62	62	62		11
	TEC	DYNAMIC RING MODULATOR	●	0C	10		63	63	63	63		
	TEC	DYNAMIC FILTER	●	0C	20		64	64	64	64		12
	TEC	AUTO SYNTH		0C	30		65	65	65	65		
	TEC	SPIRALIZER P		0C	38		66	66	66	66		13
	TEC	TEMPO SPIRALIZER P		0C	39		67	67	67	67		14
	TEC	SPIRALIZER F		0C	3A		68	68	68	68		15
	TEC	TEMPO SPIRALIZER F		0C	3B		69	69	69	69		16
	TEC	ISOLATOR		0C	40		70	70	70	70		17
	TEC	SLICE		0C	50		71	71	71	71		18
	TEC	TECH MODULATION		0C	60		72	72	72	72		
	TEC	CONTROL FILTER		0C	28		73	73	73	73		
	TEC	VINYL BREAK		0C	70		74	74	74			19
	TEC	BEAT REPEAT EVEN		0C	78		75	75	75			20
	TEC	BEAT REPEAT TRIPLET		0C	79		76	76	76			21
	TEC	BEAT REPEAT EVEN+TRIPLET		0C	7A		77	77	77			22
	TEC	BEAT REPEAT FREE		0C	7B		78	78	78			23
MISC												
	MSC	VCM EQ 501		0D	00		79	79	79	74		
	MSC	PRESENCE		0D	08		80	80	80	75		24
	MSC	HARMONIC ENHANCER		0D	10		81	81	81	76		
	MSC	STEREOPHONIC OPTIMIZER		0D	18		82	82	82	77		
	MSC	TALKING MODULATOR		0D	20		83	83	83	78		
	MSC	WAVE FOLDER		0D	28		84	84	84	79		25
	MSC	VCM MINI FILTER		0D	29		85	85	85	80		26
	MSC	VCM MINI BOOSTER		0D	2A		86	86	86	81		27
	MSC	DAMPER RESONANCE		0D	30		87	87	87	82		
	MSC	PITCH CHANGE		0D	40		88	88	88	83		
	MSC	EARLY REFLECTION		0D	50		89	89	89	84		
	MSC	VOCODER	●	0D	60		90	90	90	85		
	MSC	NOISE GATE+COMP+EQ		0D	70		91	91	91	86		

Reverb Block

[0] OFF

When this type is selected, no parameters are available.

[1] HD HALL
[5] HD ROOM

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – 30.0s	(0 – 69)	4
2	Room Size	0 – 4	(0 – 4)	
3	Initial Delay	0.1ms – 200.0ms	(0 – 127)	5
4	High Damp Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
5	—			
6	High Ratio	0.0 – 1.0	(0 – 10)	
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	EQ Low Frequency	22Hz – 1.0kHz	(1 – 34)	3
14	EQ Low Gain	–12dB – 0dB – +12dB	(52 – 76)	
15	EQ High Frequency	500Hz – 18.0kHz	(28 – 59)	3
16	EQ High Gain	–12dB – 0dB – +12dB	(52 – 76)	

[9] HD PLATE

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – 30.0s	(0 – 69)	4
2	Plate Type	0 – 2	(0 – 2)	
3	Initial Delay	0.1ms – 200.0ms	(0 – 127)	5
4	High Damp Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
5	—			
6	High Ratio	0.0 – 1.0	(0 – 10)	
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	EQ Low Frequency	22Hz – 1.0kHz	(1 – 34)	3
14	EQ Low Gain	–12dB – 0dB – +12dB	(52 – 76)	
15	EQ High Frequency	500Hz – 18.0kHz	(28 – 59)	3
16	EQ High Gain	–12dB – 0dB – +12dB	(52 – 76)	

[2] REV-X HALL
[6] REV-X ROOM

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – xy.zs	(0 – 69)	23/24
2	Diffusion	0 – 10	(0 – 10)	
3	Initial Delay	0.1ms – 200.0ms	(0 – 127)	5
4	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
5	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
6	Room Size	0 – 31	(0 – 31)	
7	High Ratio	0.1 – 1.0	(1 – 10)	
8	Low Ratio	0.1 – 1.4	(1 – 14)	
9	Decay	0 – 63	(0 – 63)	
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

REV-X HALL: [(0 – 69)] (Table No.23)
REV-X ROOM: [(0 – 69)] (Table No.24)

[3] R3 HALL
[4] SPX HALL
[7] R3 ROOM
[8] SPX ROOM
[10] R3 PLATE
[11] SPX STAGE

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – 30.0s	(0 – 69)	4
2	Diffusion	0 – 10	(0 – 10)	
3	Initial Delay	0.1ms – 200.0ms	(0 – 127)	5
4	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
5	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
6	—			
7	—			
8	—			
9	—			
10	—			
11	Reverb Delay	0.1ms – 200.0ms	(0 – 127)	5
12	Density	0 – 4	(0 – 4)	
13	ER/Rev Balance	E63>R – E=R – E<R63	(1 – 127)	
14	Feedback High Damp	0.1 – 1.0	(1 – 10)	
15	Feedback Level	–63 – +63	(1 – 127)	
16	—			

[12] SPACE SIMULATOR

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – 30.0s	(0 – 69)	4
2	Diffusion	0 – 10	(0 – 10)	
3	Initial Delay	0.1ms – 200.0ms	(0 – 127)	5
4	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
5	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
6	Width	0.5m – 30.2m	(0 – 104)	11
7	Height	0.5m – 30.2m	(0 – 104)	11
8	Depth	0.5m – 30.2m	(0 – 104)	11
9	Wall Vary	0 – 30	(0 – 30)	
10	—			
11	Reverb Delay	0.1ms – 200.0ms	(0 – 127)	5
12	Density	0 – 4	(0 – 4)	
13	ER/Rev Balance	E63>R – E=R – E<R63	(1 – 127)	
14	Feedback High Damp	0.1 – 1.0	(1 – 10)	
15	Feedback Level	–63 – +63	(1 – 127)	
16	Space Type	0 – 1	(0 – 1)	

[13] SHIMMER REVERB

No.	Parameter	Range	Value	Tbl No.
1	Shimmer Gain	-∞ dB, -60.0 dB – 0.0 dB	(0 – 536)	70
2	Shimmer Feedback	0.000 – 0.990	(0 – 990)	
3	Pitch 1	-24 – 0 – +24	(0 – 48)	
4	Fine 1	-100 – 0 – +100	(0 – 200)	
5	Pitch 2	-24 – 0 – +24	(0 – 48)	
6	Fine 2	-100 – 0 – +100	(0 – 200)	
7	Pitch 1/Pitch 2 Balance	Pitch1 1.000 > Pitch2 – Pitch1 = Pitch2 – Pitch1 < Pitch2 1.000	(0 – 1000)	
8	Pitch 1 & Pitch 2 Panning	Pitch1 L1.000 > R, Pitch2 L < R1.000 – Pitch1 C, Pitch2 C – Pitch1 L < R1.000, Pitch2 L1.000 > R	(0 – 1000)	
9	Cross-Feedback	0.000 – 1.000	(0 – 1000)	
10	—			
11	Shimmer LPF fc	500 Hz – 1.00 kHz – 10.0 kHz – 20.0 kHz	(120 – 248)	39
12	Shimmer HPF fc	20.0 Hz – 100 Hz – 1.00 kHz – 2.00 kHz	(8 – 168)	39
13	Pitch 1 & Pitch 2 Delay Offset	0.000 – 1.000	(0 – 1000)	
14	Reverb Time	0.1 s – 100.0 s, ∞ s	(0 – 280)	71
15	Pre-Delay	0.1 ms – 100 ms – 500 ms	(0 – 965)	72
16	Diffusion	0.100 – 1.000	(100 – 1000)	
17	Size	0 – 10	(0 – 10)	
18	Color	0.000 – 1.000	(0 – 1000)	
19	Mod Depth	0.000 – 1.000	(0 – 1000)	
20	Mod Speed	0.100 – 1.000	(100 – 1000)	
21	AM Depth	0.000 – 1.000	(0 – 1000)	
22	AM Frequency	0.011Hz – 10.01Hz – 100.9Hz – 1.001kHz – 5.469kHz	(4 – 1023)	73
23	AM Waveform	tri, sin, squre, saw (up), saw (down), s&h, smooth s&h	(0 – 6)	
24	AM LR Phase	0 degree, 180 degree	(0 – 1)	

Variation, Insertion Block

[0] THRU/OFF

When this type is selected, no parameters are available.

Category — REVERB

[1] SPX HALL
[2] SPX ROOM
[3] SPX STAGE

No.	Parameter	Range	Value	Tbl No.
1	Reverb Time	0.3s – 30.0s	(0 – 69)	4
2	Diffusion	0 – 10	(0 – 10)	
3	Initial Delay	0.1ms – 99.3ms	(0 – 63)	5
4	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
5	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Reverb Delay	0.1ms – 99.3ms	(0 – 63)	5
12	Density	0 – 4	(0 – 4)	
13	ER/Rev Balance	E63>R – E=R – E<R63	(1 – 127)	
14	Feedback High Damp	0.1 – 1.0	(1 – 10)	
15	Feedback Level	–63 – +63	(1 – 127)	
16	—			

[4] GATED REVERB
[5] REVERSE REVERB

No.	Parameter	Range	Value	Tbl No.
1	Type	TypeA, TypeB	(0 – 1)	
2	Room Size	0.1 – 20.0 0.1 – 7.0 (Ins17)	(0 – 127) (0 – 44)	6
3	Diffusion	0 – 10	(0 – 10)	
4	Initial Delay	0.1ms – 200ms 0.1ms – 99.3ms (Ins17)	(0 – 127) (0 – 63)	5
5	Feedback Level	–63 – 0 – +63	(1 – 127)	
6	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
7	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
8	—			
9	—			
10	Dry/Wet	D63>W – D=W – D<W63	(1 – 127)	
11	Liveness	0 – 10	(0 – 10)	
12	Density	0 – 3	(0 – 3)	
13	Feedback High Damp	0.1 – 1.0	(1 – 10)	
14	—			
15	—			
16	—			

Category — DELAY

[1] CROSS DELAY

No.	Parameter	Range	Value	Tbl No.
1	Delay Time L>R	0.1ms – 1638.3ms	(1 – 16383)	
2	Delay Time R>L	0.1ms – 1638.3ms	(1 – 16383)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Input Select	L, R, L&R, L-MODE2, R-MODE2	(0 – 4)	
5	Feedback High Damp	0.1 – 1.0	(1 – 10)	
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	EQ Low Frequency	32Hz – 2.0kHz	(4 – 40)	3
14	EQ Low Gain	–12dB – +12dB	(52 – 76)	
15	EQ High Frequency	500Hz – 16.0kHz	(28 – 58)	3
16	EQ High Gain	–12dB – +12dB	(52 – 76)	

[2] TEMPO CROSS DELAY

No.	Parameter	Range	Value	Tbl No.
1	Delay Time L>R	32nd/3 – 4thx6	(0 – 19)	13
2	Delay Time R>L	32nd/3 – 4thx6	(0 – 19)	13
3	Feedback Level	–63 – +63	(1 – 127)	
4	Input Select	L, R, L&R, L-MODE2, R-MODE2	(0 – 4)	
5	Feedback High Dump	0.1 – 1.0	(1 – 10)	
6	Lag	–63ms – +63ms	(1 – 127)	
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[3] TEMPO DELAY MONO

No.	Parameter	Range	Value	Tbl No.
1	Delay Time	32nd/3 – 4thx6	(0 – 19)	13
2	Feedback Level	–63 – +63	(1 – 127)	
3	Feedback High Damp	0.1 – 1.0	(1 – 10)	
4	L/R Diffusion	–63ms – +63ms	(1 – 127)	
5	Lag	–63ms – +63ms	(1 – 127)	
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[4] TEMPO DELAY STEREO

No.	Parameter	Range	Value	Tbl No.
1	Delay Time	32nd/3 – 4thx6	(0 – 19)	13
2	Feedback Level	–63 – +63	(1 – 127)	
3	Feedback High Dump	0.1 – 1.0	(1 – 10)	
4	L/R Diffusion	–63ms – +63ms	(1 – 127)	
5	Lag	–63ms – +63ms	(1 – 127)	
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[5] CONTROL DELAY

No.	Parameter	Range	Value	Tbl No.
1	Delay Time	0.1ms – 1486.0ms	(1 – 14860)	
2	Delay transition rate	1 – 48	(1 – 48)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Feedback High Damp	0.1 – 1.0	(1 – 10)	
5	—			

6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.

No.	Parameter	Range	Value	Tbl No.
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Control Type	Normal, Scratch	(0 – 1)	
12	—			
13	—			
14	—			
15	—			
16	—			

[6] DELAY L, R

No.	Parameter	Range	Value	Tbl No.
1	Delay Time L	0.1ms – 1638.3ms	(1 – 16383)	
2	Delay Time R	0.1ms – 1638.3ms	(1 – 16383)	
3	Feedback Time 1	0.1ms – 1638.3ms	(1 – 16383)	
4	Feedback Time 2	0.1ms – 1638.3ms	(1 – 16383)	
5	Feedback Level	–63 – +63	(1 – 127)	
6	Feedback High Damp	0.1 – 1.0	(1 – 10)	
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[7] DELAY L, C, R

No.	Parameter	Range	Value	Tbl No.
1	Delay Time L	0.1ms – 1638.3ms	(1 – 16383)	
2	Delay Time R	0.1ms – 1638.3ms	(1 – 16383)	
3	Delay Time C	0.1ms – 1638.3ms	(1 – 16383)	
4	Feedback Time	0.1ms – 1638.3ms	(1 – 16383)	
5	Feedback Level	–63 – +63	(1 – 127)	
6	Delay Level C	0 – 127	(0 – 127)	
7	Feedback High Damp	0.1 – 1.0	(1 – 10)	
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.				

[8] ANALOG DELAY RETRO

No.	Parameter	Range	Value	Tbl No.
1	Delay Time	25ms – 800ms	(0 – 127)	41
2	Feedback Level	0 – 127	(0 – 127)	
3	Delay Input Level	0 – 127	(0 – 127)	
4	Type	Mellow, Dub, Narrow, Soft, Dark	(0 – 4)	43
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[9] ANALOG DELAY MODERN

No.	Parameter	Range	Value	Tbl No.
1	Delay Time	50ms – 1.0ms	(0 – 127)	42
2	Feedback Level	0 – 127	(0 – 127)	
3	Delay Input Level	0 – 127	(0 – 127)	
4	Type	Mellow, Dub, Narrow, Soft, Dark	(0 – 4)	44
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

Category — CHORUS

[1] G CHORUS

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	—			
3	PM Depth	0 – 127	(0 – 127)	
4	Feedback Level	–63 – +63	(1 – 127)	
5	Delay Offset	0.0ms – 50.0ms	(0 – 127)	2
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry / Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	—			
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[2] 2 MODULATOR

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	AM Depth	0 – 127	(0 – 127)	
3	PM Depth	0 – 127	(0 – 127)	
4	Feedback Level	–63 – +63	(1 – 127)	
5	Delay Offset	0.0ms – 50.0ms	(0 – 127)	2
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry / Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	—			
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[3] SPX CHORUS

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	LFO Depth	0 – 127	(0 – 127)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Delay Offset	0.0ms – 50.0ms	(0 – 127)	2
5	—			
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	—			
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[4] SYMPHONIC

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	LFO Depth	0 – 127	(0 – 127)	
3	Delay Offset	0.0ms – 50.0ms	(0 – 127)	2
4	—			
5	—			
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	—			
15	—			
16	—			

[5] ENSEMBLE DETUNE

No.	Parameter	Range	Value	Tbl No.
1	Detune	–50cent – +50cent	(14 – 114)	
2	Initial Delay Lch	0.0ms – 50.0ms	(0 – 127)	2
3	Initial Delay Rch	0.0ms – 50.0ms	(0 – 127)	2
4	Spread	0 – 63	(0 – 63)	
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11 – 14: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
15	—			
16	—			

[6] GS1 ENSEMBLE & TREMOLO

No.	Parameter	Range	Value	Tbl No.
1	Ensemble LFO Depth	0 – 200	(0 – 200)	
2	Ensemble LFO Speed	0.1 – 20.0[Hz]	(1 – 200)	74
3	Ensemble Pan	0 – 100	(0 – 100)	
4	Ensemble BBD Drive	0 – 100	(0 – 100)	
5	Ensemble Dry/Wet	0 – 100	(0 – 100)	
6	Tremolo On/Off	Off, On	(0 – 1)	
7	Tremolo Phase	Normal, Invert	(0 – 1)	
8	Tremolo LFO Depth	0 – 100	(0 – 100)	74
9	Tremolo LFO Speed	0.1 – 20.0[Hz]	(1 – 200)	
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

Category — FLANGER

[1] VCM FLANGER

No.	Parameter	Range	Value	Tbl No.
1	Speed	0.040Hz – 10.00Hz	(0 – 235)	20
2	Manual	0 – 127	(0 – 127)	
3	Depth	0 – 127	(0 – 127)	
4	Feedback	0 – 127	(0 – 127)	
5	Type	1 – 3	(0 – 2)	
6	Spread	0 – 127	(0 – 127)	
7	Mix	0 – 127	(0 – 127)	
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[2] CLASSIC FLANGER

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	LFO Depth	0 – 127	(0 – 127)	
3	LFO Wave	Triangle, Sine, Random	(0 – 2)	
4	Delay Offset	0.09 – 36.21ms	(0 – 139)	18
5	Feedback Level	–100 – +100%	(0 – 200)	
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	Modulation Phase	–180 – +180	(0 – 16)	19
15	Feedback High Damp	0.1 – 1.0	(1 – 10)	
16	Analog Feel	0 – 10	(0 – 10)	

[3] TEMPO FLANGER

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	16th – 4thx16	(5 – 29)	13
2	LFO Depth	0 – 127	(0 – 127)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Delay Offset	0.0ms – 50.0ms	(0 – 127)	2
5	LFO Phase Reset	Off (free run), Key On Reset, SEQ Start Reset	(0 – 2)	
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	LFO Phase Difference	–180deg – +180deg	(4 – 124)	
15	—			
16	—			

[4] DYNAMIC FLANGER

No.	Parameter	Range	Value	Tbl No.
1	Sensitivity	0 – 127	(0 – 127)	
2	Delay Offset	0 – 127	(0 – 127)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Attack Time	0.3ms – 227ms	(0 – 127)	15
5	Release Time	2.6ms – 2171ms	(0 – 127)	16
6	Release Curve	0 – 127	(0 – 127)	
7	Direction	Up, Down	(0 – 1)	
8	Dyna Threshold Level	0 – 127	(0 – 127)	
9	Dyna Level Offset	0 – 127	(0 – 127)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.				

[5] CONTROL FLANGER

No.	Parameter	Range	Value	Tbl No.
1	Flanger Control	0 – 127	(0 – 127)	
2	Lower Range	0 – 127	(0 – 127)	
3	Upper Range	0 – 127	(0 – 127)	
4	Feedback	0 – 127	(0 – 127)	
5	Type	1 – 3	(0 – 2)	
6	Spread	0 – 127	(0 – 127)	
7	Mix	0 – 127	(0 – 127)	
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

Category — PHASER

[1] VCM PHASER MONO

No.	Parameter	Range	Value	Tbl No.
1	Speed	0.100Hz – 10.00Hz	(0 – 252)	21
2	Manual	0 – 127	(0 – 127)	
3	Depth	0 – 127	(0 – 127)	
4	Feedback	0 – 127	(0 – 127)	
5	Stage	4, 6, 8, 10, 12, 16	(0 – 5)	
6	Mode	1, 2, 3	(0 – 2)	
7	Color	0 – 127	(0 – 127)	
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

The Color parameter is not available in the following conditions: When Mode is set to 1 and Stage is set to 4, 6, 8. 12 or 16; or when Mode is set to 2 and Stage is set to 4 or 10.

[2] VCM PHASER STEREO

No.	Parameter	Range	Value	Tbl No.
1	Speed	0.100Hz – 10.00Hz	(0 – 252)	21
2	Manual	0 – 127	(0 – 127)	
3	Depth	0 – 127	(0 – 127)	
4	Feedback	0 – 127	(0 – 127)	
5	Stage	4, 6, 8, 10	(0 – 3)	
6	Mode	1, 2	(0 – 1)	
7	Color	0 – 127	(0 – 127)	
8	Spread	0 – 127	(0 – 127)	
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

The Color parameter is not available in the following conditions: When Mode is set to 1 and Stage is set to 4, 6, or 8; or when Mode is set to 2 and Stage is set to 4 or 10.

[3] TEMPO PHASER

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	16th – 4thx16	(5 – 29)	13
2	LFO Depth	0 – 127	(0 – 127)	
3	Phase Shift Offset	0 – 127	(0 – 127)	
4	Feedback Level	–63 – +63	(1 – 127)	
5	LFO Phase Reset	Off (free run), Key On Reset, SEQ Start Reset	(0 – 2)	
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Stage	4 – 22	(4 – 22)	
12	Diffusion	Mono, Stereo	(0 – 1)	
13	—			
14	—			
15	—			
16	—			

[4] DYNAMIC PHASER

No.	Parameter	Range	Value	Tbl No.
1	Sensitivity	0 – 127	(0 – 127)	
2	Dyna Level Offset	0 – 127	(0 – 127)	
3	Feedback Level	–63 – +63	(1 – 127)	
4	Attack Time	0.3ms – 227ms	(0 – 127)	15
5	Release Time	2.6ms – 2171ms	(0 – 127)	16
6	Release Curve	0 – 127	(0 – 127)	
7	Direction	up, down	(0 – 1)	
8	Dyna Threshold Level	0 – 127	(0 – 127)	
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Stage	4, 5, 6	(4 – 6)	
12	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.				

[5] CONTROL PHASER

No.	Parameter	Range	Value	Tbl No.
1	Phase Control	0 – 127	(0 – 127)	
2	Lower Range	0 – 127	(0 – 127)	
3	Upper Range	0 – 127	(0 – 127)	
4	Feedback	0 – 127	(0 – 127)	
5	Stage	4, 6, 8, 10	(0 – 3)	
6	Mode	1, 2	(0 – 1)	
7	Color	0 – 127	(0 – 127)	
8	Spread	0 – 127	(0 – 127)	
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

Category — TREMOLO&ROTARY

[1] AUTO PAN

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	L/R Depth	0 – 127	(0 – 127)	
3	F/R Depth	0 – 127	(0 – 127)	
4	Pan Direction	L<>R, L>>R, L<<R, L turn, R turn, L/R	(0 – 5)	
5	LFO Wave	0 – 28	(0 – 28)	
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	—			
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	—			
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[2] TREMOLO

No.	Parameter	Range	Value	Tbl No.
1	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
2	AM Depth	0 – 127	(0 – 127)	
3	PM Depth	0 – 127	(0 – 127)	
4	—			
5	—			
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	—			
11	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
13	EQ Mid Width	0.1 – 12.0	(1 – 120)	
14	LFO Phase difference	–180deg – +180deg	(4 – 124)	
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[3] ROTARY SPEAKER 1

No.	Parameter	Range	Value	Tbl No.
1	Rotor Speed Slow	0.0Hz – 2.65Hz	(0 – 63)	1
2	Horn Speed Slow	0.0Hz – 2.65Hz	(0 – 63)	1
3	Rotor Speed Fast	0.0Hz – 39.70Hz	(64 – 127)	1
4	Horn Speed Fast	0.0Hz – 39.70Hz	(64 – 127)	1
5	Rotor Slow/Fast Time	0 – 127	(0 – 127)	
6	Horn Slow/Fast Time	0 – 127	(0 – 127)	
7	Drive Rotor	0 – 127	(0 – 127)	
8	Drive Horn	0 – 127	(0 – 127)	
9	Rotor/Horn Balance	R63>H – R=H – R<H63	(1 – 127)	
10	—			
11 – 14: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
15	Mic L-R Angle	0deg – 180deg	(0 – 60)	
16	Speed Control	Slow, Fast	(0 – 1)	

[4] ROTARY SPEAKER 2

No.	Parameter	Range	Value	Tbl No.
1	Speed Control	Slow, Fast	(0 – 1)	
2	Drive	0.0 – 10.0	(0 – 100)	
3	Tone	0.0 – 10.0	(0 – 100)	
4	Rotor/Horn Balance	R63>H – R=H– R<H63	(1 – 127)	
5	Output Level	0 – 127	(0– 127)	
6	Mic L-R Angle	0deg, 90deg, 120deg, 180deg	(0 – 3)	
7	Input Level	–6dB – 0dB – +6dB	(52 – 76)	
8	Modulation Depth	0 – 63	(0 – 63)	
9	—			
10	—			
11	Horn Acceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
12	Horn Deceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
13	Rotor Speed Slow	0.0rpm – 88.3rpm	(0 – 127)	56
14	Horn Speed Slow	0.0rpm – 89.6rpm	(0 – 127)	57
15	Rotor Speed Fast	189.3rpm – 736.8rpm	(1 – 127)	58
16	Horn Speed Fast	209.4rpm – 817.6rpm	(1 – 127)	59
17	Rotor Acceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
18	Rotor Deceleration	x0.21 – x1.00 – x2.00	(14– 127)	49

Category — DISTORTION

[1] AMP SIMULATOR 1

No.	Parameter	Range	Value	Tbl No.
1	Overdrive	0 – 100%	(0 – 100)	
2	Device	Transistor, Vintage Tube, Distortion1, Distortion2, Fuzz	(0 – 4)	
3	Speaker Type	Flat, Stack, Combo, Twin, Radio, Megaphone	(0 – 5)	
4	Presence	–10 – +10	(0 – 20)	
5	Output Level	0 – 100%	(0 – 100)	
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[2] AMP SIMULATOR 2

No.	Parameter	Range	Value	Tbl No.
1	Overdrive	0 – 127	(0 – 127)	
2	AMP Type	Off, Stack, Combo, Tube, Crunch, Hi Gain, British	(0 – 6)	
3	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
4	Output Level	0 – 127	(0 – 127)	
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[3] COMP DISTORTION

No.	Parameter	Range	Value	Tbl No.
1	Overdrive	0 – 127	(0 – 127)	
2	EQ Low Frequency	32Hz – 2.0kHz	(4 – 40)	3
3	EQ Low Gain	–12dB – +12dB	(52 – 76)	
4	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
5	Output Level	0 – 127	(0 – 127)	
6	—			
7	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
8	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
9	EQ Mid Width	0.1 – 12.0	(1 – 120)	
10	Dry / Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Edge	0 – 127	(0 – 127)	
12	Attack	1ms – 40ms	(0 – 19)	8
13	Release	10ms – 680ms	(0 – 15)	9
14	Threshold	–48dB – –6dB	(79 – 121)	
15	Ratio	1.0 – 20.0	(0 – 7)	10
16	—			

[4] COMP DISTORTION DELAY

No.	Parameter	Range	Value	Tbl No.
1	Overdrive	0 – 100%	(0 – 100)	
2	Device	Transistor, Vintage Tube, Distortion1, Distortion2, Fuzz	(0 – 4)	
3	Speaker Type	Flat, Stack, Combo, Twin, Radio, Megaphone	(0 – 5)	
4	Presence	–10 – 10	(0 – 20)	
5	Output Level	0 – 100%	(0 – 100)	
6	Delay Time L	0.1ms – 1638.3ms	(1 – 16383)	
7	Delay Time R	0.1ms – 1638.3ms	(1 – 16383)	
8	Feedback Time	0.1ms – 1638.3ms	(1 – 16383)	
9	Feedback Level	–63 – +63	(1 – 127)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Delay Mix	0 – 127	(0 – 127)	
12	Feedback High Damp	0.1 – 1.0	(1 – 10)	
13	Compress	–48dB – –6dB	(79 – 121)	
14	—			
15	—			
16	—			

[5] US COMBO

No.	Parameter	Range	Value	Tbl No.
1	Gain Boost	Low, High	(0 – 1)	
2	Volume	0.0 – 10.0	(0 – 100)	
3	Low Cut	0.0 – 10.0	(0 – 100)	
4	Mid Cut	0.0 – 10.0	(0 – 100)	
5	Mid Width	0.0 – 10.0	(0 – 100)	
6	Mid Sweep	0.0 – 10.0	(0 – 100)	
7	High Cut	0.0 – 10.0	(0 – 100)	
8	Balance	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	Presence	0.0 – 10.0	(0 – 100)	
15	—			
16	—			

[6] JAZZ COMBO

No.	Parameter	Range	Value	Tbl No.
1	Panning	0.0 – 10.0	(0 – 100)	
2	Volume	0.0 – 10.0	(0 – 100)	
3	Distortion	Off, 0.1 – 10.0	(0 – 100)	
4	Bass	0.0 – 10.0	(0 – 100)	
5	Middle	0.0 – 10.0	(0 – 100)	
6	Treble	0.0 – 10.0	(0 – 100)	
7	High Treble	0.0 – 10.0	(0 – 100)	
8	—			
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	Chorus	Off, Chorus, Vib	(0 – 2)	
15	Vib Speed	0.0 – 10.0	(0 – 100)	
16	Depth	0.0 – 10.0	(0 – 100)	

[7] US HIGH GAIN

No.	Parameter	Range	Value	Tbl No.
1	Type	Raw1, Vintage1, Modern1, Raw2, Vintage2, Modern2	(0 – 5)	35
2	Gain	0.0 – 10.0	(0 – 100)	
3	—			
4	Bass	0.0 – 10.0	(0 – 100)	
5	Middle	0.0 – 10.0	(0 – 100)	
6	Treble	0.0 – 10.0	(0 – 100)	
7	Presence	0.0 – 10.0	(0 – 100)	
8	Master Volume	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	—			
15	—			
16	—			

[8] BRITISH LEAD

No.	Parameter	Range	Value	Tbl No.
1	Type	Crunch, Hi-Gain, Lead	(0 – 2)	
2	Preamp	0.0 – 10.0	(0 – 100)	
3	Tone Shift	Normal, Loose, Tight	(0 – 2)	
4	Bass	0.0 – 10.0	(0 – 100)	
5	Middle	0.0 – 10.0	(0 – 100)	
6	Treble	0.0 – 10.0	(0 – 100)	
7	Presence	0.0 – 10.0	(0 – 100)	
8	Master Volume	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	—			
15	—			
16	—			

[9] MULTI FX

No.	Parameter	Range	Value	Tbl No.
1	Comp. Sustain	Off, 0.1 – 10.0	(0 – 100)	
2	Wah SW	Off, Wah Pedal, Auto+ Full, Auto+ Mid, Auto+ Light, Auto– Full, Auto– Mid, Auto– Light	(0 – 7)	33
3	Wah Pedal	0 – 127	(0 – 127)	
4	Dist SW	Off, Overdrive, Distortion1, Distortion2, Clean, Crunch, Hi-Gain, Modern	(0 – 7)	34
5	Dist Drive	0.0 – 10.0	(0 – 100)	
6	Dist EQ	High Boost, Mid Boost, Mid Cut 1, Mid Cut 2, Mid Cut 3, Low Cut 1, Low Cut 2, High Cut, High/Low	(0 – 8)	35
7	Dist Tone	0.0 – 10.0	(0 – 100)	
8	Dist Presence	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, Stack, Twin, Tweed, Oldies, Modern, Mean, Soft, Small, Dip1, Dip2, Metal, Light	(0 – 12)	31
12	LFO Speed	0.1Hz – 9.925Hz	(0 – 127)	36
13	Phaser SW	Off, Standard, Wide, Vibe, Tremolo	(0 – 4)	37
14	Delay SW	Off, Delay M, Echo1 M, Echo2 M, Chorus M, Dly Chorus M, Flanger1 M, Flanger2 M, Flanger3 M, Delay St, Echo1 St, Echo2 St, Chorus St, Dl Chorus St, Flanger1 St, Flanger2 St, Flanger3 St	(0 – 16)	38
15	Delay Ctrl	0 – 127	(0 – 127)	
16	Delay Time	0 – 127	(0 – 127)	

[10] SMALL STEREO

No.	Parameter	Range	Value	Tbl No.
1	Comp. SW	Off, On	(0 – 1)	
2	Comp. Sustain	0.0 – 10.0	(0 – 100)	
3	Comp. Level	0.0 – 10.0	(0 – 100)	
4	Dist Type	Overdrive, Distortion1, Distortion2, Clean, Crunch, Hi-Gain, Modern	(1 – 7)	34
5	Dist Drive	0.0 – 10.0	(0 – 100)	
6	Dist EQ	High Boost, Mid Boost, Mid Cut 1, Mid Cut 2, Mid Cut 3, Low Cut 1, Low Cut 2, High Cut, High/Low	(0 – 8)	35
7	Dist Tone	0.0 – 10.0	(0 – 100)	
8	Dist Presence	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, Stack, Twin, Tweed, Oldies, Modern, Mean, Soft, Small, Dip1, Dip2, Metal, Light	(0 – 12)	31
12	—			
13	—			
14	—			
15	—			
16	—			

[11] BRITISH COMBO

No.	Parameter	Range	Value	Tbl No.
1	Mode	Bright, Top Boost	(0 – 1)	
2	Normal	0.0 – 10.0	(0 – 100)	
3	Brilliant	0.0 – 10.0	(0 – 100)	
4	Bass	0.0 – 10.0	(0 – 100)	
5	—			
6	Treble	0.0 – 10.0	(0 – 100)	
7	Cut	0.0 – 10.0	(0 – 100)	
8	—			
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	—			
15	—			
16	—			

[12] BRITISH LEGEND

No.	Parameter	Range	Value	Tbl No.
1	Sensitivity	High, Low	(0 – 1)	
2	Preamp	0.0 – 10.0	(0 – 100)	
3	—			
4	Bass	0.0 – 10.0	(0 – 100)	
5	Middle	0.0 – 10.0	(0 – 100)	
6	Treble	0.0 – 10.0	(0 – 100)	
7	Presence	0.0 – 10.0	(0 – 100)	
8	Master Volume	0.0 – 10.0	(0 – 100)	
9	Output Level	0 – 127	(0 – 127)	
10	—			
11	Speaker Type	Off, BS 4x12, AC 2x12, AC 1x12, AC 4x10, BC 2x12, AM 4x12, YC 4x12, JC 2x12, OC 2x12, OC 1x8	(0 – 10)	30
12	Speaker Air	0 – 2	(0 – 2)	
13	Mic Position	Center, Edge	(0 – 1)	
14	—			
15	—			
16	—			

Category — COMPRESSOR

[1] VCM COMPRESSOR 376

No.	Parameter	Range	Value	Tbl No.
1	Input Level	–∞ – 0.00dB	(0 – 200)	25
2	Output Level	–∞ – 0.00dB	(0 – 200)	25
3	Ratio	2, 4, 8, 12, 20	(0 – 4)	
4	Attack	0.022ms – 50.40ms	(0 – 200)	26
5	Release	10.88ms – 544.22ms	(0 – 200)	27
6	—			
7	—			
8	—			
9	—			
10	—			
11	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
12	—			
13	—			
14	—			
15	—			
16	—			

[2] CLASSIC COMPRESSOR

No.	Parameter	Range	Value	Tbl No.
1	Attack	1ms – 40ms	(0 – 19)	8
2	Release	10ms – 680ms	(0 – 15)	9
3	Threshold	–48dB – –6dB	(79 – 121)	
4	Ratio	1.0 – 20.0	(0 – 7)	10
5	Output Level	0 – 127	(0 – 127)	
6	—			
7	—			
8	—			
9	—			
10	—			
11	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
12	—			
13	—			
14	—			
15	—			
16	—			

[3] MULTI BAND COMP

No.	Parameter	Range	Value	Tbl No.
1	Low Attack	1ms – 200ms	(0 – 29)	8
2	Low Threshold	–54dB – –6dB	(73 – 121)	
3	Low Ratio	1.0 – 20.0	(0 – 7)	10
4	Low Gain	–∞ – +18dB	(0 – 55)	14
5	Mid Attack	1ms – 200ms	(0 – 29)	8
6	Mid Threshold	–54dB – –6dB	(73 – 121)	
7	Mid Ratio	1.0 – 20.0	(0 – 7)	10
8	Mid Gain	–∞ – +18dB	(0 – 55)	14
9	High Attack	1ms – 200ms	(0 – 29)	8
10	High Threshold	–54dB – –6dB	(73 – 121)	
11	High Ratio	1.0 – 20.0	(0 – 7)	10
12	High Gain	–∞ – +18dB	(0 – 55)	14
13	Divide Freq Low	16Hz – 20kHz	(0 – 124)	28
14	Divide Freq High	16Hz – 20kHz	(0 – 124)	28
15	Common Release	10ms – 3000ms	(0 – 23)	9
16	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45

[4] UNIVERSAL COMPRESSOR DOWN

No.	Parameter	Range	Value	Tbl No.
1	Threshold	–60dB – 0dB	(0 – 120)	
2	Knee	0 – 8	(0 – 8)	
3	Attack	0.01ms – 80ms	(0 – 127)	50
4	Release	6.25ms – 999.0ms	(0 – 127)	51
5	Ratio	1.00 – ∞	(0 – 127)	52
6	Side Chain EQ Switch	Off, On	(0 – 1)	
7	Side Chain EQ Q	0.1 – 10.0	(0 – 126)	53
8	Side Chain EQ Frequency	11.89Hz – 17.78kHz	(0 – 127)	54
9	Side Chain EQ Gain	–30 – +30 dB	(0 – 120)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–20 – +40 dB	(0 – 120)	
12	Make Up Gain	–20 – +40 dB	(0 – 120)	
13	Post-comp HPF	Off, 1.035Hz – 80.35Hz	(0 – 127)	55
14	Clipper	Off, 1 – 100	(0 – 100)	
15	Clipper Source	Dry+Wet, Wet	(0 – 1)	
16	—			
17	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45

For the Variation block, the value of the Clipper Source is fixed to Wet.

[5] UNIVERSAL COMPRESSOR UP

No.	Parameter	Range	Value	Tbl No.
1	Threshold	–60dB – 0dB	(0 – 120)	
2	Knee	0 – 8	(0 – 8)	
3	Attack	0.01ms – 80ms	(0 – 127)	50
4	Release	6.25ms – 999.0ms	(0 – 127)	51
5	Ratio	1 – ∞	(0 – 127)	52
6	Side Chain EQ Switch	Off, On	(0 – 1)	
7	Side Chain EQ Q	0.1 – 10.0	(0 – 126)	53
8	Side Chain EQ Frequency	11.89Hz – 17.78kHz	(0 – 127)	54
9	Side Chain EQ Gain	–30 – +30 dB	(0 – 120)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–20 – +40 dB	(0 – 120)	
12	Make Up Gain	–20 – +20 dB	(0 – 80)	
13	Post-comp HPF	Off, 1.035Hz – 80.35Hz	(0 – 127)	55
14	Clipper	Off, 1 – 100	(0 – 100)	
15	Clipper Source	Dry+Wet, Wet	(0 – 1)	
16	Gain Limit	0 – +12dB	(0 – 120)	
17	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45

For the Variation block, the value of the Clipper Source is fixed to Wet.

[6] PARALLEL COMPRESSOR

No.	Parameter	Range	Value	Tbl No.
1	Type	Natural, Rich, Punchy, Electronic, Loud	(0 – 4)	
2	Compression	0 – 100	(0 – 100)	
3	Texture	0 – 100	(0 – 100)	
4	Output Level	–18dB – +18dB	(0 – 120)	
5	Input Level	–18dB – +18dB	(0 – 120)	
6	—			
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[7] M/S EQ COMPRESSOR

No.	Parameter	Range	Value	Tbl No
1	M/S Balance	M100>S – M=S – M<S100	(0 – 200)	
2	Mid Gain	–∞dB–0dB–+24dB	(0 – 127)	45
3	Side Gain	–∞dB–0dB–+24dB	(0 – 127)	45
4	Stereo Expander	Bypass, 1 – 10	(0 – 10)	
5	Compressor Type	Off, Natural, Smooth, Attack, Loud, Hard, Limiter, CompSat1, CompSat2, CompSat3, LimitSat1, LimitSat2, LimitSat3	(0 – 12)	
6	Mid Threshold	–60dB – 0dB	(0 – 120)	
7	Mid Compressor Curve	0 – 100	(0 – 100)	
8	Mid Makeup Gain	–20dB – +20dB	(0 – 80)	
9	Side Threshold	–60dB – 0dB	(0 – 120)	
10	Side Compressor Curve	0 – 100	(0 – 100)	
11	Side Makeup Gain	–20dB – +20dB	(0 – 80)	
12	M/S EQ Position	Pre/Pre, Pre/Post, Post/Pre, Post/Post, Pre/PreLC, Pre/PstLC, Pst/PreLC, Pst/PstLC	(0 – 7)	
13	Mid EQ Low Frequency	16.0Hz–100Hz–1.00kHz–10.0kHz	(0 – 224)	39
14	Mid EQ Low Gain	–18.0dB – +18.0dB	(20 – 380)	
15	Mid EQ Low Q	LSF, 0.1– 16.0	(0 – 140)	
16	Mid EQ High Frequency	400Hz–1.00kHz–10.0kHz–16.0kHz	(112 – 240)	39
17	Mid EQ High Gain	–18.0dB – +18.0dB	(20 – 380)	
18	Mid EQ High Q	HSF, 0.1– 16.0	(0 – 140)	
19	Side EQ Low Frequency	16.0Hz–100Hz–1.00kHz–10.0kHz	(0 – 224)	39
20	Side EQ Low Gain	–18.0dB – +18.0dB	(20 – 380)	
21	Side EQ Low Q	LSF, 0.1– 16.0	(0 – 140)	
22	Side EQ High Frequency	400Hz–1.00kHz–10.0kHz–16.0kHz	(112 – 240)	39
23	Side EQ High Gain	–18.0dB – +18.0dB	(20 – 380)	
24	Side EQ High Q	HSF, 0.1– 16.0	(0 – 140)	

Category — WAH

[1] VCM AUTO WAH

No.	Parameter	Range	Value	Tbl No.
1	Speed	0.100Hz – 20.00Hz	(0 – 254)	22
2	Lower Range	0 – 127	(0 – 127)	
3	Upper Range	0 – 127	(0 – 127)	
4	Resonance Offset	–12.0 – +12.0	(40 – 88)	
5	LFO Wave	Sin, Trp	(0 – 1)	
6	Type	High, Mid, Low Bass	(0 – 3)	
7	Overdrive	0.0dB – +40.0dB	(0 – 80)	
8	Output	–20.0dB – +10.0dB	(24 – 84)	
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

When the value of Lower Range is greater than Upper Range, the sound will not be modulated and only the Lower Range value is available.

[2] VCM TOUCH WAH

No.	Parameter	Range	Value	Tbl No.
1	Sensitivity	0 – 127	(0 – 127)	
2	Lower Range	0 – 127	(0 – 127)	
3	Upper Range	0 – 127	(0 – 127)	
4	Resonance Offset	–12.0 – +12.0	(40 – 88)	
5	Direction	Up, Down	(0 – 1)	
6	Type	High, Mid, Low, Bass	(0 – 3)	
7	Overdrive	0.0dB – +40.0dB	(0 – 80)	
8	Output	–20.0dB – +10.0dB	(24 – 84)	
9	—			
10	—			
11	Attack Offset	–5 – +5	(59 – 69)	
12	—			
13	—			
14	—			
15	—			
16	—			

When the value of Lower Range is greater than Upper Range, the sound will not be modulated and only the Lower Range value is available.

[3] VCM PEDAL WAH

No.	Parameter	Range	Value	Tbl No.
1	Pedal Control	0 – 127	(0 – 127)	
2	Lower Range	0 – 127	(0 – 127)	
3	Upper Range	0 – 127	(0 – 127)	
4	Resonance Offset	–12.0 – +12.0	(40 – 88)	
5	Direction	Up, Down	(0 – 1)	
6	Type	High, Mid, Low, Bass	(0 – 3)	
7	Overdrive	0.0dB – +40.0dB	(0 – 80)	
8	Output	–20.0dB – +10.0dB	(24 – 84)	
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

When the value of Lower Range is greater than Upper Range, the sound will not be modulated and only the Lower Range value is available.

Category — Lo-Fi

[1] LO-FI

No.	Parameter	Range	Value	Tbl No.
1	Sampling Frequency Control	44.1kHz – 344Hz	(0 – 127)	12
2	Word Length	1 – 127	(1 – 127)	
3	Output Level	–6dB – +36dB	(0 – 42)	
4	Pre-LPF Cutoff Frequency	63Hz – 20.0kHz	(10 – 60)	3
5	Filter Type	Thru, PowerBass, Radio, Telephone, Clean, Low	(0 – 5)	
6	Pre-LPF Resonance	1.0 – 12.0	(10 – 120)	
7	Bit Assign	0 – 6	(0 – 6)	
8	Emphasis	Off, On	(0 – 1)	
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	Input Mode	Mono, Stereo	(0 – 1)	
16	—			

[2] NOISY

No.	Parameter	Range	Value	Tbl No.
1	Mod Depth	0 – 10	(0 – 10)	
2	Mod Speed	0 – 127	(0 – 127)	
3	Mod Feedback	–63 – +63	(1 – 127)	
4	Mod Mix Balance	1 – 127	(1 – 127)	
5	Drive	0 – 127	(0 – 127)	
6	AM Speed	0.00Hz – 39.7Hz	(0 – 127)	1
7	AM Depth	0 – 127	(0 – 127)	
8	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
9	LPF Resonance	1.0 – 12.0	(10 – 120)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	EQ Frequency	100Hz – 10.0kHz	(14 – 54)	3
12	EQ Gain	–12dB – +12dB	(52 – 76)	
13	EQ Width	1.0 – 12.0	(10 – 120)	
14	—			
15	—			
16	—			

[3] DIGITAL TURNTABLE

No.	Parameter	Range	Value	Tbl No.
1	Click Density	0 – 5	(0 – 5)	
2	Click Level	0 – 127	(0 – 127)	
3	Noise Tone	0 – 6	(0 – 6)	
4	Noise Mod Speed	0.00Hz – 39.7Hz	(0 – 127)	1
5	Noise Mod Depth	0 – 127	(0 – 127)	
6	Dry Send to Noise	0 – 127	(0 – 127)	
7	Noise LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
8	Noise LPF Q	1.0 – 12.0	(10 – 120)	
9	Noise Level	0 – 127	(0 – 127)	
10	—			
11	Dry Level	0 – 127	(0 – 127)	
12	Dry LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
13	—			
14	—			
15	—			
16	—			

[4] BIT CRUSHER

No.	Parameter	Range	Value	Tbl No.
1	Sample Rate	0 – 100.00	(0 – 16383)	
2	Bit	1 – 16	(1 – 16)	
3	Crush Type	Soft, Hard	(0 – 1)	
4	Input Level	–19.5dB – +12dB	(1 – 127)	47
5	M/S	Off, On	(0 – 1)	
6	Side Sample Rate	0 – 100.00	(0 – 16383)	
7	Side Bit	1 – 16	(1 – 16)	
8	Sample Rate Link	–1.0 – +1.0	(0 – 100)	
9	Bit Link	–1.0 – +1.0	(0 – 100)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–19.5dB – +12dB	(1 – 127)	47
12	—			
13	—			
14	—			
15	—			
16	—			

Category — TEC

[1] RING MODULATOR

No.	Parameter	Range	Value	Tbl No.
1	OSC Frequency Coarse	0.5Hz – 5kHz	(0 – 127)	17
2	OSC Frequency Fine	0 – 127	(0 – 127)	
3	LFO Wave	Tri, Sine	(0 – 1)	
4	LFO Depth	0 – 127	(0 – 127)	
5	LFO Speed	0.0Hz – 39.70Hz	(0 – 127)	1
6	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
7	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	Modulator Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[2] CS RING MODULATOR

No.	Parameter	Range	Value	Tbl No.
1	Attack	0.001s – 10s	(0 –100)	
2	Decay/Release	0.001s – 10s	(0 –100)	
3	Depth	–1.0 – 1.0	(0 –400)	
4	Speed	0.2Hz – 2.0kHz	(0 –1024)	
5	Modulation	0.0 – 1.0	(0 –100)	
6	Stereoize	–1.0 – 1.0	(0 –100)	
7	Luster	–1.0 – 1.0	(0 –100)	
8	Drive	0 – 100	(0 –100)	
9	Output Level	–24dB – 6dB	(0 –120)	
10	—			
11	EG Mode	Attack-Decay, Riser	(0 –1)	
12	EG Depth Mode	Normal, Deep	(0 –1)	
13	EG Key On Reset	Off, On	(0 –1)	
14	—			
15	—			
16	—			

[3] DYNAMIC RING MODULATOR

No.	Parameter	Range	Value	Tbl No.
1	Sensitivity	0 – 127	(0 – 127)	
2	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
3	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
4	Attack Time	0.3ms – 227ms	(0 – 127)	15
5	Release Time	2.6ms – 2171ms	(0 – 127)	16
6	Release Curve	0 – 127	(0 – 127)	
7	Direction	Up, Down	(0 – 1)	
8	Dyna Threshold Level	0 – 127	(0 – 127)	
9	Dyna Level Offset	0 – 127	(0 – 127)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45

13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.

[4] DYNAMIC FILTER

No.	Parameter	Range	Value	Tbl No.
1	Filter Type	LPF (12dB), LPF (18dB), LPF (24dB), HPF, BPF, BEF	(0 – 5)	
2	Sensitivity	0 – 127	(0 – 127)	
3	Dyna Level Offset	0 – 127	(0 – 127)	
4	Resonance	–16 – +111	(0 – 127)	
5	Attack Time	0.3ms – 227ms	(0 – 127)	15
6	Release Time	2.6ms – 2171ms	(0 – 127)	16
7	Release Curve	0 – 127	(0 – 127)	
8	Direction	up, down	(0 – 1)	
9	Dyna Threshold Level	0 – 127	(0 – 127)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	Side Chain Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.				

[5] AUTO SYNTH

No.	Parameter	Range	Value	Tbl No.
1	Mod Speed	0 – 127	(0 – 127)	
2	Mod Wave Type	TypeA, TypeB, TypeC, TypeD	(0 – 3)	
3	Mod Depth	0 – 127	(0 – 127)	
4	Mod Depth Offset R	–63 – +63	(1 – 127)	
5	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
6	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
7	Delay Time	0.1ms – 370.0ms	(1 – 3700)	
8	Delay Time Offset R	0 – 884	(0 – 884)	
9	Delay Level	0 – 127	(0 – 127)	
10	Dry Mix Level	0 – 127	(0 – 127)	
11	Feedback Level	–63 – +63	(1 – 127)	
12	FB Level Offset R	–63 – +63	(1 – 127)	
13	AM Speed	0.00Hz – 39.7Hz	(0 – 127)	1
14	AM Wave	Tri, Sine, Saw Up, Saw Down	(0 – 3)	
15	AM Depth	0 – 127	(0 – 127)	
16	AM Inverse R	Normal, Inverse	(0 – 1)	

[6] SPIRALIZER P
[8] SPIRALIZER F

No.	Parameter	Range	Value	Tbl No.
1	Spiral Speed	–39.7Hz – 0.00Hz – +39.7Hz	(1 – 255)	60
2	Filter Offset	C–2 – G8	(0 – 127)	
3	Feedback	0 – 127	(0 – 127)	
4	Spiral Step Mode	Continuous, Semitone, Scale	(0 – 2)	
5	Spiral Step Semitones	1 semitones – 12 semitones	(0 – 11)	
6	Spiral Step Scale Type	Maj, Min (Natural), Min (Harmonic)	(0 – 2)	
7	Spiral Sync	Step, Octave	(0 – 1)	
8	Offset Transition Rate	1 – 62	(1 – 62)	
9	Spiral Step Transition Rate	1/48 – 1/2	(0 – 14)	61
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11				
12				
13				
14				
15				
16	Spiral Switch	Off, On	(0 – 1)	

[7] TEMPO SPIRALIZER P
[9] TEMPO SPIRALIZER F

No.	Parameter	Range	Value	Tbl No.
1	Spiral Speed	32nd/3 – 4thx6	(0 – 19)	13
2	Filter Offset	C–2 – G8	(0 – 127)	
3	Feedback	0 – 127	(0 – 127)	
4	Spiral Step Mode	Continuous, Semitone, Scale	(0 – 2)	
5	Spiral Step Semitones	1 semitones – 12 semitones	(0 – 11)	
6	Spiral Step Scale Type	Maj, Min (Natural), Min (Harmonic)	(0 – 2)	
7	Spiral Sync	Step, Octave	(0 – 1)	
8	Offset Transition Rate	1 – 62	(1 – 62)	
9	Spiral Step Transition Rate	1/48 – 1/2	(0 – 14)	61
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11				
12				
13				
14				
15	Direction	Up, Down	(0 – 1)	
16	Spiral Switch	Off, On	(0 – 1)	

[10] ISOLATOR

No.	Parameter	Range	Value	Tbl No.
1	On/Off Switch	On, Off	(0 – 1)	
2	Low Level	–64 – +63	(0 – 127)	
3	Mid Level	–64 – +63	(0 – 127)	
4	High Level	–64 – +63	(0 – 127)	
5	Low Mute	Off, On	(0 – 1)	
6	Mid Mute	Off, On	(0 – 1)	
7	High Mute	Off, On	(0 – 1)	
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[11] SLICE

No.	Parameter	Range	Value	Tbl No.
1	Divide Type	16th – 4th	(5 – 11)	13
2	Gate Time	0 – 100%	(0 – 100)	
3	Pan AEG Type	A – E	(0 – 4)	
4	Pan AEG Min Level	0 – 127	(0 – 127)	
5	Pan Depth	–63 – +63	(1 – 127)	
6	Divide Min Level	0 – 127	(0 – 127)	
7	Pan Type	A – J	(0 – 9)	
8	Drive	0 – 127	(0 – 127)	
9	AEG Phase	0 – 15 (x 16th note)	(0 – 15)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Phase Reset	Off (free run), KeyOnReset, SEQ Start Reset	(0 – 2)	
12	Set Slice Tempo	—	—	
13 – 16: Same as the parameters shaded in gray in CROSS DELAY on page 160.				

[12] TECH MODULATION

No.	Parameter	Range	Value	Tbl No.
1	Mod Speed	0 – 127	(0 – 127)	
2	Mod Depth	0 – 127	(0 – 127)	
3	Mod Gain	–12 – +12dB	(52 – 76)	
4	Mod Mix Balance	D63>W – D=W – D<W63	(1 – 127)	
5	Pre Mod HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
6	Mod LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
7	Mod LPF Resonance	1.0 – 12.0	(10 – 120)	
8	Delay Time	0.1 – 740.0ms	(1 – 7400)	
9	Delay Time Offset R	0 – 884	(0 – 884)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Feedback Level	–63 – +63	(1 – 127)	
12	FB Level Offset R	–63 – +63	(1 – 127)	
13	Feedback High Damp	0.1 – 1.0	(1 – 10)	
14	FB Hi Damp Offset R	–0.9 – +0.9	(1 – 19)	
15	—			
16	—			

[13] CONTROL FILTER

No.	Parameter	Range	Value	Tbl No.
1	Filter Type	LPF (12dB), LPF (18dB), LPF (24dB), HPF, BPF	(0 – 4)	
2	Cutoff Frequency Control	0 – 127	(0 – 127)	
3	Resonance	0 – 127	(0 – 127)	
4	Filter Output Level	–12dB – +12dB	(52 – 76)	
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[14] VINYL BREAK

No.	Parameter	Range	Value	Tbl No.
1	Break	Off, On	(0 – 1)	
2	Speed	Fast, Middle, Slow, Vinyl Stop, Power Off	(0 – 4)	
3	Speed Adjust	+30% – –30%	(0 – 120)	
4	—			
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–19.5dB – +12dB	(1 – 127)	47
12	—			
13	—			
14	—			
15	—			
16	—			

[15] BEAT REPEAT EVEN
[16] BEAT REPEAT TRIPLET
[17] BEAT REPEAT EVEN+TRIPLET
[18] BEAT REPEAT FREE

No.	Parameter	Range	Value	Tbl No.
1	Repeat	Off, On	(0 – 1)	
2	Length	Even, Triplet, Even+Triplet: 1/256 – 1/1 Free: 1/256.00 – 1/1.00	Even: (0 – 8) Triplet: (0 – 8) Even+Triplet: (0 – 16) Free: (0 – 127)	48
3	Freeze	Off, On	(0 – 1)	
4	Gate Time	0 – 100%	(0 – 100)	
5	Attack Time	0 – 100%	(0 – 100)	
6	Release Time	0 – 100%	(0 – 100)	
7	Play Speed	–1.0 – +1.0	(1 – 127)	
8	Pitch Sweep	–63 – +63	(1 – 127)	
9	Time Sweep	–63 – +63	(1 – 127)	
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Filter Type	Thru, LPF, HPF	(0 – 2)	
12	Cutoff Frequency	14.1Hz – 21.1kHz	(0 – 127)	46
13	Resonance	0.0 – 12.7	(0 – 127)	
14	Output Level	–19.5dB – +12dB	(1 – 127)	47
15	Random	Off, On	(0 – 1)	
16	Retrigger Cycle	1Beat, 1/2Beat, 1/4Beat	(0 – 2)	
17	Retrigger Gate Time	0 – 100%	(0 – 100)	
18	Retrigger Attack Time	0 – 100%	(0 – 100)	
19	Retrigger Release Time	0 – 100%	(0 – 100)	
20	Retrigger Quantize	Off, On	(0 – 1)	
21	Length Change Quantize	1Beat, 1/2Beat, 1/4Beat, 1/8Beat, Off	(0 – 4)	

Category — MISC

[1] VCM EQ 501

No.	Parameter	Range	Value	Tbl No.
1	EQ1 (LSH) Frequency	31.5Hz – 2.0kHz	(12 – 84)	28
2	EQ1 (LSH) Gain	–12.0dB – +12.0dB	(60 – 300)	
3	EQ2 Q	0.50 – 16.00	(0 – 60)	29
4	EQ2 Frequency	50.0 Hz – 20.0kHz	(20 – 124)	28
5	EQ2 Gain	–18.0dB – +18.0dB	(0 – 360)	
6	EQ3 Q	0.50 – 16.00	(0 – 60)	29
7	EQ3 Frequency	50.0Hz – 20.0kHz	(20 – 124)	28
8	EQ3 Gain	–18.0dB – +18.0dB	(0 – 360)	
9	EQ4 Q	0.50 – 16.00	(0 – 60)	29
10	EQ4 Frequency	50.0Hz – 20.0kHz	(20 – 124)	28
11	EQ4 Gain	–18.0dB – +18.0dB	(0 – 360)	
12	EQ5 (HSH) Frequency	500Hz – 20.0kHz	(60 – 124)	28
13	EQ5 (HSH) Gain	–12.0dB – +12.0dB	(60 – 300)	
14	Output Level	–12.0dB – +12.0dB	(60 – 300)	
15	—			
16	—			

[2] PRESENCE

No.	Parameter	Range	Value	Tbl No.
1	Presence	0 – 100	(0 – 100)	
2	Texture	0 – 100	(0 – 100)	
3	Output Level	–6dB – +6dB	(0 – 120)	
4	—			
5	—			
6	—			
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[3] HARMONIC ENHANCER

No.	Parameter	Range	Value	Tbl No.
1	HPF Cutoff Frequency	500Hz – 16.0kHz	(28 – 58)	3
2	Drive	0 – 127	(0 – 127)	
3	Mix Level	0 – 127	(0 – 127)	
4	—			
5	—			
6	—			
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[4] STEREOPHONIC OPTIMIZER

No.	Parameter	Range	Value	Tbl No.
1	Low Subband Gain Lch	–14.00dB – 6.00dB	(5801 – 7801)	
2	Low Subband Gain Rch	–14.00dB – 6.00dB	(5801 – 7801)	
3	Mid1 Subband Gain Lch	–14.00dB – 6.00dB	(5801 – 7801)	
4	Mid1 Subband Gain Rch	–14.00dB – 6.00dB	(5801 – 7801)	
5	Mid2 Subband Gain Lch	–14.00dB – 6.00dB	(5801 – 7801)	
6	Mid2 Subband Gain Rch	–14.00dB – 6.00dB	(5801 – 7801)	
7	Mid3 Subband Gain Lch	–14.00dB – 6.00dB	(5801 – 7801)	
8	Mid3 Subband Gain Rch	–14.00dB – 6.00dB	(5801 – 7801)	
9	High Subband Gain Lch	–14.00dB – 6.00dB	(5801 – 7801)	
10	High Subband Gain Rch	–14.00dB – 6.00dB	(5801 – 7801)	
11	Width Low	0.00 – 1.00	(0 – 100)	
12	Width Mid1	0.00 – 1.00	(0 – 100)	
13	Width Mid2	0.00 – 1.00	(0 – 100)	
14	Width Mid3	0.00 – 1.00	(0 – 100)	
15	Width High	0.00 – 1.00	(0 – 100)	
16	On/Off Switch	Off, On	(0 – 1)	

[5] TALKING MODULATOR

No.	Parameter	Range	Value	Tbl No.
1	Vowel	a, i, u, e, o	(0 – 4)	
2	Move Speed	1 – 62	(1 – 62)	
3	Drive	0 – 127	(0 – 127)	
4	Output Level	0 – 127	(0 – 127)	
5	—			
6	—			
7	—			
8	—			
9	—			
10	—			
11	—			
12	—			
13	—			
14	—			
15	—			
16	—			

[6] WAVE FOLDER

No.	Parameter	Range	Value	Tbl No.
1	Fold	0.000 – 1.000	(0 – 1000)	
2	Fold Type	Soft, Hard	(0 – 1)	
3	LFO Depth	0 – 127	(0 – 127)	
4	LFO Speed	0.01Hz – 1400Hz	(0 – 1023)	62
5	LFO Shape	–50 – +50	(0 – 100)	
6	—			
7	—			
8	—			
9	Input Level	–40 – +20 dB	(0 – 120)	
10	Dry/Wet	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–40 – +20 dB	(0 – 120)	
12	SEQ Depth	0 – 127	(0 – 127)	
13	SEQ Clock	0.5x – 10.0x	(0 – 15)	63
14	SEQ Pattern	A – J	(0 – 9)	64
15	SEQ Variation	0 – 100	(0 – 100)	
16	SEQ Phase Reset	OFF, Key On, Seq Start, Seq Start + Bar	(0 – 3)	

[7] VCM MINI FILTER

No.	Parameter	Range	Value	Tbl No.
1	Cutoff Frequency	0.00 – 100.00	(0 – 10000)	
2	Resonance	0.0 – 1.0	(0 – 500)	
3	—			
4	Type	LPF, HPF	(0 – 1)	
5	Texture	Retro, Standard, Modern	(0 – 2)	
6	—			
7	—			
8	—			
9	Input Level	–36 – +24 dB	(0 – 120)	
10	Dry/Wet	D63>W – D=W – D<W63	(1 – 127)	
11	Output Level	–40 – +20 dB	(0 – 120)	
12	—			
13	—			
14	—			
15	—			
16	—			

[8] VCM MINI BOOSTER

No.	Parameter	Range	Value	Tbl No.
1	EQ Frequency	0.00 – 100.00	(0 – 10000)	
2	Resonance	0.0 – 1.0	(0 – 500)	
3	Gain	0.0 – 20.0dB	(0 – 100)	
4	Type	Low Shelf, High Shelf	(0 – 1)	
5	Texture	Retro, Standard, Modern	(0 – 2)	
6	—			
7	—			
8	—			
9	Input Level	–36 – +24 dB	(0 – 120)	
10	—			
11	Output Level	–40 – +20 dB	(0 – 120)	
12	—			
13	—			
14	—			
15	—			
16	—			

[9] DAMPER RESONANCE

No.	Parameter	Range	Value	Tbl No.
1	—			
2	—			
3	—			
4	—			
5	—			
6	—			
7	—			
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	—			
12	—			
13	—			
14	—			
15	—			
16	Damper Control	0 – 127	(0 – 127)	

[10] PITCH CHANGE

No.	Parameter	Range	Value	Tbl No.
1	Pitch 1	–24 – +24	(40 – 88)	
2	Fine 1	–50 – +50	(14 – 114)	
3	Initial Delay 1	0.1ms – 400.0ms	(0 – 127)	7
4	Feedback Level 1	–63 – +63	(1 – 127)	
5	Pitch 2	–24 – +24	(40 – 88)	
6	Fine 2	–50 – +50	(14 – 114)	
7	Initial Delay 2	0.1ms – 400.0ms	(0 – 127)	7
8	Feedback Level 2	–63 – +63	(1 – 127)	
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Pan 1	L63 – C – R63	(1 – 127)	
12	Output Level 1	0 – 127	(0 – 127)	
13	Pan 2	L63 – C – R63	(1 – 127)	
14	Output Level 2	0 – 127	(0 – 127)	
15	—			
16	—			

[11] EARLY REFLECTION

No.	Parameter	Range	Value	Tbl No.
1	Type	S-hall, L-hall, Random, Reverse, Plate, Spring	(0 – 5)	
2	Room Size	0.1 – 20.0 0.1 – 7.0 (Ins17)	(0 – 127) (0 – 44)	6
3	Diffusion	0 – 10	(0 – 10)	
4	Initial Delay	0.1ms – 200.0ms 0.1ms – 99.3ms (Ins17)	(0 – 127) (0 – 63)	5
5	Feedback Level	–63 – +63	(1 – 127)	
6	HPF Cutoff Frequency	20Hz – 8.0kHz	(0 – 52)	3
7	LPF Cutoff Frequency	1.0kHz – 20.0kHz	(34 – 60)	3
8	—			
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Liveness	0 – 10	(0 – 10)	
12	Density	0 – 3	(0 – 3)	
13	Feedback High Damp	0.1 – 1.0	(1 – 10)	
14	—			
15	—			
16	—			

[12] VOCODER

No.	Parameter	Range	Value	Tbl No.
1	Formant Shift	–2, –1, 0, +1, +2	(62 – 66)	
2	Formant Offset	–63 – +63	(1 – 127)	
3	Vocoder Attack	1ms – 200ms	(0 – 29)	
4	Vocoder Release	10ms – 3000ms	(0 – 23)	
5	Mic Output Gate Switch	Off, On	(0 – 1)	
6	—			
7	HPF Cutoff Frequency	Thru, 500Hz – 16.0kHz	(27 – 58)	
8	HPF Output Level	0 – 127	(0 – 127)	
9	—			
10	Dry/Wet Balance	D63>W – D=W – D<W63	(1 – 127)	
11	Mic Input Level	–∞dB – 0dB – +24dB	(0 – 127)	45
12	Inst Level	0 – 127	(0 – 127)	
13	Noise Level	0 – 127	(0 – 127)	
14	Output Level	0 – 127	(0 – 127)	
15	BPF1 Gain	–18dB – +18dB	(46 – 82)	
16	BPF2 Gain	–18dB – +18dB	(46 – 82)	
17	BPF3 Gain	–18dB – +18dB	(46 – 82)	
18	BPF4 Gain	–18dB – +18dB	(46 – 82)	
19	BPF5 Gain	–18dB – +18dB	(46 – 82)	
20	BPF6 Gain	–18dB – +18dB	(46 – 82)	
21	BPF7 Gain	–18dB – +18dB	(46 – 82)	
22	BPF8 Gain	–18dB – +18dB	(46 – 82)	
23	BPF9 Gain	–18dB – +18dB	(46 – 82)	
24	BPF10 Gain	–18dB – +18dB	(46 – 82)	

[13] NOISE GATE+COMP+EQ

No.	Parameter	Range	Value	Tbl No.
1	Comp Attack	1ms – 40ms	(0 – 19)	8
2	Comp Release	10ms – 680ms	(0 – 15)	9
3	Comp Threshold	–48dB – –6dB	(79 – 121)	
4	Comp Ratio	1.0 – 20.0	(0 – 7)	10
5	Comp Output Level	0 – 127	(0 – 127)	
6 – 9: Same as the parameters shaded in gray in CROSS DELAY on page 160.				
10	—			
11	Noise Gate Attack	1ms – 40ms	(0 – 19)	
12	Noise Gate Release	10ms – 680ms	(0 – 15)	
13	Noise Gate Threshold	–73dB – –30dB	(54 – 97)	
14	EQ Mid Frequency	100Hz – 10.0kHz	(14 – 54)	3
15	EQ Mid Gain	–12dB – +12dB	(52 – 76)	
16	EQ Mid Width	0.1 – 12.0	(1 – 120)	

Rotary Speaker Block

[0] THRU

When this type is selected, no parameters are available.

Category — TREMOLO&ROTARY

[1] VCM ROTARY SPEAKER CLASSIC
[2] VCM ROTARY SPEAKER OVERDRIVE
[3] VCM ROTARY SPEAKER STUDIO

No.	Parameter	Range	Value	Tbl No.
1	Drive	0 – 127	(0 – 127)	
2	Tone	0 – 127	(0 – 127)	
3	Speed Control	Slow/Stop/Fast	(0 – 2)	
4	Rotor Speed Slow	22.7 – 88.3	(1 – 127)	65
5	Horn Speed Slow	23.0 – 89.6	(1 – 127)	66
6	Rotor Speed Fast	189.3 – 736.8	(1 – 127)	67
7	Horn Speed Fast	209.4 – 817.6	(1 – 127)	68
8	Rotor Level	0 – 127	(0 – 127)	
9	Horn Level	0 – 127	(0 – 127)	
10	—			
11	Rotor Acceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
12	Horn Acceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
13	Rotor Deceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
14	Horn Deceleration	x0.21 – x1.00 – x2.00	(14 – 127)	49
15	Mic L-R Angle	0 – 180°	(0 – 60)	
16	Background Noise Level	0 – 127	(0 – 127)	
17	Background Noise Off/On	Off, On	(0 – 1)	
18	—			
19	—			
20	—			
21	—			
22	—			
23	—			
24	—			
25	—			
26	—			
27	—			
28	—			
29	—			
30	—			
31	—			
32	—			

Part EQ (2 band EQ) Block

[0] EQ

No.	Parameter	Range	Value	Tbl No.
1	EQ1 Type	Thru, LPF (–6dB/oct), HPF (–6dB/oct), LowShelving, HiShelving, Peak/Dip	0 – 5	
2	EQ1 Freq	63Hz – 18.0Hz	48 – 244	39
3	EQ1 Gain	–12dB – 0 – +12dB	40 – 64 – 88	
4	EQ1 Q	0.1 – 12.0	1 – 120	
5	EQ2 Type	Thru, LPF (–6dB/oct), HPF (–6dB/oct), LowShelving, HiShelving, Peak/Dip	0 – 5	
6	EQ2 Freq	63Hz – 18.0Hz	48 – 244	39
7	EQ2 Gain	–12dB – 0 – +12dB	40 – 64 – 88	
8	EQ2 Q	0.1 – 12.0	1– 120	
9	Output Gain	–12dB – 0 – +12dB	40 – 64 – 88	

Master Effect Block

THRU type is not included in the Master Effect Block. If you wish to bypass this block, turn the Master Effect off.

DELAY LR (Stereo)
COMP DISTORTION DELAY
VCM COMPRESSOR 376
MULTI BAND COMP
DOWNWARD COMP
UPWARD COMP
PRESENCE
PARALLEL COMP
LO-FI
BIT CRUSHER
RING MODULATOR
DYNAMIC FILTER
SPIRALIZER TYPE-P
TEMPO SPIRALIZER TYPE-P
SPIRALIZER TYPE-F
TEMPO SPIRALIZER TYPE-F
ISOLATOR
SLICE
VINYL BREAK
BEAT REPEAT
WAVE FOLDER
VCM MINI FILTER
VCM MINI BOOSTER

Master EQ Block

[0] MEQ

No.	Parameter	Range	Value	Tbl No.
1	EQ1 Gain	–12dB – +12dB	(52 – 76)	
2	EQ1 Frequency	32Hz – 2.0kHz	(4 – 40)	3
3	EQ1 Q	0.1 – 12.0	(1 – 120)	
4	EQ1 Shape	Shelving, Peaking	(0 – 1)	
5	EQ2 Gain	–12dB – +12dB	(52 – 76)	
6	EQ2 Frequency	100Hz – 10kHz	(14 – 54)	3
7	EQ2 Q	0.1 – 12.0	(1 – 120)	
8	—			
9	EQ3 Gain	–12dB – +12dB	(52 – 76)	
10	EQ3 Frequency	100Hz – 10kHz	(14 – 54)	3
11	EQ3 Q	0.1 – 12.0	(1 – 120)	
12	—			
13	EQ4 Gain	–12dB – +12dB	(52 – 76)	
14	EQ4 Frequency	100Hz – 10kHz	(14 – 54)	3
15	EQ4 Q	0.1 – 12.0	(1 – 120)	
16	—			
17	EQ5 Gain	–12dB – +12dB	(52 – 76)	
18	EQ5 Frequency	500Hz – 16kHz	(28 – 58)	3
19	EQ5 Q	0.1 – 12.0	(1 – 120)	
20	EQ5 Shape	Shelving, Peaking	(0 – 1)	

Effect Preset List

Category	Effect Type Name	Preset Name
Reverb	HD Hall	Large Hall Medium Hall Bright Hall Warm Small
	REV-X Hall	Basic Small Hall Clean Church Bright Hall
	R3 Hall	Basic Large Hall Backstage Ballad Light
	SPX Hall	Basic Large Hall Backstage Light Gymnasium
	HD Room	Small Medium Large Presence Warm Open
	REV-X Room	Basic Basement Garage Bedroom
	R3 Room	Basic Open Wide Tight
	SPX Room	Basic Open Wide Tight
	HD Plate	Large Plate Medium Plate Bright Plate Warm Plate Rattle Plate
	R3 Plate	Basic Bright Vocal Smooth Vocal Short Bright Metal Splash
	SPX Stage	Basic Small Large Warm Presence
	Space Simulator	Tunnel Basement Canyon White Room Small Room Live Room Three Walls
	Shimmer Reverb	Basic Ambient AM Mod Reverb
	Gated Reverb	Gated Reverb 1 Gated Reverb 2 Gate Delay 1 Gate Delay 2
	Reverse Reverb	Basic Long Short Rvs Delay 1 Rvs Delay 2
Delay	Cross Delay	Basic Short Long Very Long
	Tempo Cross Delay	1/8 & 1/32D 1/16 Echo 1/8T & 1/4T 1/16T Echo 1/4 Echo Dotted 1/8 Echo 1/8 Echo Triplet Echo 1/2 Echo

Category	Effect Type Name	Preset Name
Delay	Tempo Delay Mono	1/4T L/R Diff 1/8T L/R Diff 1/4 Echo 1/4 Mono Dotted 1/8 Echo 1/8 Echo Dotted 1/8 Mono 1/8 Mono Triplet Echo Triplet Mono Analog Delay
	Tempo Delay Stereo	1/4T L/R Diff 1/8T L/R Diff 1/4 Echo Dotted 1/8 Echo 1/8 Echo Triplet Echo
	Control Delay	Basic Transition Slow Transition Fast
	Delay LR	Basic Doubling Short Fast Long Very Long Analog Delay
	Delay LCR	Bright Warm Bounce Analog Delay
	Analog Delay Retro	Mellow Magical Dawn Reel to Reel Bright Dub Magical Dusk Deep Lo-Fi Echo Oil Dark Room Smokey Dub
	Analog Delay Modern	Urban Soft Rock Reel to Reel Dub Long Bucket Rev Clear Black Dub Short Lo-Fi Echo Dark Room New Wave
Chorus	G Chorus	Basic Fast Deep Mist Bright
	2 Modulator	Basic Fast Deep Mist Multi Panning Mod Vibrator Wonder Shimmer
	SPX Chorus	Basic Fast Deep Slow Flangy
	Symphonic	Basic Fast Deep Slow Analog
	Ensemble Detune	Basic Soft Wide Deep Wide Stereo Sim
	GS1 Ensemble & Tremolo	Basic Ens with Trm Mono Chorus

Category	Effect Type Name	Preset Name
Flanger	VCM Flanger	Basic Jet Deep Mod 1 Deep Mod 2 Mad Mod
	Classic Flanger	Basic Flange Chorus Psychedelic Jet
	Tempo Flanger	Deep Mod Flange Chorus Metallic Psychedelic Jet
	Dynamic Flanger	Follow Reverse Distorted Sync
	Control Flanger	Comb 1 Comb 2 Comb 3
Phaser	VCM Phaser Mono	Stage 4 Stage 6 Stage 8 Stage 10 Stage 12 Stage 16 E.Piano Orange 90 Two Phase Deep Six Deep Eight Lite Eight Deep Sweeper Orange 100 Red Twelve Blue Sixteen Clavi 1 Clavi 2 E.Guitar 1 E.Guitar 2 E.Guitar 3 Vibrato 1 Vibrato 2 Vibrato 3 Ambience 1 Ambience 2
	VCM Phaser Stereo	Stage 4 Stage 6 Stage 8 Stage 10 Deep Sweeper E.Piano 1 E.Piano 2 Clavi 1 Clavi 2 E.Guitar 1 E.Guitar 2 E.Guitar 3 Deep Six Deep Eight Vibrato 1 Vibrato 2 Vibrato 3 Ambience 1 Ambience 2
	Tempo Phaser	Stage 4 Stage 6 Stage 8 Stage 10 Stage 12 Stage 18
	Dynamic Phaser	Up Down Follow Reverse Light
	Control Phaser	Stage 4 Stage 6 Stage 8 Stage 10

Category	Effect Type Name	Preset Name
Tremolo&Rotary	Auto Pan	E.Piano Smooth Oval Right Turn Super Slow
	Tremolo	Fast Slow Super Fast Stereo Vibrato Spring Relax
	Rotary Speaker 1	Basic Horn Mic Light Heavy Rotor Fast First
	Rotary Speaker 2	Clean and Wide Vintage Mono Slow and Dirty Full Drive Broken Motors
	VCM Rotary Speaker Classic	Basic Warm Bright
	VCM Rotary Speaker Overdrive	Basic Warm Bright
	VCM Rotary Speaker Studio	Basic Warm Bright
Distortion	Amp Simulator 1	Stack 1 Stack 2 Twin Boost Old Amp Transistor Modern US-Clean J-Clean Fuzz Small Blues Buzzy Bottom Beat Crunch Beat Drive
	Amp Simulator 2	Stack 1 Stack 2 Combo Crunch Hi Gain British Tube Drive Tube Clean
	Comp Distortion	Basic Booster School Boy Detroit Long Lead 80s Clean
	Comp Distortion Delay	Hard 1 Hard 2 Grunge Voodoo Texas Rockabilly LA Session Thin Techno
	U.S. Combo	Twin Rich Clean Thin Clean Crunch
	Jazz Combo	Basic Warm Chorus Vibrato Keyboard Amp Kbd Amp Dist 1 Kbd Amp Dist 2
	U.S. High Gain	Dirty Riff Burn Solo
	British Lead	Dirty Drive Gainer Hard

Category	Effect Type Name	Preset Name
Distortion	Multi FX	Distortion Solo Distortion Basic Overdrive Chorus Crunch Wah Oldies Delay Vintage Echo
	Small Stereo	Distortion Overdrive Vintage Amp Heavy Dist
	British Combo	Classic Top Boost Custom Heavy
	British Legend	Blues Heavy 1 Heavy 2 Clean Dirty Clean
Compressor	VCM Compressor 376	Basic Comp Sustainer 60s Drum Kit Natural Kick Old Piano Valve Tone Bass Hard Basic Fast Atk + Boost Soft Atk + Boost Attack & Tight Hard Atk + Boost Vocal Comp 117x Unplugged Attack Comp Punchy Master Pinched
	Classic Compressor	Basic Attack For Vintage Keys Pack Comp Gate TightPopRhythm Cutting Comp Basic Bass Old Record Piano
	Multi-band Comp	Basic Maximizer Wild Attacky Hard Hip Club Slap Bass (ch)
	Uni Comp Down	Basic Warm Bright Sat Comp Comp + Hard Clip Master
	Uni Comp Up	Basic Warm Bright Sat Comp Comp + Hard Clip Master
	Parallel Comp	Natural Rich Punchy Electronic Loud Natural for Mst Rich for Master Punchy for Mst ElectronicForMst Loud for Master
	M/S EQ Compressor	Wide Side Mid Punchy Natural Attack Loud Comp Sat Limit Sat Lo-Fi Limiter Master Comp

Category	Effect Type Name	Preset Name
Wah	VCM Auto Wah	Clean Mid Clean High Clean Low Clean Bass Overdrive Mid Overdrive High Overdrive Low Overdrive Bass
	VCM Touch Wah	Clean Mid Clean High Clean Low Clean Bass Overdrive Mid Overdrive High Overdrive Low Overdrive Bass Follow Hi Q For Bass Reverse
	VCM Pedal Wah	Clean Mid Clean High Clean Low Clean Bass Overdrive Mid Overdrive High Overdrive Low Overdrive Bass
Lo-Fi	Lo-Fi	Lo-Fi Old Phone Overload Max Lo-Fi
	Noisy	Nz Drive Soft Nz Tremolo Nz Rotary 1 Nz Rotary 2 Noisy Tremolo Noise Fuzz Noise
	Digital Turntable	Digi Nz 78 rpm 45 rpm 331/3 rpm Old Record 1 Old Record 2 Short Wave Radio
	Bit Crusher	Hard Soft 12-bit Sampler Mid-Side 1 Mid-Side 2 Mid-Side 3 2-bit Dist
Tech	Ring Modulator	Basic Slow Tremolo Crazy
	CS Ring Modulator	Up & Down Bounce Oval Tremolo Tremoriser Change Tremolo Stable Rotator Under Tone
	Dynamic Ring Modulator	Basic Metallic Sputter Sharp Edge
	Dynamic Filter	Basic High Pass Low Pass Squish
	Auto Synth	Nz Mod Delay 1 Nz Mod Delay 2 Nz Mod Delay 3 Nz Mod Delay 4 Echo Space Walking Robot Delay
	Spiralizer P	Basic Step 1 Scale Step 2 Slow

Category	Effect Type Name	Preset Name
Tech	Tempo Spiralizer P	Basic Step 1 Scale Step 2 Slow
	Spiralizer F	Basic Step 1 Scale Step 2 Slow
	Tempo Spiralizer F	Basic Step 1 Scale Step 2 Slow
	Isolator	Lo/Hi Boost Hi Cut Lo Only Mid Only Lo Cut Near Flat
	Slice	Basic Slice Beat 8th Pan 16th Mute Rock
	Tech Modulation	Mod Chase Mod Dub Star Train Numerator Active Dist Astonish Drift Armor
	Control Filter	LPF12 LPF18 LPF24 BPF HPF
	Vinyl Break	Fast Middle Slow Vinyl Stop Power off
	Beat Repeat (even)	1/16 x 4 1/16 x 4 Rev. Trans Gate Trans Gate + HPF Pitch Sweep PitchSweep+HPF Slow Attack Echo Broken
	Beat Repeat (triplet)	Triplet x 4 Triplet x 4 Rev. Trans Gate Trans Gate + HPF Pitch Sweep PitchSweep+HPF Slow Attack Echo Broken
	Beat Repeat (evn+tri.)	1/16 x 4 1/16 x 4 Rev. Trans Gate Trans Gate + HPF Pitch Sweep PitchSweep+HPF Slow Attack Echo Broken
	Beat Repeat (free)	1/16 x 4 1/16 x 4 Rev. Trans Gate Trans Gate + HPF Pitch Sweep PitchSweep+HPF Slow Atk Echo Broken Quintuplet
Misc	VCM EQ 501	Basic Bright Warm Lo/Hi Boost Mid Boost Loud Dance SD/BD Radio Speaker Flat
	Presence	Natural Heavy Bright

Category	Effect Type Name	Preset Name
Misc	Harmonic Enhancer	Presence Edge High Edge Mid Edge
	Stereophonic Optimizer	Focus Bottom Top Center Acoustic Piano Drum EP Tremolo Organ Sax
	Talking Modulator	Basic Slow
	Wave Folder	Soft 1 Soft 2 Hard 1 Hard 2 SEQ+LFO 01 SEQ+LFO 02 SEQ+LFO 03 SEQ+LFO 04 SEQ+LFO 05 SEQ+LFO 06 SEQ+LFO 07 SEQ+LFO 08 SEQ+LFO 09 SEQ+LFO 10 Saturator 1 Saturator 2 Saturator 3 Saturator 4
	VCM Mini Filter	1970s LPF 1980s LPF Modern LPF 1970s HPF 1980s HPF Modern HPF
	VCM Mini Booster	1970s High Boost 1980s High Boost ModernHighBoost 1970s Low Boost 1980s Low Boost Modern LowBoost
	Damper Resonance	Basic String Reso Short Long
	Pitch Change	Detune Oct Echo Octaver Plus 4th Minus 4th Oval Step Up Step Down
	Early Reflection	Close Far Reverse Gate 70s Gate
	Vocoder	Basic Fast Slow
	NoiseGate + Comp + Eq	Basic Soft Comp Hard Comp Limiter

Effect Data Assign Table

Table #1
LFO Frequency

Data	Value	Data	Value
0	0.00	64	2.69
1	0.04	65	2.78
2	0.08	66	2.86
3	0.13	67	2.94
4	0.17	68	3.03
5	0.21	69	3.11
6	0.25	70	3.20
7	0.29	71	3.28
8	0.34	72	3.37
9	0.38	73	3.45
10	0.42	74	3.53
11	0.46	75	3.62
12	0.51	76	3.70
13	0.55	77	3.87
14	0.59	78	4.04
15	0.63	79	4.21
16	0.67	80	4.37
17	0.72	81	4.54
18	0.76	82	4.71
19	0.80	83	4.88
20	0.84	84	5.05
21	0.88	85	5.22
22	0.93	86	5.38
23	0.97	87	5.55
24	1.01	88	5.72
25	1.05	89	6.06
26	1.09	90	6.39
27	1.14	91	6.73
28	1.18	92	7.07
29	1.22	93	7.40
30	1.26	94	7.74
31	1.30	95	8.08
32	1.35	96	8.41
33	1.39	97	8.75
34	1.43	98	9.08
35	1.47	99	9.42
36	1.51	100	9.76
37	1.56	101	10.1
38	1.60	102	10.8
39	1.64	103	11.4
40	1.68	104	12.1
41	1.72	105	12.8
42	1.77	106	13.5
43	1.81	107	14.1
44	1.85	108	14.8
45	1.89	109	15.5
46	1.94	110	16.2
47	1.98	111	16.8
48	2.02	112	17.5
49	2.06	113	18.2
50	2.10	114	19.5
51	2.15	115	20.9
52	2.19	116	22.2
53	2.23	117	23.6
54	2.27	118	24.9
55	2.31	119	26.2
56	2.36	120	27.6
57	2.40	121	28.9
58	2.44	122	30.3
59	2.48	123	31.6
60	2.52	124	33.0
61	2.57	125	34.3
62	2.61	126	37.0
63	2.65	127	39.7

Table #2
Modulation Delay Offset

Data	Value	Data	Value
0	0.0	64	6.4
1	0.1	65	6.5
2	0.2	66	6.6
3	0.3	67	6.7
4	0.4	68	6.8
5	0.5	69	6.9
6	0.6	70	7.0
7	0.7	71	7.1
8	0.8	72	7.2
9	0.9	73	7.3
10	1.0	74	7.4
11	1.1	75	7.5
12	1.2	76	7.6
13	1.3	77	7.7
14	1.4	78	7.8
15	1.5	79	7.9
16	1.6	80	8.0
17	1.7	81	8.1
18	1.8	82	8.2
19	1.9	83	8.3
20	2.0	84	8.4
21	2.1	85	8.5
22	2.2	86	8.6
23	2.3	87	8.7
24	2.4	88	8.8
25	2.5	89	8.9
26	2.6	90	9.0
27	2.7	91	9.1
28	2.8	92	9.2
29	2.9	93	9.3
30	3.0	94	9.4
31	3.1	95	9.5
32	3.2	96	9.6
33	3.3	97	9.7
34	3.4	98	9.8
35	3.5	99	9.9
36	3.6	100	10.0
37	3.7	101	11.1
38	3.8	102	12.2
39	3.9	103	13.3
40	4.0	104	14.4
41	4.1	105	15.5
42	4.2	106	17.1
43	4.3	107	18.6
44	4.4	108	20.2
45	4.5	109	21.8
46	4.6	110	23.3
47	4.7	111	24.9
48	4.8	112	26.5
49	4.9	113	28.0
50	5.0	114	29.6
51	5.1	115	31.2
52	5.2	116	32.8
53	5.3	117	34.3
54	5.4	118	35.9
55	5.5	119	37.5
56	5.6	120	39.0
57	5.7	121	40.6
58	5.8	122	42.2
59	5.9	123	43.7
60	6.0	124	45.3
61	6.1	125	46.9
62	6.2	126	48.4
63	6.3	127	50.0

Table #3
EQ Frequency

Data	Value
0	THRU (20)
1	22
2	25
3	28
4	32
5	36
6	40
7	45
8	50
9	56
10	63
11	70
12	80
13	90
14	100
15	110
16	125
17	140
18	160
19	180
20	200
21	225
22	250
23	280
24	315
25	355
26	400
27	450
28	500
29	560
30	630
31	700
32	800
33	900
34	1.0k
35	1.1k
36	1.2k
37	1.4k
38	1.6k
39	1.8k
40	2.0k
41	2.2k
42	2.5k
43	2.8k
44	3.2k
45	3.6k
46	4.0k
47	4.5k
48	5.0k
49	5.6k
50	6.3k
51	7.0k
52	8.0k
53	9.0k
54	10.0k
55	11.0k
56	12.0k
57	14.0k
58	16.0k
59	18.0k
60	THRU (20.0k)

Table #4
Reverb Time

Data	Value
0	0.3
1	0.4
2	0.5
3	0.6
4	0.7
5	0.8
6	0.9
7	1.0
8	1.1
9	1.2
10	1.3
11	1.4
12	1.5
13	1.6
14	1.7
15	1.8
16	1.9
17	2.0
18	2.1
19	2.2
20	2.3
21	2.4
22	2.5
23	2.6
24	2.7
25	2.8
26	2.9
27	3.0
28	3.1
29	3.2
30	3.3
31	3.4
32	3.5
33	3.6
34	3.7
35	3.8
36	3.9
37	4.0
38	4.1
39	4.2
40	4.3
41	4.4
42	4.5
43	4.6
44	4.7
45	4.8
46	4.9
47	5.0
48	5.5
49	6.0
50	6.5
51	7.0
52	7.5
53	8.0
54	8.5
55	9.0
56	9.5
57	10.0
58	11.0
59	12.0
60	13.0
61	14.0
62	15.0
63	16.0
64	17.0
65	18.0
66	19.0
67	20.0
68	25.0
69	30.0

Table #5
Delay Time (0.1 – 200.0 [ms])

Data	Value	Data	Value
0	0.1	64	100.8
1	1.7	65	102.4
2	3.2	66	104.0
3	4.8	67	105.6
4	6.4	68	107.1
5	8.0	69	108.7
6	9.5	70	110.3
7	11.1	71	111.9
8	12.7	72	113.4
9	14.3	73	115.0
10	15.8	74	116.6
11	17.4	75	118.2
12	19.0	76	119.7
13	20.6	77	121.3
14	22.1	78	122.9
15	23.7	79	124.4
16	25.3	80	126.0
17	26.9	81	127.6
18	28.4	82	129.2
19	30.0	83	130.7
20	31.6	84	132.3
21	33.2	85	133.9
22	34.7	86	135.5
23	36.3	87	137.0
24	37.9	88	138.6
25	39.5	89	140.2
26	41.0	90	141.8
27	42.6	91	143.3
28	44.2	92	144.9
29	45.7	93	146.5
30	47.3	94	148.1
31	48.9	95	149.6
32	50.5	96	151.2
33	52.0	97	152.8
34	53.6	98	154.4
35	55.2	99	155.9
36	56.8	100	157.5
37	58.3	101	159.1
38	59.9	102	160.6
39	61.5	103	162.2
40	63.1	104	163.8
41	64.6	105	165.4
42	66.2	106	166.9
43	67.8	107	168.5
44	69.4	108	170.1
45	70.9	109	171.7
46	72.5	110	173.2
47	74.1	111	174.8
48	75.7	112	176.4
49	77.2	113	178.0
50	78.8	114	179.5
51	80.4	115	181.1
52	81.9	116	182.7
53	83.5	117	184.3
54	85.1	118	185.8
55	86.7	119	187.4
56	88.2	120	189.0
57	89.8	121	190.6
58	91.4	122	192.1
59	93.0	123	193.7
60	94.5	124	195.3
61	96.1	125	196.9
62	97.7	126	198.4
63	99.3	127	200.0

Table #6
Room Size

Data	Value	Data	Value
0	0.1	64	10.1
1	0.3	65	10.3
2	0.4	66	10.4
3	0.6	67	10.6
4	0.7	68	10.8
5	0.9	69	10.9
6	1.0	70	11.1
7	1.2	71	11.2
8	1.4	72	11.4
9	1.5	73	11.5
10	1.7	74	11.7
11	1.8	75	11.9
12	2.0	76	12.0
13	2.1	77	12.2
14	2.3	78	12.3
15	2.5	79	12.5
16	2.6	80	12.6
17	2.8	81	12.8
18	2.9	82	12.9
19	3.1	83	13.1
20	3.2	84	13.3
21	3.4	85	13.4
22	3.5	86	13.6
23	3.7	87	13.7
24	3.9	88	13.9
25	4.0	89	14.0
26	4.2	90	14.2
27	4.3	91	14.4
28	4.5	92	14.5
29	4.6	93	14.7
30	4.8	94	14.8
31	5.0	95	15.0
32	5.1	96	15.1
33	5.3	97	15.3
34	5.4	98	15.5
35	5.6	99	15.6
36	5.7	100	15.8
37	5.9	101	15.9
38	6.1	102	16.1
39	6.2	103	16.2
40	6.4	104	16.4
41	6.5	105	16.6
42	6.7	106	16.7
43	6.8	107	16.9
44	7.0	108	17.0
45	7.2	109	17.2
46	7.3	110	17.3
47	7.5	111	17.5
48	7.6	112	17.6
49	7.8	113	17.8
50	7.9	114	18.0
51	8.1	115	18.1
52	8.2	116	18.3
53	8.4	117	18.4
54	8.6	118	18.6
55	8.7	119	18.7
56	8.9	120	18.9
57	9.0	121	19.1
58	9.2	122	19.2
59	9.3	123	19.4
60	9.5	124	19.5
61	9.7	125	19.7
62	9.8	126	19.8
63	10.0	127	20.0

Table #7
Delay Time (0.1 – 400.0 [ms])

Data	Value	Data	Value
0	0.1	64	201.6
1	3.2	65	204.8
2	6.4	66	207.9
3	9.5	67	211.1
4	12.7	68	214.2
5	15.8	69	217.4
6	19.0	70	220.5
7	22.1	71	223.7
8	25.3	72	226.8
9	28.4	73	230.0
10	31.6	74	233.1
11	34.7	75	236.3
12	37.9	76	239.4
13	41.0	77	242.6
14	44.2	78	245.7
15	47.3	79	248.9
16	50.5	80	252.0
17	53.6	81	255.2
18	56.8	82	258.3
19	59.9	83	261.5
20	63.1	84	264.6
21	66.2	85	267.7
22	69.4	86	270.9
23	72.5	87	274.0
24	75.7	88	277.2
25	78.8	89	280.3
26	82.0	90	283.5
27	85.1	91	286.6
28	88.3	92	289.8
29	91.4	93	292.9
30	94.6	94	296.1
31	97.7	95	299.2
32	100.9	96	302.4
33	104.0	97	305.5
34	107.2	98	308.7
35	110.3	99	311.8
36	113.5	100	315.0
37	116.6	101	318.1
38	119.8	102	321.3
39	122.9	103	324.4
40	126.1	104	327.6
41	129.2	105	330.7
42	132.4	106	333.9
43	135.5	107	337.0
44	138.6	108	340.2
45	141.8	109	343.3
46	144.9	110	346.5
47	148.1	111	349.6
48	151.2	112	352.8
49	154.4	113	355.9
50	157.5	114	359.1
51	160.7	115	362.2
52	163.8	116	365.4
53	167.0	117	368.5
54	170.1	118	371.7
55	173.3	119	374.8
56	176.4	120	378.0
57	179.6	121	381.1
58	182.7	122	384.3
59	185.9	123	387.4
60	189.0	124	390.6
61	192.2	125	393.7
62	195.3	126	396.9
63	198.5	127	400.0

Table #8
Compressor Attack Time

Data	Value
0	1
1	2
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
10	12
11	14
12	16
13	18
14	20
15	23
16	26
17	30
18	35
19	40
20	50
21	60
22	70
23	80
24	100
25	120
26	140
27	160
28	180
29	200

Table #9
Compressor Release Time

Data	Value
0	10
1	15
2	25
3	35
4	45
5	55
6	65
7	75
8	85
9	100
10	115
11	140
12	170
13	230
14	340
15	680
16	850
17	1000
18	1200
19	1500
20	1700
21	2000
22	2400
23	3000

Table #10
Compressor Ratio

Data	Value
0	1.0
1	1.5
2	2.0
3	3.0
4	5.0
5	7.0
6	10.0
7	20.0

Table #11
Reverb Width; Depth; Height

Data	Value	Data	Value
0	0.5	64	17.6
1	0.8	65	17.9
2	1.0	66	18.2
3	1.3	67	18.5
4	1.5	68	18.8
5	1.8	69	19.1
6	2.0	70	19.4
7	2.3	71	19.7
8	2.6	72	20.0
9	2.8	73	20.2
10	3.1	74	20.5
11	3.3	75	20.8
12	3.6	76	21.1
13	3.9	77	21.4
14	4.1	78	21.7
15	4.4	79	22.0
16	4.6	80	22.4
17	4.9	81	22.7
18	5.2	82	23.0
19	5.4	83	23.3
20	5.7	84	23.6
21	5.9	85	23.9
22	6.2	86	24.2
23	6.5	87	24.5
24	6.7	88	24.9
25	7.0	89	25.2
26	7.2	90	25.5
27	7.5	91	25.8
28	7.8	92	26.1
29	8.0	93	26.5
30	8.3	94	26.8
31	8.6	95	27.1
32	8.8	96	27.5
33	9.1	97	27.8
34	9.4	98	28.1
35	9.6	99	28.5
36	9.9	100	28.8
37	10.2	101	29.2
38	10.4	102	29.5
39	10.7	103	29.9
40	11.0	104	30.2
41	11.2		
42	11.5		
43	11.8		
44	12.1		
45	12.3		
46	12.6		
47	12.9		
48	13.1		
49	13.4		
50	13.7		
51	14.0		
52	14.2		
53	14.5		
54	14.8		
55	15.1		
56	15.4		
57	15.6		
58	15.9		
59	16.2		
60	16.5		
61	16.8		
62	17.1		
63	17.3		

Table #12
LO-FI Sampling Frequency Control

Data	Value	Data	Value
0	44.1k	64	678.5
1	22.1k	65	668.2
2	14.7k	66	658.2
3	11.0k	67	648.5
4	8.82k	68	639.1
5	7.35k	69	630.0
6	6.30k	70	621.1
7	5.51k	71	612.5
8	4.90k	72	604.1
9	4.41k	73	595.9
10	4.01k	74	588.0
11	3.68k	75	580.3
12	3.39k	76	572.7
13	3.15k	77	565.4
14	2.94k	78	558.2
15	2.76k	79	551.3
16	2.59k	80	544.4
17	2.45k	81	537.8
18	2.32k	82	531.3
19	2.21k	83	525.0
20	2.10k	84	518.8
21	2.00k	85	512.8
22	1.92k	86	506.9
23	1.84k	87	501.1
24	1.76k	88	495.5
25	1.70k	89	490.0
26	1.63k	90	484.6
27	1.58k	91	479.3
28	1.52k	92	474.2
29	1.47k	93	469.1
30	1.42k	94	464.2
31	1.38k	95	459.4
32	1.34k	96	454.6
33	1.30k	97	450.0
34	1.26k	98	445.5
35	1.23k	99	441.0
36	1.19k	100	436.6
37	1.16k	101	432.4
38	1.13k	102	428.2
39	1.10k	103	424.0
40	1.08k	104	420.0
41	1.05k	105	416.0
42	1.03k	106	412.1
43	1.00k	107	408.3
44	980.0	108	404.6
45	958.7	109	400.9
46	938.3	110	397.3
47	918.8	111	393.8
48	900.0	112	390.3
49	882.0	113	386.8
50	864.7	114	383.5
51	848.1	115	380.2
52	832.1	116	376.9
53	816.7	117	373.7
54	801.8	118	370.6
55	787.5	119	367.5
56	773.7	120	364.5
57	760.3	121	361.5
58	747.5	122	358.5
59	735.0	123	355.6
60	723.0	124	352.8
61	711.3	125	350.0
62	700.0	126	347.2
63	689.1	127	344.5

Table #13
Tempo

Data	Value
0	32nd/3
1	64th.
2	32nd
3	16th/3
4	32nd.
5	16th
6	8th/3
7	16th.
8	8th
9	4th/3
10	8th.
11	4th
12	2nd/3
13	4th.
14	2nd
15	Whole/3
16	2nd.
17	4thx4
18	4thx5
19	4thx6
20	4thx7
21	4thx8
22	4thx9
23	4thx10
24	4thx11
25	4thx12
26	4thx13
27	4thx14
28	4thx15
29	4thx16

Table #14
Multi Compressor Gain (dB)

Data	Value	Data	Value
0	-∞	29	-8
1	-60	30	-7
2	-57	31	-6
3	-54	32	-5
4	-51	33	-4
5	-48	34	-3
6	-45	35	-2
7	-42	36	-1
8	-39	37	0
9	-36	38	1
10	-33	39	2
11	-30	40	3
12	-27	41	4
13	-24	42	5
14	-23	43	6
15	-22	44	7
16	-21	45	8
17	-20	46	9
18	-19	47	10
19	-18	48	11
20	-17	49	12
21	-16	50	13
22	-15	51	14
23	-14	52	15
24	-13	53	16
25	-12	54	17
26	-11	55	18
27	-10		
28	-9		

Table #15
Dyna Attack Time (ms)

Data	Value	Data	Value
0	0.3	64	112
1	0.9	65	114
2	1.8	66	116
3	2.7	67	118
4	3.6	68	120
5	5.4	69	121
6	7.2	70	123
7	9.0	71	125
8	10	72	127
9	12	73	129
10	14	74	130
11	16	75	132
12	18	76	134
13	20	77	136
14	21	78	138
15	23	79	140
16	25	80	141
17	27	81	143
18	29	82	145
19	30	83	147
20	32	84	149
21	34	85	150
22	36	86	152
23	38	87	154
24	40	88	156
25	41	89	158
26	43	90	160
27	45	91	161
28	47	92	163
29	49	93	165
30	50	94	167
31	52	95	169
32	54	96	170
33	56	97	172
34	58	98	174
35	60	99	176
36	61	100	178
37	63	101	180
38	65	102	181
39	67	103	183
40	69	104	185
41	70	105	187
42	72	106	189
43	74	107	190
44	76	108	192
45	78	109	194
46	80	110	196
47	81	111	198
48	83	112	200
49	85	113	201
50	87	114	203
51	89	115	205
52	90	116	207
53	92	117	209
54	94	118	210
55	96	119	212
56	98	120	214
57	100	121	216
58	101	122	218
59	103	123	220
60	105	124	221
61	107	125	223
62	109	126	225
63	110	127	227

Table #16
Dyna Release Time (ms)

Data	Value	Data	Value
0	2.6	64	369
1	3.0	65	391
2	3.4	66	413
3	3.9	67	434
4	4.3	68	456
5	4.7	69	478
6	5.2	70	499
7	5.6	71	521
8	6.0	72	543
9	6.5	73	565
10	6.9	74	586
11	7.3	75	608
12	7.8	76	630
13	8.2	77	651
14	8.6	78	673
15	13	79	695
16	17	80	717
17	22	81	738
18	26	82	760
19	30	83	782
20	35	84	803
21	39	85	825
22	43	86	847
23	48	87	869
24	52	88	890
25	56	89	912
26	61	90	934
27	65	91	955
28	69	92	977
29	74	93	999
30	78	94	1021
31	83	95	1042
32	87	96	1064
33	91	97	1086
34	96	98	1107
35	100	99	1129
36	104	100	1151
37	109	101	1173
38	113	102	1194
39	117	103	1216
40	122	104	1238
41	126	105	1259
42	130	106	1281
43	135	107	1303
44	139	108	1346
45	143	109	1390
46	148	110	1433
47	152	111	1477
48	156	112	1520
49	161	113	1563
50	165	114	1607
51	169	115	1650
52	174	116	1694
53	178	117	1737
54	182	118	1781
55	187	119	1824
56	195	120	1867
57	217	121	1911
58	239	122	1954
59	261	123	1998
60	282	124	2041
61	304	125	2085
62	326	126	2128
63	347	127	2171

Table #17
Ring Mod OSC Freq Coarse (Hz)

Data	Value	Data	Value
0	0.5	64	151
1	1.5	65	160
2	2.0	66	169
3	2.5	67	179
4	3.5	68	189
5	4.0	69	200
6	4.5	70	211
7	5.5	71	223
8	6.0	72	236
9	6.5	73	249
10	7.5	74	264
11	8.0	75	279
12	8.4	76	295
13	8.9	77	311
14	9.4	78	329
15	9.9	79	348
16	10.5	80	368
17	11.1	81	389
18	11.7	82	411
19	12.4	83	435
20	13.1	84	459
21	13.9	85	486
22	14.7	86	513
23	15.5	87	543
24	16.4	88	574
25	17.3	89	607
26	18.3	90	641
27	19.4	91	678
28	20.5	92	717
29	21.7	93	757
30	22.9	94	801
31	24.2	95	846
32	25.6	96	895
33	27.1	97	946
34	28.6	98	1.00k
35	30.3	99	1.05k
36	32.0	100	1.11k
37	33.8	101	1.18k
38	35.8	102	1.24k
39	37.8	103	1.32k
40	40.0	104	1.39k
41	42.2	105	1.47k
42	44.7	106	1.55k
43	47.2	107	1.64k
44	49.9	108	1.74k
45	52.7	109	1.84k
46	55.8	110	1.94k
47	58.9	111	2.05k
48	62.3	112	2.17k
49	65.9	113	2.29k
50	69.6	114	2.43k
51	73.6	115	2.56k
52	77.8	116	2.71k
53	82.3	117	2.87k
54	87.0	118	3.03k
55	91.9	119	3.20k
56	97.2	120	3.39k
57	102	121	3.58k
58	108	122	3.79k
59	114	123	4.00k
60	121	124	4.23k
61	128	125	4.47k
62	135	126	4.73k
63	143	127	5.00k

Table #18
Classic Flanger Delay Offset

Data	Value	Data	Value
0	0.09	70	6.35
1	0.11	71	6.67
2	0.13	72	7.01
3	0.15	73	7.37
4	0.18	74	7.74
5	0.20	75	8.13
6	0.22	76	8.54
7	0.24	77	8.97
8	0.27	78	9.41
9	0.29	79	9.85
10	0.31	80	10.29
11	0.34	81	10.73
12	0.36	82	11.17
13	0.38	83	11.61
14	0.40	84	12.05
15	0.42	85	12.49
16	0.43	86	12.93
17	0.46	87	13.37
18	0.48	88	13.81
19	0.51	89	14.24
20	0.53	90	14.68
21	0.56	91	15.12
22	0.59	92	15.56
23	0.62	93	16.00
24	0.65	94	16.44
25	0.68	95	16.88
26	0.72	96	17.32
27	0.76	97	17.76
28	0.79	98	18.20
29	0.83	99	18.64
30	0.88	100	19.08
31	0.92	101	19.52
32	0.97	102	19.96
33	1.02	103	20.40
34	1.07	104	20.83
35	1.12	105	21.27
36	1.18	106	21.71
37	1.24	107	22.15
38	1.30	108	22.59
39	1.37	109	23.03
40	1.44	110	23.47
41	1.51	111	23.91
42	1.59	112	24.35
43	1.67	113	24.79
44	1.76	114	25.23
45	1.84	115	25.66
46	1.94	116	26.10
47	2.04	117	26.54
48	2.14	118	26.98
49	2.25	119	27.42
50	2.36	120	27.86
51	2.48	121	28.30
52	2.61	122	28.74
53	2.74	123	29.18
54	2.88	124	29.62
55	3.03	125	30.06
56	3.18	126	30.50
57	3.34	127	30.94
58	3.51	128	31.38
59	3.69	129	31.82
60	3.87	130	32.25
61	4.07	131	32.69
62	4.28	132	33.13
63	4.49	133	33.57
64	4.72	134	34.01
65	4.96	135	34.45
66	5.21	136	34.89
67	5.47	137	35.33
68	5.75	138	35.77
69	6.04	139	36.21

Table #19
Modulation Phase

Data	Value
0	-180
1	-158
2	-135
3	-113
4	-90
5	-68
6	-45
7	-23
8	0
9	23
10	45
11	68
12	90
13	113
14	135
15	158
16	180

Table #20
VCM Flanger Speed

Data	Value	Data	Value	Data	Value	Data	Value
0	0.040	70	0.281	140	1.272	210	5.804
1	0.042	71	0.287	141	1.304	211	5.972
2	0.045	72	0.292	142	1.335	212	6.056
3	0.047	73	0.300	143	1.367	213	6.224
4	0.050	74	0.308	144	1.409	214	6.309
5	0.053	75	0.313	145	1.430	215	6.477
6	0.055	76	0.321	146	1.451	216	6.645
7	0.058	77	0.326	147	1.493	217	6.813
8	0.060	78	0.334	148	1.514	218	6.897
9	0.063	79	0.342	149	1.556	219	7.066
10	0.066	80	0.347	150	1.577	220	7.234
11	0.068	81	0.357	151	1.619	221	7.402
12	0.071	82	0.363	152	1.661	222	7.570
13	0.074	83	0.373	153	1.682	223	7.738
14	0.076	84	0.379	154	1.724	224	7.907
15	0.079	85	0.389	155	1.766	225	8.075
16	0.081	86	0.400	156	1.808	226	8.243
17	0.084	87	0.405	157	1.851	227	8.411
18	0.087	88	0.415	158	1.893	228	8.580
19	0.089	89	0.426	159	1.935	229	8.748
20	0.092	90	0.431	160	1.977	230	9.000
21	0.095	91	0.442	161	2.019	231	9.168
22	0.097	92	0.452	162	2.061	232	9.337
23	0.100	93	0.463	163	2.103	233	9.589
24	0.102	94	0.473	164	2.145	234	9.757
25	0.105	95	0.484	165	2.187	235	10.00
26	0.108	96	0.494	166	2.250		
27	0.110	97	0.505	167	2.292		
28	0.113	98	0.515	168	2.334		
29	0.116	99	0.526	169	2.397		
30	0.118	100	0.536	170	2.460		
31	0.121	101	0.547	171	2.502		
32	0.124	102	0.563	172	2.565		
33	0.126	103	0.573	173	2.608		
34	0.129	104	0.589	174	2.671		
35	0.131	105	0.599	175	2.733		
36	0.134	106	0.615	176	2.776		
37	0.137	107	0.626	177	2.860		
38	0.139	108	0.636	178	2.902		
39	0.145	109	0.652	179	2.986		
40	0.147	110	0.668	180	3.028		
41	0.150	111	0.683	181	3.112		
42	0.152	112	0.704	182	3.154		
43	0.158	113	0.715	183	3.238		
44	0.160	114	0.725	184	3.323		
45	0.163	115	0.747	185	3.365		
46	0.168	116	0.757	186	3.449		
47	0.171	117	0.778	187	3.533		
48	0.173	118	0.789	188	3.617		
49	0.179	119	0.810	189	3.701		
50	0.181	120	0.831	190	3.785		
51	0.187	121	0.852	191	3.869		
52	0.189	122	0.862	192	3.953		
53	0.195	123	0.883	193	4.037		
54	0.197	124	0.904	194	4.122		
55	0.202	125	0.925	195	4.206		
56	0.208	126	0.946	196	4.290		
57	0.210	127	0.967	197	4.374		
58	0.216	128	0.988	198	4.500		
59	0.221	129	1.009	199	4.584		
60	0.226	130	1.030	200	4.668		
61	0.231	131	1.051	201	4.752		
62	0.237	132	1.072	202	4.879		
63	0.242	133	1.093	203	5.005		
64	0.247	134	1.125	204	5.131		
65	0.252	135	1.146	205	5.215		
66	0.258	136	1.167	206	5.341		
67	0.263	137	1.199	207	5.467		
68	0.268	138	1.220	208	5.552		
69	0.273	139	1.251	209	5.720		

Table #21
VCM Phaser Speed

Data	Value	Data	Value	Data	Value	Data	Value
0	0.100	70	0.373	140	1.325	210	4.668
1	0.103	71	0.379	141	1.346	211	4.752
2	0.105	72	0.389	142	1.367	212	4.837
3	0.108	73	0.394	143	1.410	213	4.921
4	0.110	74	0.400	144	1.430	214	5.047
5	0.113	75	0.410	145	1.451	215	5.131
6	0.116	76	0.415	146	1.472	216	5.215
7	0.118	77	0.426	147	1.493	217	5.299
8	0.121	78	0.431	148	1.535	218	5.383
9	0.124	79	0.442	149	1.556	219	5.551
10	0.126	80	0.447	150	1.577	220	5.636
11	0.129	81	0.457	151	1.619	221	5.720
12	0.131	82	0.463	152	1.640	222	5.804
13	0.134	83	0.473	153	1.682	223	5.888
14	0.137	84	0.478	154	1.703	224	6.056
15	0.139	85	0.489	155	1.724	225	6.140
16	0.142	86	0.499	156	1.767	226	6.224
17	0.145	87	0.510	157	1.808	227	6.393
18	0.147	88	0.515	158	1.829	228	6.477
19	0.150	89	0.526	159	1.872	229	6.561
20	0.152	90	0.536	160	1.893	230	6.729
21	0.155	91	0.547	161	1.935	231	6.813
22	0.158	92	0.557	162	1.977	232	6.981
23	0.160	93	0.568	163	2.000	233	7.066
24	0.163	94	0.578	164	2.040	234	7.234
25	0.166	95	0.589	165	2.082	235	7.318
26	0.168	96	0.599	166	2.124	236	7.486
27	0.171	97	0.610	167	2.145	237	7.654
28	0.173	98	0.620	168	2.187	238	7.774
29	0.179	99	0.631	169	2.229	239	7.907
30	0.181	100	0.641	170	2.271	240	8.075
31	0.184	101	0.652	171	2.313	241	8.159
32	0.187	102	0.668	172	2.355	242	8.327
33	0.192	103	0.683	173	2.397	243	8.496
34	0.195	104	0.694	174	2.439	244	8.664
35	0.200	105	0.704	175	2.503	245	8.832
36	0.202	106	0.715	176	2.544	246	9.000
37	0.205	107	0.725	177	2.587	247	9.168
38	0.210	108	0.747	178	2.629	248	9.337
39	0.213	109	0.758	179	2.671	249	9.505
40	0.218	110	0.768	180	2.734	250	9.673
41	0.221	111	0.789	181	2.776	251	9.841
42	0.226	112	0.799	182	2.860	252	10.00
43	0.229	113	0.810	183	2.902		
44	0.234	114	0.831	184	2.944		
45	0.237	115	0.841	185	2.986		
46	0.242	116	0.862	186	3.028		
47	0.247	117	0.873	187	3.070		
48	0.250	118	0.894	188	3.154		
49	0.255	119	0.904	189	3.196		
50	0.260	120	0.925	190	3.280		
51	0.265	121	0.936	191	3.323		
52	0.271	122	0.957	192	3.365		
53	0.276	123	0.967	193	3.449		
54	0.281	124	0.988	194	3.491		
55	0.287	125	1.000	195	3.575		
56	0.289	126	1.030	196	3.659		
57	0.294	127	1.051	197	3.701		
58	0.300	128	1.062	198	3.785		
59	0.308	129	1.083	199	3.827		
60	0.310	130	1.104	200	3.911		
61	0.318	131	1.125	201	3.995		
62	0.323	132	1.146	202	4.080		
63	0.329	133	1.167	203	4.122		
64	0.334	134	1.188	204	4.206		
65	0.342	135	1.209	205	4.290		
66	0.347	136	1.230	206	4.374		
67	0.357	137	1.251	207	4.458		
68	0.363	138	1.272	208	4.500		
69	0.368	139	1.304	209	4.584		

Table #22
VCM Wah Speed

Data	Value	Data	Value	Data	Value	Data	Value
0	0.100	70	0.436	140	1.872	210	7.991
1	0.103	71	0.447	141	1.914	211	8.159
2	0.105	72	0.457	142	1.956	212	8.327
3	0.108	73	0.463	143	1.999	213	8.496
4	0.110	74	0.473	144	2.040	214	8.748
5	0.113	75	0.484	145	2.082	215	8.916
6	0.116	76	0.494	146	2.124	216	9.084
7	0.118	77	0.505	147	2.166	217	9.253
8	0.121	78	0.515	148	2.229	218	9.505
9	0.124	79	0.526	149	2.250	219	9.673
10	0.126	80	0.536	150	2.313	220	9.841
11	0.129	81	0.547	151	2.355	221	10.09
12	0.131	82	0.563	152	2.397	222	10.26
13	0.134	83	0.573	153	2.460	223	10.51
14	0.137	84	0.584	154	2.502	224	10.77
15	0.139	85	0.599	155	2.566	225	10.93
16	0.142	86	0.610	156	2.608	226	11.10
17	0.145	87	0.620	157	2.671	227	11.44
18	0.147	88	0.636	158	2.734	228	11.61
19	0.152	89	0.652	159	2.776	229	11.94
20	0.155	90	0.662	160	2.818	230	12.11
21	0.157	91	0.673	161	2.902	231	12.45
22	0.163	92	0.694	162	2.944	232	12.62
23	0.166	93	0.704	163	3.028	233	12.95
24	0.168	94	0.725	164	3.070	234	13.29
25	0.173	95	0.736	165	3.154	235	13.46
26	0.176	96	0.747	166	3.196	236	13.79
27	0.179	97	0.768	167	3.280	237	13.96
28	0.184	98	0.778	168	3.336	238	14.30
29	0.187	99	0.799	169	3.407	239	14.64
30	0.189	100	0.820	170	3.491	240	14.97
31	0.195	101	0.831	171	3.575	241	15.31
32	0.200	102	0.852	172	3.659	242	15.65
33	0.202	103	0.873	173	3.701	243	15.98
34	0.208	104	0.883	174	3.785	244	16.32
35	0.210	105	0.904	175	3.869	245	16.65
36	0.216	106	0.935	176	3.953	246	16.99
37	0.221	107	0.946	177	4.037	247	17.33
38	0.226	108	0.967	178	4.122	248	17.66
39	0.231	109	0.988	179	4.206	249	18.00
40	0.234	110	0.999	180	4.290	250	18.34
41	0.239	111	1.020	181	4.374	251	18.84
42	0.244	112	1.051	182	4.500	252	19.18
43	0.250	113	1.072	183	4.584	253	19.51
44	0.255	114	1.093	184	4.668	254	20.00
45	0.260	115	1.115	185	4.795		
46	0.265	116	1.136	186	4.879		
47	0.271	117	1.157	187	4.963		
48	0.276	118	1.188	188	5.090		
49	0.284	119	1.209	189	5.173		
50	0.289	120	1.241	190	5.299		
51	0.294	121	1.262	191	5.383		
52	0.302	122	1.293	192	5.552		
53	0.308	123	1.314	193	5.636		
54	0.315	124	1.346	194	5.720		
55	0.321	125	1.367	195	5.888		
56	0.326	126	1.409	196	5.972		
57	0.334	127	1.430	197	6.140		
58	0.342	128	1.451	198	6.224		
59	0.347	129	1.493	199	6.393		
60	0.357	130	1.514	200	6.477		
61	0.363	131	1.556	201	6.665		
62	0.368	132	1.598	202	6.813		
63	0.379	133	1.619	203	6.897		
64	0.384	134	1.661	204	7.066		
65	0.394	135	1.703	205	7.234		
66	0.405	136	1.724	206	7.402		
67	0.410	137	1.766	207	7.570		
68	0.421	138	1.808	208	7.654		
69	0.426	139	1.851	209	7.823		

Table #23
Rev Hall Time

Data	Value
0	0.3
1	0.4
2	0.5
3	0.6
4	0.7
5	0.8
6	0.9
7	1.0
8	1.1
9	1.2
10	1.3
11	1.4
12	1.5
13	1.6
14	1.7
15	1.8
16	1.9
17	2.0
18	2.1
19	2.2
20	2.3
21	2.4
22	2.5
23	2.6
24	2.7
25	2.8
26	2.9
27	3.0
28	3.1
29	3.2
30	3.3
31	3.4
32	3.5
33	3.6
34	3.7
35	3.8
36	3.9
37	4.0
38	4.1
39	4.2
40	4.3
41	4.4
42	4.5
43	4.6
44	4.7
45	4.8
46	4.9
47	5.0
48	5.5
49	6.0
50	6.5
51	7.0
52	7.5
53	8.0
54	8.5
55	9.0
56	9.5
57	10.0
58	10.5
59	11.0
60	11.5
61	12.0
62	12.5
63	13.0
64	13.5
65	14.0
66	15.0
67	16.0
68	17.0
69	18.0

Table #24
Rev Room Time

Data	Value
0	0.3
1	0.4
2	0.5
3	0.6
4	0.7
5	0.8
6	0.9
7	1.0
8	1.1
9	1.2
10	1.3
11	1.4
12	1.5
13	1.6
14	1.7
15	1.8
16	1.9
17	2.0
18	2.1
19	2.2
20	2.3
21	2.4
22	2.5
23	2.6
24	2.7
25	2.8
26	2.9
27	3.0
28	3.1
29	3.2
30	3.3
31	3.4
32	3.5
33	3.6
34	3.7
35	3.8
36	3.9
37	4.0
38	4.1
39	4.2
40	4.3
41	4.4
42	4.5
43	4.6
44	4.7
45	4.8
46	4.9
47	5.0
48	5.1
49	5.2
50	5.3
51	5.4
52	5.5
53	5.6
54	5.7
55	5.8
56	5.9
57	6.0
58	6.1
59	6.2
60	6.3
61	6.4
62	6.5
63	6.6
64	6.7
65	6.8
66	6.9
67	7.0
68	8.0
69	10.0

Table #25
VCM Comp Level

Data	Value	Data	Value	Data	Value
0	-∞dB	67	-28.50dB	134	-10.44dB
1	-138.0dB	68	-28.11dB	135	-10.24dB
2	-120.0dB	69	-27.73dB	136	-10.05dB
3	-109.4dB	70	-27.36dB	137	-9.86dB
4	-101.9dB	71	-26.99dB	138	-9.67dB
5	-96.12dB	72	-26.62dB	139	-9.48dB
6	-91.37dB	73	-26.26dB	140	-9.29dB
7	-87.36dB	74	-25.91dB	141	-9.11dB
8	-83.88dB	75	-25.56dB	142	-8.92dB
9	-80.81dB	76	-25.21dB	143	-8.74dB
10	-78.06dB	77	-24.87dB	144	-8.56dB
11	-75.58dB	78	-24.54dB	145	-8.38dB
12	-73.31dB	79	-24.20dB	146	-8.20dB
13	-71.23dB	80	-23.88dB	147	-8.02dB
14	-69.29dB	81	-23.55dB	148	-7.85dB
15	-67.50dB	82	-23.23dB	149	-7.67dB
16	-65.81dB	83	-22.92dB	150	-7.50dB
17	-64.23dB	84	-22.61dB	151	-7.32dB
18	-62.75dB	85	-22.30dB	152	-7.15dB
19	-61.34dB	86	-21.99dB	153	-6.98dB
20	-60.00dB	87	-21.69dB	154	-6.81dB
21	-58.73dB	88	-21.39dB	155	-6.64dB
22	-57.52dB	89	-21.10dB	156	-6.47dB
23	-56.36dB	90	-20.81dB	157	-6.31dB
24	-55.25dB	91	-20.52dB	158	-6.14dB
25	-54.19dB	92	-20.23dB	159	-5.98dB
26	-53.16dB	93	-19.95dB	160	-5.81dB
27	-52.18dB	94	-19.67dB	161	-5.65dB
28	-51.23dB	95	-19.40dB	162	-5.49dB
29	-50.32dB	96	-19.13dB	163	-5.33dB
30	-49.43dB	97	-18.86dB	164	-5.17dB
31	-48.58dB	98	-18.59dB	165	-5.01dB
32	-47.75dB	99	-18.32dB	166	-4.86dB
33	-46.95dB	100	-18.06dB	167	-4.70dB
34	-46.17dB	101	-17.80dB	168	-4.54dB
35	-45.42dB	102	-17.55dB	169	-4.39dB
36	-44.68dB	103	-17.29dB	170	-4.23dB
37	-43.97dB	104	-17.04dB	171	-4.08dB
38	-43.27dB	105	-16.79dB	172	-3.93dB
39	-42.60dB	106	-16.54dB	173	-3.78dB
40	-41.94dB	107	-16.30dB	174	-3.63dB
41	-41.29dB	108	-16.06dB	175	-3.48dB
42	-40.67dB	109	-15.82dB	176	-3.33dB
43	-40.05dB	110	-15.58dB	177	-3.18dB
44	-39.45dB	111	-15.34dB	178	-3.04dB
45	-38.87dB	112	-15.11dB	179	-2.89dB
46	-38.30dB	113	-14.88dB	180	-2.75dB
47	-37.74dB	114	-14.65dB	181	-2.60dB
48	-37.19dB	115	-14.42dB	182	-2.46dB
49	-36.65dB	116	-14.19dB	183	-2.31dB
50	-36.12dB	117	-13.97dB	184	-2.17dB
51	-35.61dB	118	-13.75dB	185	-2.03dB
52	-35.10dB	119	-13.53dB	186	-1.89dB
53	-34.61dB	120	-13.31dB	187	-1.75dB
54	-34.12dB	121	-13.09dB	188	-1.61dB
55	-33.64dB	122	-12.88dB	189	-1.47dB
56	-33.17dB	123	-12.67dB	190	-1.34dB
57	-32.71dB	124	-12.46dB	191	-1.20dB
58	-32.26dB	125	-12.25dB	192	-1.06dB
59	-31.81dB	126	-12.04dB	193	-0.93dB
60	-31.37dB	127	-11.83dB	194	-0.79dB
61	-30.94dB	128	-11.63dB	195	-0.66dB
62	-30.52dB	129	-11.43dB	196	-0.53dB
63	-30.10dB	130	-11.23dB	197	-0.39dB
64	-29.69dB	131	-11.03dB	198	-0.26dB
65	-29.29dB	132	-10.83dB	199	-0.13dB
66	-28.89dB	133	-10.63dB	200	0.00dB

Table #26
VCM Comp Attack Time

Data	Value	Data	Value	Data	Value
0	0.022ms	67	3.295ms	134	18.53ms
1	0.023ms	68	3.418ms	135	18.88ms
2	0.024ms	69	3.544ms	136	19.23ms
3	0.025ms	70	3.673ms	137	19.59ms
4	0.026ms	71	3.805ms	138	19.95ms
5	0.028ms	72	3.940ms	139	20.31ms
6	0.031ms	73	4.077ms	140	20.68ms
7	0.035ms	74	4.217ms	141	21.05ms
8	0.039ms	75	4.361ms	142	21.42ms
9	0.045ms	76	4.507ms	143	21.80ms
10	0.051ms	77	4.656ms	144	22.18ms
11	0.059ms	78	4.807ms	145	22.57ms
12	0.068ms	79	4.962ms	146	22.96ms
13	0.077ms	80	5.120ms	147	23.36ms
14	0.088ms	81	5.281ms	148	23.75ms
15	0.101ms	82	5.445ms	149	24.16ms
16	0.114ms	83	5.611ms	150	24.56ms
17	0.129ms	84	5.781ms	151	24.97ms
18	0.146ms	85	5.954ms	152	25.39ms
19	0.163ms	86	6.130ms	153	25.81ms
20	0.182ms	87	6.309ms	154	26.23ms
21	0.203ms	88	6.491ms	155	26.66ms
22	0.225ms	89	6.677ms	156	27.09ms
23	0.249ms	90	6.865ms	157	27.53ms
24	0.274ms	91	7.057ms	158	27.97ms
25	0.301ms	92	7.252ms	159	28.41ms
26	0.330ms	93	7.450ms	160	28.86ms
27	0.360ms	94	7.651ms	161	29.31ms
28	0.393ms	95	7.855ms	162	29.77ms
29	0.426ms	96	8.063ms	163	30.23ms
30	0.462ms	97	8.274ms	164	30.70ms
31	0.500ms	98	8.489ms	165	31.17ms
32	0.539ms	99	8.706ms	166	31.64ms
33	0.580ms	100	8.927ms	167	32.12ms
34	0.623ms	101	9.151ms	168	32.60ms
35	0.668ms	102	9.379ms	169	33.09ms
36	0.716ms	103	9.610ms	170	33.58ms
37	0.765ms	104	9.844ms	171	34.07ms
38	0.816ms	105	10.09ms	172	34.57ms
39	0.869ms	106	10.33ms	173	35.08ms
40	0.924ms	107	10.57ms	174	35.59ms
41	0.982ms	108	10.82ms	175	36.10ms
42	1.041ms	109	11.07ms	176	36.62ms
43	1.103ms	110	11.33ms	177	37.14ms
44	1.167ms	111	11.59ms	178	37.67ms
45	1.233ms	112	11.85ms	179	38.20ms
46	1.301ms	113	12.11ms	180	38.73ms
47	1.372ms	114	12.38ms	181	39.27ms
48	1.444ms	115	12.66ms	182	39.82ms
49	1.520ms	116	12.93ms	183	40.36ms
50	1.597ms	117	13.21ms	184	40.92ms
51	1.677ms	118	13.50ms	185	41.48ms
52	1.759ms	119	13.78ms	186	42.04ms
53	1.844ms	120	14.07ms	187	42.61ms
54	1.931ms	121	14.37ms	188	43.18ms
55	2.021ms	122	14.67ms	189	43.75ms
56	2.113ms	123	14.97ms	190	44.33ms
57	2.207ms	124	15.27ms	191	44.92ms
58	2.304ms	125	15.58ms	192	45.51ms
59	2.404ms	126	15.90ms	193	46.10ms
60	2.506ms	127	16.21ms	194	46.70ms
61	2.611ms	128	16.53ms	195	47.31ms
62	2.718ms	129	16.86ms	196	47.91ms
63	2.828ms	130	17.18ms	197	48.53ms
64	2.941ms	131	17.52ms	198	49.15ms
65	3.056ms	132	17.85ms	199	49.77ms
66	3.174ms	133	18.19ms	200	50.40ms

Table #27
VCM Comp Release Time

Data	Value	Data	Value	Data	Value
0	10.88ms	67	70.74ms	134	250.30ms
1	10.90ms	68	72.54ms	135	253.88ms
2	10.94ms	69	74.36ms	136	257.50ms
3	11.00ms	70	76.22ms	137	261.14ms
4	11.10ms	71	78.10ms	138	264.80ms
5	11.22ms	72	80.00ms	139	268.50ms
6	11.36ms	73	81.94ms	140	272.22ms
7	11.54ms	74	83.90ms	141	275.96ms
8	11.74ms	75	85.88ms	142	279.74ms
9	11.96ms	76	87.90ms	143	283.54ms
10	12.22ms	77	89.94ms	144	287.36ms
11	12.50ms	78	92.00ms	145	291.22ms
12	12.80ms	79	94.10ms	146	295.10ms
13	13.14ms	80	96.22ms	147	299.00ms
14	13.50ms	81	98.36ms	148	302.94ms
15	13.88ms	82	100.54ms	149	306.90ms
16	14.30ms	83	102.74ms	150	310.88ms
17	14.74ms	84	104.96ms	151	314.90ms
18	15.20ms	85	107.22ms	152	318.94ms
19	15.70ms	86	109.50ms	153	323.00ms
20	16.22ms	87	111.80ms	154	327.10ms
21	16.76ms	88	114.14ms	155	331.22ms
22	17.34ms	89	116.50ms	156	335.36ms
23	17.94ms	90	118.88ms	157	339.54ms
24	18.56ms	91	121.30ms	158	343.74ms
25	19.22ms	92	123.74ms	159	347.96ms
26	19.90ms	93	126.20ms	160	352.22ms
27	20.60ms	94	128.70ms	161	356.50ms
28	21.34ms	95	131.22ms	162	360.80ms
29	22.10ms	96	133.76ms	163	365.14ms
30	22.88ms	97	136.34ms	164	369.50ms
31	23.70ms	98	138.94ms	165	373.88ms
32	24.54ms	99	141.56ms	166	378.30ms
33	25.40ms	100	144.22ms	167	382.74ms
34	26.30ms	101	146.90ms	168	387.20ms
35	27.22ms	102	149.60ms	169	391.70ms
36	28.16ms	103	152.34ms	170	396.22ms
37	29.14ms	104	155.10ms	171	400.76ms
38	30.14ms	105	157.88ms	172	405.34ms
39	31.16ms	106	160.70ms	173	409.94ms
40	32.22ms	107	163.54ms	174	414.56ms
41	33.30ms	108	166.40ms	175	419.22ms
42	34.40ms	109	169.30ms	176	423.90ms
43	35.54ms	110	172.22ms	177	428.60ms
44	36.70ms	111	175.16ms	178	433.34ms
45	37.88ms	112	178.14ms	179	438.10ms
46	39.10ms	113	181.14ms	180	442.88ms
47	40.34ms	114	184.16ms	181	447.70ms
48	41.60ms	115	187.22ms	182	452.54ms
49	42.90ms	116	190.30ms	183	457.40ms
50	44.22ms	117	193.40ms	184	462.30ms
51	45.56ms	118	196.54ms	185	467.22ms
52	46.94ms	119	199.70ms	186	472.16ms
53	48.34ms	120	202.88ms	187	477.14ms
54	49.76ms	121	206.10ms	188	482.14ms
55	51.22ms	122	209.34ms	189	487.16ms
56	52.70ms	123	212.60ms	190	492.22ms
57	54.20ms	124	215.90ms	191	497.30ms
58	55.74ms	125	219.22ms	192	502.40ms
59	57.30ms	126	222.56ms	193	507.54ms
60	58.88ms	127	225.94ms	194	512.70ms
61	60.50ms	128	229.34ms	195	517.88ms
62	62.14ms	129	232.76ms	196	523.10ms
63	63.80ms	130	236.22ms	197	528.34ms
64	65.50ms	131	239.70ms	198	533.60ms
65	67.22ms	132	243.20ms	199	538.90ms
66	68.96ms	133	246.74ms	200	544.22ms

Table #28
VCM EQ Frequency

Data	Value	Data	Value
0	16.0Hz	69	850Hz
1	17.0Hz	70	900Hz
2	18.0Hz	71	950Hz
3	19.0Hz	72	1.00kHz
4	20.0Hz	73	1.06kHz
5	21.2Hz	74	1.12kHz
6	22.4Hz	75	1.18kHz
7	23.6Hz	76	1.25kHz
8	25.0Hz	77	1.32kHz
9	26.5Hz	78	1.40kHz
10	28.0Hz	79	1.50kHz
11	30.0Hz	80	1.60kHz
12	31.5Hz	81	1.70kHz
13	33.5Hz	82	1.80kHz
14	35.5Hz	83	1.90kHz
15	37.5Hz	84	2.00kHz
16	40.0Hz	85	2.12kHz
17	42.5Hz	86	2.24kHz
18	45.0Hz	87	2.36kHz
19	47.5Hz	88	2.50kHz
20	50.0Hz	89	2.65kHz
21	53.0Hz	90	2.80kHz
22	56.0Hz	91	3.00kHz
23	60.0Hz	92	3.15kHz
24	63.0Hz	93	3.35kHz
25	67.0Hz	94	3.55kHz
26	71.0Hz	95	3.75kHz
27	75.0Hz	96	4.00kHz
28	80.0Hz	97	4.25kHz
29	85.0Hz	98	4.50kHz
30	90.0Hz	99	4.75kHz
31	95.0Hz	100	5.00kHz
32	100Hz	101	5.30kHz
33	106Hz	102	5.60kHz
34	112Hz	103	6.00kHz
35	118Hz	104	6.30kHz
36	125Hz	105	6.70kHz
37	132Hz	106	7.10kHz
38	140Hz	107	7.50kHz
39	150Hz	108	8.00kHz
40	160Hz	109	8.50kHz
41	170Hz	110	9.00kHz
42	180Hz	111	9.50kHz
43	190Hz	112	10.0kHz
44	200Hz	113	10.6kHz
45	212Hz	114	11.2kHz
46	224Hz	115	11.8kHz
47	236Hz	116	12.5kHz
48	250Hz	117	13.2kHz
49	265Hz	118	14.0kHz
50	280Hz	119	15.0kHz
51	300Hz	120	16.0kHz
52	315Hz	121	17.0kHz
53	335Hz	122	18.0kHz
54	355Hz	123	19.0kHz
55	375Hz	124	20.0kHz
56	400Hz	125	21.2kHz
57	425Hz	126	22.4kHz
58	450Hz	127	23.6kHz
59	475Hz	128	25.0kHz
60	500Hz	129	26.5kHz
61	530Hz	130	28.0kHz
62	560Hz	131	30.0kHz
63	600Hz	132	31.5kHz
64	630Hz	133	33.5kHz
65	670Hz	134	35.5kHz
66	710Hz	135	37.5kHz
67	750Hz	136	40.0kHz
68	800Hz		

Table #29
VCM EQ Q

Data	Value
0	0.50
1	0.53
2	0.56
3	0.59
4	0.63
5	0.67
6	0.71
7	0.75
8	0.79
9	0.84
10	0.89
11	0.94
12	1.00
13	1.06
14	1.12
15	1.19
16	1.26
17	1.33
18	1.41
19	1.50
20	1.59
21	1.68
22	1.78
23	1.89
24	2.00
25	2.12
26	2.24
27	2.38
28	2.52
29	2.67
30	2.83
31	3.00
32	3.17
33	3.36
34	3.56
35	3.78
36	4.00
37	4.24
38	4.49
39	4.76
40	5.04
41	5.34
42	5.66
43	5.99
44	6.35
45	6.73
46	7.13
47	7.55
48	8.00
49	8.48
50	8.98
51	9.51
52	10.08
53	10.68
54	11.31
55	11.99
56	12.70
57	13.45
58	14.25
59	15.10
60	16.00

Table #30
Speaker Type

Data	Value
0	Off
1	BS 4x12
2	AC 2x12
3	AC 1x12
4	AC 4x10
5	BC 2x12
6	AM 4x12
7	YC 4x12
8	JC 2x12
9	OC 2x12
10	OC 1x8

Table #31
Speaker Type 2

Data	Value
0	Off
1	Stack
2	Twin
3	Tweed
4	Oldies
5	Modern
6	Mean
7	Soft
8	Small
9	Dip1
10	Dip2
11	Metal
12	Light

Table #32
Distortion Type

Data	Value
0	Raw1
1	Vintage1
2	Modern1
3	Raw2
4	Vintage2
5	Modern2

Table #33
Wah Switch

Data	Value
0	Off
1	Wah Pedal
2	Auto+ Full
3	Auto+ Mid
4	Auto+ Light
5	Auto- Full
6	Auto- Mid
7	Auto- Light

Table #34
Distortion Switch

Data	Value
0	Off
1	Overdrive
2	Distortion1
3	Distortion2
4	Clean
5	Crunch
6	Hi-Gain
7	Modern

Table #35
Distortion EQ

Data	Value
0	High Boost
1	Mid Boost
2	Mid Cut 1
3	Mid Cut 2
4	Mid Cut 3
5	Low Cut 1
6	Low Cut 2
7	High Cut
8	High/Low

Table #36
LFO Speed

Data	Value	Data	Value
0	0.100	64	1.009
1	0.103	65	1.051
2	0.105	66	1.093
3	0.110	67	1.125
4	0.113	68	1.167
5	0.118	69	1.220
6	0.124	70	1.262
7	0.129	71	1.304
8	0.131	72	1.346
9	0.137	73	1.409
10	0.142	74	1.451
11	0.147	75	1.514
12	0.152	76	1.556
13	0.158	77	1.619
14	0.166	78	1.682
15	0.171	79	1.745
16	0.176	80	1.808
17	0.184	81	1.872
18	0.192	82	1.956
19	0.197	83	2.019
20	0.205	84	2.103
21	0.213	85	2.166
22	0.221	86	2.250
23	0.229	87	2.334
24	0.237	88	2.418
25	0.247	89	2.502
26	0.255	90	2.608
27	0.265	91	2.692
28	0.276	92	2.776
29	0.284	93	2.902
30	0.294	94	2.986
31	0.308	95	3.112
32	0.318	96	3.238
33	0.329	97	3.365
34	0.342	98	3.491
35	0.352	99	3.617
36	0.368	100	3.743
37	0.379	101	3.869
38	0.394	102	4.037
39	0.410	103	4.164
40	0.426	104	4.332
41	0.442	105	4.500
42	0.457	106	4.668
43	0.473	107	4.837
44	0.489	108	5.005
45	0.510	109	5.173
46	0.526	110	5.383
47	0.547	111	5.552
48	0.568	112	5.804
49	0.589	113	5.972
50	0.610	114	6.224
51	0.631	115	6.393
52	0.657	116	6.645
53	0.673	117	6.897
54	0.704	118	7.150
55	0.725	119	7.402
56	0.757	120	7.738
57	0.789	121	7.991
58	0.810	122	8.327
59	0.841	123	8.580
60	0.873	124	8.916
61	0.904	125	9.253
62	0.946	126	9.589
63	0.978	127	9.925

Table #37
Phaser Switch

Data	Value
0	Off
1	Standard
2	Wide
3	Vibe
4	Tremolo

Table #38
Delay Switch

Data	Value
0	Off
1	Delay M
2	Echo1 M
3	Echo2 M
4	Chorus M
5	Dl Chorus M
6	Flanger1 M
7	Flanger2 M
8	Flanger3 M
9	Delay St
10	Echo1 St
11	Echo2 St
12	Chorus St
13	Dl Chorus St
14	Flanger1 St
15	Flanger2 St
16	Flanger3 St

Table #39
EQ Frequency

Data	Value	Data	Value	Data	Value	Data	Value
0	16.0	70	118	140	900	210	6.70k
1	16.3	71	122	141	917	211	6.88k
2	17.0	72	125	142	950	212	7.10k
3	17.3	73	130	143	972	213	7.29k
4	18.0	74	132	144	1.00k	214	7.50k
5	18.3	75	137	145	1.03k	215	7.72k
6	19.0	76	140	146	1.06k	216	8.00k
7	19.4	77	145	147	1.09k	217	8.18k
8	20.0	78	150	148	1.12k	218	8.50k
9	20.5	79	154	149	1.15k	219	8.66k
10	21.2	80	160	150	1.18k	220	9.00k
11	21.8	81	163	151	1.22k	221	9.17k
12	22.4	82	170	152	1.25k	222	9.50k
13	23.0	83	173	153	1.30k	223	9.72k
14	23.6	84	180	154	1.32k	224	10.0k
15	24.4	85	183	155	1.37k	225	10.3k
16	25.0	86	190	156	1.40k	226	10.6k
17	25.9	87	194	157	1.45k	227	10.9k
18	26.5	88	200	158	1.50k	228	11.2k
19	27.4	89	205	159	1.54k	229	11.5k
20	28.0	90	212	160	1.60k	230	11.8k
21	29.0	91	218	161	1.63k	231	12.2k
22	30.0	92	224	162	1.70k	232	12.5k
23	30.7	93	230	163	1.73k	233	13.0k
24	31.5	94	236	164	1.80k	234	13.2k
25	32.5	95	244	165	1.83k	235	13.7k
26	33.5	96	250	166	1.90k	236	14.0k
27	34.5	97	259	167	1.94k	237	14.5k
28	35.5	98	265	168	2.00k	238	15.0k
29	36.5	99	274	169	2.05k	239	15.4k
30	37.5	100	280	170	2.12k	240	16.0k
31	38.7	101	290	171	2.18k	241	16.3k
32	40.0	102	300	172	2.24k	242	17.0k
33	41.0	103	307	173	2.30k	243	17.3k
34	42.5	104	315	174	2.36k	244	18.0k
35	43.4	105	325	175	2.44k	245	18.3k
36	45.0	106	335	176	2.50k	246	19.0k
37	46.0	107	345	177	2.59k	247	19.4k
38	47.5	108	355	178	2.65k	248	20.0k
39	48.7	109	365	179	2.74k	249	20.5k
40	50.0	110	375	180	2.80k	250	21.2k
41	51.6	111	387	181	2.90k	251	21.8k
42	53.0	112	400	182	3.00k	252	22.4k
43	54.6	113	410	183	3.07k	253	23.0k
44	56.0	114	425	184	3.15k	254	23.6k
45	57.9	115	434	185	3.25k	255	24.4k
46	60.0	116	450	186	3.35k		
47	61.3	117	460	187	3.45k		
48	63.0	118	475	188	3.55k		
49	64.9	119	487	189	3.65k		
50	67.0	120	500	190	3.75k		
51	68.8	121	516	191	3.87k		
52	71.0	122	530	192	4.00k		
53	72.9	123	546	193	4.10k		
54	75.0	124	560	194	4.25k		
55	77.2	125	579	195	4.34k		
56	80.0	126	600	196	4.50k		
57	81.8	127	613	197	4.60k		
58	85.0	128	630	198	4.75k		
59	86.6	129	649	199	4.87k		
60	90.0	130	670	200	5.00k		
61	91.7	131	688	201	5.16k		
62	95.0	132	710	202	5.30k		
63	97.2	133	729	203	5.46k		
64	100	134	750	204	5.60k		
65	103	135	772	205	5.79k		
66	106	136	800	206	6.00k		
67	109	137	818	207	6.13k		
68	112	138	850	208	6.30k		
69	115	139	866	209	6.49k		

Table #40
Beat Repeat Ratio

Data	Value
0	1/32
1	1/24
2	1/16
3	1/12
4	1/8
5	1/6
6	1/4
7	1/3
8	1/2
9	2/3
10	1

Table #41
Delay Time (short)

Data	Value	Data	Value
0	25.0ms	64	143.4ms
1	25.7ms	65	147.3ms
2	26.4ms	66	151.4ms
3	27.1ms	67	155.6ms
4	27.9ms	68	159.9ms
5	28.7ms	69	164.3ms
6	29.4ms	70	168.9ms
7	30.3ms	71	173.5ms
8	31.1ms	72	178.3ms
9	32.0ms	73	183.3ms
10	32.8ms	74	188.3ms
11	33.8ms	75	193.6ms
12	34.7ms	76	198.9ms
13	35.6ms	77	204.4ms
14	36.6ms	78	210.1ms
15	37.6ms	79	215.9ms
16	38.7ms	80	221.9ms
17	39.8ms	81	228.0ms
18	40.9ms	82	234.3ms
19	42.0ms	83	240.8ms
20	43.1ms	84	247.4ms
21	44.3ms	85	254.3ms
22	45.6ms	86	261.3ms
23	46.8ms	87	268.6ms
24	48.1ms	88	276.0ms
25	49.5ms	89	283.6ms
26	50.8ms	90	291.5ms
27	52.2ms	91	299.5ms
28	53.7ms	92	307.8ms
29	55.2ms	93	316.3ms
30	56.7ms	94	325.1ms
31	58.3ms	95	334.1ms
32	59.9ms	96	343.3ms
33	61.5ms	97	352.8ms
34	63.2ms	98	362.6ms
35	65.0ms	99	372.6ms
36	66.8ms	100	382.9ms
37	68.6ms	101	393.5ms
38	70.5ms	102	404.4ms
39	72.5ms	103	415.6ms
40	74.5ms	104	427.1ms
41	76.5ms	105	438.9ms
42	78.7ms	106	451.0ms
43	80.8ms	107	463.5ms
44	83.1ms	108	476.3ms
45	85.4ms	109	489.5ms
46	87.7ms	110	503.1ms
47	90.1ms	111	517.0ms
48	92.6ms	112	531.3ms
49	95.2ms	113	546.0ms
50	97.8ms	114	561.1ms
51	100.5ms	115	576.6ms
52	103.3ms	116	592.5ms
53	106.2ms	117	608.9ms
54	109.1ms	118	625.8ms
55	112.1ms	119	643.1ms
56	115.2ms	120	660.9ms
57	118.4ms	121	679.2ms
58	121.7ms	122	698.0ms
59	125.1ms	123	717.3ms
60	128.5ms	124	737.1ms
61	132.1ms	125	757.5ms
62	135.7ms	126	778.5ms
63	139.5ms	127	800.0ms

Table #42
Delay Time (long)

Data	Value	Data	Value
0	50.0ms	64	226.3ms
1	51.2ms	65	231.7ms
2	52.4ms	66	237.2ms
3	53.7ms	67	242.9ms
4	54.9ms	68	248.6ms
5	56.3ms	69	254.6ms
6	57.6ms	70	260.7ms
7	59.0ms	71	266.9ms
8	60.4ms	72	273.3ms
9	61.8ms	73	279.8ms
10	63.3ms	74	286.5ms
11	64.8ms	75	293.3ms
12	66.4ms	76	300.3ms
13	67.9ms	77	307.5ms
14	69.6ms	78	314.8ms
15	71.2ms	79	322.3ms
16	72.9ms	80	330.0ms
17	74.7ms	81	337.9ms
18	76.4ms	82	345.9ms
19	78.3ms	83	354.2ms
20	80.1ms	84	362.7ms
21	82.1ms	85	371.3ms
22	84.0ms	86	380.2ms
23	86.0ms	87	389.2ms
24	88.1ms	88	398.5ms
25	90.2ms	89	408.1ms
26	92.3ms	90	417.8ms
27	94.5ms	91	427.8ms
28	96.8ms	92	438.0ms
29	99.1ms	93	448.4ms
30	101.5ms	94	459.1ms
31	103.9ms	95	470.1ms
32	106.4ms	96	481.3ms
33	108.9ms	97	492.8ms
34	111.5ms	98	504.6ms
35	114.2ms	99	516.6ms
36	116.9ms	100	528.9ms
37	119.7ms	101	541.6ms
38	122.5ms	102	554.5ms
39	125.5ms	103	567.7ms
40	128.5ms	104	581.3ms
41	131.5ms	105	595.1ms
42	134.7ms	106	609.4ms
43	137.9ms	107	623.9ms
44	141.2ms	108	638.8ms
45	144.5ms	109	654.0ms
46	148.0ms	110	669.6ms
47	151.5ms	111	685.6ms
48	155.1ms	112	702.0ms
49	158.8ms	113	718.8ms
50	162.6ms	114	735.9ms
51	166.5ms	115	753.5ms
52	170.5ms	116	771.5ms
53	174.5ms	117	789.9ms
54	178.7ms	118	808.7ms
55	183.0ms	119	828.0ms
56	187.3ms	120	847.8ms
57	191.8ms	121	868.0ms
58	196.4ms	122	888.7ms
59	201.1ms	123	910.0ms
60	205.9ms	124	931.7ms
61	210.8ms	125	953.9ms
62	215.8ms	126	976.7ms
63	221.0ms	127	1000.0ms

Table #43
Analog Delay Retro

Data	Value
0	Mellow
1	Dub
2	Narrow
3	Soft
4	Dark

Table #44
Analog Delay Modern

Data	Value
0	Urban
1	Dub
2	Narrow
3	Soft
4	Dark

Table #45
Side Chain Input Level

Data	Value	Data	Value
0	-∞dB	64	-7.5dB
1	-62.0dB	65	-7.0dB
2	-59.0dB	66	-6.5dB
3	-56.0dB	67	-6.0dB
4	-54.0dB	68	-5.5dB
5	-52.0dB	69	-5.0dB
6	-50.0dB	70	-4.5dB
7	-48.0dB	71	-4.0dB
8	-47.0dB	72	-3.5dB
9	-46.0dB	73	-3.0dB
10	-45.0dB	74	-2.5dB
11	-44.0dB	75	-2.0dB
12	-43.0dB	76	-1.5dB
13	-42.0dB	77	-1.0dB
14	-41.0dB	78	-0.5dB
15	-40.0dB	79	0.0dB
16	-39.0dB	80	0.5dB
17	-38.0dB	81	1.0dB
18	-37.0dB	82	1.5dB
19	-36.0dB	83	2.0dB
20	-35.0dB	84	2.5dB
21	-34.0dB	85	3.0dB
22	-33.0dB	86	3.5dB
23	-32.0dB	87	4.0dB
24	-31.0dB	88	4.5dB
25	-30.0dB	89	5.0dB
26	-29.0dB	90	5.5dB
27	-28.0dB	91	6.0dB
28	-27.0dB	92	6.5dB
29	-26.0dB	93	7.0dB
30	-25.0dB	94	7.5dB
31	-24.0dB	95	8.0dB
32	-23.5dB	96	8.5dB
33	-23.0dB	97	9.0dB
34	-22.5dB	98	9.5dB
35	-22.0dB	99	10.0dB
36	-21.5dB	100	10.5dB
37	-21.0dB	101	11.0dB
38	-20.5dB	102	11.5dB
39	-20.0dB	103	12.0dB
40	-19.5dB	104	12.5dB
41	-19.0dB	105	13.0dB
42	-18.5dB	106	13.5dB
43	-18.0dB	107	14.0dB
44	-17.5dB	108	14.5dB
45	-17.0dB	109	15.0dB
46	-16.5dB	110	15.5dB
47	-16.0dB	111	16.0dB
48	-15.5dB	112	16.5dB
49	-15.0dB	113	17.0dB
50	-14.5dB	114	17.5dB
51	-14.0dB	115	18.0dB
52	-13.5dB	116	18.5dB
53	-13.0dB	117	19.0dB
54	-12.5dB	118	19.5dB
55	-12.0dB	119	20.0dB
56	-11.5dB	120	20.5dB
57	-11.0dB	121	21.0dB
58	-10.5dB	122	21.5dB
59	-10.0dB	123	22.0dB
60	-9.5dB	124	22.5dB
61	-9.0dB	125	23.0dB
62	-8.5dB	126	23.5dB
63	-8.0dB	127	24.0dB

Table #46
Beat Repert Cutoff

Data	Value	Data	Value
0	14.1Hz	64	562Hz
1	15.0Hz	65	596Hz
2	15.8Hz	66	631Hz
3	16.8Hz	67	668Hz
4	17.8Hz	68	708Hz
5	18.8Hz	69	750Hz
6	20.0Hz	70	794Hz
7	21.1Hz	71	841Hz
8	22.4Hz	72	891Hz
9	23.7Hz	73	944Hz
10	25.1Hz	74	1.00kHz
11	26.6Hz	75	1.06kHz
12	28.2Hz	76	1.12kHz
13	29.9Hz	77	1.19kHz
14	31.6Hz	78	1.26kHz
15	33.5Hz	79	1.33kHz
16	35.5Hz	80	1.41kHz
17	37.6Hz	81	1.50kHz
18	39.8Hz	82	1.58kHz
19	42.2Hz	83	1.68kHz
20	44.7Hz	84	1.78kHz
21	47.3Hz	85	1.88kHz
22	50.1Hz	86	2.00kHz
23	53.1Hz	87	2.11kHz
24	56.2Hz	88	2.24kHz
25	59.6Hz	89	2.37kHz
26	63.1Hz	90	2.51kHz
27	66.8Hz	91	2.66kHz
28	70.8Hz	92	2.82kHz
29	75.0Hz	93	2.99kHz
30	79.4Hz	94	3.16kHz
31	84.1Hz	95	3.35kHz
32	89.1Hz	96	3.55kHz
33	94.4Hz	97	3.76kHz
34	100Hz	98	3.98kHz
35	106Hz	99	4.22kHz
36	112Hz	100	4.47kHz
37	119Hz	101	4.73kHz
38	126Hz	102	5.01kHz
39	133Hz	103	5.31kHz
40	141Hz	104	5.62kHz
41	150Hz	105	5.96kHz
42	158Hz	106	6.31kHz
43	168Hz	107	6.68kHz
44	178Hz	108	7.08kHz
45	188Hz	109	7.50kHz
46	200Hz	110	7.94kHz
47	211Hz	111	8.41kHz
48	224Hz	112	8.91kHz
49	237Hz	113	9.44kHz
50	251Hz	114	10.0kHz
51	266Hz	115	10.6kHz
52	282Hz	116	11.2kHz
53	299Hz	117	11.9kHz
54	316Hz	118	12.6kHz
55	335Hz	119	13.3kHz
56	355Hz	120	14.1kHz
57	376Hz	121	15.0kHz
58	398Hz	122	15.8kHz
59	422Hz	123	16.8kHz
60	447Hz	124	17.8kHz
61	473Hz	125	18.8kHz
62	501Hz	126	20.0kHz
63	531Hz	127	21.1kHz

Table #47
Beat Repert Gain

Data	Value	Data	Value
1	-19.50dB	65	-3.50dB
2	-19.25dB	66	-3.25dB
3	-19.00dB	67	-3.00dB
4	-18.75dB	68	-2.75dB
5	-18.50dB	69	-2.50dB
6	-18.25dB	70	-2.25dB
7	-18.00dB	71	-2.00dB
8	-17.75dB	72	-1.75dB
9	-17.50dB	73	-1.50dB
10	-17.25dB	74	-1.25dB
11	-17.00dB	75	-1.00dB
12	-16.75dB	76	-0.75dB
13	-16.50dB	77	-0.50dB
14	-16.25dB	78	-0.25dB
15	-16.00dB	79	0.00dB
16	-15.75dB	80	0.25dB
17	-15.50dB	81	0.50dB
18	-15.25dB	82	0.75dB
19	-15.00dB	83	1.00dB
20	-14.75dB	84	1.25dB
21	-14.50dB	85	1.50dB
22	-14.25dB	86	1.75dB
23	-14.00dB	87	2.00dB
24	-13.75dB	88	2.25dB
25	-13.50dB	89	2.50dB
26	-13.25dB	90	2.75dB
27	-13.00dB	91	3.00dB
28	-12.75dB	92	3.25dB
29	-12.50dB	93	3.50dB
30	-12.25dB	94	3.75dB
31	-12.00dB	95	4.00dB
32	-11.75dB	96	4.25dB
33	-11.50dB	97	4.50dB
34	-11.25dB	98	4.75dB
35	-11.00dB	99	5.00dB
36	-10.75dB	100	5.25dB
37	-10.50dB	101	5.50dB
38	-10.25dB	102	5.75dB
39	-10.00dB	103	6.00dB
40	-9.75dB	104	6.25dB
41	-9.50dB	105	6.50dB
42	-9.25dB	106	6.75dB
43	-9.00dB	107	7.00dB
44	-8.75dB	108	7.25dB
45	-8.50dB	109	7.50dB
46	-8.25dB	110	7.75dB
47	-8.00dB	111	8.00dB
48	-7.75dB	112	8.25dB
49	-7.50dB	113	8.50dB
50	-7.25dB	114	8.75dB
51	-7.00dB	115	9.00dB
52	-6.75dB	116	9.25dB
53	-6.50dB	117	9.50dB
54	-6.25dB	118	9.75dB
55	-6.00dB	119	10.00dB
56	-5.75dB	120	10.25dB
57	-5.50dB	121	10.50dB
58	-5.25dB	122	10.75dB
59	-5.00dB	123	11.00dB
60	-4.75dB	124	11.25dB
61	-4.50dB	125	11.50dB
62	-4.25dB	126	11.75dB
63	-4.00dB	127	12.00dB
64	-3.75dB		

Table #48
Beat Repert Length

Data	Value	Data	Value
0	1/256.00	64	1/6.00
1	1/224.00	65	1/5.90
2	1/192.00	66	1/5.80
3	1/172.00	67	1/5.70
4	1/161.00	68	1/5.60
5	1/151.00	69	1/5.50
6	1/140.00	70	1/5.40
7	1/128.00	71	1/5.30
8	1/116.00	72	1/5.20
9	1/108.00	73	1/5.10
10	1/104.00	74	1/5.00
11	1/96.00	75	1/4.90
12	1/92.00	76	1/4.80
13	1/88.00	77	1/4.70
14	1/84.00	78	1/4.60
15	1/80.00	79	1/4.50
16	1/76.00	80	1/4.40
17	1/72.00	81	1/4.30
18	1/68.00	82	1/4.20
19	1/64.00	83	1/4.10
20	1/56.00	84	1/4.00
21	1/48.00	85	1/3.90
22	1/40.00	86	1/3.80
23	1/36.00	87	1/3.70
24	1/32.00	88	1/3.60
25	1/30.00	89	1/3.50
26	1/28.00	90	1/3.40
27	1/26.00	91	1/3.30
28	1/24.00	92	1/3.20
29	1/22.00	93	1/3.10
30	1/20.00	94	1/3.00
31	1/19.00	95	1/2.90
32	1/18.00	96	1/2.80
33	1/17.00	97	1/2.70
34	1/16.00	98	1/2.60
35	1/15.00	99	1/2.50
36	1/14.00	100	1/2.40
37	1/13.50	101	1/2.30
38	1/13.00	102	1/2.25
39	1/12.50	103	1/2.20
40	1/12.00	104	1/2.15
41	1/11.50	105	1/2.10
42	1/11.00	106	1/2.05
43	1/10.50	107	1/2.00
44	1/10.00	108	1/1.95
45	1/9.50	109	1/1.90
46	1/9.00	110	1/1.85
47	1/8.75	111	1/1.80
48	1/8.50	112	1/1.75
49	1/8.25	113	1/1.70
50	1/8.00	114	1/1.65
51	1/7.75	115	1/1.60
52	1/7.50	116	1/1.55
53	1/7.25	117	1/1.50
54	1/7.00	118	1/1.45
55	1/6.90	119	1/1.40
56	1/6.80	120	1/1.35
57	1/6.70	121	1/1.30
58	1/6.60	122	1/1.25
59	1/6.50	123	1/1.20
60	1/6.40	124	1/1.15
61	1/6.30	125	1/1.10
62	1/6.20	126	1/1.05
63	1/6.10	127	1/1.00

Table #49
Rotary Windup/down Accel

Data	Value	Data	Value
14	0.21	78	1.22
15	0.22	79	1.24
16	0.24	80	1.25
17	0.25	81	1.27
18	0.27	82	1.29
19	0.29	83	1.30
20	0.30	84	1.32
21	0.32	85	1.33
22	0.33	86	1.35
23	0.35	87	1.37
24	0.37	88	1.38
25	0.38	89	1.40
26	0.40	90	1.41
27	0.41	91	1.43
28	0.43	92	1.44
29	0.44	93	1.46
30	0.46	94	1.48
31	0.48	95	1.49
32	0.49	96	1.51
33	0.51	97	1.52
34	0.52	98	1.54
35	0.54	99	1.56
36	0.56	100	1.57
37	0.57	101	1.59
38	0.59	102	1.60
39	0.60	103	1.62
40	0.62	104	1.63
41	0.63	105	1.65
42	0.65	106	1.67
43	0.67	107	1.68
44	0.68	108	1.70
45	0.70	109	1.71
46	0.71	110	1.73
47	0.73	111	1.75
48	0.75	112	1.76
49	0.76	113	1.78
50	0.78	114	1.79
51	0.79	115	1.81
52	0.81	116	1.83
53	0.83	117	1.84
54	0.84	118	1.86
55	0.86	119	1.87
56	0.87	120	1.89
57	0.89	121	1.90
58	0.90	122	1.92
59	0.92	123	1.94
60	0.94	124	1.95
61	0.95	125	1.97
62	0.97	126	1.98
63	0.98	127	2.00
64	1.00		
65	1.02		
66	1.03		
67	1.05		
68	1.06		
69	1.08		
70	1.10		
71	1.11		
72	1.13		
73	1.14		
74	1.16		
75	1.17		
76	1.19		
77	1.21		

Table #50
Downward Comp Attack

Data	Value	Data	Value
0	0.010ms	64	0.927ms
1	0.011ms	65	0.995ms
2	0.012ms	66	1.068ms
3	0.013ms	67	1.146ms
4	0.014ms	68	1.230ms
5	0.015ms	69	1.320ms
6	0.016ms	70	1.417ms
7	0.017ms	71	1.521ms
8	0.018ms	72	1.632ms
9	0.019ms	73	1.752ms
10	0.020ms	74	1.880ms
11	0.022ms	75	2.018ms
12	0.023ms	76	2.166ms
13	0.025ms	77	2.325ms
14	0.027ms	78	2.496ms
15	0.029ms	79	2.679ms
16	0.031ms	80	2.875ms
17	0.033ms	81	3.086ms
18	0.036ms	82	3.312ms
19	0.038ms	83	3.555ms
20	0.041ms	84	3.816ms
21	0.044ms	85	4.095ms
22	0.047ms	86	4.396ms
23	0.051ms	87	4.718ms
24	0.055ms	88	5.064ms
25	0.059ms	89	5.435ms
26	0.063ms	90	5.834ms
27	0.068ms	91	6.262ms
28	0.073ms	92	6.721ms
29	0.078ms	93	7.214ms
30	0.084ms	94	7.743ms
31	0.090ms	95	8.311ms
32	0.096ms	96	8.920ms
33	0.103ms	97	9.574ms
34	0.111ms	98	10.28ms
35	0.119ms	99	11.03ms
36	0.128ms	100	11.84ms
37	0.137ms	101	12.71ms
38	0.147ms	102	13.64ms
39	0.158ms	103	14.64ms
40	0.170ms	104	15.71ms
41	0.182ms	105	16.86ms
42	0.195ms	106	18.10ms
43	0.210ms	107	19.43ms
44	0.225ms	108	20.85ms
45	0.242ms	109	22.38ms
46	0.259ms	110	24.02ms
47	0.278ms	111	25.79ms
48	0.299ms	112	27.68ms
49	0.321ms	113	29.71ms
50	0.344ms	114	31.88ms
51	0.369ms	115	34.22ms
52	0.396ms	116	36.73ms
53	0.425ms	117	39.42ms
54	0.457ms	118	42.32ms
55	0.490ms	119	45.42ms
56	0.526ms	120	48.75ms
57	0.565ms	121	52.32ms
58	0.606ms	122	56.16ms
59	0.650ms	123	60.28ms
60	0.698ms	124	64.70ms
61	0.749ms	125	69.44ms
62	0.804ms	126	74.53ms
63	0.863ms	127	80.00ms

Table #51
Downward Comp Release

Data	Value	Data	Value
0	6.250ms	64	80.61ms
1	6.505ms	65	83.90ms
2	6.770ms	66	87.32ms
3	7.046ms	67	90.88ms
4	7.333ms	68	94.58ms
5	7.632ms	69	98.44ms
6	7.943ms	70	102.4ms
7	8.267ms	71	106.6ms
8	8.604ms	72	111.0ms
9	8.955ms	73	115.5ms
10	9.320ms	74	120.2ms
11	9.700ms	75	125.1ms
12	10.09ms	76	130.2ms
13	10.51ms	77	135.5ms
14	10.93ms	78	141.0ms
15	11.38ms	79	146.8ms
16	11.84ms	80	152.8ms
17	12.33ms	81	159.0ms
18	12.83ms	82	165.5ms
19	13.35ms	83	172.2ms
20	13.90ms	84	179.2ms
21	14.46ms	85	186.5ms
22	15.05ms	86	194.2ms
23	15.67ms	87	202.1ms
24	16.31ms	88	210.3ms
25	16.97ms	89	218.9ms
26	17.66ms	90	227.8ms
27	18.38ms	91	237.1ms
28	19.13ms	92	246.7ms
29	19.91ms	93	256.8ms
30	20.72ms	94	267.3ms
31	21.57ms	95	278.2ms
32	22.45ms	96	289.5ms
33	23.36ms	97	301.3ms
34	24.31ms	98	313.6ms
35	25.30ms	99	326.4ms
36	26.34ms	100	339.7ms
37	27.41ms	101	353.5ms
38	28.53ms	102	367.9ms
39	29.69ms	103	382.9ms
40	30.90ms	104	398.5ms
41	32.16ms	105	414.8ms
42	33.47ms	106	431.7ms
43	34.83ms	107	449.3ms
44	36.25ms	108	467.6ms
45	37.73ms	109	486.7ms
46	39.27ms	110	506.5ms
47	40.87ms	111	527.2ms
48	42.54ms	112	548.6ms
49	44.27ms	113	571.0ms
50	46.08ms	114	594.3ms
51	47.95ms	115	618.5ms
52	49.91ms	116	643.7ms
53	51.94ms	117	670.0ms
54	54.06ms	118	697.3ms
55	56.26ms	119	725.7ms
56	58.56ms	120	755.3ms
57	60.94ms	121	786.1ms
58	63.43ms	122	818.1ms
59	66.01ms	123	851.4ms
60	68.71ms	124	886.2ms
61	71.51ms	125	922.3ms
62	74.42ms	126	959.9ms
63	77.45ms	127	999.0ms

Table #52
Downward Comp Ratio

Data	Value	Data	Value
0	1.00	64	4.30
1	1.05	65	4.40
2	1.10	66	4.50
3	1.15	67	4.60
4	1.20	68	4.70
5	1.25	69	4.80
6	1.30	70	4.90
7	1.35	71	5.00
8	1.40	72	5.20
9	1.45	73	5.40
10	1.50	74	5.60
11	1.55	75	5.80
12	1.60	76	6.00
13	1.65	77	6.20
14	1.70	78	6.40
15	1.75	79	6.60
16	1.80	80	6.80
17	1.85	81	7.00
18	1.90	82	7.50
19	1.95	83	8.00
20	2.00	84	8.50
21	2.05	85	9.00
22	2.10	86	9.50
23	2.15	87	10.00
24	2.20	88	10.50
25	2.25	89	11.00
26	2.30	90	12.00
27	2.35	91	13.00
28	2.40	92	14.00
29	2.45	93	15.00
30	2.50	94	16.00
31	2.55	95	17.00
32	2.60	96	18.00
33	2.65	97	19.00
34	2.70	98	20.00
35	2.75	99	21.00
36	2.80	100	22.00
37	2.85	101	24.00
38	2.90	102	26.00
39	2.95	103	28.00
40	3.00	104	30.00
41	3.05	105	32.00
42	3.10	106	34.00
43	3.15	107	36.00
44	3.20	108	38.00
45	3.25	109	40.00
46	3.30	110	45.00
47	3.35	111	50.00
48	3.40	112	55.00
49	3.45	113	60.00
50	3.50	114	65.00
51	3.55	115	70.00
52	3.60	116	75.00
53	3.65	117	80.00
54	3.70	118	85.00
55	3.75	119	90.00
56	3.80	120	95.00
57	3.85	121	100.00
58	3.90	122	120.00
59	3.95	123	150.00
60	4.00	124	200.00
61	4.05	125	300.00
62	4.10	126	500.00
63	4.20	127	∞

Table #53
Downward Comp EQ Q

Data	Value	Data	Value
0	0.100	64	1.037
1	0.104	65	1.076
2	0.108	66	1.116
3	0.112	67	1.157
4	0.116	68	1.201
5	0.120	69	1.245
6	0.125	70	1.292
7	0.129	71	1.340
8	0.134	72	1.389
9	0.139	73	1.441
10	0.144	74	1.495
11	0.149	75	1.551
12	0.155	76	1.608
13	0.161	77	1.668
14	0.167	78	1.730
15	0.173	79	1.795
16	0.179	80	1.861
17	0.186	81	1.931
18	0.193	82	2.003
19	0.200	83	2.077
20	0.208	84	2.154
21	0.215	85	2.235
22	0.223	86	2.318
23	0.232	87	2.404
24	0.240	88	2.494
25	0.249	89	2.586
26	0.259	90	2.683
27	0.268	91	2.783
28	0.278	92	2.886
29	0.289	93	2.994
30	0.299	94	3.105
31	0.311	95	3.221
32	0.322	96	3.340
33	0.334	97	3.465
34	0.346	98	3.594
35	0.359	99	3.728
36	0.373	100	3.866
37	0.387	101	4.010
38	0.401	102	4.160
39	0.416	103	4.314
40	0.431	104	4.475
41	0.448	105	4.642
42	0.464	106	4.814
43	0.481	107	4.994
44	0.499	108	5.179
45	0.518	109	5.372
46	0.537	110	5.572
47	0.557	111	5.780
48	0.578	112	5.995
49	0.599	113	6.218
50	0.622	114	6.449
51	0.645	115	6.690
52	0.669	116	6.939
53	0.694	117	7.197
54	0.720	118	7.465
55	0.746	119	7.743
56	0.774	120	8.031
57	0.803	121	8.330
58	0.833	122	8.640
59	0.864	123	8.962
60	0.896	124	9.295
61	0.930	125	9.641
62	0.964	126	10.00
63	1.000		

Table #54
Downward Comp EQ Freq

Data	Value	Data	Value
0	11.89Hz	64	473.2Hz
1	12.59Hz	65	501.2Hz
2	13.34Hz	66	530.9Hz
3	14.13Hz	67	562.3Hz
4	14.96Hz	68	595.7Hz
5	15.85Hz	69	631.0Hz
6	16.79Hz	70	668.3Hz
7	17.78Hz	71	707.9Hz
8	18.84Hz	72	749.9Hz
9	19.95Hz	73	794.3Hz
10	21.13Hz	74	841.4Hz
11	22.39Hz	75	891.3Hz
12	23.71Hz	76	944.1Hz
13	25.12Hz	77	1.000kHz
14	26.61Hz	78	1.059kHz
15	28.18Hz	79	1.122kHz
16	29.85Hz	80	1.189kHz
17	31.62Hz	81	1.259kHz
18	33.50Hz	82	1.334kHz
19	35.48Hz	83	1.413kHz
20	37.58Hz	84	1.496kHz
21	39.81Hz	85	1.585kHz
22	42.17Hz	86	1.679kHz
23	44.67Hz	87	1.778kHz
24	47.32Hz	88	1.884kHz
25	50.12Hz	89	1.995kHz
26	53.09Hz	90	2.113kHz
27	56.23Hz	91	2.239kHz
28	59.57Hz	92	2.371kHz
29	63.10Hz	93	2.512kHz
30	66.83Hz	94	2.661kHz
31	70.79Hz	95	2.818kHz
32	74.99Hz	96	2.985kHz
33	79.43Hz	97	3.162kHz
34	84.14Hz	98	3.350kHz
35	89.13Hz	99	3.548kHz
36	94.41Hz	100	3.758kHz
37	100.0Hz	101	3.981kHz
38	105.9Hz	102	4.217kHz
39	112.2Hz	103	4.467kHz
40	118.9Hz	104	4.732kHz
41	125.9Hz	105	5.012kHz
42	133.4Hz	106	5.309kHz
43	141.3Hz	107	5.623kHz
44	149.6Hz	108	5.957kHz
45	158.5Hz	109	6.310kHz
46	167.9Hz	110	6.683kHz
47	177.8Hz	111	7.079kHz
48	188.4Hz	112	7.499kHz
49	199.5Hz	113	7.943kHz
50	211.3Hz	114	8.414kHz
51	223.9Hz	115	8.913kHz
52	237.1Hz	116	9.441kHz
53	251.2Hz	117	10.00kHz
54	266.1Hz	118	10.59kHz
55	281.8Hz	119	11.22kHz
56	298.5Hz	120	11.89kHz
57	316.2Hz	121	12.59kHz
58	335.0Hz	122	13.34kHz
59	354.8Hz	123	14.13kHz
60	375.8Hz	124	14.96kHz
61	398.1Hz	125	15.85kHz
62	421.7Hz	126	16.79kHz
63	446.7Hz	127	17.78kHz

Table #55
Downward Comp Post HPF

Data	Value	Data	Value
0	Off	64	9.12Hz
1	1.04Hz	65	9.44Hz
2	1.07Hz	66	9.77Hz
3	1.11Hz	67	10.12Hz
4	1.15Hz	68	10.47Hz
5	1.19Hz	69	10.84Hz
6	1.23Hz	70	11.22Hz
7	1.27Hz	71	11.61Hz
8	1.32Hz	72	12.02Hz
9	1.36Hz	73	12.45Hz
10	1.41Hz	74	12.88Hz
11	1.46Hz	75	13.34Hz
12	1.51Hz	76	13.80Hz
13	1.57Hz	77	14.29Hz
14	1.62Hz	78	14.79Hz
15	1.68Hz	79	15.31Hz
16	1.74Hz	80	15.85Hz
17	1.80Hz	81	16.41Hz
18	1.86Hz	82	16.98Hz
19	1.93Hz	83	17.58Hz
20	2.00Hz	84	18.20Hz
21	2.07Hz	85	18.84Hz
22	2.14Hz	86	19.50Hz
23	2.21Hz	87	20.18Hz
24	2.29Hz	88	20.89Hz
25	2.37Hz	89	21.63Hz
26	2.45Hz	90	22.39Hz
27	2.54Hz	91	23.17Hz
28	2.63Hz	92	23.99Hz
29	2.72Hz	93	24.83Hz
30	2.82Hz	94	25.70Hz
31	2.92Hz	95	26.61Hz
32	3.02Hz	96	27.54Hz
33	3.13Hz	97	28.51Hz
34	3.24Hz	98	29.51Hz
35	3.35Hz	99	30.55Hz
36	3.47Hz	100	31.62Hz
37	3.59Hz	101	32.73Hz
38	3.72Hz	102	33.88Hz
39	3.85Hz	103	35.08Hz
40	3.98Hz	104	36.31Hz
41	4.12Hz	105	37.58Hz
42	4.27Hz	106	38.90Hz
43	4.42Hz	107	40.27Hz
44	4.57Hz	108	41.69Hz
45	4.73Hz	109	43.15Hz
46	4.90Hz	110	44.67Hz
47	5.07Hz	111	46.24Hz
48	5.25Hz	112	47.86Hz
49	5.43Hz	113	49.55Hz
50	5.62Hz	114	51.29Hz
51	5.82Hz	115	53.09Hz
52	6.03Hz	116	54.95Hz
53	6.24Hz	117	56.89Hz
54	6.46Hz	118	58.88Hz
55	6.68Hz	119	60.95Hz
56	6.92Hz	120	63.10Hz
57	7.16Hz	121	65.31Hz
58	7.41Hz	122	67.61Hz
59	7.67Hz	123	69.98Hz
60	7.94Hz	124	72.44Hz
61	8.22Hz	125	74.99Hz
62	8.51Hz	126	77.62Hz
63	8.81Hz	127	80.35Hz

Table #56
Rotary Speaker 2 Speed Slow Woofer

Data	Value	Data	Value
0	0.0rpm	64	44.8rpm
1	22.7rpm	65	45.4rpm
2	23.0rpm	66	46.1rpm
3	23.3rpm	67	46.7rpm
4	23.7rpm	68	47.3rpm
5	24.0rpm	69	47.9rpm
6	24.3rpm	70	48.6rpm
7	24.6rpm	71	49.2rpm
8	24.9rpm	72	49.8rpm
9	25.2rpm	73	50.5rpm
10	25.5rpm	74	51.1rpm
11	25.9rpm	75	51.7rpm
12	26.2rpm	76	52.4rpm
13	26.5rpm	77	53.0rpm
14	26.8rpm	78	53.6rpm
15	27.1rpm	79	54.3rpm
16	27.4rpm	80	54.9rpm
17	27.8rpm	81	55.5rpm
18	28.1rpm	82	56.1rpm
19	28.4rpm	83	56.8rpm
20	28.7rpm	84	57.4rpm
21	29.0rpm	85	58.0rpm
22	29.3rpm	86	58.7rpm
23	29.7rpm	87	59.3rpm
24	30.0rpm	88	59.9rpm
25	30.3rpm	89	60.6rpm
26	30.6rpm	90	61.2rpm
27	30.9rpm	91	61.8rpm
28	31.2rpm	92	62.5rpm
29	31.5rpm	93	63.1rpm
30	31.9rpm	94	63.7rpm
31	32.2rpm	95	64.3rpm
32	32.5rpm	96	65.0rpm
33	32.8rpm	97	65.6rpm
34	33.1rpm	98	66.2rpm
35	33.4rpm	99	66.9rpm
36	33.8rpm	100	67.5rpm
37	34.1rpm	101	68.1rpm
38	34.4rpm	102	68.8rpm
39	34.7rpm	103	69.4rpm
40	35.0rpm	104	70.0rpm
41	35.3rpm	105	70.7rpm
42	35.6rpm	106	71.3rpm
43	36.0rpm	107	71.9rpm
44	36.3rpm	108	72.5rpm
45	36.6rpm	109	73.2rpm
46	36.9rpm	110	73.8rpm
47	37.2rpm	111	74.4rpm
48	37.5rpm	112	75.1rpm
49	37.9rpm	113	75.7rpm
50	38.2rpm	114	76.3rpm
51	38.5rpm	115	77.0rpm
52	38.8rpm	116	77.6rpm
53	39.1rpm	117	78.2rpm
54	39.4rpm	118	78.9rpm
55	39.7rpm	119	79.5rpm
56	40.1rpm	120	80.1rpm
57	40.4rpm	121	80.7rpm
58	41.0rpm	122	82.0rpm
59	41.6rpm	123	83.3rpm
60	42.3rpm	124	84.5rpm
61	42.9rpm	125	85.8rpm
62	43.5rpm	126	87.1rpm
63	44.2rpm	127	88.3rpm

Table #57
Rotary Speaker 2 Speed Slow Horn

Data	Value	Data	Value
0	0.0rpm	64	45.4rpm
1	23.0rpm	65	46.1rpm
2	23.3rpm	66	46.7rpm
3	23.7rpm	67	47.3rpm
4	24.0rpm	68	47.9rpm
5	24.3rpm	69	48.6rpm
6	24.6rpm	70	49.2rpm
7	24.9rpm	71	49.8rpm
8	25.2rpm	72	50.5rpm
9	25.5rpm	73	51.1rpm
10	25.9rpm	74	51.7rpm
11	26.2rpm	75	52.4rpm
12	26.5rpm	76	53.0rpm
13	26.8rpm	77	53.6rpm
14	27.1rpm	78	54.3rpm
15	27.4rpm	79	54.9rpm
16	27.8rpm	80	55.5rpm
17	28.1rpm	81	56.1rpm
18	28.4rpm	82	56.8rpm
19	28.7rpm	83	57.4rpm
20	29.0rpm	84	58.0rpm
21	29.3rpm	85	58.7rpm
22	29.7rpm	86	59.3rpm
23	30.0rpm	87	59.9rpm
24	30.3rpm	88	60.6rpm
25	30.6rpm	89	61.2rpm
26	30.9rpm	90	61.8rpm
27	31.2rpm	91	62.5rpm
28	31.5rpm	92	63.1rpm
29	31.9rpm	93	63.7rpm
30	32.2rpm	94	64.3rpm
31	32.5rpm	95	65.0rpm
32	32.8rpm	96	65.6rpm
33	33.1rpm	97	66.2rpm
34	33.4rpm	98	66.9rpm
35	33.8rpm	99	67.5rpm
36	34.1rpm	100	68.1rpm
37	34.4rpm	101	68.8rpm
38	34.7rpm	102	69.4rpm
39	35.0rpm	103	70.0rpm
40	35.3rpm	104	70.7rpm
41	35.6rpm	105	71.3rpm
42	36.0rpm	106	71.9rpm
43	36.3rpm	107	72.5rpm
44	36.6rpm	108	73.2rpm
45	36.9rpm	109	73.8rpm
46	37.2rpm	110	74.4rpm
47	37.5rpm	111	75.1rpm
48	37.9rpm	112	75.7rpm
49	38.2rpm	113	76.3rpm
50	38.5rpm	114	77.0rpm
51	38.8rpm	115	77.6rpm
52	39.1rpm	116	78.2rpm
53	39.4rpm	117	78.9rpm
54	39.7rpm	118	79.5rpm
55	40.1rpm	119	80.1rpm
56	40.4rpm	120	80.7rpm
57	41.0rpm	121	82.0rpm
58	41.6rpm	122	83.3rpm
59	42.3rpm	123	84.5rpm
60	42.9rpm	124	85.8rpm
61	43.5rpm	125	87.1rpm
62	44.2rpm	126	88.3rpm
63	44.8rpm	127	89.6rpm

Table #58
Rotary Speaker 2 Speed Fast Woofer

Data	Value	Data	Value
0	-	64	373.5rpm
1	189.3rpm	65	378.5rpm
2	191.8rpm	66	383.6rpm
3	194.3rpm	67	388.6rpm
4	196.8rpm	68	393.7rpm
5	199.4rpm	69	398.7rpm
6	201.9rpm	70	403.7rpm
7	204.4rpm	71	408.8rpm
8	206.9rpm	72	413.8rpm
9	209.4rpm	73	418.9rpm
10	212.0rpm	74	423.9rpm
11	214.5rpm	75	429.0rpm
12	217.0rpm	76	434.0rpm
13	219.5rpm	77	439.1rpm
14	222.1rpm	78	444.1rpm
15	224.6rpm	79	449.2rpm
16	227.1rpm	80	454.2rpm
17	229.6rpm	81	459.3rpm
18	232.2rpm	82	464.3rpm
19	234.7rpm	83	469.4rpm
20	237.2rpm	84	474.4rpm
21	239.7rpm	85	479.5rpm
22	242.2rpm	86	484.5rpm
23	244.8rpm	87	489.5rpm
24	247.3rpm	88	494.6rpm
25	249.8rpm	89	499.6rpm
26	252.3rpm	90	504.7rpm
27	254.9rpm	91	509.7rpm
28	257.4rpm	92	514.8rpm
29	259.9rpm	93	519.8rpm
30	262.4rpm	94	524.9rpm
31	265.0rpm	95	529.9rpm
32	267.5rpm	96	535.0rpm
33	270.0rpm	97	540.0rpm
34	272.5rpm	98	545.1rpm
35	275.1rpm	99	550.1rpm
36	277.6rpm	100	555.2rpm
37	280.1rpm	101	560.2rpm
38	282.6rpm	102	565.2rpm
39	285.1rpm	103	570.3rpm
40	287.7rpm	104	575.3rpm
41	290.2rpm	105	580.4rpm
42	292.7rpm	106	585.4rpm
43	295.2rpm	107	590.5rpm
44	297.8rpm	108	595.5rpm
45	300.3rpm	109	600.6rpm
46	302.8rpm	110	605.6rpm
47	305.3rpm	111	610.7rpm
48	307.9rpm	112	615.7rpm
49	310.4rpm	113	620.8rpm
50	312.9rpm	114	625.8rpm
51	315.4rpm	115	630.9rpm
52	318.0rpm	116	635.9rpm
53	320.5rpm	117	640.9rpm
54	323.0rpm	118	646.0rpm
55	328.0rpm	119	656.1rpm
56	333.1rpm	120	666.2rpm
57	338.1rpm	121	676.3rpm
58	343.2rpm	122	686.4rpm
59	348.2rpm	123	696.5rpm
60	353.3rpm	124	706.6rpm
61	358.3rpm	125	716.7rpm
62	363.4rpm	126	726.7rpm
63	368.4rpm	127	736.8rpm

Table #59
Rotary Speaker 2 Speed Fast Horn

Data	Value	Data	Value
0	-	64	413.8rpm
1	209.4rpm	65	418.9rpm
2	212.0rpm	66	423.9rpm
3	214.5rpm	67	429.0rpm
4	217.0rpm	68	434.0rpm
5	219.5rpm	69	439.1rpm
6	222.1rpm	70	444.1rpm
7	224.6rpm	71	449.2rpm
8	227.1rpm	72	454.2rpm
9	229.6rpm	73	459.3rpm
10	232.2rpm	74	464.3rpm
11	234.7rpm	75	469.4rpm
12	237.2rpm	76	474.4rpm
13	239.7rpm	77	479.5rpm
14	242.2rpm	78	484.5rpm
15	244.8rpm	79	489.5rpm
16	247.3rpm	80	494.6rpm
17	249.8rpm	81	499.6rpm
18	252.3rpm	82	504.7rpm
19	254.9rpm	83	509.7rpm
20	257.4rpm	84	514.8rpm
21	259.9rpm	85	519.8rpm
22	262.4rpm	86	524.9rpm
23	265.0rpm	87	529.9rpm
24	267.5rpm	88	535.0rpm
25	270.0rpm	89	540.0rpm
26	272.5rpm	90	545.1rpm
27	275.1rpm	91	550.1rpm
28	277.6rpm	92	555.2rpm
29	280.1rpm	93	560.2rpm
30	282.6rpm	94	565.2rpm
31	285.1rpm	95	570.3rpm
32	287.7rpm	96	575.3rpm
33	290.2rpm	97	580.4rpm
34	292.7rpm	98	585.4rpm
35	295.2rpm	99	590.5rpm
36	297.8rpm	100	595.5rpm
37	300.3rpm	101	600.6rpm
38	302.8rpm	102	605.6rpm
39	305.3rpm	103	610.7rpm
40	307.9rpm	104	615.7rpm
41	310.4rpm	105	620.8rpm
42	312.9rpm	106	625.8rpm
43	315.4rpm	107	630.9rpm
44	318.0rpm	108	635.9rpm
45	320.5rpm	109	640.9rpm
46	323.0rpm	110	646.0rpm
47	328.0rpm	111	656.1rpm
48	333.1rpm	112	666.2rpm
49	338.1rpm	113	676.3rpm
50	343.2rpm	114	686.4rpm
51	348.2rpm	115	696.5rpm
52	353.3rpm	116	706.6rpm
53	358.3rpm	117	716.7rpm
54	363.4rpm	118	726.7rpm
55	368.4rpm	119	736.8rpm
56	373.5rpm	120	746.9rpm
57	378.5rpm	121	757.0rpm
58	383.6rpm	122	767.1rpm
59	388.6rpm	123	777.2rpm
60	393.7rpm	124	787.3rpm
61	398.7rpm	125	797.4rpm
62	403.7rpm	126	807.5rpm
63	408.8rpm	127	817.6rpm

Table #60
Reversible LFO Frequency

Data	Value	Data	Value	Data	Value	Data	Value
0	-	64	-2.69Hz	128	0.00Hz	192	2.69Hz
1	-39.7Hz	65	-2.65Hz	129	0.04Hz	193	2.78Hz
2	-37.0Hz	66	-2.61Hz	130	0.08Hz	194	2.86Hz
3	-34.3Hz	67	-2.57Hz	131	0.13Hz	195	2.94Hz
4	-33.0Hz	68	-2.52Hz	132	0.17Hz	196	3.03Hz
5	-31.6Hz	69	-2.48Hz	133	0.21Hz	197	3.11Hz
6	-30.3Hz	70	-2.44Hz	134	0.25Hz	198	3.20Hz
7	-28.9Hz	71	-2.40Hz	135	0.29Hz	199	3.28Hz
8	-27.6Hz	72	-2.36Hz	136	0.34Hz	200	3.37Hz
9	-26.2Hz	73	-2.31Hz	137	0.38Hz	201	3.45Hz
10	-24.9Hz	74	-2.27Hz	138	0.42Hz	202	3.53Hz
11	-23.6Hz	75	-2.23Hz	139	0.46Hz	203	3.62Hz
12	-22.2Hz	76	-2.19Hz	140	0.51Hz	204	3.70Hz
13	-20.9Hz	77	-2.15Hz	141	0.55Hz	205	3.87Hz
14	-19.5Hz	78	-2.10Hz	142	0.59Hz	206	4.04Hz
15	-18.2Hz	79	-2.06Hz	143	0.63Hz	207	4.21Hz
16	-17.5Hz	80	-2.02Hz	144	0.67Hz	208	4.37Hz
17	-16.8Hz	81	-1.98Hz	145	0.72Hz	209	4.54Hz
18	-16.2Hz	82	-1.94Hz	146	0.76Hz	210	4.71Hz
19	-15.5Hz	83	-1.89Hz	147	0.80Hz	211	4.88Hz
20	-14.8Hz	84	-1.85Hz	148	0.84Hz	212	5.05Hz
21	-14.1Hz	85	-1.81Hz	149	0.88Hz	213	5.22Hz
22	-13.5Hz	86	-1.77Hz	150	0.93Hz	214	5.38Hz
23	-12.8Hz	87	-1.72Hz	151	0.97Hz	215	5.55Hz
24	-12.1Hz	88	-1.68Hz	152	1.01Hz	216	5.72Hz
25	-11.4Hz	89	-1.64Hz	153	1.05Hz	217	6.06Hz
26	-10.8Hz	90	-1.60Hz	154	1.09Hz	218	6.39Hz
27	-10.1Hz	91	-1.56Hz	155	1.14Hz	219	6.73Hz
28	-9.76Hz	92	-1.51Hz	156	1.18Hz	220	7.07Hz
29	-9.42Hz	93	-1.47Hz	157	1.22Hz	221	7.40Hz
30	-9.08Hz	94	-1.43Hz	158	1.26Hz	222	7.74Hz
31	-8.75Hz	95	-1.39Hz	159	1.30Hz	223	8.08Hz
32	-8.41Hz	96	-1.35Hz	160	1.35Hz	224	8.41Hz
33	-8.08Hz	97	-1.30Hz	161	1.39Hz	225	8.75Hz
34	-7.74Hz	98	-1.26Hz	162	1.43Hz	226	9.08Hz
35	-7.40Hz	99	-1.22Hz	163	1.47Hz	227	9.42Hz
36	-7.07Hz	100	-1.18Hz	164	1.51Hz	228	9.76Hz
37	-6.73Hz	101	-1.14Hz	165	1.56Hz	229	10.1Hz
38	-6.39Hz	102	-1.09Hz	166	1.60Hz	230	10.8Hz
39	-6.06Hz	103	-1.05Hz	167	1.64Hz	231	11.4Hz
40	-5.72Hz	104	-1.01Hz	168	1.68Hz	232	12.1Hz
41	-5.55Hz	105	-0.97Hz	169	1.72Hz	233	12.8Hz
42	-5.38Hz	106	-0.93Hz	170	1.77Hz	234	13.5Hz
43	-5.22Hz	107	-0.88Hz	171	1.81Hz	235	14.1Hz
44	-5.05Hz	108	-0.84Hz	172	1.85Hz	236	14.8Hz
45	-4.88Hz	109	-0.80Hz	173	1.89Hz	237	15.5Hz
46	-4.71Hz	110	-0.76Hz	174	1.94Hz	238	16.2Hz
47	-4.54Hz	111	-0.72Hz	175	1.98Hz	239	16.8Hz
48	-4.37Hz	112	-0.67Hz	176	2.02Hz	240	17.5Hz
49	-4.21Hz	113	-0.63Hz	177	2.06Hz	241	18.2Hz
50	-4.04Hz	114	-0.59Hz	178	2.10Hz	242	19.5Hz
51	-3.87Hz	115	-0.55Hz	179	2.15Hz	243	20.9Hz
52	-3.70Hz	116	-0.51Hz	180	2.19Hz	244	22.2Hz
53	-3.62Hz	117	-0.46Hz	181	2.23Hz	245	23.6Hz
54	-3.53Hz	118	-0.42Hz	182	2.27Hz	246	24.9Hz
55	-3.45Hz	119	-0.38Hz	183	2.31Hz	247	26.2Hz
56	-3.37Hz	120	-0.34Hz	184	2.36Hz	248	27.6Hz
57	-3.28Hz	121	-0.29Hz	185	2.40Hz	249	28.9Hz
58	-3.20Hz	122	-0.25Hz	186	2.44Hz	250	30.3Hz
59	-3.11Hz	123	-0.21Hz	187	2.48Hz	251	31.6Hz
60	-3.03Hz	124	-0.17Hz	188	2.52Hz	252	33.0Hz
61	-2.94Hz	125	-0.13Hz	189	2.57Hz	253	34.3Hz
62	-2.86Hz	126	-0.08Hz	190	2.61Hz	254	37.0Hz
63	-2.78Hz	127	-0.04Hz	191	2.65Hz	255	39.7Hz

Table #61
LFO Step Transitional Rate

Data	Value
0	1/48
1	3/128
2	1/32
3	1/24
4	3/64
5	1/16
6	1/12
7	3/32
8	1/8
9	1/6
10	3/16
11	1/4
12	1/3
13	3/8
14	1/2

Table #62
Wave Folder LFO Speed

Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value
0	0.0100Hz	80	0.0253Hz	160	0.0638Hz	240	0.1612Hz	320	0.4071Hz	400	1.0284Hz	480	2.5978Hz	560	6.5621Hz	640	16.576Hz
1	0.0101Hz	81	0.0256Hz	161	0.0646Hz	241	0.1631Hz	321	0.4119Hz	401	1.0404Hz	481	2.6281Hz	561	6.6385Hz	641	16.769Hz
2	0.0102Hz	82	0.0259Hz	162	0.0653Hz	242	0.1650Hz	322	0.4167Hz	402	1.0525Hz	482	2.6587Hz	562	6.7158Hz	642	16.964Hz
3	0.0104Hz	83	0.0262Hz	163	0.0661Hz	243	0.1669Hz	323	0.4215Hz	403	1.0648Hz	483	2.6897Hz	563	6.7941Hz	643	17.162Hz
4	0.0105Hz	84	0.0265Hz	164	0.0668Hz	244	0.1688Hz	324	0.4264Hz	404	1.0772Hz	484	2.7210Hz	564	6.8732Hz	644	17.362Hz
5	0.0106Hz	85	0.0268Hz	165	0.0676Hz	245	0.1708Hz	325	0.4314Hz	405	1.0897Hz	485	2.7527Hz	565	6.9533Hz	645	17.564Hz
6	0.0107Hz	86	0.0271Hz	166	0.0684Hz	246	0.1728Hz	326	0.4364Hz	406	1.1024Hz	486	2.7848Hz	566	7.0343Hz	646	17.769Hz
7	0.0108Hz	87	0.0274Hz	167	0.0692Hz	247	0.1748Hz	327	0.4415Hz	407	1.1153Hz	487	2.8172Hz	567	7.1163Hz	647	17.976Hz
8	0.0110Hz	88	0.0277Hz	168	0.0700Hz	248	0.1768Hz	328	0.4467Hz	408	1.1283Hz	488	2.8500Hz	568	7.1992Hz	648	18.185Hz
9	0.0111Hz	89	0.0280Hz	169	0.0708Hz	249	0.1789Hz	329	0.4519Hz	409	1.1414Hz	489	2.8832Hz	569	7.2831Hz	649	18.397Hz
10	0.0112Hz	90	0.0284Hz	170	0.0716Hz	250	0.1810Hz	330	0.4571Hz	410	1.1547Hz	490	2.9168Hz	570	7.3679Hz	650	18.611Hz
11	0.0114Hz	91	0.0287Hz	171	0.0725Hz	251	0.1831Hz	331	0.4625Hz	411	1.1682Hz	491	2.9508Hz	571	7.4537Hz	651	18.828Hz
12	0.0115Hz	92	0.0290Hz	172	0.0733Hz	252	0.1852Hz	332	0.4678Hz	412	1.1818Hz	492	2.9852Hz	572	7.5406Hz	652	19.048Hz
13	0.0116Hz	93	0.0294Hz	173	0.0742Hz	253	0.1874Hz	333	0.4733Hz	413	1.1955Hz	493	3.0200Hz	573	7.6284Hz	653	19.270Hz
14	0.0118Hz	94	0.0297Hz	174	0.0750Hz	254	0.1896Hz	334	0.4788Hz	414	1.2095Hz	494	3.0551Hz	574	7.7173Hz	654	19.494Hz
15	0.0119Hz	95	0.0301Hz	175	0.0759Hz	255	0.1918Hz	335	0.4844Hz	415	1.2236Hz	495	3.0907Hz	575	7.8072Hz	655	19.721Hz
16	0.0120Hz	96	0.0304Hz	176	0.0768Hz	256	0.1940Hz	336	0.4900Hz	416	1.2378Hz	496	3.1267Hz	576	7.8982Hz	656	19.951Hz
17	0.0122Hz	97	0.0308Hz	177	0.0777Hz	257	0.1963Hz	337	0.4957Hz	417	1.2522Hz	497	3.1632Hz	577	7.9902Hz	657	20.183Hz
18	0.0123Hz	98	0.0311Hz	178	0.0786Hz	258	0.1985Hz	338	0.5015Hz	418	1.2668Hz	498	3.2000Hz	578	8.0833Hz	658	20.418Hz
19	0.0125Hz	99	0.0315Hz	179	0.0795Hz	259	0.2009Hz	339	0.5074Hz	419	1.2816Hz	499	3.2373Hz	579	8.1775Hz	659	20.656Hz
20	0.0126Hz	100	0.0318Hz	180	0.0804Hz	260	0.2032Hz	340	0.5133Hz	420	1.2965Hz	500	3.2750Hz	580	8.2727Hz	660	20.897Hz
21	0.0128Hz	101	0.0322Hz	181	0.0814Hz	261	0.2056Hz	341	0.5192Hz	421	1.3116Hz	501	3.3132Hz	581	8.3691Hz	661	21.140Hz
22	0.0129Hz	102	0.0326Hz	182	0.0823Hz	262	0.2080Hz	342	0.5253Hz	422	1.3269Hz	502	3.3518Hz	582	8.4666Hz	662	21.387Hz
23	0.0131Hz	103	0.0330Hz	183	0.0833Hz	263	0.2104Hz	343	0.5314Hz	423	1.3424Hz	503	3.3908Hz	583	8.5652Hz	663	21.636Hz
24	0.0132Hz	104	0.0334Hz	184	0.0843Hz	264	0.2128Hz	344	0.5376Hz	424	1.3580Hz	504	3.4303Hz	584	8.6650Hz	664	21.888Hz
25	0.0134Hz	105	0.0337Hz	185	0.0852Hz	265	0.2153Hz	345	0.5439Hz	425	1.3738Hz	505	3.4703Hz	585	8.7660Hz	665	22.143Hz
26	0.0135Hz	106	0.0341Hz	186	0.0862Hz	266	0.2178Hz	346	0.5502Hz	426	1.3898Hz	506	3.5107Hz	586	8.8681Hz	666	22.401Hz
27	0.0137Hz	107	0.0345Hz	187	0.0872Hz	267	0.2204Hz	347	0.5566Hz	427	1.4060Hz	507	3.5516Hz	587	8.9714Hz	667	22.662Hz
28	0.0138Hz	108	0.0349Hz	188	0.0883Hz	268	0.2229Hz	348	0.5631Hz	428	1.4224Hz	508	3.5930Hz	588	9.0759Hz	668	22.926Hz
29	0.0140Hz	109	0.0353Hz	189	0.0893Hz	269	0.2255Hz	349	0.5697Hz	429	1.4390Hz	509	3.6349Hz	589	9.1817Hz	669	23.193Hz
30	0.0142Hz	110	0.0358Hz	190	0.0903Hz	270	0.2281Hz	350	0.5763Hz	430	1.4557Hz	510	3.6772Hz	590	9.2887Hz	670	23.463Hz
31	0.0143Hz	111	0.0362Hz	191	0.0914Hz	271	0.2308Hz	351	0.5830Hz	431	1.4727Hz	511	3.7201Hz	591	9.3969Hz	671	23.737Hz
32	0.0145Hz	112	0.0366Hz	192	0.0924Hz	272	0.2335Hz	352	0.5898Hz	432	1.4899Hz	512	3.7634Hz	592	9.5063Hz	672	24.013Hz
33	0.0147Hz	113	0.0370Hz	193	0.0935Hz	273	0.2362Hz	353	0.5967Hz	433	1.5072Hz	513	3.8072Hz	593	9.6171Hz	673	24.293Hz
34	0.0148Hz	114	0.0375Hz	194	0.0946Hz	274	0.2390Hz	354	0.6036Hz	434	1.5248Hz	514	3.8516Hz	594	9.7291Hz	674	24.576Hz
35	0.0150Hz	115	0.0379Hz	195	0.0957Hz	275	0.2418Hz	355	0.6107Hz	435	1.5425Hz	515	3.8965Hz	595	9.8425Hz	675	24.862Hz
36	0.0152Hz	116	0.0383Hz	196	0.0968Hz	276	0.2446Hz	356	0.6178Hz	436	1.5605Hz	516	3.9419Hz	596	9.9572Hz	676	25.152Hz
37	0.0154Hz	117	0.0388Hz	197	0.0979Hz	277	0.2474Hz	357	0.6250Hz	437	1.5787Hz	517	3.9878Hz	597	10.073Hz	677	25.445Hz
38	0.0155Hz	118	0.0392Hz	198	0.0991Hz	278	0.2503Hz	358	0.6323Hz	438	1.5971Hz	518	4.0342Hz	598	10.191Hz	678	25.741Hz
39	0.0157Hz	119	0.0397Hz	199	0.1002Hz	279	0.2532Hz	359	0.6396Hz	439	1.6157Hz	519	4.0812Hz	599	10.309Hz	679	26.041Hz
40	0.0159Hz	120	0.0401Hz	200	0.1014Hz	280	0.2562Hz	360	0.6471Hz	440	1.6345Hz	520	4.1288Hz	600	10.429Hz	680	26.345Hz
41	0.0161Hz	121	0.0406Hz	201	0.1026Hz	281	0.2591Hz	361	0.6546Hz	441	1.6536Hz	521	4.1769Hz	601	10.551Hz	681	26.652Hz
42	0.0163Hz	122	0.0411Hz	202	0.1038Hz	282	0.2622Hz	362	0.6622Hz	442	1.6728Hz	522	4.2256Hz	602	10.674Hz	682	26.962Hz
43	0.0165Hz	123	0.0416Hz	203	0.1050Hz	283	0.2652Hz	363	0.6700Hz	443	1.6923Hz	523	4.2748Hz	603	10.798Hz	683	27.276Hz
44	0.0166Hz	124	0.0421Hz	204	0.1062Hz	284	0.2683Hz	364	0.6778Hz	444	1.7120Hz	524	4.3246Hz	604	10.924Hz	684	27.594Hz
45	0.0168Hz	125	0.0425Hz	205	0.1075Hz	285	0.2714Hz	365	0.6857Hz	445	1.7320Hz	525	4.3750Hz	605	11.051Hz	685	27.915Hz
46	0.0170Hz	126	0.0430Hz	206	0.1087Hz	286	0.2746Hz	366	0.6936Hz	446	1.7521Hz	526	4.4259Hz	606	11.180Hz	686	28.241Hz
47	0.0172Hz	127	0.0435Hz	207	0.1100Hz	287	0.2778Hz	367	0.7017Hz	447	1.7726Hz	527	4.4775Hz	607	11.310Hz	687	28.570Hz
48	0.0174Hz	128	0.0440Hz	208	0.1113Hz	288	0.2810Hz	368	0.7099Hz	448	1.7932Hz	528	4.5297Hz	608	11.442Hz	688	28.902Hz
49	0.0176Hz	129	0.0446Hz	209	0.1126Hz	289	0.2843Hz	369	0.7182Hz	449	1.8141Hz	529	4.5824Hz	609	11.575Hz	689	29.239Hz
50	0.0178Hz	130	0.0451Hz	210	0.1139Hz	290	0.2876Hz	370	0.7265Hz	450	1.8352Hz	530	4.6358Hz	610	11.710Hz	690	29.580Hz
51	0.0181Hz	131	0.0456Hz	211	0.1152Hz	291	0.2910Hz	371	0.7350Hz	451	1.8566Hz	531	4.6898Hz	611	11.847Hz	691	29.924Hz
52	0.0183Hz	132	0.0461Hz	212	0.1165Hz	292	0.2944Hz	372	0.7436Hz	452	1.8783Hz	532	4.7445Hz	612	11.985Hz	692	30.273Hz
53	0.0185Hz	133	0.0467Hz	213	0.1179Hz	293	0.2978Hz	373	0.7522Hz	453	1.9001Hz	533	4.7997Hz	613	12.124Hz	693	30.626Hz
54	0.0187Hz	134	0.0472Hz	214	0.1193Hz	294	0.3013Hz	374	0.7610Hz	454	1.9223Hz	534	4.8557Hz	614	12.265Hz	694	30.983Hz
55	0.0189Hz	135	0.0478Hz	215	0.1207Hz	295	0.3048Hz	375	0.7699Hz	455	1.9447Hz	535	4.9122Hz	615	12.408Hz	695	31.344Hz
56	0.0191Hz	136	0.0483Hz	216	0.1221Hz	296	0.3083Hz	376	0.7788Hz	456	1.9673Hz	536	4.9695Hz	616	12.553Hz	696	31.709Hz
57	0.0194Hz	137	0.0489Hz	217	0.1235Hz	297	0.3119Hz	377	0.7879Hz	457	1.9902Hz	537	5.0274Hz	617	12.699Hz	697	32.078Hz
58	0.0196Hz	138	0.0495Hz	218	0.1249Hz	298	0.3155Hz	378	0.7971Hz	458	2.0134Hz	538	5.0859Hz	618	12.847Hz	698	32.452Hz
59	0.0198Hz	139	0.0500Hz	219	0.1264Hz	299	0.3192Hz	379	0.8064Hz	459	2.0369Hz	539	5.1452Hz	619	12.997Hz	699	32.830Hz
60	0.0200Hz	140	0.0506Hz	220	0.1278Hz	300	0.3229Hz	380	0.8158Hz	460	2.0606Hz	540	5.2051Hz	620	13.148Hz	700	33.212Hz
61	0.0203Hz	141	0.0512Hz	221	0.1293Hz	301	0.3267Hz	381	0.8253Hz	461	2.0846Hz	541	5.2658Hz	621	13.301Hz	701	33.599Hz
62	0.0205Hz	142	0.0518Hz	222	0.1308Hz	302	0.3305Hz	382	0.8349Hz	462	2.1089Hz	542	5.3271Hz	622	13.456Hz	702	33.991Hz
63	0.0207Hz	143	0.0524Hz	223	0.1324Hz	303	0.3344Hz	383	0.8446Hz	463	2.1335Hz	543	5.3892Hz	623	13.613Hz	703	34.387Hz
64	0.0210Hz	144	0.0530Hz	224	0.1339Hz	304	0.3383Hz	384	0.8544Hz	464	2.1583Hz	544	5.4520Hz	624	13.772Hz	704	34.787Hz
65	0.0212Hz	145	0.0536Hz	225	0.1355Hz	305	0.3422Hz	385	0.8644Hz	465	2.1835Hz	545	5.5155Hz	625	13.932Hz	705	35.193Hz
66	0.0215Hz	146	0.0543Hz	226	0.1370Hz	306	0.3462Hz	386	0.8745Hz	466	2.2089Hz	546	5.5797Hz	626	14.094Hz	706	35.603Hz
67	0.0217Hz	147	0.0549Hz	227	0.1386Hz	307	0.3502Hz	387	0.8847Hz	467	2.2347Hz	547	5.6447Hz	627	14.259Hz	707	36.017Hz
68	0.0220Hz	148	0.0555Hz	228	0.1403Hz	308	0.3543Hz	388	0.8950Hz	468	2.2607Hz	548	5.7105Hz	628	14.425Hz	708	36.437Hz
69	0.0222Hz	149	0.0562Hz	229	0.1419Hz	309	0.3584Hz	389	0.9054Hz	469	2.2870Hz	549	5.7770Hz	629	14.593Hz	709	36.862Hz
70	0.0225Hz	150	0.0568Hz	230	0.1435Hz	310	0.3626Hz	390	0.9159Hz	470	2.3137Hz	550	5.8443Hz	630	14.763Hz	710	37.291Hz
71	0.0228Hz	151	0.0575Hz	231	0.1452Hz	311	0.3668Hz	391	0.9266Hz	471	2.3406Hz	551	5.9124Hz	631	14.935Hz	711	37.726Hz
72	0.0230Hz	152	0.0582Hz	232	0.1469Hz	312	0.3711Hz	392	0.9374Hz	472	2.3679Hz	552	5.9813Hz	632	15.109Hz	712	38.165Hz
73	0.0233Hz	153	0.0588Hz	233	0.1486Hz	313	0.3754Hz	393	0.9483Hz	473	2.3955Hz	553	6.0510Hz	633	15.285Hz	713	38.610Hz
74	0.0236Hz	154	0.0595Hz	234	0.1504Hz	314	0.3798Hz	394	0.9594Hz	474	2.4234Hz	554	6.1215Hz	634	15.463Hz	714	39.059Hz
75	0.0238Hz	155	0.0602Hz	235	0.1521Hz	315	0.3842Hz	395	0.9706Hz	475	2.4516Hz	555	6.1928Hz	635	15.643Hz	715	39.515Hz
76	0.0241Hz	156	0.0609Hz	236	0.1539Hz	316	0.3887Hz	396	0.9819Hz	476	2.4802Hz	556	6.2650Hz	636	15.825Hz	716	39.975Hz
77	0.0244Hz	157	0.0616Hz	237	0.1557Hz	317	0.3932Hz	397	0.9933Hz	477	2.5091Hz	557	6.3379Hz	637	16.010Hz	717	40.441Hz
78	0.0247Hz	158	0.0623Hz	238	0.1575Hz	318	0.3978Hz	398	1.0049Hz	478	2.5383Hz	558	6.4118Hz	638	16.196Hz	718	40.912Hz
79	0.0250Hz	159	0.0631Hz	239	0.1593Hz	319	0.4024Hz	399	1.0166Hz	479	2.5679Hz	559	6.4865Hz	639	16.385Hz	719	41.388Hz

Data	Value	Data	Value	Data	Value	Data	Value
720	41.871Hz	800	105.77Hz	880	267.16Hz	960	674.86Hz
721	42.358Hz	801	107.00Hz	881	270.28Hz	961	682.72Hz
722	42.852Hz	802	108.24Hz	882	273.42Hz	962	690.67Hz
723	43.351Hz	803	109.51Hz	883	276.61Hz	963	698.72Hz
724	43.856Hz	804	110.78Hz	884	279.83Hz	964	706.86Hz
725	44.367Hz	805	112.07Hz	885	283.09Hz	965	715.09Hz
726	44.884Hz	806	113.38Hz	886	286.39Hz	966	723.43Hz
727	45.407Hz	807	114.70Hz	887	289.73Hz	967	731.85Hz
728	45.936Hz	808	116.03Hz	888	293.10Hz	968	740.38Hz
729	46.471Hz	809	117.39Hz	889	296.52Hz	969	749.01Hz
730	47.012Hz	810	118.75Hz	890	299.97Hz	970	757.73Hz
731	47.560Hz	811	120.14Hz	891	303.47Hz	971	766.56Hz
732	48.114Hz	812	121.54Hz	892	307.00Hz	972	775.49Hz
733	48.675Hz	813	122.95Hz	893	310.58Hz	973	784.52Hz
734	49.242Hz	814	124.39Hz	894	314.20Hz	974	793.66Hz
735	49.816Hz	815	125.83Hz	895	317.86Hz	975	802.91Hz
736	50.396Hz	816	127.30Hz	896	321.56Hz	976	812.27Hz
737	50.983Hz	817	128.78Hz	897	325.31Hz	977	821.73Hz
738	51.577Hz	818	130.28Hz	898	329.10Hz	978	831.30Hz
739	52.178Hz	819	131.80Hz	899	332.93Hz	979	840.99Hz
740	52.786Hz	820	133.34Hz	900	336.81Hz	980	850.78Hz
741	53.401Hz	821	134.89Hz	901	340.73Hz	981	860.70Hz
742	54.023Hz	822	136.46Hz	902	344.70Hz	982	870.72Hz
743	54.652Hz	823	138.05Hz	903	348.72Hz	983	880.87Hz
744	55.289Hz	824	139.66Hz	904	352.78Hz	984	891.13Hz
745	55.933Hz	825	141.29Hz	905	356.89Hz	985	901.51Hz
746	56.585Hz	826	142.93Hz	906	361.05Hz	986	912.02Hz
747	57.244Hz	827	144.60Hz	907	365.26Hz	987	922.64Hz
748	57.911Hz	828	146.28Hz	908	369.51Hz	988	933.39Hz
749	58.586Hz	829	147.99Hz	909	373.82Hz	989	944.26Hz
750	59.268Hz	830	149.71Hz	910	378.17Hz	990	955.27Hz
751	59.959Hz	831	151.46Hz	911	382.58Hz	991	966.39Hz
752	60.657Hz	832	153.22Hz	912	387.04Hz	992	977.65Hz
753	61.364Hz	833	155.01Hz	913	391.54Hz	993	989.04Hz
754	62.079Hz	834	156.81Hz	914	396.11Hz	994	1000.6Hz
755	62.802Hz	835	158.64Hz	915	400.72Hz	995	1012.2Hz
756	63.534Hz	836	160.49Hz	916	405.39Hz	996	1024.0Hz
757	64.274Hz	837	162.36Hz	917	410.11Hz	997	1035.9Hz
758	65.023Hz	838	164.25Hz	918	414.89Hz	998	1048.0Hz
759	65.780Hz	839	166.16Hz	919	419.72Hz	999	1060.2Hz
760	66.547Hz	840	168.10Hz	920	424.61Hz	1000	1072.6Hz
761	67.322Hz	841	170.06Hz	921	429.56Hz	1001	1085.1Hz
762	68.106Hz	842	172.04Hz	922	434.57Hz	1002	1097.7Hz
763	68.900Hz	843	174.04Hz	923	439.63Hz	1003	1110.5Hz
764	69.702Hz	844	176.07Hz	924	444.75Hz	1004	1123.4Hz
765	70.514Hz	845	178.12Hz	925	449.93Hz	1005	1136.5Hz
766	71.336Hz	846	180.19Hz	926	455.17Hz	1006	1149.8Hz
767	72.167Hz	847	182.29Hz	927	460.48Hz	1007	1163.2Hz
768	73.008Hz	848	184.42Hz	928	465.84Hz	1008	1176.7Hz
769	73.858Hz	849	186.57Hz	929	471.27Hz	1009	1190.4Hz
770	74.719Hz	850	188.74Hz	930	476.76Hz	1010	1204.3Hz
771	75.589Hz	851	190.94Hz	931	482.31Hz	1011	1218.3Hz
772	76.470Hz	852	193.16Hz	932	487.93Hz	1012	1232.5Hz
773	77.361Hz	853	195.41Hz	933	493.62Hz	1013	1246.9Hz
774	78.262Hz	854	197.69Hz	934	499.37Hz	1014	1261.4Hz
775	79.174Hz	855	199.99Hz	935	505.18Hz	1015	1276.1Hz
776	80.096Hz	856	202.32Hz	936	511.07Hz	1016	1291.0Hz
777	81.029Hz	857	204.68Hz	937	517.02Hz	1017	1306.0Hz
778	81.973Hz	858	207.07Hz	938	523.05Hz	1018	1321.2Hz
779	82.929Hz	859	209.48Hz	939	529.14Hz	1019	1336.6Hz
780	83.895Hz	860	211.92Hz	940	535.31Hz	1020	1352.2Hz
781	84.872Hz	861	214.39Hz	941	541.54Hz	1021	1367.9Hz
782	85.861Hz	862	216.88Hz	942	547.85Hz	1022	1383.9Hz
783	86.861Hz	863	219.41Hz	943	554.23Hz	1023	1400.0Hz
784	87.873Hz	864	221.97Hz	944	560.69Hz		
785	88.897Hz	865	224.55Hz	945	567.22Hz		
786	89.933Hz	866	227.17Hz	946	573.83Hz		
787	90.980Hz	867	229.82Hz	947	580.52Hz		
788	92.040Hz	868	232.49Hz	948	587.28Hz		
789	93.113Hz	869	235.20Hz	949	594.12Hz		
790	94.197Hz	870	237.94Hz	950	601.04Hz		
791	95.295Hz	871	240.71Hz	951	608.05Hz		
792	96.405Hz	872	243.52Hz	952	615.13Hz		
793	97.528Hz	873	246.36Hz	953	622.30Hz		
794	98.664Hz	874	249.23Hz	954	629.55Hz		
795	99.814Hz	875	252.13Hz	955	636.88Hz		
796	100.98Hz	876	255.07Hz	956	644.30Hz		
797	102.15Hz	877	258.04Hz	957	651.81Hz		
798	103.34Hz	878	261.05Hz	958	659.40Hz		
799	104.55Hz	879	264.09Hz	959	667.08Hz		

Table #63
Wave Folder Seq Speed

Data	Value
0	0.5x
1	0.66x
2	0.75x
3	1.0x
4	1.33x
5	1.5x
6	2.0x
7	2.66x
8	3.0x
9	4.0x
10	5.0x
11	6.0x
12	7.0x
13	8.0x
14	9.0x
15	10.0x

Table #64
Wave Folder Seq Pattern

Data	Value
0	A
1	B
2	C
3	D
4	E
5	F
6	G
7	H
8	I
9	J

Table #65
VCM Rotary Woofer Speed Slow [rpm]

Data	Value	Data	Value
0	0.0	64	44.8
1	22.7	65	45.4
2	23.0	66	46.1
3	23.3	67	46.7
4	23.7	68	47.3
5	24.0	69	47.9
6	24.3	70	48.6
7	24.6	71	49.2
8	24.9	72	49.8
9	25.2	73	50.5
10	25.5	74	51.1
11	25.9	75	51.7
12	26.2	76	52.4
13	26.5	77	53.0
14	26.8	78	53.6
15	27.1	79	54.3
16	27.4	80	54.9
17	27.8	81	55.5
18	28.1	82	56.1
19	28.4	83	56.8
20	28.7	84	57.4
21	29.0	85	58.0
22	29.3	86	58.7
23	29.7	87	59.3
24	30.0	88	59.9
25	30.3	89	60.6
26	30.6	90	61.2
27	30.9	91	61.8
28	31.2	92	62.5
29	31.5	93	63.1
30	31.9	94	63.7
31	32.2	95	64.3
32	32.5	96	65.0
33	32.8	97	65.6
34	33.1	98	66.2
35	33.4	99	66.9
36	33.8	100	67.5
37	34.1	101	68.1
38	34.4	102	68.8
39	34.7	103	69.4
40	35.0	104	70.0
41	35.3	105	70.7
42	35.6	106	71.3
43	36.0	107	71.9
44	36.3	108	72.5
45	36.6	109	73.2
46	36.9	110	73.8
47	37.2	111	74.4
48	37.5	112	75.1
49	37.9	113	75.7
50	38.2	114	76.3
51	38.5	115	77.0
52	38.8	116	77.6
53	39.1	117	78.2
54	39.4	118	78.9
55	39.7	119	79.5
56	40.1	120	80.1
57	40.4	121	80.7
58	41.0	122	82.0
59	41.6	123	83.3
60	42.3	124	84.5
61	42.9	125	85.8
62	43.5	126	87.1
63	44.2	127	88.3

Table #66
VCM Rotary Horn Speed Slow [rpm]

Data	Value	Data	Value
0	0.0	64	45.4
1	23.0	65	46.1
2	23.3	66	46.7
3	23.7	67	47.3
4	24.0	68	47.9
5	24.3	69	48.6
6	24.6	70	49.2
7	24.9	71	49.8
8	25.2	72	50.5
9	25.5	73	51.1
10	25.9	74	51.7
11	26.2	75	52.4
12	26.5	76	53.0
13	26.8	77	53.6
14	27.1	78	54.3
15	27.4	79	54.9
16	27.8	80	55.5
17	28.1	81	56.1
18	28.4	82	56.8
19	28.7	83	57.4
20	29.0	84	58.0
21	29.3	85	58.7
22	29.7	86	59.3
23	30.0	87	59.9
24	30.3	88	60.6
25	30.6	89	61.2
26	30.9	90	61.8
27	31.2	91	62.5
28	31.5	92	63.1
29	31.9	93	63.7
30	32.2	94	64.3
31	32.5	95	65.0
32	32.8	96	65.6
33	33.1	97	66.2
34	33.4	98	66.9
35	33.8	99	67.5
36	34.1	100	68.1
37	34.4	101	68.8
38	34.7	102	69.4
39	35.0	103	70.0
40	35.3	104	70.7
41	35.6	105	71.3
42	36.0	106	71.9
43	36.3	107	72.5
44	36.6	108	73.2
45	36.9	109	73.8
46	37.2	110	74.4
47	37.5	111	75.1
48	37.9	112	75.7
49	38.2	113	76.3
50	38.5	114	77.0
51	38.8	115	77.6
52	39.1	116	78.2
53	39.4	117	78.9
54	39.7	118	79.5
55	40.1	119	80.1
56	40.4	120	80.7
57	41.0	121	82.0
58	41.6	122	83.3
59	42.3	123	84.5
60	42.9	124	85.8
61	43.5	125	87.1
62	44.2	126	88.3
63	44.8	127	89.6

Table #67
VCM Rotary Woofer Speed Fast [rpm]

Data	Value	Data	Value
1	189.3	65	378.5
2	191.8	66	383.6
3	194.3	67	388.6
4	196.8	68	393.7
5	199.4	69	398.7
6	201.9	70	403.7
7	204.4	71	408.8
8	206.9	72	413.8
9	209.4	73	418.9
10	212.0	74	423.9
11	214.5	75	429.0
12	217.0	76	434.0
13	219.5	77	439.1
14	222.1	78	444.1
15	224.6	79	449.2
16	227.1	80	454.2
17	229.6	81	459.3
18	232.2	82	464.3
19	234.7	83	469.4
20	237.2	84	474.4
21	239.7	85	479.5
22	242.2	86	484.5
23	244.8	87	489.5
24	247.3	88	494.6
25	249.8	89	499.6
26	252.3	90	504.7
27	254.9	91	509.7
28	257.4	92	514.8
29	259.9	93	519.8
30	262.4	94	524.9
31	265.0	95	529.9
32	267.5	96	535.0
33	270.0	97	540.0
34	272.5	98	545.1
35	275.1	99	550.1
36	277.6	100	555.2
37	280.1	101	560.2
38	282.6	102	565.2
39	285.1	103	570.3
40	287.7	104	575.3
41	290.2	105	580.4
42	292.7	106	585.4
43	295.2	107	590.5
44	297.8	108	595.5
45	300.3	109	600.6
46	302.8	110	605.6
47	305.3	111	610.7
48	307.9	112	615.7
49	310.4	113	620.8
50	312.9	114	625.8
51	315.4	115	630.9
52	318.0	116	635.9
53	320.5	117	640.9
54	323.0	118	646.0
55	328.0	119	656.1
56	333.1	120	666.2
57	338.1	121	676.3
58	343.2	122	686.4
59	348.2	123	696.5
60	353.3	124	706.6
61	358.3	125	716.7
62	363.4	126	726.7
63	368.4	127	736.8
64	373.5		

Table #68
VCM Rotary Horn Speed Fast [rpm]

Data	Value	Data	Value
1	209.4	65	418.9
2	212.0	66	423.9
3	214.5	67	429.0
4	217.0	68	434.0
5	219.5	69	439.1
6	222.1	70	444.1
7	224.6	71	449.2
8	227.1	72	454.2
9	229.6	73	459.3
10	232.2	74	464.3
11	234.7	75	469.4
12	237.2	76	474.4
13	239.7	77	479.5
14	242.2	78	484.5
15	244.8	79	489.5
16	247.3	80	494.6
17	249.8	81	499.6
18	252.3	82	504.7
19	254.9	83	509.7
20	257.4	84	514.8
21	259.9	85	519.8
22	262.4	86	524.9
23	265.0	87	529.9
24	267.5	88	535.0
25	270.0	89	540.0
26	272.5	90	545.1
27	275.1	91	550.1
28	277.6	92	555.2
29	280.1	93	560.2
30	282.6	94	565.2
31	285.1	95	570.3
32	287.7	96	575.3
33	290.2	97	580.4
34	292.7	98	585.4
35	295.2	99	590.5
36	297.8	100	595.5
37	300.3	101	600.6
38	302.8	102	605.6
39	305.3	103	610.7
40	307.9	104	615.7
41	310.4	105	620.8
42	312.9	106	625.8
43	315.4	107	630.9
44	318.0	108	635.9
45	320.5	109	640.9
46	323.0	110	646.0
47	328.0	111	656.1
48	333.1	112	666.2
49	338.1	113	676.3
50	343.2	114	686.4
51	348.2	115	696.5
52	353.3	116	706.6
53	358.3	117	716.7
54	363.4	118	726.7
55	368.4	119	736.8
56	373.5	120	746.9
57	378.5	121	757.0
58	383.6	122	767.1
59	388.6	123	777.2
60	393.7	124	787.3
61	398.7	125	797.4
62	403.7	126	807.5
63	408.8	127	817.6
64	413.8		

Table #69
Gain Table

Data	Value	Data	Value
0	-24.000dB	64	0.000dB
1	-23.625dB	65	0.375dB
2	-23.250dB	66	0.750dB
3	-22.875dB	67	1.125dB
4	-22.500dB	68	1.500dB
5	-22.125dB	69	1.875dB
6	-21.750dB	70	2.250dB
7	-21.375dB	71	2.625dB
8	-21.000dB	72	3.000dB
9	-20.625dB	73	3.375dB
10	-20.250dB	74	3.750dB
11	-19.875dB	75	4.125dB
12	-19.500dB	76	4.500dB
13	-19.125dB	77	4.875dB
14	-18.750dB	78	5.250dB
15	-18.375dB	79	5.625dB
16	-18.000dB	80	6.000dB
17	-17.625dB	81	6.375dB
18	-17.250dB	82	6.750dB
19	-16.875dB	83	7.125dB
20	-16.500dB	84	7.500dB
21	-16.125dB	85	7.875dB
22	-15.750dB	86	8.250dB
23	-15.375dB	87	8.625dB
24	-15.000dB	88	9.000dB
25	-14.625dB	89	9.375dB
26	-14.250dB	90	9.750dB
27	-13.875dB	91	10.125dB
28	-13.500dB	92	10.500dB
29	-13.125dB	93	10.875dB
30	-12.750dB	94	11.250dB
31	-12.375dB	95	11.625dB
32	-12.000dB	96	12.000dB
33	-11.625dB	97	12.375dB
34	-11.250dB	98	12.750dB
35	-10.875dB	99	13.125dB
36	-10.500dB	100	13.500dB
37	-10.125dB	101	13.875dB
38	-9.750dB	102	14.250dB
39	-9.375dB	103	14.625dB
40	-9.000dB	104	15.000dB
41	-8.625dB	105	15.375dB
42	-8.250dB	106	15.750dB
43	-7.875dB	107	16.125dB
44	-7.500dB	108	16.500dB
45	-7.125dB	109	16.875dB
46	-6.750dB	110	17.250dB
47	-6.375dB	111	17.625dB
48	-6.000dB	112	18.000dB
49	-5.625dB	113	18.375dB
50	-5.250dB	114	18.750dB
51	-4.875dB	115	19.125dB
52	-4.500dB	116	19.500dB
53	-4.125dB	117	19.875dB
54	-3.750dB	118	20.250dB
55	-3.375dB	119	20.625dB
56	-3.000dB	120	21.000dB
57	-2.625dB	121	21.375dB
58	-2.250dB	122	21.750dB
59	-1.875dB	123	22.125dB
60	-1.500dB	124	22.500dB
61	-1.125dB	125	22.875dB
62	-0.750dB	126	23.250dB
63	-0.375dB	127	23.625dB

Table #70
Shimmer Gain

Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value
0	-∞ dB	64	-47.2 dB	128	-40.8 dB	192	-34.4 dB	256	-28.0 dB	320	-21.6 dB	384	-15.2 dB	448	-8.8 dB	512	-2.4 dB
1	-60.0 dB	65	-47.1 dB	129	-40.7 dB	193	-34.3 dB	257	-27.9 dB	321	-21.5 dB	385	-15.1 dB	449	-8.7 dB	513	-2.3 dB
2	-59.5 dB	66	-47.0 dB	130	-40.6 dB	194	-34.2 dB	258	-27.8 dB	322	-21.4 dB	386	-15.0 dB	450	-8.6 dB	514	-2.2 dB
3	-59.0 dB	67	-46.9 dB	131	-40.5 dB	195	-34.1 dB	259	-27.7 dB	323	-21.3 dB	387	-14.9 dB	451	-8.5 dB	515	-2.1 dB
4	-58.5 dB	68	-46.8 dB	132	-40.4 dB	196	-34.0 dB	260	-27.6 dB	324	-21.2 dB	388	-14.8 dB	452	-8.4 dB	516	-2.0 dB
5	-58.0 dB	69	-46.7 dB	133	-40.3 dB	197	-33.9 dB	261	-27.5 dB	325	-21.1 dB	389	-14.7 dB	453	-8.3 dB	517	-1.9 dB
6	-57.5 dB	70	-46.6 dB	134	-40.2 dB	198	-33.8 dB	262	-27.4 dB	326	-21.0 dB	390	-14.6 dB	454	-8.2 dB	518	-1.8 dB
7	-57.0 dB	71	-46.5 dB	135	-40.1 dB	199	-33.7 dB	263	-27.3 dB	327	-20.9 dB	391	-14.5 dB	455	-8.1 dB	519	-1.7 dB
8	-56.5 dB	72	-46.4 dB	136	-40.0 dB	200	-33.6 dB	264	-27.2 dB	328	-20.8 dB	392	-14.4 dB	456	-8.0 dB	520	-1.6 dB
9	-56.0 dB	73	-46.3 dB	137	-39.9 dB	201	-33.5 dB	265	-27.1 dB	329	-20.7 dB	393	-14.3 dB	457	-7.9 dB	521	-1.5 dB
10	-55.5 dB	74	-46.2 dB	138	-39.8 dB	202	-33.4 dB	266	-27.0 dB	330	-20.6 dB	394	-14.2 dB	458	-7.8 dB	522	-1.4 dB
11	-55.0 dB	75	-46.1 dB	139	-39.7 dB	203	-33.3 dB	267	-26.9 dB	331	-20.5 dB	395	-14.1 dB	459	-7.7 dB	523	-1.3 dB
12	-54.8 dB	76	-46.0 dB	140	-39.6 dB	204	-33.2 dB	268	-26.8 dB	332	-20.4 dB	396	-14.0 dB	460	-7.6 dB	524	-1.2 dB
13	-54.6 dB	77	-45.9 dB	141	-39.5 dB	205	-33.1 dB	269	-26.7 dB	333	-20.3 dB	397	-13.9 dB	461	-7.5 dB	525	-1.1 dB
14	-54.4 dB	78	-45.8 dB	142	-39.4 dB	206	-33.0 dB	270	-26.6 dB	334	-20.2 dB	398	-13.8 dB	462	-7.4 dB	526	-1.0 dB
15	-54.2 dB	79	-45.7 dB	143	-39.3 dB	207	-32.9 dB	271	-26.5 dB	335	-20.1 dB	399	-13.7 dB	463	-7.3 dB	527	-0.9 dB
16	-54.0 dB	80	-45.6 dB	144	-39.2 dB	208	-32.8 dB	272	-26.4 dB	336	-20.0 dB	400	-13.6 dB	464	-7.2 dB	528	-0.8 dB
17	-53.8 dB	81	-45.5 dB	145	-39.1 dB	209	-32.7 dB	273	-26.3 dB	337	-19.9 dB	401	-13.5 dB	465	-7.1 dB	529	-0.7 dB
18	-53.6 dB	82	-45.4 dB	146	-39.0 dB	210	-32.6 dB	274	-26.2 dB	338	-19.8 dB	402	-13.4 dB	466	-7.0 dB	530	-0.6 dB
19	-53.4 dB	83	-45.3 dB	147	-38.9 dB	211	-32.5 dB	275	-26.1 dB	339	-19.7 dB	403	-13.3 dB	467	-6.9 dB	531	-0.5 dB
20	-53.2 dB	84	-45.2 dB	148	-38.8 dB	212	-32.4 dB	276	-26.0 dB	340	-19.6 dB	404	-13.2 dB	468	-6.8 dB	532	-0.4 dB
21	-53.0 dB	85	-45.1 dB	149	-38.7 dB	213	-32.3 dB	277	-25.9 dB	341	-19.5 dB	405	-13.1 dB	469	-6.7 dB	533	-0.3 dB
22	-52.8 dB	86	-45.0 dB	150	-38.6 dB	214	-32.2 dB	278	-25.8 dB	342	-19.4 dB	406	-13.0 dB	470	-6.6 dB	534	-0.2 dB
23	-52.6 dB	87	-44.9 dB	151	-38.5 dB	215	-32.1 dB	279	-25.7 dB	343	-19.3 dB	407	-12.9 dB	471	-6.5 dB	535	-0.1 dB
24	-52.4 dB	88	-44.8 dB	152	-38.4 dB	216	-32.0 dB	280	-25.6 dB	344	-19.2 dB	408	-12.8 dB	472	-6.4 dB	536	0.0 dB
25	-52.2 dB	89	-44.7 dB	153	-38.3 dB	217	-31.9 dB	281	-25.5 dB	345	-19.1 dB	409	-12.7 dB	473	-6.3 dB		
26	-52.0 dB	90	-44.6 dB	154	-38.2 dB	218	-31.8 dB	282	-25.4 dB	346	-19.0 dB	410	-12.6 dB	474	-6.2 dB		
27	-51.8 dB	91	-44.5 dB	155	-38.1 dB	219	-31.7 dB	283	-25.3 dB	347	-18.9 dB	411	-12.5 dB	475	-6.1 dB		
28	-51.6 dB	92	-44.4 dB	156	-38.0 dB	220	-31.6 dB	284	-25.2 dB	348	-18.8 dB	412	-12.4 dB	476	-6.0 dB		
29	-51.4 dB	93	-44.3 dB	157	-37.9 dB	221	-31.5 dB	285	-25.1 dB	349	-18.7 dB	413	-12.3 dB	477	-5.9 dB		
30	-51.2 dB	94	-44.2 dB	158	-37.8 dB	222	-31.4 dB	286	-25.0 dB	350	-18.6 dB	414	-12.2 dB	478	-5.8 dB		
31	-51.0 dB	95	-44.1 dB	159	-37.7 dB	223	-31.3 dB	287	-24.9 dB	351	-18.5 dB	415	-12.1 dB	479	-5.7 dB		
32	-50.8 dB	96	-44.0 dB	160	-37.6 dB	224	-31.2 dB	288	-24.8 dB	352	-18.4 dB	416	-12.0 dB	480	-5.6 dB		
33	-50.6 dB	97	-43.9 dB	161	-37.5 dB	225	-31.1 dB	289	-24.7 dB	353	-18.3 dB	417	-11.9 dB	481	-5.5 dB		
34	-50.4 dB	98	-43.8 dB	162	-37.4 dB	226	-31.0 dB	290	-24.6 dB	354	-18.2 dB	418	-11.8 dB	482	-5.4 dB		
35	-50.2 dB	99	-43.7 dB	163	-37.3 dB	227	-30.9 dB	291	-24.5 dB	355	-18.1 dB	419	-11.7 dB	483	-5.3 dB		
36	-50.0 dB	100	-43.6 dB	164	-37.2 dB	228	-30.8 dB	292	-24.4 dB	356	-18.0 dB	420	-11.6 dB	484	-5.2 dB		
37	-49.9 dB	101	-43.5 dB	165	-37.1 dB	229	-30.7 dB	293	-24.3 dB	357	-17.9 dB	421	-11.5 dB	485	-5.1 dB		
38	-49.8 dB	102	-43.4 dB	166	-37.0 dB	230	-30.6 dB	294	-24.2 dB	358	-17.8 dB	422	-11.4 dB	486	-5.0 dB		
39	-49.7 dB	103	-43.3 dB	167	-36.9 dB	231	-30.5 dB	295	-24.1 dB	359	-17.7 dB	423	-11.3 dB	487	-4.9 dB		
40	-49.6 dB	104	-43.2 dB	168	-36.8 dB	232	-30.4 dB	296	-24.0 dB	360	-17.6 dB	424	-11.2 dB	488	-4.8 dB		
41	-49.5 dB	105	-43.1 dB	169	-36.7 dB	233	-30.3 dB	297	-23.9 dB	361	-17.5 dB	425	-11.1 dB	489	-4.7 dB		
42	-49.4 dB	106	-43.0 dB	170	-36.6 dB	234	-30.2 dB	298	-23.8 dB	362	-17.4 dB	426	-11.0 dB	490	-4.6 dB		
43	-49.3 dB	107	-42.9 dB	171	-36.5 dB	235	-30.1 dB	299	-23.7 dB	363	-17.3 dB	427	-10.9 dB	491	-4.5 dB		
44	-49.2 dB	108	-42.8 dB	172	-36.4 dB	236	-30.0 dB	300	-23.6 dB	364	-17.2 dB	428	-10.8 dB	492	-4.4 dB		
45	-49.1 dB	109	-42.7 dB	173	-36.3 dB	237	-29.9 dB	301	-23.5 dB	365	-17.1 dB	429	-10.7 dB	493	-4.3 dB		
46	-49.0 dB	110	-42.6 dB	174	-36.2 dB	238	-29.8 dB	302	-23.4 dB	366	-17.0 dB	430	-10.6 dB	494	-4.2 dB		
47	-48.9 dB	111	-42.5 dB	175	-36.1 dB	239	-29.7 dB	303	-23.3 dB	367	-16.9 dB	431	-10.5 dB	495	-4.1 dB		
48	-48.8 dB	112	-42.4 dB	176	-36.0 dB	240	-29.6 dB	304	-23.2 dB	368	-16.8 dB	432	-10.4 dB	496	-4.0 dB		
49	-48.7 dB	113	-42.3 dB	177	-35.9 dB	241	-29.5 dB	305	-23.1 dB	369	-16.7 dB	433	-10.3 dB	497	-3.9 dB		
50	-48.6 dB	114	-42.2 dB	178	-35.8 dB	242	-29.4 dB	306	-23.0 dB	370	-16.6 dB	434	-10.2 dB	498	-3.8 dB		
51	-48.5 dB	115	-42.1 dB	179	-35.7 dB	243	-29.3 dB	307	-22.9 dB	371	-16.5 dB	435	-10.1 dB	499	-3.7 dB		
52	-48.4 dB	116	-42.0 dB	180	-35.6 dB	244	-29.2 dB	308	-22.8 dB	372	-16.4 dB	436	-10.0 dB	500	-3.6 dB		
53	-48.3 dB	117	-41.9 dB	181	-35.5 dB	245	-29.1 dB	309	-22.7 dB	373	-16.3 dB	437	-9.9 dB	501	-3.5 dB		
54	-48.2 dB	118	-41.8 dB	182	-35.4 dB	246	-29.0 dB	310	-22.6 dB	374	-16.2 dB	438	-9.8 dB	502	-3.4 dB		
55	-48.1 dB	119	-41.7 dB	183	-35.3 dB	247	-28.9 dB	311	-22.5 dB	375	-16.1 dB	439	-9.7 dB	503	-3.3 dB		
56	-48.0 dB	120	-41.6 dB	184	-35.2 dB	248	-28.8 dB	312	-22.4 dB	376	-16.0 dB	440	-9.6 dB	504	-3.2 dB		
57	-47.9 dB	121	-41.5 dB	185	-35.1 dB	249	-28.7 dB	313	-22.3 dB	377	-15.9 dB	441	-9.5 dB	505	-3.1 dB		
58	-47.8 dB	122	-41.4 dB	186	-35.0 dB	250	-28.6 dB	314	-22.2 dB	378	-15.8 dB	442	-9.4 dB	506	-3.0 dB		
59	-47.7 dB	123	-41.3 dB	187	-34.9 dB	251	-28.5 dB	315	-22.1 dB	379	-15.7 dB	443	-9.3 dB	507	-2.9 dB		
60	-47.6 dB	124	-41.2 dB	188	-34.8 dB	252	-28.4 dB	316	-22.0 dB	380	-15.6 dB	444	-9.2 dB	508	-2.8 dB		
61	-47.5 dB	125	-41.1 dB	189	-34.7 dB	253	-28.3 dB	317	-21.9 dB	381	-15.5 dB	445	-9.1 dB	509	-2.7 dB		
62	-47.4 dB	126	-41.0 dB	190	-34.6 dB	254	-28.2 dB	318	-21.8 dB	382	-15.4 dB	446	-9.0 dB	510	-2.6 dB		
63	-47.3 dB	127	-40.9 dB	191	-34.5 dB	255	-28.1 dB	319	-21.7 dB	383	-15.3 dB	447	-8.9 dB	511	-2.5 dB		

Table#71
Shimmer Reverb Time

Data	Value	Data	Value	Data	Value	Data	Value	Data	Value
0	0.1 s	64	6.5 s	128	12.9 s	192	19.3 s	256	77.0 s
1	0.2 s	65	6.6 s	129	13.0 s	193	19.4 s	257	78.0 s
2	0.3 s	66	6.7 s	130	13.1 s	194	19.5 s	258	79.0 s
3	0.4 s	67	6.8 s	131	13.2 s	195	19.6 s	259	80.0 s
4	0.5 s	68	6.9 s	132	13.3 s	196	19.7 s	260	81.0 s
5	0.6 s	69	7.0 s	133	13.4 s	197	19.8 s	261	82.0 s
6	0.7 s	70	7.1 s	134	13.5 s	198	19.9 s	262	83.0 s
7	0.8 s	71	7.2 s	135	13.6 s	199	20.0 s	263	84.0 s
8	0.9 s	72	7.3 s	136	13.7 s	200	21.0 s	264	85.0 s
9	1.0 s	73	7.4 s	137	13.8 s	201	22.0 s	265	86.0 s
10	1.1 s	74	7.5 s	138	13.9 s	202	23.0 s	266	87.0 s
11	1.2 s	75	7.6 s	139	14.0 s	203	24.0 s	267	88.0 s
12	1.3 s	76	7.7 s	140	14.1 s	204	25.0 s	268	89.0 s
13	1.4 s	77	7.8 s	141	14.2 s	205	26.0 s	269	90.0 s
14	1.5 s	78	7.9 s	142	14.3 s	206	27.0 s	270	91.0 s
15	1.6 s	79	8.0 s	143	14.4 s	207	28.0 s	271	92.0 s
16	1.7 s	80	8.1 s	144	14.5 s	208	29.0 s	272	93.0 s
17	1.8 s	81	8.2 s	145	14.6 s	209	30.0 s	273	94.0 s
18	1.9 s	82	8.3 s	146	14.7 s	210	31.0 s	274	95.0 s
19	2.0 s	83	8.4 s	147	14.8 s	211	32.0 s	275	96.0 s
20	2.1 s	84	8.5 s	148	14.9 s	212	33.0 s	276	97.0 s
21	2.2 s	85	8.6 s	149	15.0 s	213	34.0 s	277	98.0 s
22	2.3 s	86	8.7 s	150	15.1 s	214	35.0 s	278	99.0 s
23	2.4 s	87	8.8 s	151	15.2 s	215	36.0 s	279	100.0 s
24	2.5 s	88	8.9 s	152	15.3 s	216	37.0 s	280	∞ s
25	2.6 s	89	9.0 s	153	15.4 s	217	38.0 s		
26	2.7 s	90	9.1 s	154	15.5 s	218	39.0 s		
27	2.8 s	91	9.2 s	155	15.6 s	219	40.0 s		
28	2.9 s	92	9.3 s	156	15.7 s	220	41.0 s		
29	3.0 s	93	9.4 s	157	15.8 s	221	42.0 s		
30	3.1 s	94	9.5 s	158	15.9 s	222	43.0 s		
31	3.2 s	95	9.6 s	159	16.0 s	223	44.0 s		
32	3.3 s	96	9.7 s	160	16.1 s	224	45.0 s		
33	3.4 s	97	9.8 s	161	16.2 s	225	46.0 s		
34	3.5 s	98	9.9 s	162	16.3 s	226	47.0 s		
35	3.6 s	99	10.0 s	163	16.4 s	227	48.0 s		
36	3.7 s	100	10.1 s	164	16.5 s	228	49.0 s		
37	3.8 s	101	10.2 s	165	16.6 s	229	50.0 s		
38	3.9 s	102	10.3 s	166	16.7 s	230	51.0 s		
39	4.0 s	103	10.4 s	167	16.8 s	231	52.0 s		
40	4.1 s	104	10.5 s	168	16.9 s	232	53.0 s		
41	4.2 s	105	10.6 s	169	17.0 s	233	54.0 s		
42	4.3 s	106	10.7 s	170	17.1 s	234	55.0 s		
43	4.4 s	107	10.8 s	171	17.2 s	235	56.0 s		
44	4.5 s	108	10.9 s	172	17.3 s	236	57.0 s		
45	4.6 s	109	11.0 s	173	17.4 s	237	58.0 s		
46	4.7 s	110	11.1 s	174	17.5 s	238	59.0 s		
47	4.8 s	111	11.2 s	175	17.6 s	239	60.0 s		
48	4.9 s	112	11.3 s	176	17.7 s	240	61.0 s		
49	5.0 s	113	11.4 s	177	17.8 s	241	62.0 s		
50	5.1 s	114	11.5 s	178	17.9 s	242	63.0 s		
51	5.2 s	115	11.6 s	179	18.0 s	243	64.0 s		
52	5.3 s	116	11.7 s	180	18.1 s	244	65.0 s		
53	5.4 s	117	11.8 s	181	18.2 s	245	66.0 s		
54	5.5 s	118	11.9 s	182	18.3 s	246	67.0 s		
55	5.6 s	119	12.0 s	183	18.4 s	247	68.0 s		
56	5.7 s	120	12.1 s	184	18.5 s	248	69.0 s		
57	5.8 s	121	12.2 s	185	18.6 s	249	70.0 s		
58	5.9 s	122	12.3 s	186	18.7 s	250	71.0 s		
59	6.0 s	123	12.4 s	187	18.8 s	251	72.0 s		
60	6.1 s	124	12.5 s	188	18.9 s	252	73.0 s		
61	6.2 s	125	12.6 s	189	19.0 s	253	74.0 s		
62	6.3 s	126	12.7 s	190	19.1 s	254	75.0 s		
63	6.4 s	127	12.8 s	191	19.2 s	255	76.0 s		

Table #72
Shimmer Pre-Delay

Data	Value	Data	Value	Data	Value	Data	Value
0	0.1 ms	80	8.1 ms	160	16.1 ms	240	24.1 ms
1	0.2 ms	81	8.2 ms	161	16.2 ms	241	24.2 ms
2	0.3 ms	82	8.3 ms	162	16.3 ms	242	24.3 ms
3	0.4 ms	83	8.4 ms	163	16.4 ms	243	24.4 ms
4	0.5 ms	84	8.5 ms	164	16.5 ms	244	24.5 ms
5	0.6 ms	85	8.6 ms	165	16.6 ms	245	24.6 ms
6	0.7 ms	86	8.7 ms	166	16.7 ms	246	24.7 ms
7	0.8 ms	87	8.8 ms	167	16.8 ms	247	24.8 ms
8	0.9 ms	88	8.9 ms	168	16.9 ms	248	24.9 ms
9	1.0 ms	89	9.0 ms	169	17.0 ms	249	25.0 ms
10	1.1 ms	90	9.1 ms	170	17.1 ms	250	25.1 ms
11	1.2 ms	91	9.2 ms	171	17.2 ms	251	25.2 ms
12	1.3 ms	92	9.3 ms	172	17.3 ms	252	25.3 ms
13	1.4 ms	93	9.4 ms	173	17.4 ms	253	25.4 ms
14	1.5 ms	94	9.5 ms	174	17.5 ms	254	25.5 ms
15	1.6 ms	95	9.6 ms	175	17.6 ms	255	25.6 ms
16	1.7 ms	96	9.7 ms	176	17.7 ms	256	25.7 ms
17	1.8 ms	97	9.8 ms	177	17.8 ms	257	25.8 ms
18	1.9 ms	98	9.9 ms	178	17.9 ms	258	25.9 ms
19	2.0 ms	99	10.0 ms	179	18.0 ms	259	26.0 ms
20	2.1 ms	100	10.1 ms	180	18.1 ms	260	26.1 ms
21	2.2 ms	101	10.2 ms	181	18.2 ms	261	26.2 ms
22	2.3 ms	102	10.3 ms	182	18.3 ms	262	26.3 ms
23	2.4 ms	103	10.4 ms	183	18.4 ms	263	26.4 ms
24	2.5 ms	104	10.5 ms	184	18.5 ms	264	26.5 ms
25	2.6 ms	105	10.6 ms	185	18.6 ms	265	26.6 ms
26	2.7 ms	106	10.7 ms	186	18.7 ms	266	26.7 ms
27	2.8 ms	107	10.8 ms	187	18.8 ms	267	26.8 ms
28	2.9 ms	108	10.9 ms	188	18.9 ms	268	26.9 ms
29	3.0 ms	109	11.0 ms	189	19.0 ms	269	27.0 ms
30	3.1 ms	110	11.1 ms	190	19.1 ms	270	27.1 ms
31	3.2 ms	111	11.2 ms	191	19.2 ms	271	27.2 ms
32	3.3 ms	112	11.3 ms	192	19.3 ms	272	27.3 ms
33	3.4 ms	113	11.4 ms	193	19.4 ms	273	27.4 ms
34	3.5 ms	114	11.5 ms	194	19.5 ms	274	27.5 ms
35	3.6 ms	115	11.6 ms	195	19.6 ms	275	27.6 ms
36	3.7 ms	116	11.7 ms	196	19.7 ms	276	27.7 ms
37	3.8 ms	117	11.8 ms	197	19.8 ms	277	27.8 ms
38	3.9 ms	118	11.9 ms	198	19.9 ms	278	27.9 ms
39	4.0 ms	119	12.0 ms	199	20.0 ms	279	28.0 ms
40	4.1 ms	120	12.1 ms	200	20.1 ms	280	28.1 ms
41	4.2 ms	121	12.2 ms	201	20.2 ms	281	28.2 ms
42	4.3 ms	122	12.3 ms	202	20.3 ms	282	28.3 ms
43	4.4 ms	123	12.4 ms	203	20.4 ms	283	28.4 ms
44	4.5 ms	124	12.5 ms	204	20.5 ms	284	28.5 ms
45	4.6 ms	125	12.6 ms	205	20.6 ms	285	28.6 ms
46	4.7 ms	126	12.7 ms	206	20.7 ms	286	28.7 ms
47	4.8 ms	127	12.8 ms	207	20.8 ms	287	28.8 ms
48	4.9 ms	128	12.9 ms	208	20.9 ms	288	28.9 ms
49	5.0 ms	129	13.0 ms	209	21.0 ms	289	29.0 ms
50	5.1 ms	130	13.1 ms	210	21.1 ms	290	29.1 ms
51	5.2 ms	131	13.2 ms	211	21.2 ms	291	29.2 ms
52	5.3 ms	132	13.3 ms	212	21.3 ms	292	29.3 ms
53	5.4 ms	133	13.4 ms	213	21.4 ms	293	29.4 ms
54	5.5 ms	134	13.5 ms	214	21.5 ms	294	29.5 ms
55	5.6 ms	135	13.6 ms	215	21.6 ms	295	29.6 ms
56	5.7 ms	136	13.7 ms	216	21.7 ms	296	29.7 ms
57	5.8 ms	137	13.8 ms	217	21.8 ms	297	29.8 ms
58	5.9 ms	138	13.9 ms	218	21.9 ms	298	29.9 ms
59	6.0 ms	139	14.0 ms	219	22.0 ms	299	30.0 ms
60	6.1 ms	140	14.1 ms	220	22.1 ms	300	30.1 ms
61	6.2 ms	141	14.2 ms	221	22.2 ms	301	30.2 ms
62	6.3 ms	142	14.3 ms	222	22.3 ms	302	30.3 ms
63	6.4 ms	143	14.4 ms	223	22.4 ms	303	30.4 ms
64	6.5 ms	144	14.5 ms	224	22.5 ms	304	30.5 ms
65	6.6 ms	145	14.6 ms	225	22.6 ms	305	30.6 ms
66	6.7 ms	146	14.7 ms	226	22.7 ms	306	30.7 ms
67	6.8 ms	147	14.8 ms	227	22.8 ms	307	30.8 ms
68	6.9 ms	148	14.9 ms	228	22.9 ms	308	30.9 ms
69	7.0 ms	149	15.0 ms	229	23.0 ms	309	31.0 ms
70	7.1 ms	150	15.1 ms	230	23.1 ms	310	31.1 ms
71	7.2 ms	151	15.2 ms	231	23.2 ms	311	31.2 ms
72	7.3 ms	152	15.3 ms	232	23.3 ms	312	31.3 ms
73	7.4 ms	153	15.4 ms	233	23.4 ms	313	31.4 ms
74	7.5 ms	154	15.5 ms	234	23.5 ms	314	31.5 ms
75	7.6 ms	155	15.6 ms	235	23.6 ms	315	31.6 ms
76	7.7 ms	156	15.7 ms	236	23.7 ms	316	31.8 ms
77	7.8 ms	157	15.8 ms	237	23.8 ms	317	32.0 ms
78	7.9 ms	158	15.9 ms	238	23.9 ms	318	32.2 ms
79	8.0 ms	159	16.0 ms	239	24.0 ms	319	32.4 ms

Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value
320	32.6 ms	400	48.6 ms	480	64.6 ms	560	80.6 ms	640	96.6 ms	720	163 ms	800	243 ms	880	330 ms	960	490 ms
321	32.8 ms	401	48.8 ms	481	64.8 ms	561	80.8 ms	641	96.8 ms	721	164 ms	801	244 ms	881	332 ms	961	492 ms
322	33.0 ms	402	49.0 ms	482	65.0 ms	562	81.0 ms	642	97.0 ms	722	165 ms	802	245 ms	882	334 ms	962	494 ms
323	33.2 ms	403	49.2 ms	483	65.2 ms	563	81.2 ms	643	97.2 ms	723	166 ms	803	246 ms	883	336 ms	963	496 ms
324	33.4 ms	404	49.4 ms	484	65.4 ms	564	81.4 ms	644	97.4 ms	724	167 ms	804	247 ms	884	338 ms	964	498 ms
325	33.6 ms	405	49.6 ms	485	65.6 ms	565	81.6 ms	645	97.6 ms	725	168 ms	805	248 ms	885	340 ms	965	500 ms
326	33.8 ms	406	49.8 ms	486	65.8 ms	566	81.8 ms	646	97.8 ms	726	169 ms	806	249 ms	886	342 ms		
327	34.0 ms	407	50.0 ms	487	66.0 ms	567	82.0 ms	647	98.0 ms	727	170 ms	807	250 ms	887	344 ms		
328	34.2 ms	408	50.2 ms	488	66.2 ms	568	82.2 ms	648	98.2 ms	728	171 ms	808	251 ms	888	346 ms		
329	34.4 ms	409	50.4 ms	489	66.4 ms	569	82.4 ms	649	98.4 ms	729	172 ms	809	252 ms	889	348 ms		
330	34.6 ms	410	50.6 ms	490	66.6 ms	570	82.6 ms	650	98.6 ms	730	173 ms	810	253 ms	890	350 ms		
331	34.8 ms	411	50.8 ms	491	66.8 ms	571	82.8 ms	651	98.8 ms	731	174 ms	811	254 ms	891	352 ms		
332	35.0 ms	412	51.0 ms	492	67.0 ms	572	83.0 ms	652	99.0 ms	732	175 ms	812	255 ms	892	354 ms		
333	35.2 ms	413	51.2 ms	493	67.2 ms	573	83.2 ms	653	99.2 ms	733	176 ms	813	256 ms	893	356 ms		
334	35.4 ms	414	51.4 ms	494	67.4 ms	574	83.4 ms	654	99.4 ms	734	177 ms	814	257 ms	894	358 ms		
335	35.6 ms	415	51.6 ms	495	67.6 ms	575	83.6 ms	655	99.6 ms	735	178 ms	815	258 ms	895	360 ms		
336	35.8 ms	416	51.8 ms	496	67.8 ms	576	83.8 ms	656	99.8 ms	736	179 ms	816	259 ms	896	362 ms		
337	36.0 ms	417	52.0 ms	497	68.0 ms	577	84.0 ms	657	100 ms	737	180 ms	817	260 ms	897	364 ms		
338	36.2 ms	418	52.2 ms	498	68.2 ms	578	84.2 ms	658	101 ms	738	181 ms	818	261 ms	898	366 ms		
339	36.4 ms	419	52.4 ms	499	68.4 ms	579	84.4 ms	659	102 ms	739	182 ms	819	262 ms	899	368 ms		
340	36.6 ms	420	52.6 ms	500	68.6 ms	580	84.6 ms	660	103 ms	740	183 ms	820	263 ms	900	370 ms		
341	36.8 ms	421	52.8 ms	501	68.8 ms	581	84.8 ms	661	104 ms	741	184 ms	821	264 ms	901	372 ms		
342	37.0 ms	422	53.0 ms	502	69.0 ms	582	85.0 ms	662	105 ms	742	185 ms	822	265 ms	902	374 ms		
343	37.2 ms	423	53.2 ms	503	69.2 ms	583	85.2 ms	663	106 ms	743	186 ms	823	266 ms	903	376 ms		
344	37.4 ms	424	53.4 ms	504	69.4 ms	584	85.4 ms	664	107 ms	744	187 ms	824	267 ms	904	378 ms		
345	37.6 ms	425	53.6 ms	505	69.6 ms	585	85.6 ms	665	108 ms	745	188 ms	825	268 ms	905	380 ms		
346	37.8 ms	426	53.8 ms	506	69.8 ms	586	85.8 ms	666	109 ms	746	189 ms	826	269 ms	906	382 ms		
347	38.0 ms	427	54.0 ms	507	70.0 ms	587	86.0 ms	667	110 ms	747	190 ms	827	270 ms	907	384 ms		
348	38.2 ms	428	54.2 ms	508	70.2 ms	588	86.2 ms	668	111 ms	748	191 ms	828	271 ms	908	386 ms		
349	38.4 ms	429	54.4 ms	509	70.4 ms	589	86.4 ms	669	112 ms	749	192 ms	829	272 ms	909	388 ms		
350	38.6 ms	430	54.6 ms	510	70.6 ms	590	86.6 ms	670	113 ms	750	193 ms	830	273 ms	910	390 ms		
351	38.8 ms	431	54.8 ms	511	70.8 ms	591	86.8 ms	671	114 ms	751	194 ms	831	274 ms	911	392 ms		
352	39.0 ms	432	55.0 ms	512	71.0 ms	592	87.0 ms	672	115 ms	752	195 ms	832	275 ms	912	394 ms		
353	39.2 ms	433	55.2 ms	513	71.2 ms	593	87.2 ms	673	116 ms	753	196 ms	833	276 ms	913	396 ms		
354	39.4 ms	434	55.4 ms	514	71.4 ms	594	87.4 ms	674	117 ms	754	197 ms	834	277 ms	914	398 ms		
355	39.6 ms	435	55.6 ms	515	71.6 ms	595	87.6 ms	675	118 ms	755	198 ms	835	278 ms	915	400 ms		
356	39.8 ms	436	55.8 ms	516	71.8 ms	596	87.8 ms	676	119 ms	756	199 ms	836	279 ms	916	402 ms		
357	40.0 ms	437	56.0 ms	517	72.0 ms	597	88.0 ms	677	120 ms	757	200 ms	837	280 ms	917	404 ms		
358	40.2 ms	438	56.2 ms	518	72.2 ms	598	88.2 ms	678	121 ms	758	201 ms	838	281 ms	918	406 ms		
359	40.4 ms	439	56.4 ms	519	72.4 ms	599	88.4 ms	679	122 ms	759	202 ms	839	282 ms	919	408 ms		
360	40.6 ms	440	56.6 ms	520	72.6 ms	600	88.6 ms	680	123 ms	760	203 ms	840	283 ms	920	410 ms		
361	40.8 ms	441	56.8 ms	521	72.8 ms	601	88.8 ms	681	124 ms	761	204 ms	841	284 ms	921	412 ms		
362	41.0 ms	442	57.0 ms	522	73.0 ms	602	89.0 ms	682	125 ms	762	205 ms	842	285 ms	922	414 ms		
363	41.2 ms	443	57.2 ms	523	73.2 ms	603	89.2 ms	683	126 ms	763	206 ms	843	286 ms	923	416 ms		
364	41.4 ms	444	57.4 ms	524	73.4 ms	604	89.4 ms	684	127 ms	764	207 ms	844	287 ms	924	418 ms		
365	41.6 ms	445	57.6 ms	525	73.6 ms	605	89.6 ms	685	128 ms	765	208 ms	845	288 ms	925	420 ms		
366	41.8 ms	446	57.8 ms	526	73.8 ms	606	89.8 ms	686	129 ms	766	209 ms	846	289 ms	926	422 ms		
367	42.0 ms	447	58.0 ms	527	74.0 ms	607	90.0 ms	687	130 ms	767	210 ms	847	290 ms	927	424 ms		
368	42.2 ms	448	58.2 ms	528	74.2 ms	608	90.2 ms	688	131 ms	768	211 ms	848	291 ms	928	426 ms		
369	42.4 ms	449	58.4 ms	529	74.4 ms	609	90.4 ms	689	132 ms	769	212 ms	849	292 ms	929	428 ms		
370	42.6 ms	450	58.6 ms	530	74.6 ms	610	90.6 ms	690	133 ms	770	213 ms	850	293 ms	930	430 ms		
371	42.8 ms	451	58.8 ms	531	74.8 ms	611	90.8 ms	691	134 ms	771	214 ms	851	294 ms	931	432 ms		
372	43.0 ms	452	59.0 ms	532	75.0 ms	612	91.0 ms	692	135 ms	772	215 ms	852	295 ms	932	434 ms		
373	43.2 ms	453	59.2 ms	533	75.2 ms	613	91.2 ms	693	136 ms	773	216 ms	853	296 ms	933	436 ms		
374	43.4 ms	454	59.4 ms	534	75.4 ms	614	91.4 ms	694	137 ms	774	217 ms	854	297 ms	934	438 ms		
375	43.6 ms	455	59.6 ms	535	75.6 ms	615	91.6 ms	695	138 ms	775	218 ms	855	298 ms	935	440 ms		
376	43.8 ms	456	59.8 ms	536	75.8 ms	616	91.8 ms	696	139 ms	776	219 ms	856	299 ms	936	442 ms		
377	44.0 ms	457	60.0 ms	537	76.0 ms	617	92.0 ms	697	140 ms	777	220 ms	857	300 ms	937	444 ms		
378	44.2 ms	458	60.2 ms	538	76.2 ms	618	92.2 ms	698	141 ms	778	221 ms	858	301 ms	938	446 ms		
379	44.4 ms	459	60.4 ms	539	76.4 ms	619	92.4 ms	699	142 ms	779	222 ms	859	302 ms	939	448 ms		
380	44.6 ms	460	60.6 ms	540	76.6 ms	620	92.6 ms	700	143 ms	780	223 ms	860	303 ms	940	450 ms		
381	44.8 ms	461	60.8 ms	541	76.8 ms	621	92.8 ms	701	144 ms	781	224 ms	861	304 ms	941	452 ms		
382	45.0 ms	462	61.0 ms	542	77.0 ms	622	93.0 ms	702	145 ms	782	225 ms	862	305 ms	942	454 ms		
383	45.2 ms	463	61.2 ms	543	77.2 ms	623	93.2 ms	703	146 ms	783	226 ms	863	306 ms	943	456 ms		
384	45.4 ms	464	61.4 ms	544	77.4 ms	624	93.4 ms	704	147 ms	784	227 ms	864	307 ms	944	458 ms		
385	45.6 ms	465	61.6 ms	545	77.6 ms	625	93.6 ms	705	148 ms	785	228 ms	865	308 ms	945	460 ms		
386	45.8 ms	466	61.8 ms	546	77.8 ms	626	93.8 ms	706	149 ms	786	229 ms	866	309 ms	946	462 ms		
387	46.0 ms	467	62.0 ms	547	78.0 ms	627	94.0 ms	707	150 ms	787	230 ms	867	310 ms	947	464 ms		
388	46.2 ms	468	62.2 ms	548	78.2 ms	628	94.2 ms	708	151 ms	788	231 ms	868	311 ms	948	466 ms		
389	46.4 ms	469	62.4 ms	549	78.4 ms	629	94.4 ms	709	152 ms	789	232 ms	869	312 ms	949	468 ms		
390	46.6 ms	470	62.6 ms	550	78.6 ms	630	94.6 ms	710	153 ms	790	233 ms	870	313 ms	950	470 ms		
391	46.8 ms	471	62.8 ms	551	78.8 ms	631	94.8 ms	711	154 ms	791	234 ms	871	314 ms	951	472 ms		
392	47.0 ms	472	63.0 ms	552	79.0 ms	632	95.0 ms	712	155 ms	792	235 ms	872	315 ms	952	474 ms		
393	47.2 ms	473	63.2 ms	553	79.2 ms	633	95.2 ms	713	156 ms	793	236 ms	873	316 ms	953	476 ms		
394	47.4 ms	474	63.4 ms	554	79.4 ms	634	95.4 ms	714	157 ms	794	237 ms	874	318 ms	954	478 ms		
395	47.6 ms	475	63.6 ms	555	79.6 ms	635	95.6 ms	715	158 ms	795	238 ms	875	320 ms	955	480 ms		
396	47.8 ms	476	63.8 ms	556	79.8 ms	636	95.8 ms	716	159 ms	796	239 ms	876	322 ms	956	482 ms		
397	48.0 ms	477	64.0 ms	557	80.0 ms	637	96.0 ms	717	160 ms	797	240 ms	877	324 ms	957	484 ms		
398	48.2 ms	478	64.2 ms	558	80.2 ms	638	96.2 ms	718	161 ms	798	241 ms	878	326 ms	958	486 ms		
399	48.4 ms	479	64.4 ms	559	80.4 ms	639	96.4 ms	719	162 ms	799	242 ms	879	328 ms	959	488 ms		

Table #73
Shimmer AM Freq

Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value	Data	Value
4	0.011 Hz	84	0.221 Hz	164	0.526 Hz	244	1.220 Hz	324	2.860 Hz	404	7.066 Hz	484	16.82 Hz	564	39.03 Hz	644	91.52 Hz	724	226.1 Hz
5	0.013 Hz	85	0.223 Hz	165	0.531 Hz	245	1.230 Hz	325	2.902 Hz	405	7.150 Hz	485	16.99 Hz	565	39.37 Hz	645	92.86 Hz	725	228.8 Hz
6	0.016 Hz	86	0.226 Hz	166	0.536 Hz	246	1.241 Hz	326	2.944 Hz	406	7.234 Hz	486	17.16 Hz	566	39.70 Hz	646	94.21 Hz	726	231.5 Hz
7	0.018 Hz	87	0.229 Hz	167	0.541 Hz	247	1.251 Hz	327	2.986 Hz	407	7.318 Hz	487	17.33 Hz	567	40.04 Hz	647	95.55 Hz	727	234.2 Hz
8	0.021 Hz	88	0.231 Hz	168	0.547 Hz	248	1.262 Hz	328	3.028 Hz	408	7.402 Hz	488	17.50 Hz	568	40.37 Hz	648	96.90 Hz	728	236.9 Hz
9	0.024 Hz	89	0.234 Hz	169	0.552 Hz	249	1.272 Hz	329	3.070 Hz	409	7.486 Hz	489	17.66 Hz	569	40.71 Hz	649	98.25 Hz	729	239.6 Hz
10	0.026 Hz	90	0.237 Hz	170	0.557 Hz	250	1.283 Hz	330	3.112 Hz	410	7.570 Hz	490	17.83 Hz	570	41.05 Hz	650	99.59 Hz	730	242.2 Hz
11	0.029 Hz	91	0.239 Hz	171	0.563 Hz	251	1.293 Hz	331	3.154 Hz	411	7.654 Hz	491	18.00 Hz	571	41.38 Hz	651	100.9 Hz	731	244.9 Hz
12	0.032 Hz	92	0.242 Hz	172	0.568 Hz	252	1.304 Hz	332	3.196 Hz	412	7.738 Hz	492	18.17 Hz	572	41.72 Hz	652	102.3 Hz	732	247.6 Hz
13	0.034 Hz	93	0.244 Hz	173	0.573 Hz	253	1.314 Hz	333	3.238 Hz	413	7.823 Hz	493	18.34 Hz	573	42.06 Hz	653	103.6 Hz	733	250.3 Hz
14	0.037 Hz	94	0.247 Hz	174	0.578 Hz	254	1.325 Hz	334	3.280 Hz	414	7.907 Hz	494	18.51 Hz	574	42.39 Hz	654	105.0 Hz	734	253.0 Hz
15	0.039 Hz	95	0.250 Hz	175	0.584 Hz	255	1.335 Hz	335	3.323 Hz	415	7.991 Hz	495	18.67 Hz	575	42.73 Hz	655	106.3 Hz	735	255.7 Hz
16	0.042 Hz	96	0.252 Hz	176	0.589 Hz	256	1.346 Hz	336	3.365 Hz	416	8.075 Hz	496	18.84 Hz	576	43.07 Hz	656	107.7 Hz	736	258.4 Hz
17	0.045 Hz	97	0.255 Hz	177	0.594 Hz	257	1.367 Hz	337	3.407 Hz	417	8.159 Hz	497	19.01 Hz	577	43.74 Hz	657	109.0 Hz	737	261.1 Hz
18	0.047 Hz	98	0.258 Hz	178	0.599 Hz	258	1.388 Hz	338	3.449 Hz	418	8.243 Hz	498	19.18 Hz	578	44.41 Hz	658	110.4 Hz	738	263.8 Hz
19	0.050 Hz	99	0.260 Hz	179	0.605 Hz	259	1.409 Hz	339	3.491 Hz	419	8.327 Hz	499	19.35 Hz	579	45.09 Hz	659	111.7 Hz	739	266.5 Hz
20	0.053 Hz	100	0.263 Hz	180	0.610 Hz	260	1.430 Hz	340	3.533 Hz	420	8.411 Hz	500	19.51 Hz	580	45.76 Hz	660	113.0 Hz	740	269.2 Hz
21	0.055 Hz	101	0.265 Hz	181	0.615 Hz	261	1.451 Hz	341	3.575 Hz	421	8.496 Hz	501	19.68 Hz	581	46.43 Hz	661	114.4 Hz	741	271.9 Hz
22	0.058 Hz	102	0.268 Hz	182	0.620 Hz	262	1.472 Hz	342	3.617 Hz	422	8.580 Hz	502	19.85 Hz	582	47.10 Hz	662	115.7 Hz	742	274.5 Hz
23	0.060 Hz	103	0.271 Hz	183	0.626 Hz	263	1.493 Hz	343	3.659 Hz	423	8.664 Hz	503	20.02 Hz	583	47.78 Hz	663	117.1 Hz	743	277.2 Hz
24	0.063 Hz	104	0.273 Hz	184	0.631 Hz	264	1.514 Hz	344	3.701 Hz	424	8.748 Hz	504	20.19 Hz	584	48.45 Hz	664	118.4 Hz	744	279.9 Hz
25	0.066 Hz	105	0.276 Hz	185	0.636 Hz	265	1.535 Hz	345	3.743 Hz	425	8.832 Hz	505	20.36 Hz	585	49.12 Hz	665	119.8 Hz	745	282.6 Hz
26	0.068 Hz	106	0.279 Hz	186	0.641 Hz	266	1.556 Hz	346	3.785 Hz	426	8.916 Hz	506	20.52 Hz	586	49.80 Hz	666	121.1 Hz	746	285.3 Hz
27	0.071 Hz	107	0.281 Hz	187	0.647 Hz	267	1.577 Hz	347	3.827 Hz	427	9.000 Hz	507	20.69 Hz	587	50.47 Hz	667	122.5 Hz	747	288.0 Hz
28	0.074 Hz	108	0.284 Hz	188	0.652 Hz	268	1.598 Hz	348	3.869 Hz	428	9.084 Hz	508	20.86 Hz	588	51.14 Hz	668	123.8 Hz	748	290.7 Hz
29	0.076 Hz	109	0.287 Hz	189	0.657 Hz	269	1.619 Hz	349	3.911 Hz	429	9.168 Hz	509	21.03 Hz	589	51.81 Hz	669	125.2 Hz	749	293.4 Hz
30	0.079 Hz	110	0.289 Hz	190	0.662 Hz	270	1.640 Hz	350	3.953 Hz	430	9.253 Hz	510	21.20 Hz	590	52.49 Hz	670	126.5 Hz	750	296.1 Hz
31	0.081 Hz	111	0.292 Hz	191	0.668 Hz	271	1.661 Hz	351	3.995 Hz	431	9.337 Hz	511	21.36 Hz	591	53.16 Hz	671	127.9 Hz	751	298.8 Hz
32	0.084 Hz	112	0.294 Hz	192	0.673 Hz	272	1.682 Hz	352	4.037 Hz	432	9.421 Hz	512	21.53 Hz	592	53.83 Hz	672	129.2 Hz	752	301.5 Hz
33	0.087 Hz	113	0.297 Hz	193	0.683 Hz	273	1.703 Hz	353	4.080 Hz	433	9.505 Hz	513	21.87 Hz	593	54.51 Hz	673	130.5 Hz	753	304.2 Hz
34	0.089 Hz	114	0.300 Hz	194	0.694 Hz	274	1.724 Hz	354	4.122 Hz	434	9.589 Hz	514	22.21 Hz	594	55.18 Hz	674	131.9 Hz	754	306.8 Hz
35	0.092 Hz	115	0.302 Hz	195	0.704 Hz	275	1.745 Hz	355	4.164 Hz	435	9.673 Hz	515	22.54 Hz	595	55.85 Hz	675	133.2 Hz	755	309.5 Hz
36	0.095 Hz	116	0.305 Hz	196	0.715 Hz	276	1.766 Hz	356	4.206 Hz	436	9.757 Hz	516	22.88 Hz	596	56.52 Hz	676	134.6 Hz	756	312.2 Hz
37	0.097 Hz	117	0.308 Hz	197	0.725 Hz	277	1.787 Hz	357	4.248 Hz	437	9.841 Hz	517	23.22 Hz	597	57.20 Hz	677	135.9 Hz	757	314.9 Hz
38	0.100 Hz	118	0.310 Hz	198	0.736 Hz	278	1.808 Hz	358	4.290 Hz	438	9.925 Hz	518	23.55 Hz	598	57.87 Hz	678	137.3 Hz	758	317.6 Hz
39	0.103 Hz	119	0.313 Hz	199	0.747 Hz	279	1.829 Hz	359	4.332 Hz	439	10.01 Hz	519	23.89 Hz	599	58.54 Hz	679	138.6 Hz	759	320.3 Hz
40	0.105 Hz	120	0.315 Hz	200	0.757 Hz	280	1.851 Hz	360	4.374 Hz	440	10.09 Hz	520	24.22 Hz	600	59.22 Hz	680	140.0 Hz	760	323.0 Hz
41	0.108 Hz	121	0.318 Hz	201	0.768 Hz	281	1.872 Hz	361	4.416 Hz	441	10.18 Hz	521	24.56 Hz	601	59.89 Hz	681	141.3 Hz	761	325.7 Hz
42	0.110 Hz	122	0.321 Hz	202	0.778 Hz	282	1.893 Hz	362	4.458 Hz	442	10.26 Hz	522	24.90 Hz	602	60.56 Hz	682	142.7 Hz	762	328.4 Hz
43	0.113 Hz	123	0.323 Hz	203	0.789 Hz	283	1.914 Hz	363	4.500 Hz	443	10.35 Hz	523	25.23 Hz	603	61.24 Hz	683	144.0 Hz	763	331.1 Hz
44	0.116 Hz	124	0.326 Hz	204	0.799 Hz	284	1.935 Hz	364	4.542 Hz	444	10.43 Hz	524	25.57 Hz	604	61.91 Hz	684	145.3 Hz	764	333.8 Hz
45	0.118 Hz	125	0.329 Hz	205	0.810 Hz	285	1.956 Hz	365	4.584 Hz	445	10.51 Hz	525	25.91 Hz	605	62.58 Hz	685	146.7 Hz	765	336.5 Hz
46	0.121 Hz	126	0.331 Hz	206	0.820 Hz	286	1.977 Hz	366	4.626 Hz	446	10.60 Hz	526	26.24 Hz	606	63.25 Hz	686	148.0 Hz	766	339.1 Hz
47	0.124 Hz	127	0.334 Hz	207	0.831 Hz	287	1.998 Hz	367	4.668 Hz	447	10.68 Hz	527	26.58 Hz	607	63.93 Hz	687	149.4 Hz	767	341.8 Hz
48	0.126 Hz	128	0.336 Hz	208	0.841 Hz	288	2.019 Hz	368	4.710 Hz	448	10.77 Hz	528	26.92 Hz	608	64.60 Hz	688	150.7 Hz	768	344.5 Hz
49	0.129 Hz	129	0.342 Hz	209	0.852 Hz	289	2.040 Hz	369	4.752 Hz	449	10.93 Hz	529	27.25 Hz	609	65.27 Hz	689	152.1 Hz	769	349.9 Hz
50	0.131 Hz	130	0.347 Hz	210	0.862 Hz	290	2.061 Hz	370	4.795 Hz	450	11.10 Hz	530	27.59 Hz	610	65.95 Hz	690	153.4 Hz	770	355.3 Hz
51	0.134 Hz	131	0.352 Hz	211	0.873 Hz	291	2.082 Hz	371	4.837 Hz	451	11.27 Hz	531	27.93 Hz	611	66.62 Hz	691	154.8 Hz	771	360.7 Hz
52	0.137 Hz	132	0.357 Hz	212	0.883 Hz	292	2.103 Hz	372	4.879 Hz	452	11.44 Hz	532	28.26 Hz	612	67.29 Hz	692	156.1 Hz	772	366.1 Hz
53	0.139 Hz	133	0.363 Hz	213	0.894 Hz	293	2.124 Hz	373	4.921 Hz	453	11.61 Hz	533	28.60 Hz	613	67.96 Hz	693	157.5 Hz	773	371.4 Hz
54	0.142 Hz	134	0.368 Hz	214	0.904 Hz	294	2.145 Hz	374	4.963 Hz	454	11.78 Hz	534	28.94 Hz	614	68.64 Hz	694	158.8 Hz	774	376.8 Hz
55	0.145 Hz	135	0.373 Hz	215	0.915 Hz	295	2.166 Hz	375	5.005 Hz	455	11.94 Hz	535	29.27 Hz	615	69.31 Hz	695	160.2 Hz	775	382.2 Hz
56	0.147 Hz	136	0.379 Hz	216	0.925 Hz	296	2.187 Hz	376	5.047 Hz	456	12.11 Hz	536	29.61 Hz	616	69.98 Hz	696	161.5 Hz	776	387.6 Hz
57	0.150 Hz	137	0.384 Hz	217	0.936 Hz	297	2.208 Hz	377	5.089 Hz	457	12.28 Hz	537	29.94 Hz	617	70.66 Hz	697	162.8 Hz	777	393.0 Hz
58	0.152 Hz	138	0.389 Hz	218	0.946 Hz	298	2.229 Hz	378	5.131 Hz	458	12.45 Hz	538	30.28 Hz	618	71.33 Hz	698	164.2 Hz	778	398.4 Hz
59	0.155 Hz	139	0.394 Hz	219	0.957 Hz	299	2.250 Hz	379	5.173 Hz	459	12.62 Hz	539	30.62 Hz	619	72.00 Hz	699	165.5 Hz	779	403.7 Hz
60	0.158 Hz	140	0.400 Hz	220	0.967 Hz	300	2.271 Hz	380	5.215 Hz	460	12.79 Hz	540	30.95 Hz	620	72.67 Hz	700	166.9 Hz	780	409.1 Hz
61	0.160 Hz	141	0.405 Hz	221	0.978 Hz	301	2.292 Hz	381	5.257 Hz	461	12.95 Hz	541	31.29 Hz	621	73.35 Hz	701	168.2 Hz	781	414.5 Hz
62	0.163 Hz	142	0.410 Hz	222	0.988 Hz	302	2.313 Hz	382	5.299 Hz	462	13.12 Hz	542	31.63 Hz	622	74.02 Hz	702	169.6 Hz	782	419.9 Hz
63	0.166 Hz	143	0.415 Hz	223	0.999 Hz	303	2.334 Hz	383	5.341 Hz	463	13.29 Hz	543	31.96 Hz	623	74.69 Hz	703	170.9 Hz	783	425.3 Hz
64	0.168 Hz	144	0.421 Hz	224	1.009 Hz	304	2.355 Hz	384	5.383 Hz	464	13.46 Hz	544	32.30 Hz	624	75.37 Hz	704	172.3 Hz	784	430.7 Hz
65	0.171 Hz	145	0.426 Hz	225	1.020 Hz	305	2.376 Hz	385	5.467 Hz	465	13.63 Hz	545	32.64 Hz	625	76.04 Hz	705	175.0 Hz	785	436.0 Hz
66	0.173 Hz	146	0.431 Hz	226	1.030 Hz	306	2.397 Hz	386	5.552 Hz	466	13.79 Hz	546	32.97 Hz	626	76.71 Hz	706	177.6 Hz	786	441.4 Hz
67	0.176 Hz	147	0.436 Hz	227	1.041 Hz	307	2.418 Hz	387	5.636 Hz	467	13.96 Hz	547	33.31 Hz	627	77.38 Hz	707	180.3 Hz	787	446.8 Hz
68	0.179 Hz	148	0.442 Hz	228	1.051 Hz	308	2.439 Hz	388	5.720 Hz	468	14.13 Hz	548	33.65 Hz	628	78.06 Hz	708	183.0 Hz	788	452.2 Hz
69	0.181 Hz	149	0.447 Hz	229	1.062 Hz	309	2.460 Hz	389	5.804 Hz	469	14.30 Hz	549	33.98 Hz	629	78.73 Hz	709	185.7 Hz	789	457.6 Hz
70	0.184 Hz	150	0.452 Hz	230	1.072 Hz	310	2.481 Hz	390	5.888 Hz	470	14.47 Hz	550	34.32 Hz	630	79.40 Hz	710	188.4 Hz	790	463.0 Hz
71	0.187 Hz	151	0.457 Hz	231	1.083 Hz	311	2.502 Hz	391	5.972 Hz	471	14.64 Hz	551	34.65 Hz	631	80.08 Hz	711	191.1 Hz	791	468.3 Hz
72	0.189 Hz	152	0.463 Hz	232	1.093 Hz	312	2.523 Hz	392	6.056 Hz	472	14.80 Hz	552	34.99 Hz	632	80.75 Hz	712	193.8 Hz	792	473.7 Hz
73	0.192 Hz	153	0.468 Hz	233	1.104 Hz	313	2.544 Hz	393	6.140 Hz	473	14.97 Hz	553	35.33 Hz	633	81.42 Hz	713	196.5 Hz	793	479.1 Hz
74	0.195 Hz	154	0.473 Hz	234	1.115 Hz	314	2.565 Hz	394	6.224 Hz	474	15.14 Hz	554	35.66 Hz	634	82.10 Hz	714	199.2 Hz	794	484.5 Hz
75	0.197 Hz	155	0.478 Hz	235	1.125 Hz	315	2.587 Hz	395	6.309 Hz	475	15.31 Hz	555	36.00 Hz	635	82.77 Hz	715	201.9 Hz	795	489.9 Hz
76	0.200 Hz	156	0.484 Hz	236	1.136 Hz	316	2.608 Hz	396	6.393 Hz	476	15.48 Hz	556	36.34 Hz	636	83.44 Hz	716	204.6 Hz	796	495.3 Hz
77	0.202 Hz	157	0.489 Hz	237	1.146 Hz	317	2.629 Hz	397	6.477 Hz	477	15.65 Hz	557	36.67 Hz	637	84.11 Hz	717	207.3 Hz	797	500.6 Hz
78	0.205 Hz	158	0.494 Hz	238	1.157 Hz	318	2.650 Hz	398	6.561 Hz	478	15.81 Hz	558	37.01 Hz	638	84.79 Hz	718	209.9 Hz	798	506.0 Hz
79	0.208 Hz	159	0.499 Hz	239	1.167 Hz	319	2.671 Hz	399	6.645 Hz	479	15.98 Hz	559	37.35 Hz	639	85.46 Hz	719	212.6 Hz	799	511.4 Hz
80	0.210 Hz	160	0.505 Hz	240	1.178 Hz	320	2.692 Hz	400	6.729 Hz	480	16.15 Hz	560	37.68 Hz	640	86.13 Hz	720	215.3 Hz	800	516.8 Hz
81	0.213 Hz	161	0.510 Hz	241	1.188 Hz	321	2.734 Hz	401	6.813 Hz	481	16.32 Hz	561	38.02 Hz	641	87.48 Hz	721	218.0 Hz	801	522.2 Hz
82	0.216 Hz	162	0.515 Hz	242	1.199 Hz	322	2.776 Hz	402	6.897 Hz	482	16.49 Hz	562	38.36 Hz	642	88.82 Hz	722	220.7 Hz	802	527.6 Hz
83	0.218 Hz	163	0.520 Hz	243	1.209 Hz	323	2.818 Hz	403	6.981 Hz	483	16.65 Hz	563	38.69 Hz	643	90.17 Hz	723	223.4 Hz	803	532.9 Hz

Data	Value	Data	Value	Data	Value
804	538.3 Hz	884	1.249 kHz	964	2.929 kHz
805	543.7 Hz	885	1.260 kHz	965	2.972 kHz
806	549.1 Hz	886	1.270 kHz	966	3.015 kHz
807	554.5 Hz	887	1.281 kHz	967	3.058 kHz
808	559.9 Hz	888	1.292 kHz	968	3.101 kHz
809	565.2 Hz	889	1.303 kHz	969	3.144 kHz
810	570.6 Hz	890	1.314 kHz	970	3.187 kHz
811	576.0 Hz	891	1.324 kHz	971	3.230 kHz
812	581.4 Hz	892	1.335 kHz	972	3.273 kHz
813	586.8 Hz	893	1.346 kHz	973	3.316 kHz
814	592.2 Hz	894	1.357 kHz	974	3.359 kHz
815	597.5 Hz	895	1.367 kHz	975	3.402 kHz
816	602.9 Hz	896	1.378 kHz	976	3.445 kHz
817	608.3 Hz	897	1.400 kHz	977	3.488 kHz
818	613.7 Hz	898	1.421 kHz	978	3.531 kHz
819	619.1 Hz	899	1.443 kHz	979	3.575 kHz
820	624.5 Hz	900	1.464 kHz	980	3.618 kHz
821	629.8 Hz	901	1.486 kHz	981	3.661 kHz
822	635.2 Hz	902	1.507 kHz	982	3.704 kHz
823	640.6 Hz	903	1.529 kHz	983	3.747 kHz
824	646.0 Hz	904	1.550 kHz	984	3.790 kHz
825	651.4 Hz	905	1.572 kHz	985	3.833 kHz
826	656.8 Hz	906	1.593 kHz	986	3.876 kHz
827	662.1 Hz	907	1.615 kHz	987	3.919 kHz
828	667.5 Hz	908	1.637 kHz	988	3.962 kHz
829	672.9 Hz	909	1.658 kHz	989	4.005 kHz
830	678.3 Hz	910	1.680 kHz	990	4.048 kHz
831	683.7 Hz	911	1.701 kHz	991	4.091 kHz
832	689.1 Hz	912	1.723 kHz	992	4.134 kHz
833	699.8 Hz	913	1.744 kHz	993	4.177 kHz
834	710.6 Hz	914	1.766 kHz	994	4.221 kHz
835	721.4 Hz	915	1.787 kHz	995	4.264 kHz
836	732.1 Hz	916	1.809 kHz	996	4.307 kHz
837	742.9 Hz	917	1.830 kHz	997	4.350 kHz
838	753.7 Hz	918	1.852 kHz	998	4.393 kHz
839	764.4 Hz	919	1.873 kHz	999	4.436 kHz
840	775.2 Hz	920	1.895 kHz	1000	4.479 kHz
841	786.0 Hz	921	1.916 kHz	1001	4.522 kHz
842	796.7 Hz	922	1.938 kHz	1002	4.565 kHz
843	807.5 Hz	923	1.960 kHz	1003	4.608 kHz
844	818.3 Hz	924	1.981 kHz	1004	4.651 kHz
845	829.0 Hz	925	2.003 kHz	1005	4.694 kHz
846	839.8 Hz	926	2.024 kHz	1006	4.737 kHz
847	850.6 Hz	927	2.046 kHz	1007	4.780 kHz
848	861.3 Hz	928	2.067 kHz	1008	4.823 kHz
849	872.1 Hz	929	2.089 kHz	1009	4.867 kHz
850	882.9 Hz	930	2.110 kHz	1010	4.910 kHz
851	893.6 Hz	931	2.132 kHz	1011	4.953 kHz
852	904.4 Hz	932	2.153 kHz	1012	4.996 kHz
853	915.2 Hz	933	2.175 kHz	1013	5.039 kHz
854	925.9 Hz	934	2.196 kHz	1014	5.082 kHz
855	936.7 Hz	935	2.218 kHz	1015	5.125 kHz
856	947.5 Hz	936	2.239 kHz	1016	5.168 kHz
857	958.2 Hz	937	2.261 kHz	1017	5.211 kHz
858	969.0 Hz	938	2.283 kHz	1018	5.254 kHz
859	979.8 Hz	939	2.304 kHz	1019	5.297 kHz
860	990.5 Hz	940	2.326 kHz	1020	5.340 kHz
861	1.001 kHz	941	2.347 kHz	1021	5.383 kHz
862	1.012 kHz	942	2.369 kHz	1022	5.426 kHz
863	1.023 kHz	943	2.390 kHz	1023	5.469 kHz
864	1.034 kHz	944	2.412 kHz		
865	1.044 kHz	945	2.433 kHz		
866	1.055 kHz	946	2.455 kHz		
867	1.066 kHz	947	2.476 kHz		
868	1.077 kHz	948	2.498 kHz		
869	1.087 kHz	949	2.519 kHz		
870	1.098 kHz	950	2.541 kHz		
871	1.109 kHz	951	2.562 kHz		
872	1.120 kHz	952	2.584 kHz		
873	1.130 kHz	953	2.606 kHz		
874	1.141 kHz	954	2.627 kHz		
875	1.152 kHz	955	2.649 kHz		
876	1.163 kHz	956	2.670 kHz		
877	1.174 kHz	957	2.692 kHz		
878	1.184 kHz	958	2.713 kHz		
879	1.195 kHz	959	2.735 kHz		
880	1.206 kHz	960	2.756 kHz		
881	1.217 kHz	961	2.799 kHz		
882	1.227 kHz	962	2.842 kHz		
883	1.238 kHz	963	2.885 kHz		

Table #74
GS1 Ensemble LFO Speed

Data	Value	Data	Value	Data	Value
0	---	80	8.0 Hz	160	16.0 Hz
1	0.1 Hz	81	8.1 Hz	161	16.1 Hz
2	0.2 Hz	82	8.2 Hz	162	16.2 Hz
3	0.3 Hz	83	8.3 Hz	163	16.3 Hz
4	0.4 Hz	84	8.4 Hz	164	16.4 Hz
5	0.5 Hz	85	8.5 Hz	165	16.5 Hz
6	0.6 Hz	86	8.6 Hz	166	16.6 Hz
7	0.7 Hz	87	8.7 Hz	167	16.7 Hz
8	0.8 Hz	88	8.8 Hz	168	16.8 Hz
9	0.9 Hz	89	8.9 Hz	169	16.9 Hz
10	1.0 Hz	90	9.0 Hz	170	17.0 Hz
11	1.1 Hz	91	9.1 Hz	171	17.1 Hz
12	1.2 Hz	92	9.2 Hz	172	17.2 Hz
13	1.3 Hz	93	9.3 Hz	173	17.3 Hz
14	1.4 Hz	94	9.4 Hz	174	17.4 Hz
15	1.5 Hz	95	9.5 Hz	175	17.5 Hz
16	1.6 Hz	96	9.6 Hz	176	17.6 Hz
17	1.7 Hz	97	9.7 Hz	177	17.7 Hz
18	1.8 Hz	98	9.8 Hz	178	17.8 Hz
19	1.9 Hz	99	9.9 Hz	179	17.9 Hz
20	2.0 Hz	100	10.0 Hz	180	18.0 Hz
21	2.1 Hz	101	10.1 Hz	181	18.1 Hz
22	2.2 Hz	102	10.2 Hz	182	18.2 Hz
23	2.3 Hz	103	10.3 Hz	183	18.3 Hz
24	2.4 Hz	104	10.4 Hz	184	18.4 Hz
25	2.5 Hz	105	10.5 Hz	185	18.5 Hz
26	2.6 Hz	106	10.6 Hz	186	18.6 Hz
27	2.7 Hz	107	10.7 Hz	187	18.7 Hz
28	2.8 Hz	108	10.8 Hz	188	18.8 Hz
29	2.9 Hz	109	10.9 Hz	189	18.9 Hz
30	3.0 Hz	110	11.0 Hz	190	19.0 Hz
31	3.1 Hz	111	11.1 Hz	191	19.1 Hz
32	3.2 Hz	112	11.2 Hz	192	19.2 Hz
33	3.3 Hz	113	11.3 Hz	193	19.3 Hz
34	3.4 Hz	114	11.4 Hz	194	19.4 Hz
35	3.5 Hz	115	11.5 Hz	195	19.5 Hz
36	3.6 Hz	116	11.6 Hz	196	19.6 Hz
37	3.7 Hz	117	11.7 Hz	197	19.7 Hz
38	3.8 Hz	118	11.8 Hz	198	19.8 Hz
39	3.9 Hz	119	11.9 Hz	199	19.9 Hz
40	4.0 Hz	120	12.0 Hz	200	20.0 Hz
41	4.1 Hz	121	12.1 Hz		
42	4.2 Hz	122	12.2 Hz		
43	4.3 Hz	123	12.3 Hz		
44	4.4 Hz	124	12.4 Hz		
45	4.5 Hz	125	12.5 Hz		
46	4.6 Hz	126	12.6 Hz		
47	4.7 Hz	127	12.7 Hz		
48	4.8 Hz	128	12.8 Hz		
49	4.9 Hz	129	12.9 Hz		
50	5.0 Hz	130	13.0 Hz		
51	5.1 Hz	131	13.1 Hz		
52	5.2 Hz	132	13.2 Hz		
53	5.3 Hz	133	13.3 Hz		
54	5.4 Hz	134	13.4 Hz		
55	5.5 Hz	135	13.5 Hz		
56	5.6 Hz	136	13.6 Hz		
57	5.7 Hz	137	13.7 Hz		
58	5.8 Hz	138	13.8 Hz		
59	5.9 Hz	139	13.9 Hz		
60	6.0 Hz	140	14.0 Hz		
61	6.1 Hz	141	14.1 Hz		
62	6.2 Hz	142	14.2 Hz		
63	6.3 Hz	143	14.3 Hz		
64	6.4 Hz	144	14.4 Hz		
65	6.5 Hz	145	14.5 Hz		
66	6.6 Hz	146	14.6 Hz		
67	6.7 Hz	147	14.7 Hz		
68	6.8 Hz	148	14.8 Hz		
69	6.9 Hz	149	14.9 Hz		
70	7.0 Hz	150	15.0 Hz		
71	7.1 Hz	151	15.1 Hz		
72	7.2 Hz	152	15.2 Hz		
73	7.3 Hz	153	15.3 Hz		
74	7.4 Hz	154	15.4 Hz		
75	7.5 Hz	155	15.5 Hz		
76	7.6 Hz	156	15.6 Hz		
77	7.7 Hz	157	15.7 Hz		
78	7.8 Hz	158	15.8 Hz		
79	7.9 Hz	159	15.9 Hz		

Controller Box Source

No.	Parameter	Short Name	Common	Part
0	Pitch Bend	PitchBend	O	O
1	Modulation Wheel	ModWheel	O	O
2	After Touch	AfterTouch	O	O
3	Foot Controller 1	FootCtrl 1	O	O
4	Foot Controller 2	FootCtrl 2	O	O
5	Foot Switch	FootSwitch	O	O
6	Ribbon Controller	Ribbon	O	O
7	Breath Controller	Breath	O	O
8	Assignable Knob 1	AsgnKnob 1	O	O
9	Assignable Knob 2	AsgnKnob 2	O	O
10	Assignable Knob 3	AsgnKnob 3	O	O
11	Assignable Knob 4	AsgnKnob 4	O	O
12	Assignable Knob 5	AsgnKnob 5	O	O
13	Assignable Knob 6	AsgnKnob 6	O	O
14	Assignable Knob 7	AsgnKnob 7	O	O
15	Assignable Knob 8	AsgnKnob 8	O	O
16	Assignable Switch 1	AsgnSw 1	O	O
17	Assignable Switch 2	AsgnSw 2	O	O
18	Motion Seq 1	MotionSeq 1	O	O
19	Motion Seq 2	MotionSeq 2	O	O
20	Motion Seq 3	MotionSeq 3	O	O
21	Motion Seq 4	MotionSeq 4	O	O
22	Envelope Follower 1	EnvFollow 1	O	O
23	Envelope Follower 2	EnvFollow 2	O	O
24	Envelope Follower 3	EnvFollow 3	O	O
25	Envelope Follower 4	EnvFollow 4	O	O
26	Envelope Follower 5	EnvFollow 5	O	O
27	Envelope Follower 6	EnvFollow 6	O	O
28	Envelope Follower 7	EnvFollow 7	O	O
29	Envelope Follower 8	EnvFollow 8	O	O
30	Envelope Follower 9	EnvFollow 9	O	O
31	Envelope Follower 10	EnvFollow 10	O	O
32	Envelope Follower 11	EnvFollow 11	O	O
33	Envelope Follower 12	EnvFollow 12	O	O
34	Envelope Follower 13	EnvFollow 13	O	O
35	Envelope Follower 14	EnvFollow 14	O	O
36	Envelope Follower 15	EnvFollow 15	O	O
37	Envelope Follower 16	EnvFollow 16	O	O
38	Envelope Follower A/D	EnvFollowAD	O	O
39	Envelope Follower Master	EnvFollowMst	O	O
40	reserved		×	×
41	reserved		×	×

Controller Box Destination

*1 This is available only for Part 1.
*2 For Grid Mode, only Lane 1 Sequence 1 is affected. (For Common, Super Knob Lane Sequence 1 is affected.)
*3 For Grid Mode, only Decay 1 is affected.

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
0	Off	Off	O	O	O	O	O	O
Common Parameter								
1	Insertion Effect A Parameter 1	InsA Param 1	O	O	O	O	O	O
2	Insertion Effect A Parameter 2	InsA Param 2	O	O	O	O	O	O
3	Insertion Effect A Parameter 3	InsA Param 3	O	O	O	O	O	O
4	Insertion Effect A Parameter 4	InsA Param 4	O	O	O	O	O	O
5	Insertion Effect A Parameter 5	InsA Param 5	O	O	O	O	O	O
6	Insertion Effect A Parameter 6	InsA Param 6	O	O	O	O	O	O
7	Insertion Effect A Parameter 7	InsA Param 7	O	O	O	O	O	O
8	Insertion Effect A Parameter 8	InsA Param 8	O	O	O	O	O	O
9	Insertion Effect A Parameter 9	InsA Param 9	O	O	O	O	O	O
10	Insertion Effect A Parameter 10	InsA Param 10	O	O	O	O	O	O
11	Insertion Effect A Parameter 11	InsA Param 11	O	O	O	O	O	O
12	Insertion Effect A Parameter 12	InsA Param 12	O	O	O	O	O	O
13	Insertion Effect A Parameter 13	InsA Param 13	O	O	O	O	O	O
14	Insertion Effect A Parameter 14	InsA Param 14	O	O	O	O	O	O
15	Insertion Effect A Parameter 15	InsA Param 15	O	O	O	O	O	O
16	Insertion Effect A Parameter 16	InsA Param 16	O	O	O	O	O	O
17	Insertion Effect A Parameter 17	InsA Param 17	O	O	O	O	O	O
18	Insertion Effect A Parameter 18	InsA Param 18	O	O	O	O	O	O
19	Insertion Effect A Parameter 19	InsA Param 19	O	O	O	O	O	O
20	Insertion Effect A Parameter 20	InsA Param 20	O	O	O	O	O	O
21	Insertion Effect A Parameter 21	InsA Param 21	O	O	O	O	O	O
22	Insertion Effect A Parameter 22	InsA Param 22	O	O	O	O	O	O
23	Insertion Effect A Parameter 23	InsA Param 23	O	O	O	O	O	O
24	Insertion Effect A Parameter 24	InsA Param 24	O	O	O	O	O	O
25	Insertion Effect B Parameter 1	InsB Param 1	O	O	O	O	O	O
26	Insertion Effect B Parameter 2	InsB Param 2	O	O	O	O	O	O
27	Insertion Effect B Parameter 3	InsB Param 3	O	O	O	O	O	O
28	Insertion Effect B Parameter 4	InsB Param 4	O	O	O	O	O	O
29	Insertion Effect B Parameter 5	InsB Param 5	O	O	O	O	O	O
30	Insertion Effect B Parameter 6	InsB Param 6	O	O	O	O	O	O
31	Insertion Effect B Parameter 7	InsB Param 7	O	O	O	O	O	O
32	Insertion Effect B Parameter 8	InsB Param 8	O	O	O	O	O	O
33	Insertion Effect B Parameter 9	InsB Param 9	O	O	O	O	O	O
34	Insertion Effect B Parameter 10	InsB Param 10	O	O	O	O	O	O
35	Insertion Effect B Parameter 11	InsB Param 11	O	O	O	O	O	O
36	Insertion Effect B Parameter 12	InsB Param 12	O	O	O	O	O	O
37	Insertion Effect B Parameter 13	InsB Param 13	O	O	O	O	O	O
38	Insertion Effect B Parameter 14	InsB Param 14	O	O	O	O	O	O
39	Insertion Effect B Parameter 15	InsB Param 15	O	O	O	O	O	O
40	Insertion Effect B Parameter 16	InsB Param 16	O	O	O	O	O	O
41	Insertion Effect B Parameter 17	InsB Param 17	O	O	O	O	O	O
42	Insertion Effect B Parameter 18	InsB Param 18	O	O	O	O	O	O
43	Insertion Effect B Parameter 19	InsB Param 19	O	O	O	O	O	O
44	Insertion Effect B Parameter 20	InsB Param 20	O	O	O	O	O	O
45	Insertion Effect B Parameter 21	InsB Param 21	O	O	O	O	O	O
46	Insertion Effect B Parameter 22	InsB Param 22	O	O	O	O	O	O
47	Insertion Effect B Parameter 23	InsB Param 23	O	O	O	O	O	O
48	Insertion Effect B Parameter 24	InsB Param 24	O	O	O	O	O	O
49	(reserved)		×	×	×	×	×	×
50	Part Reverb Send	Rev Send	O	O	O	O	×	O
51	Part Variation Send	Var Send	O	O	O	O	×	O
52	Part Portamento Time	Porta Time	O	×	O	O	×	O
53	Part Mono/Poly	Mono/Poly	O	×	O	O	×	O
54	Pitch	Pitch	O	×	O	O	×	×
55	Part Volume	Volume	O	O	O	O	×	O
56	Part LFO Speed	P.LFO Speed	O	×	O	O	×	O
57	Part LFO Destination 1 Depth	P.LFO Depth 1	O	×	O	O	×	O
58	Part LFO Destination 2 Depth	P.LFO Depth 2	O	×	O	O	×	O
59	Part LFO Destination 3 Depth	P.LFO Depth 3	O	×	O	O	×	O
AWM Parameter								
60	Element Level	Elem Level	O	×	×	×	×	×
61	Element Pan	Elem Pan	O	×	×	×	×	×
62	Element Key On Delay Time	Elem Delay	O	×	×	×	×	×
63	Element LFO Speed	E.LFO Speed	O	×	×	×	×	×
64	Element LFO PMD	E.LFO PMD	O	×	×	×	×	×
65	Element LFO AMD	E.LFO AMD	O	×	×	×	×	×
66	Element LFO FMD	E.LFO FMD	O	×	×	×	×	×
67	Element Coarse Tune	Coarse	O	×	×	×	×	×
68	Element Fine Tune	Fine	O	×	×	×	×	×
69	Element PEG Depth	PEG Depth	O	×	×	×	×	×
70	Element PEG Hold Time	PEG Hold	O	×	×	×	×	×

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
71	Element PEG Attack Time	PEG Attack	O	×	×	×	×	×
72	Element PEG Decay 1 Time	PEG Decay 1	O	×	×	×	×	×
73	Element PEG Decay 2 Time	PEG Decay 2	O	×	×	×	×	×
74	Element PEG Release Time	PEG Release	O	×	×	×	×	×
75	Element AEG Attack Time	AEG Attack	O	×	×	×	×	×
76	Element AEG Decay 1 Time	AEG Decay 1	O	×	×	×	×	×
77	Element AEG Decay 2 Time	AEG Decay 2	O	×	×	×	×	×
78	Element AEG Release Time	AEG Release	O	×	×	×	×	×
79	Element FEG Depth	FEG Depth	O	×	×	×	×	×
80	Element FEG Hold Time	FEG Hold	O	×	×	×	×	×
81	Element FEG Attack Time	FEG Attack	O	×	×	×	×	×
82	Element FEG Decay 1 Time	FEG Decay 1	O	×	×	×	×	×
83	Element FEG Decay 2 Time	FEG Decay 2	O	×	×	×	×	×
84	Element FEG Release Time	FEG Release	O	×	×	×	×	×
85	Element Cutoff Frequency	Cutoff	O	×	×	×	×	×
86	Element Resonance	Resonance	O	×	×	×	×	×
87	Element HPF Cutoff Frequency	HPF Cutoff	O	×	×	×	×	×
FM Parameter								
88	FM-X Pan	FM-X Pan	×	×	O	×	×	×
89	LFO Speed	LFO2 Speed	×	×	O	×	×	O
90	LFO PMD	LFO2 PMD	×	×	O	×	×	O
91	LFO AMD	LFO2 AMD	×	×	O	×	×	O
92	LFO FMD	LFO2 FMD	×	×	O	×	×	O
93	PEG Attack Time	PEG Attack	×	×	O	×	×	O
94	PEG Release Time	PEG Release	×	×	O	×	×	O
95	AEG Attack Time	AEG Attack	×	×	O	×	×	O
96	AEG Decay 1&2 Time	AEG Decay 1&2	×	×	O	×	×	O
97	AEG Release Time	AEG Release	×	×	O	×	×	O
98	FEG Depth	FEG Depth	×	×	O	×	×	O
99	FEG Attack Time	FEG Attack	×	×	O	×	×	O
100	FEG Decay 1&2 Time	FEG Decay 1&2	×	×	O	×	×	O*3
101	FEG Release Time	FEG Release	×	×	O	×	×	O
102	Filter Cutoff Frequency	Cutoff	×	×	O	×	×	O
103	Filter Resonance	Resonance	×	×	O	×	×	O
104	Feedback	Feedback	×	×	O	×	×	O
105	OP1-8 Frequency	OP Freq	×	×	O	×	×	×
106	OP1-8 Output Level	OP Level	×	×	O	×	×	×
107	OP1-8 Spectral Form	OP Spectral	×	×	O	×	×	×
108	OP1-8 Spectral Skirt	OP Skirt	×	×	O	×	×	×
109	OP1-8 Spectral Resonance	OP Resonance	×	×	O	×	×	×
110	OP1-8 Detune	OP Detune	×	×	O	×	×	×
111	OP1-8 EG Level Offset	OP AEG Offset	×	×	O	×	×	×
112	OP1-8 EG Time1	OP AEG Attack	×	×	O	×	×	×
113	OP1-8 EG Time2	OP AEG Decay1	×	×	O	×	×	×
114	OP1-8 EG Time3	OP AEG Decay2	×	×	O	×	×	×
115	OP1-8 EG Time4	OP AEG Release	×	×	O	×	×	×
116	OP1-8 Pitch EG Attack Time	OP PEG Attack	×	×	O	×	×	×
117	OP1-8 Pitch EG Decay Time	OP PEG Decay	×	×	O	×	×	×
AN-X Parameter								
118	AN-X Pan	AN-X Pan	×	×	×	O	×	×
119	LFO Speed (Common)	LFO Speed	×	×	×	O	×	O
120	Pitch EG Attack Time	PEG Attack	×	×	×	O	×	O
121	Pitch EG Release Time	PEG Release	×	×	×	O	×	O
122	Oscillator1-3 Wave	OSC Wave	×	×	×	O	×	×
123	Oscillator1-3 Frequency	OSC Freq	×	×	×	O	×	×
124	Oscillator1-3 Pitch LFO Depth	OSC Pitch LFO	×	×	×	O	×	×
125	Oscillator1-3 Pulse Width	OSC Pulse Width	×	×	×	O	×	×
126	Oscillator1-3 Pulse Width EG Depth	OSC PW EG	×	×	×	O	×	×
127	Oscillator1-3 Pulse Width LFO Depth	OSC PW LFO	×	×	×	O	×	×
128	Oscillator1-3 Self Sync Pitch	OSC Sync Pitch	×	×	×	O	×	×
129	Oscillator1-3 Self Sync EG Depth	OSC Sync EG	×	×	×	O	×	×
130	Oscillator1-3 Self Sync LFO Depth	OSC Sync LFO	×	×	×	O	×	×
131	Oscillator1-3 Wave Shaper	OSC Shaper	×	×	×	O	×	×
132	Oscillator1-3 Wave Shaper EG Depth	OSC Shaper EG	×	×	×	O	×	×
133	Oscillator1-3 Wave Shaper LFO Depth	OSC Shaper LFO	×	×	×	O	×	×
134	Oscillator1-2 FM Level	OSC FM	×	×	×	O	×	×
135	Oscillator1-2 Ring Level	OSC Ring	×	×	×	O	×	×
136	Oscillator1-3 Out Level	OSC Output	×	×	×	O	×	×
137	Noise Oscillator Tone	Noise Tone	×	×	×	O	×	O
138	Noise Oscillator Out Level	Noise Output	×	×	×	O	×	O
139	Filter Cutoff EG Attack Time	FEG Attack	×	×	×	O	×	O
140	Filter Cutoff EG Decay Time	FEG Decay	×	×	×	O	×	O
141	Filter Cutoff EG Release Time	FEG Release	×	×	×	O	×	O

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
142	Filter1-2 Cutoff	Cutoff	×	×	×	O	×	×
143	Filter1-2 Cutoff EG Depth	Cutoff EG	×	×	×	O	×	×
144	Filter1-2 Cutoff LFO Depth	Cutoff LFO	×	×	×	O	×	×
145	Filter1-2 Resonance	Resonance	×	×	×	O	×	×
146	Filter1-2 Saturator Drive	Drive	×	×	×	O	×	×
147	Amplitude EG Attack Time	AEG Attack	×	×	×	O	×	O
148	Amplitude EG Decay Time	AEG Decay	×	×	×	O	×	O
149	Amplitude EG Release Time	AEG Release	×	×	×	O	×	O
150	Amplitude Level LFO Depth	Amp LFO	×	×	×	O	×	O
System Parameter								
151	Reverb Effect Parameter 1	Rev Param 1	×	×	×	×	O	O
152	Reverb Effect Parameter 2	Rev Param 2	×	×	×	×	O	O
153	Reverb Effect Parameter 3	Rev Param 3	×	×	×	×	O	O
154	Reverb Effect Parameter 4	Rev Param 4	×	×	×	×	O	O
155	Reverb Effect Parameter 5	Rev Param 5	×	×	×	×	O	O
156	Reverb Effect Parameter 6	Rev Param 6	×	×	×	×	O	O
157	Reverb Effect Parameter 7	Rev Param 7	×	×	×	×	O	O
158	Reverb Effect Parameter 8	Rev Param 8	×	×	×	×	O	O
159	Reverb Effect Parameter 9	Rev Param 9	×	×	×	×	O	O
160	Reverb Effect Parameter 10	Rev Param 10	×	×	×	×	O	O
161	Reverb Effect Parameter 11	Rev Param 11	×	×	×	×	O	O
162	Reverb Effect Parameter 12	Rev Param 12	×	×	×	×	O	O
163	Reverb Effect Parameter 13	Rev Param 13	×	×	×	×	O	O
164	Reverb Effect Parameter 14	Rev Param 14	×	×	×	×	O	O
165	Reverb Effect Parameter 15	Rev Param 15	×	×	×	×	O	O
166	Reverb Effect Parameter 16	Rev Param 16	×	×	×	×	O	O
167	Reverb Effect Parameter 17	Rev Param 17	×	×	×	×	O	O
168	Reverb Effect Parameter 18	Rev Param 18	×	×	×	×	O	O
169	Reverb Effect Parameter 19	Rev Param 19	×	×	×	×	O	O
170	Reverb Effect Parameter 20	Rev Param 20	×	×	×	×	O	O
171	Reverb Effect Parameter 21	Rev Param 21	×	×	×	×	O	O
172	Reverb Effect Parameter 22	Rev Param 22	×	×	×	×	O	O
173	Reverb Effect Parameter 23	Rev Param 23	×	×	×	×	O	O
174	Reverb Effect Parameter 24	Rev Param 24	×	×	×	×	O	O
175	Variation Effect Parameter 1	Var Param 1	×	×	×	×	O	O
176	Variation Effect Parameter 2	Var Param 2	×	×	×	×	O	O
177	Variation Effect Parameter 3	Var Param 3	×	×	×	×	O	O
178	Variation Effect Parameter 4	Var Param 4	×	×	×	×	O	O
179	Variation Effect Parameter 5	Var Param 5	×	×	×	×	O	O
180	Variation Effect Parameter 6	Var Param 6	×	×	×	×	O	O
181	Variation Effect Parameter 7	Var Param 7	×	×	×	×	O	O
182	Variation Effect Parameter 8	Var Param 8	×	×	×	×	O	O
183	Variation Effect Parameter 9	Var Param 9	×	×	×	×	O	O
184	Variation Effect Parameter 10	Var Param 10	×	×	×	×	O	O
185	Variation Effect Parameter 11	Var Param 11	×	×	×	×	O	O
186	Variation Effect Parameter 12	Var Param 12	×	×	×	×	O	O
187	Variation Effect Parameter 13	Var Param 13	×	×	×	×	O	O
188	Variation Effect Parameter 14	Var Param 14	×	×	×	×	O	O
189	Variation Effect Parameter 15	Var Param 15	×	×	×	×	O	O
190	Variation Effect Parameter 16	Var Param 16	×	×	×	×	O	O
191	Variation Effect Parameter 17	Var Param 17	×	×	×	×	O	O
192	Variation Effect Parameter 18	Var Param 18	×	×	×	×	O	O
193	Variation Effect Parameter 19	Var Param 19	×	×	×	×	O	O
194	Variation Effect Parameter 20	Var Param 20	×	×	×	×	O	O
195	Variation Effect Parameter 21	Var Param 21	×	×	×	×	O	O
196	Variation Effect Parameter 22	Var Param 22	×	×	×	×	O	O
197	Variation Effect Parameter 23	Var Param 23	×	×	×	×	O	O
198	Variation Effect Parameter 24	Var Param 24	×	×	×	×	O	O
199	Master Effect Parameter 1	Mfx Param 1	×	×	×	×	O	O
200	Master Effect Parameter 2	Mfx Param 2	×	×	×	×	O	O
201	Master Effect Parameter 3	Mfx Param 3	×	×	×	×	O	O
202	Master Effect Parameter 4	Mfx Param 4	×	×	×	×	O	O
203	Master Effect Parameter 5	Mfx Param 5	×	×	×	×	O	O
204	Master Effect Parameter 6	Mfx Param 6	×	×	×	×	O	O
205	Master Effect Parameter 7	Mfx Param 7	×	×	×	×	O	O
206	Master Effect Parameter 8	Mfx Param 8	×	×	×	×	O	O
207	Master Effect Parameter 9	Mfx Param 9	×	×	×	×	O	O
208	Master Effect Parameter 10	Mfx Param 10	×	×	×	×	O	O
209	Master Effect Parameter 11	Mfx Param 11	×	×	×	×	O	O
210	Master Effect Parameter 12	Mfx Param 12	×	×	×	×	O	O
211	Master Effect Parameter 13	Mfx Param 13	×	×	×	×	O	O
212	Master Effect Parameter 14	Mfx Param 14	×	×	×	×	O	O
213	Master Effect Parameter 15	Mfx Param 15	×	×	×	×	O	O

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
214	Master Effect Parameter 16	Mfx Param 16	×	×	×	×	○	○
215	Master Effect Parameter 17	Mfx Param 17	×	×	×	×	○	○
216	Master Effect Parameter 18	Mfx Param 18	×	×	×	×	○	○
217	Master Effect Parameter 19	Mfx Param 19	×	×	×	×	○	○
218	Master Effect Parameter 20	Mfx Param 20	×	×	×	×	○	○
219	Master Effect Parameter 21	Mfx Param 21	×	×	×	×	○	○
220	Master Effect Parameter 22	Mfx Param 22	×	×	×	×	○	○
221	Master Effect Parameter 23	Mfx Param 23	×	×	×	×	○	○
222	Master Effect Parameter 24	Mfx Param 24	×	×	×	×	○	○
AD Parameter								
223	Part Volume	AD Volume	×	×	×	×	○	○
224	Part Reverb Send	AD Rev Send	×	×	×	×	○	○
225	Part Variation Send	AD Var Send	×	×	×	×	○	○
Part Assignable Knob								
226	Part 1 Assignable Knob 1	Part 1 Assign 1	×	×	×	×	○	×
227	Part 1 Assignable Knob 2	Part 1 Assign 2	×	×	×	×	○	×
228	Part 1 Assignable Knob 3	Part 1 Assign 3	×	×	×	×	○	×
229	Part 1 Assignable Knob 4	Part 1 Assign 4	×	×	×	×	○	×
230	Part 1 Assignable Knob 5	Part 1 Assign 5	×	×	×	×	○	×
231	Part 1 Assignable Knob 6	Part 1 Assign 6	×	×	×	×	○	×
232	Part 1 Assignable Knob 7	Part 1 Assign 7	×	×	×	×	○	×
233	Part 1 Assignable Knob 8	Part 1 Assign 8	×	×	×	×	○	×
234	Part 2 Assignable Knob 1	Part 2 Assign 1	×	×	×	×	○	×
235	Part 2 Assignable Knob 2	Part 2 Assign 2	×	×	×	×	○	×
236	Part 2 Assignable Knob 3	Part 2 Assign 3	×	×	×	×	○	×
237	Part 2 Assignable Knob 4	Part 2 Assign 4	×	×	×	×	○	×
238	Part 2 Assignable Knob 5	Part 2 Assign 5	×	×	×	×	○	×
239	Part 2 Assignable Knob 6	Part 2 Assign 6	×	×	×	×	○	×
240	Part 2 Assignable Knob 7	Part 2 Assign 7	×	×	×	×	○	×
241	Part 2 Assignable Knob 8	Part 2 Assign 8	×	×	×	×	○	×
242	Part 3 Assignable Knob 1	Part 3 Assign 1	×	×	×	×	○	×
243	Part 3 Assignable Knob 2	Part 3 Assign 2	×	×	×	×	○	×
244	Part 3 Assignable Knob 3	Part 3 Assign 3	×	×	×	×	○	×
245	Part 3 Assignable Knob 4	Part 3 Assign 4	×	×	×	×	○	×
246	Part 3 Assignable Knob 5	Part 3 Assign 5	×	×	×	×	○	×
247	Part 3 Assignable Knob 6	Part 3 Assign 6	×	×	×	×	○	×
248	Part 3 Assignable Knob 7	Part 3 Assign 7	×	×	×	×	○	×
249	Part 3 Assignable Knob 8	Part 3 Assign 8	×	×	×	×	○	×
250	Part 4 Assignable Knob 1	Part 4 Assign 1	×	×	×	×	○	×
251	Part 4 Assignable Knob 2	Part 4 Assign 2	×	×	×	×	○	×
252	Part 4 Assignable Knob 3	Part 4 Assign 3	×	×	×	×	○	×
253	Part 4 Assignable Knob 4	Part 4 Assign 4	×	×	×	×	○	×
254	Part 4 Assignable Knob 5	Part 4 Assign 5	×	×	×	×	○	×
255	Part 4 Assignable Knob 6	Part 4 Assign 6	×	×	×	×	○	×
256	Part 4 Assignable Knob 7	Part 4 Assign 7	×	×	×	×	○	×
257	Part 4 Assignable Knob 8	Part 4 Assign 8	×	×	×	×	○	×
258	Part 5 Assignable Knob 1	Part 5 Assign 1	×	×	×	×	○	×
259	Part 5 Assignable Knob 2	Part 5 Assign 2	×	×	×	×	○	×
260	Part 5 Assignable Knob 3	Part 5 Assign 3	×	×	×	×	○	×
261	Part 5 Assignable Knob 4	Part 5 Assign 4	×	×	×	×	○	×
262	Part 5 Assignable Knob 5	Part 5 Assign 5	×	×	×	×	○	×
263	Part 5 Assignable Knob 6	Part 5 Assign 6	×	×	×	×	○	×
264	Part 5 Assignable Knob 7	Part 5 Assign 7	×	×	×	×	○	×
265	Part 5 Assignable Knob 8	Part 5 Assign 8	×	×	×	×	○	×
266	Part 6 Assignable Knob 1	Part 6 Assign 1	×	×	×	×	○	×
267	Part 6 Assignable Knob 2	Part 6 Assign 2	×	×	×	×	○	×
268	Part 6 Assignable Knob 3	Part 6 Assign 3	×	×	×	×	○	×
269	Part 6 Assignable Knob 4	Part 6 Assign 4	×	×	×	×	○	×
270	Part 6 Assignable Knob 5	Part 6 Assign 5	×	×	×	×	○	×
271	Part 6 Assignable Knob 6	Part 6 Assign 6	×	×	×	×	○	×
272	Part 6 Assignable Knob 7	Part 6 Assign 7	×	×	×	×	○	×
273	Part 6 Assignable Knob 8	Part 6 Assign 8	×	×	×	×	○	×
274	Part 7 Assignable Knob 1	Part 7 Assign 1	×	×	×	×	○	×
275	Part 7 Assignable Knob 2	Part 7 Assign 2	×	×	×	×	○	×
276	Part 7 Assignable Knob 3	Part 7 Assign 3	×	×	×	×	○	×
277	Part 7 Assignable Knob 4	Part 7 Assign 4	×	×	×	×	○	×
278	Part 7 Assignable Knob 5	Part 7 Assign 5	×	×	×	×	○	×
279	Part 7 Assignable Knob 6	Part 7 Assign 6	×	×	×	×	○	×
280	Part 7 Assignable Knob 7	Part 7 Assign 7	×	×	×	×	○	×
281	Part 7 Assignable Knob 8	Part 7 Assign 8	×	×	×	×	○	×
282	Part 8 Assignable Knob 1	Part 8 Assign 1	×	×	×	×	○	×
283	Part 8 Assignable Knob 2	Part 8 Assign 2	×	×	×	×	○	×
284	Part 8 Assignable Knob 3	Part 8 Assign 3	×	×	×	×	○	×

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
285	Part 8 Assignable Knob 4	Part 8 Assign 4	×	×	×	×	○	×
286	Part 8 Assignable Knob 5	Part 8 Assign 5	×	×	×	×	○	×
287	Part 8 Assignable Knob 6	Part 8 Assign 6	×	×	×	×	○	×
288	Part 8 Assignable Knob 7	Part 8 Assign 7	×	×	×	×	○	×
289	Part 8 Assignable Knob 8	Part 8 Assign 8	×	×	×	×	○	×
290	Part 9 Assignable Knob 1	Part 9 Assign 1	×	×	×	×	○	×
291	Part 9 Assignable Knob 2	Part 9 Assign 2	×	×	×	×	○	×
292	Part 9 Assignable Knob 3	Part 9 Assign 3	×	×	×	×	○	×
293	Part 9 Assignable Knob 4	Part 9 Assign 4	×	×	×	×	○	×
294	Part 9 Assignable Knob 5	Part 9 Assign 5	×	×	×	×	○	×
295	Part 9 Assignable Knob 6	Part 9 Assign 6	×	×	×	×	○	×
296	Part 9 Assignable Knob 7	Part 9 Assign 7	×	×	×	×	○	×
297	Part 9 Assignable Knob 8	Part 9 Assign 8	×	×	×	×	○	×
298	Part 10 Assignable Knob 1	Part 10 Assign 1	×	×	×	×	○	×
299	Part 10 Assignable Knob 2	Part 10 Assign 2	×	×	×	×	○	×
300	Part 10 Assignable Knob 3	Part 10 Assign 3	×	×	×	×	○	×
301	Part 10 Assignable Knob 4	Part 10 Assign 4	×	×	×	×	○	×
302	Part 10 Assignable Knob 5	Part 10 Assign 5	×	×	×	×	○	×
303	Part 10 Assignable Knob 6	Part 10 Assign 6	×	×	×	×	○	×
304	Part 10 Assignable Knob 7	Part 10 Assign 7	×	×	×	×	○	×
305	Part 10 Assignable Knob 8	Part 10 Assign 8	×	×	×	×	○	×
306	Part 11 Assignable Knob 1	Part 11 Assign 1	×	×	×	×	○	×
307	Part 11 Assignable Knob 2	Part 11 Assign 2	×	×	×	×	○	×
308	Part 11 Assignable Knob 3	Part 11 Assign 3	×	×	×	×	○	×
309	Part 11 Assignable Knob 4	Part 11 Assign 4	×	×	×	×	○	×
310	Part 11 Assignable Knob 5	Part 11 Assign 5	×	×	×	×	○	×
311	Part 11 Assignable Knob 6	Part 11 Assign 6	×	×	×	×	○	×
312	Part 11 Assignable Knob 7	Part 11 Assign 7	×	×	×	×	○	×
313	Part 11 Assignable Knob 8	Part 11 Assign 8	×	×	×	×	○	×
314	Part 12 Assignable Knob 1	Part 12 Assign 1	×	×	×	×	○	×
315	Part 12 Assignable Knob 2	Part 12 Assign 2	×	×	×	×	○	×
316	Part 12 Assignable Knob 3	Part 12 Assign 3	×	×	×	×	○	×
317	Part 12 Assignable Knob 4	Part 12 Assign 4	×	×	×	×	○	×
318	Part 12 Assignable Knob 5	Part 12 Assign 5	×	×	×	×	○	×
319	Part 12 Assignable Knob 6	Part 12 Assign 6	×	×	×	×	○	×
320	Part 12 Assignable Knob 7	Part 12 Assign 7	×	×	×	×	○	×
321	Part 12 Assignable Knob 8	Part 12 Assign 8	×	×	×	×	○	×
322	Part 13 Assignable Knob 1	Part 13 Assign 1	×	×	×	×	○	×
323	Part 13 Assignable Knob 2	Part 13 Assign 2	×	×	×	×	○	×
324	Part 13 Assignable Knob 3	Part 13 Assign 3	×	×	×	×	○	×
325	Part 13 Assignable Knob 4	Part 13 Assign 4	×	×	×	×	○	×
326	Part 13 Assignable Knob 5	Part 13 Assign 5	×	×	×	×	○	×
327	Part 13 Assignable Knob 6	Part 13 Assign 6	×	×	×	×	○	×
328	Part 13 Assignable Knob 7	Part 13 Assign 7	×	×	×	×	○	×
329	Part 13 Assignable Knob 8	Part 13 Assign 8	×	×	×	×	○	×
330	Part 14 Assignable Knob 1	Part 14 Assign 1	×	×	×	×	○	×
331	Part 14 Assignable Knob 2	Part 14 Assign 2	×	×	×	×	○	×
332	Part 14 Assignable Knob 3	Part 14 Assign 3	×	×	×	×	○	×
333	Part 14 Assignable Knob 4	Part 14 Assign 4	×	×	×	×	○	×
334	Part 14 Assignable Knob 5	Part 14 Assign 5	×	×	×	×	○	×
335	Part 14 Assignable Knob 6	Part 14 Assign 6	×	×	×	×	○	×
336	Part 14 Assignable Knob 7	Part 14 Assign 7	×	×	×	×	○	×
337	Part 14 Assignable Knob 8	Part 14 Assign 8	×	×	×	×	○	×
338	Part 15 Assignable Knob 1	Part 15 Assign 1	×	×	×	×	○	×
339	Part 15 Assignable Knob 2	Part 15 Assign 2	×	×	×	×	○	×
340	Part 15 Assignable Knob 3	Part 15 Assign 3	×	×	×	×	○	×
341	Part 15 Assignable Knob 4	Part 15 Assign 4	×	×	×	×	○	×
342	Part 15 Assignable Knob 5	Part 15 Assign 5	×	×	×	×	○	×
343	Part 15 Assignable Knob 6	Part 15 Assign 6	×	×	×	×	○	×
344	Part 15 Assignable Knob 7	Part 15 Assign 7	×	×	×	×	○	×
345	Part 15 Assignable Knob 8	Part 15 Assign 8	×	×	×	×	○	×
346	Part 16 Assignable Knob 1	Part 16 Assign 1	×	×	×	×	○	×
347	Part 16 Assignable Knob 2	Part 16 Assign 2	×	×	×	×	○	×
348	Part 16 Assignable Knob 3	Part 16 Assign 3	×	×	×	×	○	×
349	Part 16 Assignable Knob 4	Part 16 Assign 4	×	×	×	×	○	×
350	Part 16 Assignable Knob 5	Part 16 Assign 5	×	×	×	×	○	×
351	Part 16 Assignable Knob 6	Part 16 Assign 6	×	×	×	×	○	×
352	Part 16 Assignable Knob 7	Part 16 Assign 7	×	×	×	×	○	×
353	Part 16 Assignable Knob 8	Part 16 Assign 8	×	×	×	×	○	×
Non-TG Parameter								
354	Performance Volume	Volume	×	×	×	×	○	○
355	Performance Pan	Perf Pan	×	×	×	×	○	○
356	Part Pan	Part Pan	○	○	○	○	×	○

No.	Parameter	Short Name	Multi Part				Common / Audio Part	Ribbon Grid Mode
			AWM Part	AWM Drum	FM-X Part	AN-X Part		
357	Portamento Time	Porta Time	×	×	×	×	O	O
358	Variation Return	Var Return	×	×	×	×	O	O
359	Reverb Return	Rev Return	×	×	×	×	O	O
360	Tempo	Tempo	×	×	×	×	O	O
361	Arp Gate Time	Arp Gate Time	O	O	O	O	O	O
362	Arp Velocity	Arp Vel	O	O	O	O	O	O
363	Arp Quantize Value	Arp Qntz Value	O	O	O	O	×	×
364	Arp Quantize Strength	Arp Qntz Str	O	O	O	O	O	O
365	Arp Octave Shift	Arp Oct Shift	O	O	O	O	O	O
366	Arp Octave Range	Arp Oct Range	O	O	O	O	O	O
367	Arp / Motion Seq Swing	Swing	O	O	O	O	O	O
368	Arp Unit Multiply	Unit Multiply	O	O	O	O	O	O
369	Motion Seq Amplitude	MS Amp	O	O	O	O	O	O
370	Motion Seq Shape	MS Shape	O	O	O	O	O	O
371	Motion Seq Smooth	MS Smooth	O	O	O	O	O	O
372	Motion Seq Random	MS Random	O	O	O	O	O	O
373	Motion Seq Grid	MS Grid	O	O	O	O	O	O*2
374	Motion Seq Length	MS Length	O	O	O	O	O	O*2
AN-X Parameter 2								
375	Unison Detune	U Detune	×	×	×	O	×	O
376	Unison Spread	U Spread	×	×	×	O	×	O
VCM Rotary Parameter								
377	VCM Rotary Parameter 1	Rtr Param 1	O *1	×	O *1	O *1	×	×
378	VCM Rotary Parameter 2	Rtr Param 2	O *1	×	O *1	O *1	×	×
379	VCM Rotary Parameter 3	Rtr Param 3	O *1	×	O *1	O *1	×	O *1
380	VCM Rotary Parameter 4	Rtr Param 4	O *1	×	O *1	O *1	×	×
381	VCM Rotary Parameter 5	Rtr Param 5	O *1	×	O *1	O *1	×	×
382	VCM Rotary Parameter 6	Rtr Param 6	O *1	×	O *1	O *1	×	×
383	VCM Rotary Parameter 7	Rtr Param 7	O *1	×	O *1	O *1	×	×
384	VCM Rotary Parameter 8	Rtr Param 8	O *1	×	O *1	O *1	×	×
385	VCM Rotary Parameter 9	Rtr Param 9	O *1	×	O *1	O *1	×	×
386	VCM Rotary Parameter 10	Rtr Param 10	O *1	×	O *1	O *1	×	×
387	VCM Rotary Parameter 11	Rtr Param 11	O *1	×	O *1	O *1	×	×
388	VCM Rotary Parameter 12	Rtr Param 12	O *1	×	O *1	O *1	×	×
389	VCM Rotary Parameter 13	Rtr Param 13	O *1	×	O *1	O *1	×	×
390	VCM Rotary Parameter 14	Rtr Param 14	O *1	×	O *1	O *1	×	×
391	VCM Rotary Parameter 15	Rtr Param 15	O *1	×	O *1	O *1	×	×
392	VCM Rotary Parameter 16	Rtr Param 16	O *1	×	O *1	O *1	×	×
393	VCM Rotary Parameter 17	Rtr Param 17	O *1	×	O *1	O *1	×	×
394	VCM Rotary Parameter 18	Rtr Param 18	O *1	×	O *1	O *1	×	×
395	VCM Rotary Parameter 19	Rtr Param 19	O *1	×	O *1	O *1	×	×
396	VCM Rotary Parameter 20	Rtr Param 20	O *1	×	O *1	O *1	×	×
397	VCM Rotary Parameter 21	Rtr Param 21	O *1	×	O *1	O *1	×	×
398	VCM Rotary Parameter 22	Rtr Param 22	O *1	×	O *1	O *1	×	×
399	VCM Rotary Parameter 23	Rtr Param 23	O *1	×	O *1	O *1	×	×
400	VCM Rotary Parameter 24	Rtr Param 24	O *1	×	O *1	O *1	×	×
AN-X Parameter 3								
401	LFO Speed Pitch	LFO Spd Pitch	×	×	×	O	×	O
402	LFO Speed OSC	LFO Spd OSC	×	×	×	O	×	×
403	LFO Speed Modifier	LFO Spd Mod	×	×	×	O	×	O
404	LFO Speed Filter	LFO Spd Filter	×	×	×	O	×	O
405	LFO Speed Amplitude	LFO Spd Amp	×	×	×	O	×	O
406	Modifier Wave Folder	Wave Folder	×	×	×	O	×	O
407	Modifier Wave Folder EG Depth	Folder EG	×	×	×	O	×	O
408	Modifier Wave Folder LFO Depth	Folder LFO	×	×	×	O	×	O
409	Modifier Wave Folder Texture	Folder Texture	×	×	×	O	×	O
410	Modifier Wave Folder Type	Folder Type	×	×	×	O	×	O
411	Modifier EG Attack Time	M.EG Attack	×	×	×	O	×	O
412	Modifier EG Decay Time	M.EG Decay	×	×	×	O	×	O
413	Modifier EG Release Time	M.EG Release	×	×	×	O	×	O

LFO Box Destination

No.	Parameter	Short Name	Multi Part				Audio Part
			AWM Part	AWM Drum	FM-X Part	AN-X Part	
Common Parameter							
0	Insertion Effect A Parameter 1	InsA Param 1	O	×	O	O	-
1	Insertion Effect A Parameter 2	InsA Param 2	O	×	O	O	-
2	Insertion Effect A Parameter 3	InsA Param 3	O	×	O	O	-
3	Insertion Effect A Parameter 4	InsA Param 4	O	×	O	O	-
4	Insertion Effect A Parameter 5	InsA Param 5	O	×	O	O	-
5	Insertion Effect A Parameter 6	InsA Param 6	O	×	O	O	-
6	Insertion Effect A Parameter 7	InsA Param 7	O	×	O	O	-
7	Insertion Effect A Parameter 8	InsA Param 8	O	×	O	O	-
8	Insertion Effect A Parameter 9	InsA Param 9	O	×	O	O	-
9	Insertion Effect A Parameter 10	InsA Param 10	O	×	O	O	-
10	Insertion Effect A Parameter 11	InsA Param 11	O	×	O	O	-
11	Insertion Effect A Parameter 12	InsA Param 12	O	×	O	O	-
12	Insertion Effect A Parameter 13	InsA Param 13	O	×	O	O	-
13	Insertion Effect A Parameter 14	InsA Param 14	O	×	O	O	-
14	Insertion Effect A Parameter 15	InsA Param 15	O	×	O	O	-
15	Insertion Effect A Parameter 16	InsA Param 16	O	×	O	O	-
16	Insertion Effect A Parameter 17	InsA Param 17	O	×	O	O	-
17	Insertion Effect A Parameter 18	InsA Param 18	O	×	O	O	-
18	Insertion Effect A Parameter 19	InsA Param 19	O	×	O	O	-
19	Insertion Effect A Parameter 20	InsA Param 20	O	×	O	O	-
20	Insertion Effect A Parameter 21	InsA Param 21	O	×	O	O	-
21	Insertion Effect A Parameter 22	InsA Param 22	O	×	O	O	-
22	Insertion Effect A Parameter 23	InsA Param 23	O	×	O	O	-
23	Insertion Effect A Parameter 24	InsA Param 24	O	×	O	O	-
24	reserved		×	×	×	×	-
25	reserved		×	×	×	×	-
26	reserved		×	×	×	×	-
27	reserved		×	×	×	×	-
28	reserved		×	×	×	×	-
29	reserved		×	×	×	×	-
30	reserved		×	×	×	×	-
31	reserved		×	×	×	×	-
32	Insertion Effect B Parameter 1	InsB Param 1	O	×	O	O	-
33	Insertion Effect B Parameter 2	InsB Param 2	O	×	O	O	-
34	Insertion Effect B Parameter 3	InsB Param 3	O	×	O	O	-
35	Insertion Effect B Parameter 4	InsB Param 4	O	×	O	O	-
36	Insertion Effect B Parameter 5	InsB Param 5	O	×	O	O	-
37	Insertion Effect B Parameter 6	InsB Param 6	O	×	O	O	-
38	Insertion Effect B Parameter 7	InsB Param 7	O	×	O	O	-
39	Insertion Effect B Parameter 8	InsB Param 8	O	×	O	O	-
40	Insertion Effect B Parameter 9	InsB Param 9	O	×	O	O	-
41	Insertion Effect B Parameter 10	InsB Param 10	O	×	O	O	-
42	Insertion Effect B Parameter 11	InsB Param 11	O	×	O	O	-
43	Insertion Effect B Parameter 12	InsB Param 12	O	×	O	O	-
44	Insertion Effect B Parameter 13	InsB Param 13	O	×	O	O	-
45	Insertion Effect B Parameter 14	InsB Param 14	O	×	O	O	-
46	Insertion Effect B Parameter 15	InsB Param 15	O	×	O	O	-
47	Insertion Effect B Parameter 16	InsB Param 16	O	×	O	O	-
48	Insertion Effect B Parameter 17	InsB Param 17	O	×	O	O	-
49	Insertion Effect B Parameter 18	InsB Param 18	O	×	O	O	-
50	Insertion Effect B Parameter 19	InsB Param 19	O	×	O	O	-
51	Insertion Effect B Parameter 20	InsB Param 20	O	×	O	O	-
52	Insertion Effect B Parameter 21	InsB Param 21	O	×	O	O	-
53	Insertion Effect B Parameter 22	InsB Param 22	O	×	O	O	-
54	Insertion Effect B Parameter 23	InsB Param 23	O	×	O	O	-
55	Insertion Effect B Parameter 24	InsB Param 24	O	×	O	O	-
56	reserved		×	×	×	×	-
57	reserved		×	×	×	×	-
58	reserved		×	×	×	×	-
59	reserved		×	×	×	×	-
60	reserved		×	×	×	×	-
61	reserved		×	×	×	×	-
62	reserved		×	×	×	×	-
63	reserved		×	×	×	×	-
AWM Parameter							
64	Element Level	Level	O	×	×	×	-
65	Element Pitch	Pitch	O	×	×	×	-
66	Element Filter Cutoff	Cutoff	O	×	×	×	-
67	Element Filter Resonance/Width	Resonance	O	×	×	×	-
68	Element Pan	Pan	O	×	×	×	-
69	Element LFO Speed	E.LFO Speed	O	×	×	×	-

	No.	Parameter	Short Name	Multi Part				Audio Part
				AWM Part	AWM Drum	FM-X Part	AN-X Part	
FM Parameter								
	70	Pan	Pan	×	×	O	×	-
	71	LFO Speed	2nd LFO Speed	×	×	O	×	-
	72	Filter Cutoff Frequency	Cutoff	×	×	O	×	-
	73	Filter Resonance	Resonance	×	×	O	×	-
	74	Feedback	Feedback	×	×	O	×	-
	75	OP1-8 Frequency	Op Freq	×	×	O	×	-
	76	OP1-8 Spectral Form	Op Spectral	×	×	O	×	-
	77	OP1-8 Detune	Op Detune	×	×	O	×	-
	78	OP1-8 Output Level	Op Level	×	×	O	×	-
AN-X Parameter								
	79	Pan	Pan	×	×	×	O	-
	80	LFO Speed (Common)	LFO Speed	×	×	×	O	-
	81	Oscillator1-2 FM Level	FM Level	×	×	×	O	-
	82	Oscillator1-2 Ring Level	Ring Level	×	×	×	O	-
	83	Oscillator1-3 Out Level	Osc Level	×	×	×	O	-
	84	Noise Generator Tone	Noise Tone	×	×	×	O	-
	85	Noise Generator Out Level	Noise Level	×	×	×	O	-
	86	Modifier Wave Folder Texture	Folder Texture	×	×	×	O	-
	87	Filter1-2 Cutoff	Cutoff	×	×	×	O	-
	88	Filter1-2 Resonance	Resonance	×	×	×	O	-

Key Controller Box Destination

Value	Parameter	Category	Multi Part				Audio Part
			AWM Normal	AWM Drum	FM-X Part	AN-X Part	
0	Off	-	O	O	O	O	-
1	Part Pitch (Pitch)	Common	O	-	O	O	-
2	Element Level	AWM TG	O	-	×	×	-
3	Element Pan		O	-	×	×	-
4	Element LFO Speed		O	-	×	×	-
5	Element LFO PMD		O	-	×	×	-
6	Element LFO AMD		O	-	×	×	-
7	Element LFO FMD		O	-	×	×	-
8	Element Fine Tune		O	-	×	×	-
9	Element Cutoff Frequency		O	-	×	×	-
10	Element Resonance		O	-	×	×	-
11	Element HPF Cutoff Frequency		O	-	×	×	-
12	Pan	FM-X TG	×	-	O	×	-
13	LFO Speed		×	-	O	×	-
14	LFO PMD		×	-	O	×	-
15	LFO AMD		×	-	O	×	-
16	LFO FMD		×	-	O	×	-
17	Filter Cutoff Frequency		×	-	O	×	-
18	Filter Resonance		×	-	O	×	-
19	Feedback		×	-	O	×	-
20	OP1-8 Frequency		×	-	O	×	-
21	OP1-8 Spectral Form		×	-	O	×	-
22	OP1-8 Spectral Skirt		×	-	O	×	-
23	OP1-8 Spectral Resonance		×	-	O	×	-
24	OP1-8 Detune		×	-	O	×	-
25	OP1-8 EG Level Offset		×	-	O	×	-
26	OP1-8 Output Level		×	-	O	×	-
27	Pan	AN-X TG	×	-	×	O	-
28	LFO Speed (Common)		×	-	×	O	-
29	Oscillator1-3 Wave		×	-	×	O	-
30	Oscillator1-3 Pitch LFO Depth		×	-	×	O	-
31	Oscillator1-3 Pulse Width		×	-	×	O	-
32	Oscillator1-3 Pulse Width LFO Depth		×	-	×	O	-
33	Oscillator1-3 Sync Pitch		×	-	×	O	-
34	Oscillator1-3 Sync LFO Depth		×	-	×	O	-
35	Oscillator1-3 Wave Shaper		×	-	×	O	-
36	Oscillator1-3 Wave Shaper LFO Depth		×	-	×	O	-
37	Oscillator1-2 FM Level		×	-	×	O	-
38	Oscillator1-2 Ring Level		×	-	×	O	-
39	Oscillator1-3 Out Level		×	-	×	O	-
40	Noise Oscillator Tone		×	-	×	O	-
41	Noise Oscillator Out Level		×	-	×	O	-
42	Filter1-2 Cutoff		×	-	×	O	-
43	Filter1-2 Cutoff EG Depth		×	-	×	O	-
44	Filter1-2 Cutoff LFO Depth		×	-	×	O	-
45	Filter1-2 Resonance		×	-	×	O	-
46	Filter1-2 Saturator Drive		×	-	×	O	-
47	Amplitude Level LFO Depth		×	-	×	O	-
48	Unison Detune	AN-X TG 2	×	-	×	O	-
49	Unison Spread		×	-	×	O	-
50	LFO Speed Pitch		×	-	×	O	-
51	LFO Speed OSC		×	-	×	O	-
52	LFO Speed Modifier		×	-	×	O	-
53	LFO Speed Filter		×	-	×	O	-
54	LFO Speed Amplitude		×	-	×	O	-
55	Oscillator1?3 Frequency		×	-	×	O	-
56	Modifier Wave Folder		×	-	×	O	-
57	Modifier Wave Folder LFO Depth		×	-	×	O	-
58	Modifier Wave Folder Texture		×	-	×	O	-

Algorithm Chart

			
1	2	3	4
			
5	6	7	8
			
9	10	11	12
			
13	14	15	16
			
17	18	19	20
			
21	22	23	24

			
25	26	27	28
			
29	30	31	32
33	34	35	36
			
37	38	39	40
			
41	42	43	44
			
45	46	47	48

			
49	50	51	52
			
53	54	55	56
			
57	58	59	60
			
61	62	63	64
			
65	66	67	68
			
69	70	71	72

			
73	**74**	**75**	**76**
			
77	**78**	**79**	**80**
			
81	**82**	**83**	**84**
			
85	**86**	**87**	**88**

MIDI Data Format

Many MIDI messages listed in the MIDI Data Format section are expressed in hexadecimal or binary numbers. Hexadecimal numbers may include the letter “H” as a suffix. The letter “n” indicates a certain whole number.
The chart below lists the corresponding decimal number for each hexadecimal number.

Decimal	Hexadecimal	Decimal	Hexadecimal
0	0	64	40
1	1	65	41
2	2	66	42
3	3	67	43
4	4	68	44
5	5	69	45
6	6	70	46
7	7	71	47
8	8	72	48
9	9	73	49
10	0A	74	4A
11	0B	75	4B
12	0C	76	4C
13	0D	77	4D
14	0E	78	4E
15	0F	79	4F
16	10	80	50
17	11	81	51
18	12	82	52
19	13	83	53
20	14	84	54
21	15	85	55
22	16	86	56
23	17	87	57
24	18	88	58
25	19	89	59
26	1A	90	5A
27	1B	91	5B
28	1C	92	5C
29	1D	93	5D
30	1E	94	5E
31	1F	95	5F
32	20	96	60
33	21	97	61
34	22	98	62
35	23	99	63
36	24	100	64
37	25	101	65
38	26	102	66
39	27	103	67
40	28	104	68
41	29	105	69
42	2A	106	6A
43	2B	107	6B
44	2C	108	6C
45	2D	109	6D
46	2E	110	6E
47	2F	111	6F
48	30	112	70
49	31	113	71
50	32	114	72
51	33	115	73
52	34	116	74
53	35	117	75
54	36	118	76
55	37	119	77
56	38	120	78
57	39	121	79
58	3A	122	7A
59	3B	123	7B
60	3C	124	7C
61	3D	125	7D
62	3E	126	7E
63	3F	127	7F

Additional Notes

- For example, 144 – 159(Decimal)/9nH/1001 0000 – 1001 1111(Binary) indicate the note-on messages for the channels 1 through 16 respectively. 176 – 191/BnH/1011 0000 – 1011 1111 indicate the control change messages for the channels 1 through 16 respectively. 192 – 207/CnH/1100 0000 – 1100 1111 indicate the program change messages for the channels 1 through 16 respectively. 240/F0H/1111 0000 is positioned at the beginning of data to indicate a system exclusive message. 247/F7H/1111 0111 is positioned at the end of the system exclusive message.
- aaH (Hexadecimal)/0aaaaaaa (Binary) indicates the data addresses. The data address consists of High, Mid and Low.
- bbH/0bbbbbbb indicates byte counts.
- ccH/0ccccccc indicates check sums.
- ddH/0ddddddd indicates data/value.

1 Scope

The specifications described herein apply to transmission and reception of MIDI data by a MODX M6, MODX M7, and MODX M8.

2 Compliance

The specifications described herein comply with the MIDI 1.0 standard.

(1) TRANSMIT FLOW

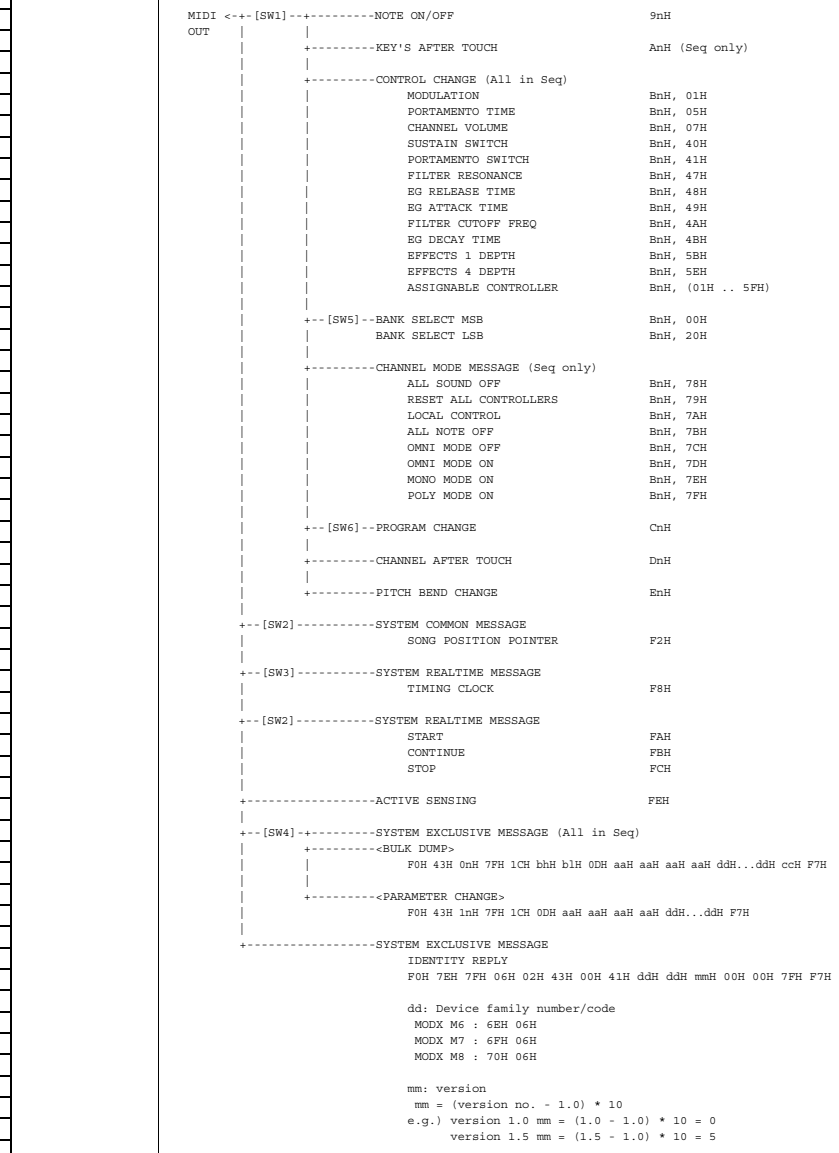

[SW1] MIDI Transmit Channel
Complies with Transmit Channel when the Part Mode is set to External.
Complies with MIDI I/O Channel when the Part Mode is set to Internal and the Keyboard Control Switch is set to On.
Complies with Tx/Rx Channell when the Part Mode is set to Internal and the Keyboard Control Switch is set to Off.
[SW2] SYSTEM Song Play/Stop Transmit Switch
[SW3] SYSTEM MIDI Clock Out
[SW4] SYSTEM MIDI Device Number
When set to “all,” transmitted via “1.”
[SW5] SYSTEM Bank Select Switch
[SW6] SYSTEM Program Change Switch

(2) RECEIVE FLOW

```
MIDI>-+-[SW1]--+---------NOTE OFF                          8nH
       |       |
       |       +---------NOTE ON/OFF                       9nH
       |       |
       |       +---------KEY'S AFTER TOUCH                 AnH
       |       |
       |       +---------CONTROL CHANGE (All in Seq)
       |       |           MODULATION                      BnH, 01H
       |       |           PORTAMENTO TIME                 BnH, 05H
       |       |           DATA ENTRY MSB                  BnH, 06H
       |       |           DATA ENTRY LSB                  BnH, 26H
       |       |           CHANNEL VOLUME                  BnH, 07H
       |       |           PAN                             BnH, 0AH
       |       |           EXPRESSION                      BnH, 0BH
       |       |           SUSTAIN SWITCH                  BnH, 40H
       |       |           PORTAMENTO SWITCH               BnH, 41H
       |       |           SOSTENUTO                       BnH, 42H
       |       |           HARMONIC CONTENT                BnH, 47H
       |       |           EG RELEASE TIME                 BnH, 48H
       |       |           EG ATTACK TIME                  BnH, 49H
       |       |           BRIGHTNESS                      BnH, 4AH
       |       |           EG DECAY TIME                   BnH, 4BH
       |       |           EFFECTS 1 DEPTH                 BnH, 5BH
       |       |           EFFECTS 4 DEPTH                 BnH, 5EH
       |       |           DATA ENTRY INC                  BnH, 60H
       |       |           DATA ENTRY DEC                  BnH, 61H
       |       |           ASSIGNABLE CONTROLLER           BnH, (01H .. 5FH)
       |       |           RPN
       |       |            PITCH BEND SENS.               BnH, 64H, 00H, 65H, 00H, 06H,
       |       |                                           mmH
       |       |            FINE TUNING                    BnH, 64H, 01H, 65H, 00H, 06H,
       |       |                                           mmH, 26H, llH
       |       |            COARSE TUNING                  BnH, 64H, 02H, 65H, 00H, 06H,
       |       |                                           mmH
       |       |            RPN RESET                      BnH, 64H, 7FH, 65H, 7FH
       |       |
       |       +--[SW6]--BANK SELECT MSB                   BnH, 00H
       |       |         BANK SELECT LSB                   BnH, 20H
       |       |
       |       +---------CHANNEL MODE MESSAGE
       |       |           ALL SOUND OFF                   BnH, 78H
       |       |           RESET ALL CONTROLLERS           BnH, 79H
       |       |           ALL NOTE OFF                    BnH, 7BH
       |       |           OMNI MODE OFF                   BnH, 7CH
       |       |           OMNI MODE ON                    BnH, 7DH
       |       |           MONO MODE ON                    BnH, 7EH
       |       |           POLY MODE ON                    BnH, 7FH
       |       |
       |       +--[SW7]--PROGRAM CHANGE                    CnH
       |       |
       |       +---------CHANNEL AFTER TOUCH               DnH
       |       |
       |       +---------PITCH BEND CHANGE                 EnH
       |
       +--[SW3]----------SYSTEM COMMON MESSAGE
       |                 SONG POSITION POINTER             F2H
       |
       +--[SW2]----------SYSTEM REALTIME MESSAGE
       |                 TIMING CLOCK                      F8H
       |
       +--[SW3]----------SYSTEM REALTIME MESSAGE
       |                 START                             FAH
       |                 CONTINUE                          FBH
       |                 STOP                              FCH
       |
       +-----------------ACTIVE SENSING                   FEH
       |
       +--[SW4]--+---------SYSTEM EXCLUSIVE MESSAGE (All in Seq)
       |         |           MIDI MASTER VOLUME            F0H 7FH 7FH 04H 01H llH mmH F7H
       |         |
       |         +--[SW5]---<BULK DUMP>
       |         |           F0H 43H 0nH 7FH 1CH bhH blH 0DH aaH aaH aaH aaH ddH...ddH ccH F7H
       |         |
       |         +----------<PARAMETER CHANGE>
       |         |           F0H 43H 1nH 7FH 1CH 0DH aaH aaH aaH aaH ddH...ddH F7H
       |         |
       |         +--[SW5]---<BULK DUMP REQUEST>
       |         |           F0H 43H 2nH 7FH 1CH 0DH aaH aaH aaH aaH F7H
       |         |
       |         +----------<PARAMETER REQUEST>
       |         |           F0H 43H 3nH 7FH 1CH 0DH aaH aaH aaH aaH F7H
       |         |
       |         +----------GM MODE ON
       |                     F0H 7EH 7FH 09H 01H F7H
       |
       +-----------------SYSTEM EXCLUSIVE MESSAGE
                         IDENTITY REQUEST                 F0H 7EH 0nH 06H 01H F7H
```

[SW1] MIDI Receive Channel
Always off when the Part Mode is set to External
Complies with MIDI I/O Channel when the Part Mode is set to Internal and the Keyboard Control Switch is set to On.
Complies with Tx/Rx Channell when the Part Mode is set to Internal and the Keyboard Control Switch is set to Off.
[SW2] SYSTEM MIDI Sync for determining whether internal Clock or MIDI Clock is used as Timing Clock.
[SW3] SYSTEM Sequencer Control
[SW4] SYSTEM MIDI Device Number
When this is not set to off, the MIDI Master Volume can be recognized in any mode.
[SW5] SYSTEM Bulk Receive Switch
[SW6] SYSTEM Bank Select Switch
[SW7] SYSTEM Program Change Switch

(3) TRANSMIT/RECEIVE DATA

(3-1) CHANNEL VOICE MESSAGES

(3-1-1) NOTE OFF

```
STATUS              1000nnnn (8nH)          n = 0 - 15 CHANNEL NUMBER
NOTE No.            0kkkkkkk                k = 0 (C-2) - 127 (G8)
VELOCITY            0vvvvvvv                v: ignored
Receive only
```

(3-1-2) NOTE ON/OFF

```
STATUS              1001nnnn (9nH)          n = 0 - 15 CHANNEL NUMBER
NOTE NUMBER         0kkkkkkk                k = 0 (C-2) - 127 (G8)
VELOCITY NOTE ON    0vvvvvvv (v≠0)
         NOTE OFF   0vvvvvvv (v=0)
```

(3-1-3) CONTROL CHANGE

```
STATUS              1011nnnn (BnH)          n = 0 - 15 CHANNEL NUMBER
CONTROL NUMBER      0ccccccc
CONTROL VALUE       0vvvvvvv

*TRANSMITTED CONTROL NUMBER
c =  0              BANK SELECT MSB         ; v = 0 - 127                   *3
c = 32              BANK SELECT LSB         ; v = 0 - 127                   *3
c =  1              MODULATION              ; v = 0 - 127
c =  5              PORTAMENTO TIME         ; v = 0 - 127
c =  7              CHANNEL VOLUME          ; v = 0 - 127
c = 10              PAN                     ; v = 0 - 127
c = 64              SUSTAIN SWITCH          ; v = 0 - 127                   *5
c = 65              PORTAMENTO SWITCH       ; v = 0: OFF, 127: ON
c = 71              FILTER RESONANCE        ; v = 0: -64 - 64: 0 - 127: +63
c = 72              EG RELEASE TIME         ; v = 0: -64 - 64: 0 - 127: +63
c = 73              EG ATTACK TIME          ; v = 0: -64 - 64: 0 - 127: +63
c = 74              FILTER CUTOFF FREQ      ; v = 0: -64 - 64: 0 - 127: +63
c = 75              EG DECAY TIME           ; v = 0: -64 - 64: 0 - 127: +63
c = 91              EFFECTS 1 DEPTH         ; v = 0 - 127
c = 94              EFFECTS 4 DEPTH         ; v = 0 - 127
c = 1..95           ASSIGNABLE CONTROLLER   ; v = 0 - 127                   *4
The Sequencer Part will play back all recorded control change messages.

* RECEIVED CONTROL NUMBER
c =  0              BANK SELECT MSB         ; v = 0 - 127                   *3
c = 32              BANK SELECT LSB         ; v = 0 - 127                   *3
c =  1              MODULATION              ; v = 0 - 127
c =  5              PORTAMENTO TIME         ; v = 0 - 127                   *2
c =  6              DATA ENTRY MSB          ; v = 0 - 127                   *1
c = 38              DATA ENTRY LSB          ; v = 0 - 127                   *1
c =  7              CHANNEL VOLUME          ; v = 0 - 127
c = 10              PAN                     ; v = 0 - 127
c = 11              EXPRESSION              ; v = 0 - 127
c = 64              SUSTAIN SWITCH          ; v = 0 - 127
c = 65              PORTAMENTO SWITCH       ; v = 0 - 63: OFF, 64 - 127: ON  *2
c = 66              SOSTENUTO               ; v = 0 - 63: OFF, 64 - 127: ON
c = 71              HARMONIC CONTENT        ; v = 0: -64 - 64: 0 - 127: +63
c = 72              EG RELEASE TIME         ; v = 0: -64 - 64: 0 - 127: +63 *2
c = 73              EG ATTACK TIME          ; v = 0: -64 - 64: 0 - 127: +63
c = 74              BRIGHTNESS              ; v = 0: -64 - 64: 0 - 127: +63
c = 75              EG DECAY TIME           ; v = 0: -64 - 64: 0 - 127: +63
c = 91              EFFECTS 1 DEPTH         ; v = 0 - 127
c = 94              EFFECTS 4 DEPTH         ; v = 0 - 127
c = 96              DATA ENTRY INC          ; v = 127                       *1
c = 97              DATA ENTRY DEC          ; v = 127                       *1
c = 1..95           ASSIGNABLE CONTROLLER   ; v = 0 - 127                   *4
All Control Change events can be recorded to the song/pattern.
```

*1 Used only when a value is set using RPN.
*2 Invalid with Drum Parts.
*3 Relation between BANK CHANGE and PROGRAM is as follows:

CATEGORY	MSB	LSB	PROGRAM No.
GM Voice	0	0	0..127 (1..128)
GM Drum Voice	127	0	0 (1)
Performance (Single Part) Preset 1	63	0	0..127 (1..128)
:	:	:	:
Preset 40	63	39	0..127 (1..128)
User 1	64	0	0..127 (1..128)
:	:	:	:
User 5	64	4	0..127 (1..128)
Library 1	64	8	0..127 (1..128)
:	:	:	:
Library 120	64	127	0..127 (1..128)
Performance (Multi Part) Preset 1	65	0	0..127 (1..128)
:	:	:	:
Preset 40	65	39	0..127 (1..128)
User 1	66	0	0..127 (1..128)
:	:	:	:
User 5	66	4	0..127 (1..128)
Library 1	66	8	0..127 (1..128)
:	:	:	:
Library 120	66	127	0..127 (1..128)
Live Set Page 1	62	0	0..15 (Receive only)
:	:	:	:
Live Set Page 16	62	15	0..15 (Receive only)

*4 The default CONTROL NUMBERs of ASSIGNABLE CONTROLLER are as follows:

BREATH CONTROLLER	2
FOOT CONTROLLER 1	11
FOOT CONTROLLER 2	Super Knob
ASSIGNABLE KNOB 1	17
ASSIGNABLE KNOB 2	18
ASSIGNABLE KNOB 3	19
ASSIGNABLE KNOB 4	20
ASSIGNABLE KNOB 5	21
ASSIGNABLE KNOB 6	22
ASSIGNABLE KNOB 7	23
ASSIGNABLE KNOB 8	24
RIBBON CONTROLLER	16
ASSIGNABLE FUNCTION 1	86
ASSIGNABLE FUNCTION 2	87
MOTION SEQ TRIGGER	89
FOOT SWITCH	Arp SW

*5 When the sustain pedal is set to something other than "FC3 (Half On)," operating the sustain pedal transmits only values of 0 (off) or 127 (on).

PORTAMENTO TIME sets the time it takes for the pitch to reach the next note played when PORTAMENTO SWITCH is set to on.
PAN position relatively changes according to the preset value for each Part.
EFFECTS 1 DEPTH controls Reverb Send Level.
EFFECTS 4 DEPTH controls Variation Send Level.
HARMONIC CONTENT adjusts the Resonance preset for each Part.
Setting a value adds to or subtracts from the center value, 64, since it is an offset parameter.
The larger the value more resonant sound will be produced.
The effective range may be narrower than the range you can designate depending on the selected Part.
The parameters, EG ATTACK TIME, EG DECAY TIME, EG SUSTAIN LEVEL, EG RELEASE TIME adjust the envelopes preset for each Part.
Setting these values add to or subtract from the center value, 64, since these are offset parameters.
BRIGHTNESS adjusts the Cutoff Frequency preset for each Part.
Setting a value adds to or subtracts from the center value, 64, since it is an offset parameter.
The smaller the value the Cutoff Frequency will be lowered.
The effective range may be narrower than the range you can designate depending on the selected voice.
Bank Select will be actually executed when the Program Change message is received.
Bank Select and Program Change numbers that are not supported by Yamaha will be ignored.

(3-1-4) PROGRAM CHANGE

```
STATUS              1100nnnn (CnH)          n = 0 - 15 CHANNEL NUMBER
PROGRAM NUMBER      0ppppppp                p = 0 - 127
```

(3-1-5) CHANNEL AFTER TOUCH

```
STATUS              1101nnnn (DnH)          n = 0 - 15 CHANNEL NUMBER
VALUE               0vvvvvvv                v = 0 - 127 AFTER TOUCH VALUE
```

(3-1-6) PITCH BEND CHANGE

```
STATUS              1110nnnn (EnH)          n = 0 - 15 CHANNEL NUMBER
LSB                 0vvvvvvv                PITCH BEND CHANGE LSB
MSB                 0vvvvvvv                PITCH BEND CHANGE MSB
Transmitted with a resolution of 10 bits.
```

(3-2) CHANNEL MODE MESSAGES

```
STATUS              1011nnnn (BnH)          n = 0 - 15 CHANNEL NUMBER
CONTROL NUMBER      0ccccccc                c = CONTROL NUMBER
CONTROL VALUE       0vvvvvvv                v = DATA VALUE
```

(3-2-1) ALL SOUND OFF (CONTROL NUMBER = 78H, DATA VALUE = 0)

All the sounds currently played including the Channel Messages such as Note-On and Hold-On in a certain channel are muted when receiving this message.

(3-2-2) RESET ALL CONTROLLERS (CONTROL NUMBER = 79H, DATA VALUE = 0)

Resets the values set for the following controllers.

PITCH BEND CHANGE	0 (center)
CHANNEL AFTER TOUCH	0 (minimum)
MODULATION	0 (minimum)
EXPRESSION	127 (maximum)
BREATH CONTROLLER	127 (maximum)
FOOT CONTROLLER 1	127 (maximum)
FOOT CONTROLLER 2	127 (maximum)
FOOT SWITCH	0 (off)
RIBBON CONTROLLER	0 (center)
ASSIGNABLE FUNCTION 1	0 (off)
ASSIGNABLE FUNCTION 2	0 (off)
SUSTAIN SWITCH	0 (off)
SOSTENUTO SWITCH	0 (off)
MOTION SEQ LANE 1	0 (minimum when Polarity is set to Unipolar and center when Polarity is set to Bipolar)
MOTION SEQ LANE 2	0 (minimum when Polarity is set to Unipolar and center when Polarity is set to Bipolar)
MOTION SEQ LANE 3	0 (minimum when Polarity is set to Unipolar and center when Polarity is set to Bipolar)
MOTION SEQ LANE 4	0 (minimum when Polarity is set to Unipolar and center when Polarity is set to Bipolar)
RPN	Not assigned; No change

Doesn't reset the following data:
PROGRAM CHANGE, BANK SELECT MSB/LSB, VOLUME, PAN, HARMONIC CONTENT, SUSTAIN LEVEL, RELEASE TIME, ATTACK TIME, DECAY TIME, BRIGHTNESS, EFFECT1 DEPTH, EFFECT4 DEPTH, PORTAMENTO SWITCH, PITCH BEND SENSITIVITY, FINE TUNING, COARSE TUNING, ASSIGNABLE KNOB 1-8

(3-2-3) ALL NOTE OFF (CONTROL NUMBER = 7BH, DATA VALUE = 0)

All the notes currently set to on in certain channel(s) are muted when receiving this message.
However, if Sustain or Sostenuto is on, notes will continue sounding until these are turned off.

(3-2-4) OMNI MODE OFF (CONTROL NUMBER = 7CH, DATA VALUE = 0)

Performs the same function as when receiving ALL NOTES OFF.

(3-2-5) OMNI MODE ON (CONTROL NUMBER = 7DH, DATA VALUE = 0)

Performs the same function as when receiving ALL NOTES OFF.

(3-2-6) MONO (CONTROL NUMBER = 7EH, DATA VALUE = 0..16)

Performs the same function as when receiving ALL SOUNDS OFF.
If the 3rd byte (mono) is within 0 through 16, the channel will be Mode 4 (m = 1).

(3-2-7) POLY (CONTROL NUMBER = 7FH, DATA VALUE = 0)

Performs the same function as when receiving ALL SOUNDS OFF. The channel will be Mode 3.

(3-3) REGISTERED PARAMETER NUMBER

```
STATUS              1011nnnn (BnH)      n = 0 - 15 CHANNEL NUMBER
LSB                 01100100 (64H)
RPN LSB             0ppppppp            p = RPN LSB (Refer to the table as shown below.)
MSB                 01100101 (65H)
RPN MSB             0qqqqqqq            q = RPN MSB (Refer to the table as shown below.)
DATA ENTRY MSB      00000110 (06H)
DATA VALUE          0mmmmmmm            m = Data Value
DATA ENTRY LSB      00100110 (26H)
DATA VALUE          0lllllll            l = Data Value
```

First, designate the parameter using RPN MSB/LSB numbers. Then, set its value with data entry MSB/LSB.

```
RPN     D.ENTRY
LSB MSB MSB LSB  PARAMETER NAME           DATA RANGE
00H 00H mmH ---  PITCH BEND SENSITIVITY   00H - 18H (0 - 24 semitones)
01H 00H mmH llH  MASTER FINE TUNE         {mmH,llH}={00H,00H}-{40H,00H}-{7FH,7FH}
                                          (-8192*100/8192) - 0 - (+8191*100/8192)
02H 00H mmH ---  MASTER COARSE TUNE       28H - 40H - 58H (-24 - 0 - +24 semitones)
7FH 7FH --- ---  RPN RESET
                 RPN numbers will be left not designated.
                 The internal values are not affected.
```

(3-4) SYSTEM REAL TIME MESSAGES

(3-4-1) ACTIVE SENSING

```
STATUS              11111110 (FEH)
```

Transmitted at every 200 msec.
Once this code is received, the instrument starts sensing.
When neither status messages nor data are received for more than approximately 350 ms, the MIDI receive buffer will be cleared, and the sounds currently being played are forcibly turned off.

(3-5) SYSTEM EXCLUSIVE MESSAGE

(3-5-1) UNIVERSAL NON REALTIME MESSAGE

(3-5-1-1) GENERAL MIDI MODE ON

```
F0H 7EH 7FH 09H 01H F7H
```

The internal tone generator block will receive this message except when the Compare function is activated.

(3-5-1-2) IDENTITY REQUEST (Receive only)

```
F0H 7EH 0nH 06H 01H F7H ("n" = Device No. However, this instrument receives under "omni.")
```

(3-5-1-3) IDENTITY REPLY (Transmit only)

```
F0H 7EH 7FH 06H 02H 43H 00H 41H ddH ddH mmH 00H 00H 7FH F7H

dd: Device family number/code
MODX M6 : 6EH 06H
MODX M7 : 6FH 06H
MODX M8 : 70H 06H

mm: version
mm = (version no. - 1.0) * 10
e.g.) version 1.0 mm = (1.0 - 1.0) * 10 = 0
      version 1.5 mm = (1.5 - 1.0) * 10 = 5
```

(3-5-2) UNIVERSAL REALTIME MESSAGE

(3-5-2-1) MIDI MASTER VOLUME

```
F0H 7FH 7FH 04H 01H llH mmH F7H
```

Sets the MASTER VOLUME value.
The value "mm" is used to set the master volume (the value "ll" should be ignored).

(3-5-3) PARAMETER CHANGE

(3-5-3-1) NATIVE PARAMETER CHANGE, MODE CHANGE

```
11110000            F0              Exclusive Status
01000011            43              YAMAHA ID
0001nnnn            1n              Device Number
01111111            7F              Group ID High
00011100            1C              Group ID Low
00001101            0D              Model ID
0aaaaaaa            aaaaaaa         Address 1st
0aaaaaaa            aaaaaaa         Address 2nd
0aaaaaaa            aaaaaaa         Address 3rd
0aaaaaaa            aaaaaaa         Address 4th
0ddddddd            ddddddd         Data
|                   |
11110111            F7              End of Exclusive
```

For parameters with data size of 2 or more, the appropriate number of data bytes will be transmitted.
See the following MIDI Data Table for Address.

(3-5-4) BULK DUMP

```
11110000            F0              Exclusive Status
01000011            43              YAMAHA ID
0000nnnn            0n              Device Number
01111111            7F              Group ID High
00011100            1C              Group ID Low
0bbbbbbb            bbbbbbb         Byte Count
0bbbbbbb            bbbbbbb         Byte Count
00001101            0D              Model ID
0aaaaaaa            aaaaaaa         Address 1st
0aaaaaaa            aaaaaaa         Address 2nd
0aaaaaaa            aaaaaaa         Address 3rd
0aaaaaaa            aaaaaaa         Address 4th
0ddddddd            ddddddd         Data
|                   |
0ccccccc            ccccccc         Check-sum
11110111            F7              End of Exclusive
```

See the following MIDI Data Table for Address and Byte Count.
Check-sum is the value that results in a value of 0 for the lower 7 bits when the Model ID, Start Address, Data and Check-sum itself are added.

(3-5-5) DUMP REQUEST

```
11110000            F0              Exclusive Status
01000011            43              YAMAHA ID
0010nnnn            2n              Device Number
01111111            7F              Group ID High
00011100            1C              Group ID Low
00001101            0D              Model ID
0aaaaaaa            aaaaaaa         Address 1st
0aaaaaaa            aaaaaaa         Address 2nd
0aaaaaaa            aaaaaaa         Address 3rd
0aaaaaaa            aaaaaaa         Address 4th
11110111            F7              End of Exclusive
```

See the following MIDI Data Table for Address.

(3-5-6) PARAMETER REQUEST

11110000	F0	Exclusive Status
01000011	43	YAMAHA ID
0011nnnn	3n	Device Number
01111111	7F	Group ID High
00011100	1C	Group ID Low
00001101	0D	Model ID
0aaaaaaa	aaaaaaa	Address 1st
0aaaaaaa	aaaaaaa	Address 2nd
0aaaaaaa	aaaaaaa	Address 3rd
0aaaaaaa	aaaaaaa	Address 4th
11110111	F7	End of Exclusive

See the following MIDI Data Table for Address.

(4) SYSTEM OVERVIEW (Keyboard, Sequencer and Tone Generator)

MIDI IN/OUT = MIDI

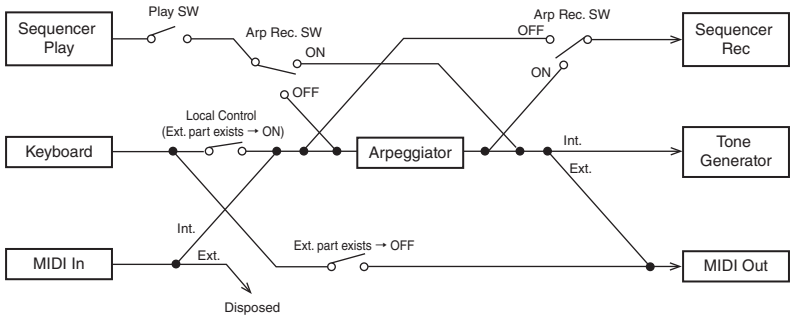

MIDI IN/OUT = USB

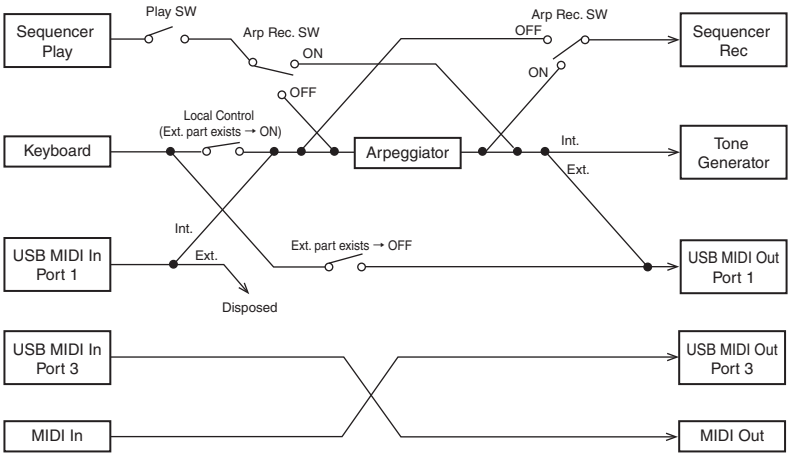

Although three types of note on / note off data, received via MIDI, played by the internal sequencer and played on the keyboard will be distinguished, the other controllers (channel messages) equally affect the entire notes.

ALL SOUND OFF clears all the sounds in the specific channel(s) played by both the keyboard and the data via MIDI.
ALL NOTES OFF received via MIDI clears the sounds in the specific channel(s) played via MIDI.

MIDI Data Table

Bank Select

Available Bank Select/Program Change

MSB	(HEX)	LSB	(HEX)	Program No.	Type	Memory	Description
0	00	0	00	0 – 127	Normal Voice	GM Voice	
127	7F	0	00	0	Drum Voice	GM Drum	
63	3F	0	00	0 – 127	Performance (Single Part)	Preset 1	Can be used when only specified Part is changed.
		1	01	0 – 127		Preset 2	
		2	02	0 – 127		Preset 3	
		3	03	0 – 127		Preset 4	
		4	04	0 – 127		Preset 5	
		5	05	0 – 127		Preset 6	
		6	06	0 – 127		Preset 7	
		7	07	0 – 127		Preset 8	
		8	08	0 – 127		Preset 9	
		9	09	0 – 127		Preset 10	
		10	0A	0 – 127		Preset 11	
		11	0B	0 – 127		Preset 12	
		12	0C	0 – 127		Preset 13	
		13	0D	0 – 127		Preset 14	
		14	0E	0 – 127		Preset 15	
		15	0F	0 – 127		Preset 16	
		16	10	0 – 127		Preset 17	
		17	11	0 – 127		Preset 18	
		18	12	0 – 127		Preset 19	
		19	13	0 – 127		Preset 20	
		20	14	0 – 127		Preset 21	
		21	15	0 – 127		Preset 22	
		22	16	0 – 127		Preset 23	
		23	17	0 – 127		Preset 24	
		24	18	0 – 127		Preset 25	
		25	19	0 – 127		Preset 26	
		26	1A	0 – 127		Preset 27	
		27	1B	0 – 127		Preset 28	
		28	1C	0 – 127		Preset 29	
		29	1D	0 – 127		Preset 30	
		30	1E	0 – 127		Preset 31	
		31	1F	0 – 127		Preset 32	
		32	20	0 – 127		Preset 33	
		33	21	0 – 127		Preset 34	
		34	22	0 – 127		Preset 35	
		35	23	0 – 127		Preset 36	
		36	24	0 – 127		Preset 37	
		37	25	0 – 127		Preset 38	
		38	26	0 – 127		Preset 39	
		39	27	0 – 127		Preset 40	
64	40	0	00	0 – 127		User 1	
		1	01	0 – 127		User 2	
		2	02	0 – 127		User 3	
		3	03	0 – 127		User 4	
		4	04	0 – 127		User 5	
		5	05	0 – 127		reserved	
		6	06	0 – 127		reserved	
		7	07	0 – 127		reserved	
		8	08	0 – 127		Library 1	
		9	09	0 – 127		Library 2	
		10	0A	0 – 127		Library 3	
		11	0B	0 – 127		Library 4	
		12	0C	0 – 127		Library 5	
		13	0D	0 – 127		Library 6	
		14	0E	0 – 127		Library 7	
		15	0F	0 – 127		Library 8	
		16	10	0 – 127		Library 9	
		17	11	0 – 127		Library 10	
		18	12	0 – 127		Library 11	
		19	13	0 – 127		Library 12	
		20	14	0 – 127		Library 13	
		21	15	0 – 127		Library 14	
		22	16	0 – 127		Library 15	
		23	17	0 – 127		Library 16	
		24	18	0 – 127		Library 17	
		25	19	0 – 127		Library 18	
		26	1A	0 – 127		Library 19	
		27	1B	0 – 127		Library 20	
		28	1C	0 – 127		Library 21	
		29	1D	0 – 127		Library 22	
		30	1E	0 – 127		Library 23	
		31	1F	0 – 127		Library 24	
		32	20	0 – 127		Library 25	
		33	21	0 – 127		Library 26	
		34	22	0 – 127		Library 27	
		35	23	0 – 127		Library 28	
		36	24	0 – 127		Library 29	
		37	25	0 – 127		Library 30	
		38	26	0 – 127		Library 31	
		39	27	0 – 127		Library 32	
		40	28	0 – 127		Library 33	
		41	29	0 – 127		Library 34	
		42	2A	0 – 127		Library 35	
		43	2B	0 – 127		Library 36	
		44	2C	0 – 127		Library 37	
		45	2D	0 – 127		Library 38	
		46	2E	0 – 127		Library 39	
		47	2F	0 – 127		Library 40	
		48	30	0 – 127		Library 41	
		49	31	0 – 127		Library 42	
		50	32	0 – 127		Library 43	
		51	33	0 – 127		Library 44	
		52	34	0 – 127		Library 45	
		53	35	0 – 127		Library 46	
		54	36	0 – 127		Library 47	
		55	37	0 – 127		Library 48	
		56	38	0 – 127		Library 49	
		57	39	0 – 127		Library 50	
		58	3A	0 – 127		Library 51	
		59	3B	0 – 127		Library 52	
		60	3C	0 – 127		Library 53	
		61	3D	0 – 127		Library 54	
		62	3E	0 – 127		Library 55	
		63	3F	0 – 127		Library 56	
		64	40	0 – 127		Library 57	
		65	41	0 – 127		Library 58	
		66	42	0 – 127		Library 59	
		67	43	0 – 127		Library 60	
		68	44	0 – 127		Library 61	
		69	45	0 – 127		Library 62	
		70	46	0 – 127		Library 63	
		71	47	0 – 127		Library 64	
		72	48	0 – 127		Library 65	
		73	49	0 – 127		Library 66	
		74	4A	0 – 127		Library 67	
		75	4B	0 – 127		Library 68	
		76	4C	0 – 127		Library 69	
		77	4D	0 – 127		Library 70	
		78	4E	0 – 127		Library 71	
		79	4F	0 – 127		Library 72	
		80	50	0 – 127		Library 73	
		81	51	0 – 127		Library 74	
		82	52	0 – 127		Library 75	
		83	53	0 – 127		Library 76	
		84	54	0 – 127		Library 77	
		85	55	0 – 127		Library 78	
		86	56	0 – 127		Library 79	
		87	57	0 – 127		Library 80	
		88	58	0 – 127		Library 81	
		89	59	0 – 127		Library 82	
		90	5A	0 – 127		Library 83	
		91	5B	0 – 127		Library 84	
		92	5C	0 – 127		Library 85	
		93	5D	0 – 127		Library 86	
		94	5E	0 – 127		Library 87	
		95	5F	0 – 127		Library 88	
		96	60	0 – 127		Library 89	
		97	61	0 – 127		Library 90	
		98	62	0 – 127		Library 91	
		99	63	0 – 127		Library 92	
		100	64	0 – 127		Library 93	
		101	65	0 – 127		Library 94	
		102	66	0 – 127		Library 95	
		103	67	0 – 127		Library 96	
		104	68	0 – 127		Library 97	
		105	69	0 – 127		Library 98	
		106	6A	0 – 127		Library 99	
		107	6B	0 – 127		Library 100	
		108	6C	0 – 127		Library 101	
		109	6D	0 – 127		Library 102	
		110	6E	0 – 127		Library 103	
		111	6F	0 – 127		Library 104	

MSB	(HEX)	LSB	(HEX)	Program No.	Type	Memory	Description
		112	70	0 – 127		Library 105	
		113	71	0 – 127		Library 106	
		114	72	0 – 127		Library 107	
		115	73	0 – 127		Library 108	
		116	74	0 – 127		Library 109	
		117	75	0 – 127		Library 110	
		118	76	0 – 127		Library 111	
		119	77	0 – 127		Library 112	
		120	78	0 – 127		Library 113	
		121	79	0 – 127		Library 114	
		122	7A	0 – 127		Library 115	
		123	7B	0 – 127		Library 116	
		124	7C	0 – 127		Library 117	
		125	7D	0 – 127		Library 118	
		126	7E	0 – 127		Library 119	
		127	7F	0 – 127		Library 120	
65	41	0	00	0 – 127	Performance (Multi Part)	Preset 1	Can be used when only all Parts are changed.
		1	01	0 – 127		Preset 2	
		2	02	0 – 127		Preset 3	
		3	03	0 – 127		Preset 4	
		4	04	0 – 127		Preset 5	
		5	05	0 – 127		Preset 6	
		6	06	0 – 127		Preset 7	
		7	07	0 – 127		Preset 8	
		8	08	0 – 127		Preset 9	
		9	09	0 – 127		Preset 10	
		10	0A	0 – 127		Preset 11	
		11	0B	0 – 127		Preset 12	
		12	0C	0 – 127		Preset 13	
		13	0D	0 – 127		Preset 14	
		14	0E	0 – 127		Preset 15	
		15	0F	0 – 127		Preset 16	
		16	10	0 – 127		Preset 17	
		17	11	0 – 127		Preset 18	
		18	12	0 – 127		Preset 19	
		19	13	0 – 127		Preset 20	
		20	14	0 – 127		Preset 21	
		21	15	0 – 127		Preset 22	
		22	16	0 – 127		Preset 23	
		23	17	0 – 127		Preset 24	
		24	18	0 – 127		Preset 25	
		25	19	0 – 127		Preset 26	
		26	1A	0 – 127		Preset 27	
		27	1B	0 – 127		Preset 28	
		28	1C	0 – 127		Preset 29	
		29	1D	0 – 127		Preset 30	
		30	1E	0 – 127		Preset 31	
		31	1F	0 – 127		Preset 32	
		32	20	0 – 127		Preset 33	
		33	21	0 – 127		Preset 34	
		34	22	0 – 127		Preset 35	
		35	23	0 – 127		Preset 36	
		36	24	0 – 127		Preset 37	
		37	25	0 – 127		Preset 38	
		38	26	0 – 127		Preset 39	
		39	27	0 – 127		Preset 40	
66	42	0	00	0 – 127		User 1	
		1	01	0 – 127		User 2	
		2	02	0 – 127		User 3	
		3	03	0 – 127		User 4	
		4	04	0 – 127		User 5	
		5	05	0 – 127		reserved	
		6	06	0 – 127		reserved	
		7	07	0 – 127		reserved	
		8	08	0 – 127		Library 1	
		9	09	0 – 127		Library 2	
		10	0A	0 – 127		Library 3	
		11	0B	0 – 127		Library 4	
		12	0C	0 – 127		Library 5	
		13	0D	0 – 127		Library 6	
		14	0E	0 – 127		Library 7	
		15	0F	0 – 127		Library 8	
		16	10	0 – 127		Library 9	
		17	11	0 – 127		Library 10	
		18	12	0 – 127		Library 11	
		19	13	0 – 127		Library 12	
		20	14	0 – 127		Library 13	
		21	15	0 – 127		Library 14	
		22	16	0 – 127		Library 15	
		23	17	0 – 127		Library 16	
		24	18	0 – 127		Library 17	
		25	19	0 – 127		Library 18	
		26	1A	0 – 127		Library 19	
		27	1B	0 – 127		Library 20	
		28	1C	0 – 127		Library 21	
		29	1D	0 – 127		Library 22	
		30	1E	0 – 127		Library 23	
		31	1F	0 – 127		Library 24	
		32	20	0 – 127		Library 25	
		33	21	0 – 127		Library 26	
		34	22	0 – 127		Library 27	
		35	23	0 – 127		Library 28	
		36	24	0 – 127		Library 29	
		37	25	0 – 127		Library 30	
		38	26	0 – 127		Library 31	
		39	27	0 – 127		Library 32	
		40	28	0 – 127		Library 33	
		41	29	0 – 127		Library 34	
		42	2A	0 – 127		Library 35	
		43	2B	0 – 127		Library 36	
		44	2C	0 – 127		Library 37	
		45	2D	0 – 127		Library 38	
		46	2E	0 – 127		Library 39	
		47	2F	0 – 127		Library 40	
		48	30	0 – 127		Library 41	
		49	31	0 – 127		Library 42	
		50	32	0 – 127		Library 43	
		51	33	0 – 127		Library 44	
		52	34	0 – 127		Library 45	
		53	35	0 – 127		Library 46	
		54	36	0 – 127		Library 47	
		55	37	0 – 127		Library 48	
		56	38	0 – 127		Library 49	
		57	39	0 – 127		Library 50	
		58	3A	0 – 127		Library 51	
		59	3B	0 – 127		Library 52	
		60	3C	0 – 127		Library 53	
		61	3D	0 – 127		Library 54	
		62	3E	0 – 127		Library 55	
		63	3F	0 – 127		Library 56	
		64	40	0 – 127		Library 57	
		65	41	0 – 127		Library 58	
		66	42	0 – 127		Library 59	
		67	43	0 – 127		Library 60	
		68	44	0 – 127		Library 61	
		69	45	0 – 127		Library 62	
		70	46	0 – 127		Library 63	
		71	47	0 – 127		Library 64	
		72	48	0 – 127		Library 65	
		73	49	0 – 127		Library 66	
		74	4A	0 – 127		Library 67	
		75	4B	0 – 127		Library 68	
		76	4C	0 – 127		Library 69	
		77	4D	0 – 127		Library 70	
		78	4E	0 – 127		Library 71	
		79	4F	0 – 127		Library 72	
		80	50	0 – 127		Library 73	
		81	51	0 – 127		Library 74	
		82	52	0 – 127		Library 75	
		83	53	0 – 127		Library 76	
		84	54	0 – 127		Library 77	
		85	55	0 – 127		Library 78	
		86	56	0 – 127		Library 79	
		87	57	0 – 127		Library 80	
		88	58	0 – 127		Library 81	
		89	59	0 – 127		Library 82	
		90	5A	0 – 127		Library 83	
		91	5B	0 – 127		Library 84	
		92	5C	0 – 127		Library 85	
		93	5D	0 – 127		Library 86	
		94	5E	0 – 127		Library 87	
		95	5F	0 – 127		Library 88	
		96	60	0 – 127		Library 89	
		97	61	0 – 127		Library 90	

MSB	(HEX)	LSB	(HEX)	Program No.	Type	Memory	Description
		98	62	0 – 127		Library 91	
		99	63	0 – 127		Library 92	
		100	64	0 – 127		Library 93	
		101	65	0 – 127		Library 94	
		102	66	0 – 127		Library 95	
		103	67	0 – 127		Library 96	
		104	68	0 – 127		Library 97	
		105	69	0 – 127		Library 98	
		106	6A	0 – 127		Library 99	
		107	6B	0 – 127		Library 100	
		108	6C	0 – 127		Library 101	
		109	6D	0 – 127		Library 102	
		110	6E	0 – 127		Library 103	
		111	6F	0 – 127		Library 104	
		112	70	0 – 127		Library 105	
		113	71	0 – 127		Library 106	
		114	72	0 – 127		Library 107	
		115	73	0 – 127		Library 108	
		116	74	0 – 127		Library 109	
		117	75	0 – 127		Library 110	
		118	76	0 – 127		Library 111	
		119	77	0 – 127		Library 112	
		120	78	0 – 127		Library 113	
		121	79	0 – 127		Library 114	
		122	7A	0 – 127		Library 115	
		123	7B	0 – 127		Library 116	
		124	7C	0 – 127		Library 117	
		125	7D	0 – 127		Library 118	
		126	7E	0 – 127		Library 119	
		127	7F	0 – 127		Library 120	

Available Live Set Select/Program Change

MSB	(HEX)	LSB	(HEX)	Program No.	Type	Memory	Description
62	3E	0	00	0 – 15	Live Set Slot	Page 1	Only for the selected Bank
		1	01	0 – 15		Page 2	
		2	02	0 – 15		Page 3	
		3	03	0 – 15		Page 4	
		4	04	0 – 15		Page 5	
		5	05	0 – 15		Page 6	
		6	06	0 – 15		Page 7	
		7	07	0 – 15		Page 8	
		8	08	0 – 15		Page 9	
		9	09	0 – 15		Page 10	
		10	0A	0 – 15		Page 11	
		11	0B	0 – 15		Page 12	
		12	0C	0 – 15		Page 13	
		13	0D	0 – 15		Page 14	
		14	0E	0 – 15		Page 15	
		15	0F	0 – 15		Page 16	

Parameter Base Address

Group Number =7F 1C, Model ID = 0D

Parameter Block	Top Address				Description
	1	2	3	4	
SYSTEM	00	00	00	00	System
	00	00	01	00	Sequencer Setup
	00	00	02	00	Temporary Setup
	00	00	03	00	Remote
	00	01	0n	00	Micro Tuning User Table [n: No. (0…7)]
	00	02	0n	00	Micro Tuning User Table Name [n: No. (0…7)]
	00	00	7F	00	Soundmondo Format Version
CURVE	01	00	nn	00	Curve User Table Name [nn: User Curve No. (0…31)]
	01	01	nn	00	Curve User Table [nn: User Curve No. (0…31)]
LIVE SET	03	00	00	00	Live Set Bank Name
	03	1p	00	00	Live Set Page Name [p: Page No. (0…15)]
	03	2p	0s	00	Live Set Page 1 – 16 Slot Table Name [p: Page No. (0…15), s: Slot No. (0…15)]
	03	3p	0s	00	Live Set Page 1 – 16 Slot Table [p: Page No. (0…15), s: Slot No. (0…15)]
	03	4p	0s	00	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]
	03	5p	0s	00	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]
BULK CONTROL	04	00	00	00	Header
	05	00	00	00	Footer
PERFORMANCE COMMON	06	00	00	00	Performance Name
	06	00	01	00	Performance Common 1byte param
	06	00	02	00	Performance Common 2byte param
	06	00	03	00	Performance Common Controller
	06	00	04	00	Insertion A for A/D
	06	00	05	00	Insertion B for A/D
	06	00	06	00	Arpeggio Common
	06	00	07	00	Reverb
	06	00	08	00	Variation
	06	00	09	00	VCM Rotary Speaker
	06	00	0A	00	Master EQ
	06	00	0B	00	Master Effect
	06	00	0C	00	Motion Seq Common Settings
	06	00	0D	00	Super Knob Settings
	06	00	0E	00	Audio In Parts (A/D)
	06	00	0F	00	Audio In Parts (USB)
	06	00	10	00	FM-X Smart Morph Data (File Dump)
	06	00	11	00	FM-X Smart Morph PNG Data (File Dump)
	06	00	12	00	Super Knob Lane Settings
	06	00	20	00	AN-X Smart Morph Data (File Dump)
	06	00	21	00	AN-X Smart Morph PNG Data (File Dump)
	06	01	0m	00	Super Knob Sequence [m: Motion Sequence No. (0…7)]
	06	02	0c	00	Scene1 – 8 Common 1byte [c: Scene No. (0…7)]
	06	03	0c	00	Scene1 – 8 Common 2byte [c: Scene No. (0…7)]
	06	04	0k	00	Assignable Knob Name [k: Knob No. (0…7)]
	06	05	bb	00	Common/AD Controller Box 1 – 32 [bb: Controller Box No. (0…31)]
	06	06	L0	00	Motion Seq AD Part Lane Settings 1byte [L: Lane No. (0…3)]
	06	07	L0	00	Motion Seq AD Part Lane Settings 2byte [L: Lane No. (0…3)]
	06	08	Lm	00	Motion Seq AD Part Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7)]
	06	09	00	00	Performance Flag
PERFORMANCE PART	1p	00	00	00	Performance Part Name [p: Part No. (0…15)]
	1p	00	01	00	Performance Part 1byte [p: Part No. (0…15)]
	1p	00	02	00	Performance Part 2byte [p: Part No. (0…15)]
	1p	00	03	00	Performance Part 2byte Pitch/Effect [p: Part No. (0…15)]
	1p	00	04	00	Insertion A [p: Part No. (0…15)]
	1p	00	05	00	Insertion B [p: Part No. (0…15)]
	1p	00	06	00	Arpeggio Part [p: Part No. (0…15)]
	1p	00	07	00	LFO [p: Part No. (0…15)]
	1p	00	08	00	Zone Setting [p: Part No. (0…15)]
	1p	00	09	00	Key Controller Box
	1p	03	0c	00	Scene Part [c: Scene No. (0…7), p: Part No. (0…15)]
	1p	04	0k	00	Assignable Knob Name [p: Part No. (0…15), k: Knob No. (0…7)]
	1p	05	bb	00	Controller 1 – 32 [p: Part No. (0…15), bb: Controller Box No. (0…32)]
	1p	06	L0	00	Motion Seq Part/Lane Settings 1byte [L: Lane No. (0…3), p: Part No. (0…15)]
	1p	07	L0	00	Motion Seq Part/Lane Settings 2byte [L: Lane No. (0…3), p: Part No. (0…15)]
PERFORMANCE PART	1p	08	Lm	00	Motion Seq Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7), p: Part No. (0…15)]
NORMAL PART ELEMENT	2p	00	ee	00	Element 1byte [p: Part No. (0…15), ee: Element No. (0…127)]
	2p	01	ee	00	Oscillator [p: Part No. (0…15), ee: Element No. (0…127)]
	2p	02	ee	00	Amplitude [p: Part No. (0…15), ee: Element No. (0…127)]
	2p	03	ee	00	Pitch [p: Part No. (0…15), ee: Element No. (0…127)]
	2p	04	ee	00	Filter + EQ + LFO [p: Part No. (0…15), ee: Element No. (0…127)]
DRUM PART KEY	2p	10	kk	00	Key [kk: Key No. (0…72), p: Part No. (0…15)]
FM-X PART	3p	00	00	00	Common [p: Part No. (0…15)]
	3p	00	01	00	Filter [p: Part No. (0…15)]
	3p	01	0o	00	Controller Box Switch [o: Operator No. (0…7), p: Part No. (0…15)]
	3p	02	0o	00	Operator [o: Operator No. (0…7), p: Part No. (0…15)]
AN-X PART	4p	00	00	00	common [p: Part No. (0…15)]
	4p	01	0o	00	Oscillator Controller Box Switch [p: Part No. (0…15), o: Oscillator No. (0…2)]
	4p	02	0o	00	Oscillator [p: Part No. (0…15), o: Oscillator No. (0…2)]
	4p	03	0f	00	Filter Controller Box Switch [p: Part No. (0…15), f: Filter No. (0…1)]
	4p	04	0f	00	Filter [p: Part No. (0…15), f: Filter No. (0…1)]
	4p	05	00	00	Wave Folder [p: Part No. (0…15)]
VA Bulk Unsupported	7p	00	00	00	Common [p: Part No. (0…15)]
FM Bulk Unsupported	7p	01	0o	00	Operator [o: Operator No. (0…7), p: Part No. (0…15)]

Bulk Dump Block

"Top Address" indicates the top address of each block designated by the bulk dump operation.
"Byte Count" indicates the data size contained in each block designated by the bulk dump operation.
The Block from the Bulk Header to the Bulk Footer of the PERFOMANCE can be received regardless of their order.
They can be received even if all of them are not transmitted. However, they cannot be received if an irrelevant Block is included.
To execute 1 Performance bulk dump request, designate its corresponding Bulk Header address.
For information about "ll","mm" and "nn" shown in the following list, refer to the MIDI PARAMETER CHANGE TABLE (BULK CONTROL).

Group Number =7F 1C, Model ID = 0D

Parameter Block	Description	Byte Count		Top Address			
		Dec	Hex	1	2	3	4
SYSTEM	System	78	004E	00	00	00	00
	Sequencer Setup	22	0016	00	00	01	00
	Remote	112	0070	00	00	03	00
MICRO TUNING	Micro Tuning User Table [n: No. (0…7)]	24	0018	00	01	0n	00
MICRO TUNING NAME	Micro Tuning User Table Name [n: No. (0…7)]	20	0014	00	02	0n	00
CURVE	Bulk Header	0	0000	04	05	00	00
	Curve User Table Name [nn: User Curve No. (0…31)]	20	0014	01	00	nn	00
	Curve User Table [nn: User Curve No. (0…31)]	34	0022	01	01	nn	00
	Bulk Footer	0	0000	05	05	00	00
LIVE SET EDIT BUFFER	Bulk Header	0	0000	04	06	00	00
	Live Set Bank Name	20	0014	03	00	00	00
	Live Set Page Name [p: Page No. (0…15)]	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	06	00	00
LIVE SET EDIT BUFFER PAGE	Bulk Header	0	0000	04	06	10	0p
	Live Set Page Name	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	06	10	0p
LIVE SET USER BANK	Bulk Header	0	0000	04	07	0b	00
	Live Set Bank Name	20	0014	03	00	00	00
	Live Set Page Name [p: Page No. (0…15)]	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	07	0b	00
LIVE SET USER BANK PAGE	Bulk Header	0	0000	04	07	1b	0p
	Live Set Page Name	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	07	1b	0p
LIVE SET LIBRARY BANK	Bulk Header	0	0000	04	08	0b	00
	Live Set Bank Name	20	0014	03	00	00	00
	Live Set Page Name [p: Page No. (0…15)]	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	08	0b	00
LIVE SET LIBRARY BANK PAGE	Bulk Header	0	0000	04	08	1b	0p
	Live Set Page Name	20	0014	03	1p	00	00
	Live Set Page 1 – 16 Slot Name [p: Page No. (0…15), s: Slot No. (0…15)]	20	0014	03	2p	0s	00
	Live Set Page 1 – 16 Slot [p: Page No. (0…15), s: Slot No. (0…15)]	18	0012	03	3p	0s	00
	Live Set Page 1 – 16 Slot Audio File Path [p: Page No. (0…15), s: Slot No. (0…15)]	256	0100	03	4p	0s	00
	Live Set Page 1 – 16 Slot Identifier [p: Page No. (0…15), s: Slot No. (0…15)]	32	0020	03	5p	0s	00
	Bulk Footer	0	0000	05	08	1b	0p
PERFORMANCE	Bulk Header	0	0000	04	ll	mm	nn
	Soundmondo Format Version	6	0006	00	00	7F	00
PERFORMANCE COMMON	Performance Name	20	0014	06	00	00	00
	Performance Common 1byte param	29	001D	06	00	01	00
	Performance Common 2byte param	86	0056	06	00	02	00
	Performance Common Controller	86	0056	06	00	03	00
	Insertion A for A/D	52	0034	06	00	04	00
	Insertion B for A/D	52	0034	06	00	05	00
	Arpeggio Common	14	000E	06	00	06	00
	Reverb	52	0034	06	00	07	00
	Variation	52	0034	06	00	08	00
	VCM Rotary Speaker	68	0044	06	00	09	00
	Master EQ	34	0022	06	00	0A	00
	Master Effect	52	0034	06	00	0B	00
	Motion Seq Common Settings	12	000C	06	00	0C	00
	Super Knob Settings	90	005A	06	00	0D	00
	Audio In Parts (A/D)	42	002A	06	00	0E	00
	Audio In Parts (USB)	14	000E	06	00	0F	00
	FM-X Smart Morph Data (File Dump)	3004	0BBC	06	00	10	00
	FM-X Smart Morph PNG Data (File Dump)	3000	0BB8	06	00	11	00
	Super Knob Lane Settings	20	0014	06	00	12	00
	AN-X Smart Morph Data (File Dump)	3004	0BBC	06	00	20	00
	AN-X Smart Morph PNG Data (File Dump)	3000	0BB8	06	00	21	00
	Super Knob Sequence [m: Motion Sequence No. (0…7)]	102	0066	06	01	0m	00
	Scene1 – 8 Common 1byte [c: Scene No. (0…7)]	19	0013	06	02	0c	00
	Scene1 – 8 Common 2byte [c: Scene No. (0…7)]	44	002C	06	03	0c	00

Parameter Block	Description	Byte Count		Top Address			
		Dec	Hex	1	2	3	4
PERFORMANCE COMMON	Assignable Knob Name [k: Knob No. (0…7)]	16	0010	06	04	0k	00
	Common/AD Controller Box 1 – 32 [bb: Controller Box No. (0…31)]	16	0010	06	05	bb	00
	Motion Seq AD Part Lane Settings 1byte [L: Lane No. (0…3)]	4	0004	06	06	L0	00
	Motion Seq AD Part Lane Settings 2byte [L: Lane No. (0…3)]	20	0014	06	07	L0	00
	Motion Seq AD Part Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7)]	102	0066	06	08	Lm	00
	Performance Flag	8	0008	06	09	00	00
PERFORMANCE PART	Performance Part Name [p: Part No. (0…15)]	20	0014	1p	00	00	00
	Performance Part 1byte [p: Part No. (0…15)]	81	0051	1p	00	01	00
	Performance Part 2byte [p: Part No. (0…15)]	94	005E	1p	00	02	00
	Performance Part 2byte Pitch/Effect [p: Part No. (0…15)]	62	003E	1p	00	03	00
	Insertion A [p: Part No. (0…15)]	52	0034	1p	00	04	00
	Insertion B [p: Part No. (0…15)]	52	0034	1p	00	05	00
	Arpeggio Part [p: Part No. (0…15)]	100	0064	1p	00	06	00
	LFO [p: Part No. (0…15)]	68	0044	1p	00	07	00
	Zone Setting [p: Part No. (0…15)]	26	001A	1p	00	08	00
	Key Controller Box	64	0040	1p	00	09	00
	Scene Part [c: Scene No. (0…7), p: Part No. (0…15)]	80	0050	1p	03	0c	00
	Assignable Knob Name [p: Part No. (0…15), k: Knob No. (0…7)]	16	0010	1p	04	0k	00
	Controller 1 – 32 [p: Part No. (0…15), bb: Controller Box No. (0…32)]	18	0012	1p	05	bb	00
	Motion Seq Part/Lane Settings 1byte [L: Lane No. (0…3), p: Part No. (0…15)]	4	0004	1p	06	L0	00
	Motion Seq Part/Lane Settings 2byte [L: Lane No. (0…3), p: Part No. (0…15)]	20	0014	1p	07	L0	00
	Motion Seq Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7), p: Part No. (0…15)]	102	0066	1p	08	Lm	00
	:			Max 16 Parts			
NORMAL PART ELEMENT	Element 1byte [p: Part No. (0…15), ee: Element No. (0…127)]	36	0024	2p	00	ee	00
	Oscillator [p: Part No. (0…15), ee: Element No. (0…127)]	40	0028	2p	01	ee	00
	Amplitude [p: Part No. (0…15), ee: Element No. (0…127)]	54	0036	2p	02	ee	00
	Pitch [p: Part No. (0…15), ee: Element No. (0…127)]	48	0030	2p	03	ee	00
	Filter + EQ + LFO [p: Part No. (0…15), ee: Element No. (0…127)]	106	006A	2p	04	ee	00
	:	128Blocks		Max 16 Parts			
DRUM PART KEY	Key [kk: Key No. (0…72), p: Part No. (0…15)]	64	0040	2p	10	kk	00
	:	73 Blocks		Max 16 Parts			
FM-X PART	Common [p: Part No. (0…15)]	82	0052	3p	00	00	00
	Filter [p: Part No. (0…15)]	70	0046	3p	00	01	00
	Controller Box Switch [o: Operator No. (0…7), p: Part No. (0…15)]	39	0027	3p	01	0o	00
	Operator [o: Operator No. (0…7), p: Part No. (0…15)]	76	004C	3p	02	0o	00
	:	8 Blocks		Max 16 Parts			
AN-X PART	common [p: Part No. (0…15)]	110	006E	4p	00	00	00
	Oscillator Controller Box Switch [p: Part No. (0…15), o: Oscillator No. (0…2)]	39	0027	4p	01	0o	00
	Oscillator [p: Part No. (0…15), o: Oscillator No. (0…2)]	78	004E	4p	02	0o	00
	Filter Controller Box Switch [p: Part No. (0…15), f: Filter No. (0…1)]	39	0027	4p	03	0f	00
	Filter [p: Part No. (0…15), f: Filter No. (0…1)]	30	001E	4p	04	0f	00
	Wave Folder [p: Part No. (0…15)]	34	0022	4p	05	00	00
	Bulk Footer	0	00	05	ll	mm	nn

Parameter Block	Description	Byte Count		Top Address			
		Dec	Hex	1	2	3	4
PERFORMANCE PART	Bulk Header	0	0000	04	04	01	nn
PERFORMANCE PART	Performance Part Name [p: Part No. (0…15)]	20	0014	1p	00	00	00
	Performance Part 1byte [p: Part No. (0…15)]	81	0051	1p	00	01	00
	Performance Part 2byte [p: Part No. (0…15)]	94	005E	1p	00	02	00
	Performance Part 2byte Pitch/Effect [p: Part No. (0…15)]	62	003E	1p	00	03	00
	Insertion A [p: Part No. (0…15)]	52	0034	1p	00	04	00
	Insertion B [p: Part No. (0…15)]	52	0034	1p	00	05	00
	Arpeggio Part [p: Part No. (0…15)]	100	0064	1p	00	06	00
	LFO [p: Part No. (0…15)]	68	0044	1p	00	07	00
	Zone Setting [p: Part No. (0…15)]	26	001A	1p	00	08	00
	Key Controller Box	64	0040	1p	00	09	00
	Scene Part [c: Scene No. (0…7), p: Part No. (0…15)]	80	0050	1p	03	0c	00
	Assignable Knob Name [p: Part No. (0…15), k: Knob No. (0…7)]	16	0010	1p	04	0k	00
	Controller 1 – 32 [p: Part No. (0…15), bb: Controller Box No. (0…32)]	18	0012	1p	05	bb	00
	Motion Seq Part/Lane Settings 1byte [L: Lane No. (0…3), p: Part No. (0…15)]	4	0004	1p	06	L0	00
	Motion Seq Part/Lane Settings 2byte [L: Lane No. (0…3), p: Part No. (0…15)]	20	0014	1p	07	L0	00
	Motion Seq Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7), p: Part No. (0…15)]	102	0066	1p	08	Lm	00
	:			Max 16 Parts			
NORMAL PART ELEMENT	Element 1byte [p: Part No. (0…15), ee: Element No. (0…127)]	36	0024	2p	00	ee	00
	Oscillator [p: Part No. (0…15), ee: Element No. (0…127)]	40	0028	2p	01	ee	00
	Amplitude [p: Part No. (0…15), ee: Element No. (0…127)]	54	0036	2p	02	ee	00
	Pitch [p: Part No. (0…15), ee: Element No. (0…127)]	48	0030	2p	03	ee	00
	Filter + EQ + LFO [p: Part No. (0…15), ee: Element No. (0…127)]	106	006A	2p	04	ee	00
	:	128 Blocks		Max 16 Parts			
DRUM PART KEY	Key [kk: Key No. (0…72), p: Part No. (0…15)]	64	0040	2p	10	kk	00
	:	73 Blocks		Max 16 Parts			
FM-X PART	Common [p: Part No. (0…15)]	82	0052	3p	00	00	00
	Filter [p: Part No. (0…15)]	70	0046	3p	00	01	00
	Controller Box Switch [o: Operator No. (0…7), p: Part No. (0…15)]	39	0027	3p	01	0o	00
	Operator [o: Operator No. (0…7), p: Part No. (0…15)]	76	004C	3p	02	0o	00
	:	8 Blocks		Max 16 Parts			
AN-X PART	Common [p: Part No. (0…15)]	110	006E	4p	00	00	00
	Oscillator Controller Box Switch [p: Part No. (0…15), o: Oscillator No. (0…2)]	39	0027	4p	01	0o	00
	Oscillator [p: Part No. (0…15), o: Oscillator No. (0…2)]	78	004E	4p	02	0o	00
	Filter Controller Box Switch [p: Part No. (0…15), f: Filter No. (0…1)]	39	0027	4p	03	0f	00
	Filter [p: Part No. (0…15), f: Filter No. (0…1)]	30	001E	4p	04	0f	00
	Wave Folder [p: Part No. (0…15)]	34	0022	4p	05	00	00
	Bulk Footer	0	00	05	04	01	nn

PERFORMANCE COMMON	Bulk Header	0	0000	04	04	02	00
PERFORMANCE COMMON	Performance Name	20	0014	06	00	00	00
	Performance Common 1byte param	29	001D	06	00	01	00
	Performance Common 2byte param	86	0056	06	00	02	00
	Performance Common Controller	86	0056	06	00	03	00
	Insertion A for A/D	52	0034	06	00	04	00
	Insertion B for A/D	52	0034	06	00	05	00
	Arpeggio Common	14	000E	06	00	06	00
	Reverb	52	0034	06	00	07	00
	Variation	52	0034	06	00	08	00
	VCM Rotary Speaker	68	0044	06	00	09	00
	Master EQ	34	0022	06	00	0A	00
	Master Effect	52	0034	06	00	0B	00

Parameter Block	Description	Byte Count		Top Address			
		Dec	Hex	1	2	3	4
PERFORMANCE COMMON	Motion Seq Common Settings	12	000C	06	00	0C	00
	Super Knob Settings	90	005A	06	00	0D	00
	Audio In Parts (A/D)	42	002A	06	00	0E	00
	Audio In Parts (USB)	14	000E	06	00	0F	00
	FM-X Smart Morph Data (File Dump)	3004	0BBC	06	00	10	00
	FM-X Smart Morph PNG Data (File Dump)	3000	0BB8	06	00	11	00
	Super Knob Lane Settings	20	0014	06	00	12	00
	AN-X Smart Morph Data (File Dump)	3004	0BBC	06	00	20	00
	AN-X Smart Morph PNG Data (File Dump)	3000	0BB8	06	00	21	00
	Super Knob Sequence [m: Motion Sequence No. (0…7)]	102	0066	06	01	0m	00
	Scene1 – 8 Common 1byte [c: Scene No. (0…7)]	19	0013	06	02	0c	00
	Scene1 – 8 Common 2byte [c: Scene No. (0…7)]	44	002C	06	03	0c	00
	Assignable Knob Name [k: Knob No. (0…7)]	16	0010	06	04	0k	00
	Common/AD Controller Box 1 – 32 [bb: Controller Box No. (0…31)]	16	0010	06	05	bb	00
	Motion Seq AD Part Lane Settings 1byte [L: Lane No. (0…3)]	4	0004	06	06	L0	00
	Motion Seq AD Part Lane Settings 2byte [L: Lane No. (0…3)]	20	0014	06	07	L0	00
	Motion Seq AD Part Lane Sequence [L: Lane No. (0…3), m: MotionSeq No. (0…7)]	102	0066	06	08	Lm	00
	Bulk Footer	0	00	05	04	02	00

MIDI PARAMETER CHANGE TABLE (BULK CONTROL)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
04	00	00	nn	1	-	Bulk Header	Performance PRE 1 (nn = 0 – 127)		
		01	nn	1	-		Performance PRE 2 (nn = 0 – 127)		
		02	nn	1	-		Performance PRE 3 (nn = 0 – 127)		
		03	nn	1	-		Performance PRE 4 (nn = 0 – 127)		
		04	nn	1	-		Performance PRE 5 (nn = 0 – 127)		
		05	nn	1	-		Performance PRE 6 (nn = 0 – 127)		
		06	nn	1	-		Performance PRE 7 (nn = 0 – 127)		
		07	nn	1	-		Performance PRE 8 (nn = 0 – 127)		
		08	nn	1	-		Performance PRE 9 (nn = 0 – 127)		
		09	nn	1	-		Performance PRE 10 (nn = 0 – 127)		
		0A	nn	1	-		Performance PRE 11 (nn = 0 – 127)		
		0B	nn	1	-		Performance PRE 12 (nn = 0 – 127)		
		0C	nn	1	-		Performance PRE 13 (nn = 0 – 127)		
		0D	nn	1	-		Performance PRE 14 (nn = 0 – 127)		
		0E	nn	1	-		Performance PRE 15 (nn = 0 – 127)		
		0F	nn	1	-		Performance PRE 16 (nn = 0 – 127)		
		10	nn	1	-		Performance PRE 17 (nn = 0 – 127)		
		11	nn	1	-		Performance PRE 18 (nn = 0 – 127)		
		12	nn	1	-		Performance PRE 19 (nn = 0 – 127)		
		13	nn	1	-		Performance PRE 20 (nn = 0 – 127)		
		14	nn	1	-		Performance PRE 21 (nn = 0 – 127)		
		15	nn	1	-		Performance PRE 22 (nn = 0 – 127)		
		16	nn	1	-		Performance PRE 23 (nn = 0 – 127)		
		17	nn	1	-		Performance PRE 24 (nn = 0 – 127)		
		18	nn	1	-		Performance PRE 25 (nn = 0 – 127)		
		19	nn	1	-		Performance PRE 26 (nn = 0 – 127)		
		1A	nn	1	-		Performance PRE 27 (nn = 0 – 127)		
		1B	nn	1	-		Performance PRE 28 (nn = 0 – 127)		
		1C	nn	1	-		Performance PRE 29 (nn = 0 – 127)		
		1D	nn	1	-		Performance PRE 30 (nn = 0 – 127)		
		1E	nn	1	-		Performance PRE 31 (nn = 0 – 127)		
		1F	nn	1	-		Performance PRE 32 (nn = 0 – 127)		
		20	nn	1	-		Performance PRE 33 (nn = 0 – 127)		
		21	nn	1	-		Performance PRE 34 (nn = 0 – 127)		
		22	nn	1	-		Performance PRE 35 (nn = 0 – 127)		
		23	nn	1	-		Performance PRE 36 (nn = 0 – 127)		
		24	nn	1	-		Performance PRE 37 (nn = 0 – 127)		
		25	nn	1	-		Performance PRE 38 (nn = 0 – 127)		
		26	nn	1	-		Performance PRE 39 (nn = 0 – 127)		
		27	nn	1	-		Performance PRE 40 (nn = 0 – 127)		
	01	00	nn	1	-		Performance USER 1 (nn = 0 – 127)		
		01	nn	1	-		Performance USER 2 (nn = 0 – 127)		
		02	nn	1	-		Performance USER 3 (nn = 0 – 127)		
		03	nn	1	-		Performance USER 4 (nn = 0 – 127)		
		04	nn	1	-		Performance USER 5 (nn = 0 – 127)		
	02	00	nn	1	-		Performance GM (nn = 0 – 127)		
		01	nn	1	-		Performance GM Drum (nn = 0)		
	03	00	nn	1	-		Performance LIBRARY 1 (nn = 0 – 127)		
		01	nn	1	-		Performance LIBRARY 2 (nn = 0 – 127)		
		02	nn	1	-		Performance LIBRARY 3 (nn = 0 – 127)		
		03	nn	1	-		Performance LIBRARY 4 (nn = 0 – 127)		
		04	nn	1	-		Performance LIBRARY 5 (nn = 0 – 127)		
		05	nn	1	-		Performance LIBRARY 6 (nn = 0 – 127)		
		06	nn	1	-		Performance LIBRARY 7 (nn = 0 – 127)		
		07	nn	1	-		Performance LIBRARY 8 (nn = 0 – 127)		
		08	nn	1	-		Performance LIBRARY 9 (nn = 0 – 127)		
		09	nn	1	-		Performance LIBRARY 10 (nn = 0 – 127)		
		0A	nn	1	-		Performance LIBRARY 11 (nn = 0 – 127)		
		0B	nn	1	-		Performance LIBRARY 12 (nn = 0 – 127)		
		0C	nn	1	-		Performance LIBRARY 13 (nn = 0 – 127)		
		0D	nn	1	-		Performance LIBRARY 14 (nn = 0 – 127)		
		0E	nn	1	-		Performance LIBRARY 15 (nn = 0 – 127)		
		0F	nn	1	-		Performance LIBRARY 16 (nn = 0 – 127)		
		10	nn	1	-		Performance LIBRARY 17 (nn = 0 – 127)		
		11	nn	1	-		Performance LIBRARY 18 (nn = 0 – 127)		
		12	nn	1	-		Performance LIBRARY 19 (nn = 0 – 127)		
		13	nn	1	-		Performance LIBRARY 20 (nn = 0 – 127)		
		14	nn	1	-		Performance LIBRARY 21 (nn = 0 – 127)		
		15	nn	1	-		Performance LIBRARY 22 (nn = 0 – 127)		
		16	nn	1	-		Performance LIBRARY 23 (nn = 0 – 127)		
		17	nn	1	-		Performance LIBRARY 24 (nn = 0 – 127)		
		18	nn	1	-		Performance LIBRARY 25 (nn = 0 – 127)		
		19	nn	1	-		Performance LIBRARY 26 (nn = 0 – 127)		
		1A	nn	1	-		Performance LIBRARY 27 (nn = 0 – 127)		
		1B	nn	1	-		Performance LIBRARY 28 (nn = 0 – 127)		
		1C	nn	1	-		Performance LIBRARY 29 (nn = 0 – 127)		
		1D	nn	1	-		Performance LIBRARY 30 (nn = 0 – 127)		
		1E	nn	1	-	Bulk Header	Performance LIBRARY 31 (nn = 0 – 127)		
		1F	nn	1	-		Performance LIBRARY 32 (nn = 0 – 127)		
		20	nn	1	-		Performance LIBRARY 33 (nn = 0 – 127)		
		21	nn	1	-		Performance LIBRARY 34 (nn = 0 – 127)		
		22	nn	1	-		Performance LIBRARY 35 (nn = 0 – 127)		
		23	nn	1	-		Performance LIBRARY 36 (nn = 0 – 127)		
		24	nn	1	-		Performance LIBRARY 37 (nn = 0 – 127)		
		25	nn	1	-		Performance LIBRARY 38 (nn = 0 – 127)		
		26	nn	1	-		Performance LIBRARY 39 (nn = 0 – 127)		
		27	nn	1	-		Performance LIBRARY 40 (nn = 0 – 127)		
		28	nn	1	-		Performance LIBRARY 41 (nn = 0 – 127)		
		29	nn	1	-		Performance LIBRARY 42 (nn = 0 – 127)		
		2A	nn	1	-		Performance LIBRARY 43 (nn = 0 – 127)		
		2B	nn	1	-		Performance LIBRARY 44 (nn = 0 – 127)		
		2C	nn	1	-		Performance LIBRARY 45 (nn = 0 – 127)		
		2D	nn	1	-		Performance LIBRARY 46 (nn = 0 – 127)		
		2E	nn	1	-		Performance LIBRARY 47 (nn = 0 – 127)		
		2F	nn	1	-		Performance LIBRARY 48 (nn = 0 – 127)		
		30	nn	1	-		Performance LIBRARY 49 (nn = 0 – 127)		
		31	nn	1	-		Performance LIBRARY 50 (nn = 0 – 127)		
		32	nn	1	-		Performance LIBRARY 51 (nn = 0 – 127)		
		33	nn	1	-		Performance LIBRARY 52 (nn = 0 – 127)		
		34	nn	1	-		Performance LIBRARY 53 (nn = 0 – 127)		
		35	nn	1	-		Performance LIBRARY 54 (nn = 0 – 127)		
		36	nn	1	-		Performance LIBRARY 55 (nn = 0 – 127)		
		37	nn	1	-		Performance LIBRARY 56 (nn = 0 – 127)		
		38	nn	1	-		Performance LIBRARY 57 (nn = 0 – 127)		
		39	nn	1	-		Performance LIBRARY 58 (nn = 0 – 127)		
		3A	nn	1	-		Performance LIBRARY 59 (nn = 0 – 127)		
		3B	nn	1	-		Performance LIBRARY 60 (nn = 0 – 127)		
		3C	nn	1	-		Performance LIBRARY 61 (nn = 0 – 127)		
		3D	nn	1	-		Performance LIBRARY 62 (nn = 0 – 127)		
		3E	nn	1	-		Performance LIBRARY 63 (nn = 0 – 127)		
		3F	nn	1	-		Performance LIBRARY 64 (nn = 0 – 127)		
		40	nn	1	-		Performance LIBRARY 65 (nn = 0 – 127)		
		41	nn	1	-		Performance LIBRARY 66 (nn = 0 – 127)		
		42	nn	1	-		Performance LIBRARY 67 (nn = 0 – 127)		
		43	nn	1	-		Performance LIBRARY 68 (nn = 0 – 127)		
		44	nn	1	-		Performance LIBRARY 69 (nn = 0 – 127)		
		45	nn	1	-		Performance LIBRARY 70 (nn = 0 – 127)		
		46	nn	1	-		Performance LIBRARY 71 (nn = 0 – 127)		
		47	nn	1	-		Performance LIBRARY 72 (nn = 0 – 127)		
		48	nn	1	-		Performance LIBRARY 73 (nn = 0 – 127)		
		49	nn	1	-		Performance LIBRARY 74 (nn = 0 – 127)		
		4A	nn	1	-		Performance LIBRARY 75 (nn = 0 – 127)		
		4B	nn	1	-		Performance LIBRARY 76 (nn = 0 – 127)		
		4C	nn	1	-		Performance LIBRARY 77 (nn = 0 – 127)		
		4D	nn	1	-		Performance LIBRARY 78 (nn = 0 – 127)		
		4E	nn	1	-		Performance LIBRARY 79 (nn = 0 – 127)		
		4F	nn	1	-		Performance LIBRARY 80 (nn = 0 – 127)		
		50	nn	1	-		Performance LIBRARY 81		
		51	nn	1	-		Performance LIBRARY 82		
		52	nn	1	-		Performance LIBRARY 83		
		53	nn	1	-		Performance LIBRARY 84		
		54	nn	1	-		Performance LIBRARY 85		
		55	nn	1	-		Performance LIBRARY 86		
		56	nn	1	-		Performance LIBRARY 87		
		57	nn	1	-		Performance LIBRARY 88		
		58	nn	1	-		Performance LIBRARY 89		
		59	nn	1	-		Performance LIBRARY 90		
		5A	nn	1	-		Performance LIBRARY 91		
		5B	nn	1	-		Performance LIBRARY 92		
		5C	nn	1	-		Performance LIBRARY 93		
		5D	nn	1	-		Performance LIBRARY 94		
		5E	nn	1	-		Performance LIBRARY 95		
		5F	nn	1	-		Performance LIBRARY 96		
		60	nn	1	-		Performance LIBRARY 97		
		61	nn	1	-		Performance LIBRARY 98		
		62	nn	1	-		Performance LIBRARY 99		
		63	nn	1	-		Performance LIBRARY 100		
		64	nn	1	-		Performance LIBRARY 101		
		65	nn	1	-		Performance LIBRARY 102		
		66	nn	1	-		Performance LIBRARY 103		
		67	nn	1	-		Performance LIBRARY 104		
		68	nn	1	-		Performance LIBRARY 105		
		69	nn	1	-		Performance LIBRARY 106		
		6A	nn	1	-		Performance LIBRARY 107		
		6B	nn	1	-		Performance LIBRARY 108		
		6C	nn	1	-		Performance LIBRARY 109		

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
		6D	nn	1	-	Bulk Header	Performance LIBRARY 110		
		6E	nn	1	-		Performance LIBRARY 111		
		6F	nn	1	-		Performance LIBRARY 112		
		70	nn	1	-		Performance LIBRARY 113		
		71	nn	1	-		Performance LIBRARY 114		
		72	nn	1	-		Performance LIBRARY 115		
		73	nn	1	-		Performance LIBRARY 116		
		74	nn	1	-		Performance LIBRARY 117		
		75	nn	1	-		Performance LIBRARY 118		
		76	nn	1	-		Performance LIBRARY 119		
		77	nn	1	-		Performance LIBRARY 120		
	04	00	00	1	-		Performance Edit Buffer		
		01	nn	1	-		Performance Edit Buffer Part nn (nn = 0 – 15)		
		02	00	1	-		Performance Edit Buffer Common		
	05	00	00	1	-		Curve Edit Buffer		
	06	00	00	1	-		Live Set Edit Buffer		
		10	0p	1	-		Live Set Edit Buffer Page p (p = 0 – 15)		
	07	0b	00	1	-		Live Set User Bank b (b = 0 – 7)		
		1b	0p	1	-		Live Set User Bank b Page p (b = 0 – 8, p = 0 – 15)		
	08	0b	00	1	-		Live Set Library Bank b (b = 0 – 7)		
		1b	0p	1	-		Live Set Library Bank b Page p (b = 0 – 15, p = 0 – 15)		
		2b	00	1	-		Live Set Library Bank 16 + b (b = 0 – 7)		
		3b	0p	1	-		Live Set Library Bank 16 + b Page p (b = 0 – 7, p = 0 – 15)		
05	00	00	nn	1	-	Bulk Footer	Performance PRE 1 (nn = 0 – 127)		
		01	nn	1	-		Performance PRE 2 (nn = 0 – 127)		
		02	nn	1	-		Performance PRE 3 (nn = 0 – 127)		
		03	nn	1	-		Performance PRE 4 (nn = 0 – 127)		
		04	nn	1	-		Performance PRE 5 (nn = 0 – 127)		
		05	nn	1	-		Performance PRE 6 (nn = 0 – 127)		
		06	nn	1	-		Performance PRE 7 (nn = 0 – 127)		
		07	nn	1	-		Performance PRE 8 (nn = 0 – 127)		
		08	nn	1	-		Performance PRE 9 (nn = 0 – 127)		
		09	nn	1	-		Performance PRE 10 (nn = 0 – 127)		
		0A	nn	1	-		Performance PRE 11 (nn = 0 – 127)		
		0B	nn	1	-		Performance PRE 12 (nn = 0 – 127)		
		0C	nn	1	-		Performance PRE 13 (nn = 0 – 127)		
		0D	nn	1	-		Performance PRE 14 (nn = 0 – 127)		
		0E	nn	1	-		Performance PRE 15 (nn = 0 – 127)		
		0F	nn	1	-		Performance PRE 16 (nn = 0 – 127)		
		10	nn	1	-		Performance PRE 17 (nn = 0 – 127)		
		11	nn	1	-		Performance PRE 18 (nn = 0 – 127)		
		12	nn	1	-		Performance PRE 19 (nn = 0 – 127)		
		13	nn	1	-		Performance PRE 20 (nn = 0 – 127)		
		14	nn	1	-		Performance PRE 21 (nn = 0 – 127)		
		15	nn	1	-		Performance PRE 22 (nn = 0 – 127)		
		16	nn	1	-		Performance PRE 23 (nn = 0 – 127)		
		17	nn	1	-		Performance PRE 24 (nn = 0 – 127)		
		18	nn	1	-		Performance PRE 25 (nn = 0 – 127)		
		19	nn	1	-		Performance PRE 26 (nn = 0 – 127)		
		1A	nn	1	-		Performance PRE 27 (nn = 0 – 127)		
		1B	nn	1	-		Performance PRE 28 (nn = 0 – 127)		
		1C	nn	1	-		Performance PRE 29 (nn = 0 – 127)		
		1D	nn	1	-		Performance PRE 30 (nn = 0 – 127)		
		1E	nn	1	-		Performance PRE 31 (nn = 0 – 127)		
		1F	nn	1	-		Performance PRE 32 (nn = 0 – 127)		
		20	nn	1	-		Performance PRE 33 (nn = 0 – 128)		
		21	nn	1	-		Performance PRE 34 (nn = 0 – 129)		
		22	nn	1	-		Performance PRE 35 (nn = 0 – 130)		
		23	nn	1	-		Performance PRE 36 (nn = 0 – 131)		
		24	nn	1	-		Performance PRE 37 (nn = 0 – 132)		
		25	nn	1	-		Performance PRE 38 (nn = 0 – 133)		
		26	nn	1	-		Performance PRE 39 (nn = 0 – 134)		
		27	nn	1	-		Performance PRE 40 (nn = 0 – 135)		
	01	00	nn	1	-		Performance USER 1 (nn = 0 – 127)		
		01	nn	1	-		Performance USER 2 (nn = 0 – 127)		
		02	nn	1	-		Performance USER 3 (nn = 0 – 127)		
		03	nn	1	-		Performance USER 4 (nn = 0 – 127)		
		04	nn	1	-		Performance USER 5 (nn = 0 – 127)		
	02	00	nn	1	-		Performance GM (nn = 0 – 127)		
		01	nn	1	-		Performance GM (nn = 0)		
	03	00	nn	1	-		Performance LIBRARY 1 (nn = 0 – 127)		
		01	nn	1	-		Performance LIBRARY 2 (nn = 0 – 127)		
		02	nn	1	-		Performance LIBRARY 3 (nn = 0 – 127)		
		03	nn	1	-		Performance LIBRARY 4 (nn = 0 – 127)		
		04	nn	1	-		Performance LIBRARY 5 (nn = 0 – 127)		

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
		05	nn	1	-	Bulk Footer	Performance LIBRARY 6 (nn = 0 – 127)		
		06	nn	1	-		Performance LIBRARY 7 (nn = 0 – 127)		
		07	nn	1	-		Performance LIBRARY 8 (nn = 0 – 127)		
		08	nn	1	-		Performance LIBRARY 9 (nn = 0 – 127)		
		09	nn	1	-		Performance LIBRARY 10 (nn = 0 – 127)		
		0A	nn	1	-		Performance LIBRARY 11 (nn = 0 – 127)		
		0B	nn	1	-		Performance LIBRARY 12 (nn = 0 – 127)		
		0C	nn	1	-		Performance LIBRARY 13 (nn = 0 – 127)		
		0D	nn	1	-		Performance LIBRARY 14 (nn = 0 – 127)		
		0E	nn	1	-		Performance LIBRARY 15 (nn = 0 – 127)		
		0F	nn	1	-		Performance LIBRARY 16 (nn = 0 – 127)		
		10	nn	1	-		Performance LIBRARY 17 (nn = 0 – 127)		
		11	nn	1	-		Performance LIBRARY 18 (nn = 0 – 127)		
		12	nn	1	-		Performance LIBRARY 19 (nn = 0 – 127)		
		13	nn	1	-		Performance LIBRARY 20 (nn = 0 – 127)		
		14	nn	1	-		Performance LIBRARY 21 (nn = 0 – 127)		
		15	nn	1	-		Performance LIBRARY 22 (nn = 0 – 127)		
		16	nn	1	-		Performance LIBRARY 23 (nn = 0 – 127)		
		17	nn	1	-		Performance LIBRARY 24 (nn = 0 – 127)		
		18	nn	1	-		Performance LIBRARY 25 (nn = 0 – 127)		
		19	nn	1	-		Performance LIBRARY 26 (nn = 0 – 127)		
		1A	nn	1	-		Performance LIBRARY 27 (nn = 0 – 127)		
		1B	nn	1	-		Performance LIBRARY 28 (nn = 0 – 127)		
		1C	nn	1	-		Performance LIBRARY 29 (nn = 0 – 127)		
		1D	nn	1	-		Performance LIBRARY 30 (nn = 0 – 127)		
		1E	nn	1	-		Performance LIBRARY 31 (nn = 0 – 127)		
		1F	nn	1	-		Performance LIBRARY 32 (nn = 0 – 127)		
		20	nn	1	-		Performance LIBRARY 33 (nn = 0 – 127)		
		21	nn	1	-		Performance LIBRARY 34 (nn = 0 – 127)		
		22	nn	1	-		Performance LIBRARY 35 (nn = 0 – 127)		
		23	nn	1	-		Performance LIBRARY 36 (nn = 0 – 127)		
		24	nn	1	-		Performance LIBRARY 37 (nn = 0 – 127)		
		25	nn	1	-		Performance LIBRARY 38 (nn = 0 – 127)		
		26	nn	1	-		Performance LIBRARY 39 (nn = 0 – 127)		
		27	nn	1	-		Performance LIBRARY 40 (nn = 0 – 127)		
		28	nn	1	-		Performance LIBRARY 41 (nn = 0 – 127)		
		29	nn	1	-		Performance LIBRARY 42 (nn = 0 – 127)		
		2A	nn	1	-		Performance LIBRARY 43 (nn = 0 – 127)		
		2B	nn	1	-		Performance LIBRARY 44 (nn = 0 – 127)		
		2C	nn	1	-		Performance LIBRARY 45 (nn = 0 – 127)		
		2D	nn	1	-		Performance LIBRARY 46 (nn = 0 – 127)		
		2E	nn	1	-		Performance LIBRARY 47 (nn = 0 – 127)		
		2F	nn	1	-		Performance LIBRARY 48 (nn = 0 – 127)		
		30	nn	1	-		Performance LIBRARY 49 (nn = 0 – 127)		
		31	nn	1	-		Performance LIBRARY 50 (nn = 0 – 127)		
		32	nn	1	-		Performance LIBRARY 51 (nn = 0 – 127)		
		33	nn	1	-		Performance LIBRARY 52 (nn = 0 – 127)		
		34	nn	1	-		Performance LIBRARY 53 (nn = 0 – 127)		
		35	nn	1	-		Performance LIBRARY 54 (nn = 0 – 127)		
		36	nn	1	-		Performance LIBRARY 55 (nn = 0 – 127)		
		37	nn	1	-		Performance LIBRARY 56 (nn = 0 – 127)		
		38	nn	1	-		Performance LIBRARY 57 (nn = 0 – 127)		
		39	nn	1	-		Performance LIBRARY 58 (nn = 0 – 127)		
		3A	nn	1	-		Performance LIBRARY 59 (nn = 0 – 127)		
		3B	nn	1	-		Performance LIBRARY 60 (nn = 0 – 127)		
		3C	nn	1	-		Performance LIBRARY 61 (nn = 0 – 127)		
		3D	nn	1	-		Performance LIBRARY 62 (nn = 0 – 127)		
		3E	nn	1	-		Performance LIBRARY 63 (nn = 0 – 127)		
		3F	nn	1	-		Performance LIBRARY 64 (nn = 0 – 127)		
		40	nn	1	-		Performance LIBRARY 65 (nn = 0 – 127)		
		41	nn	1	-		Performance LIBRARY 66 (nn = 0 – 127)		
		42	nn	1	-		Performance LIBRARY 67 (nn = 0 – 127)		
		43	nn	1	-		Performance LIBRARY 68 (nn = 0 – 127)		
		44	nn	1	-		Performance LIBRARY 69 (nn = 0 – 127)		
		45	nn	1	-		Performance LIBRARY 70 (nn = 0 – 127)		
		46	nn	1	-		Performance LIBRARY 71 (nn = 0 – 127)		
		47	nn	1	-		Performance LIBRARY 72 (nn = 0 – 127)		
		48	nn	1	-		Performance LIBRARY 73 (nn = 0 – 127)		
		49	nn	1	-		Performance LIBRARY 74 (nn = 0 – 127)		
		4A	nn	1	-		Performance LIBRARY 75 (nn = 0 – 127)		
		4B	nn	1	-		Performance LIBRARY 76 (nn = 0 – 127)		
		4C	nn	1	-		Performance LIBRARY 77 (nn = 0 – 127)		
		4D	nn	1	-		Performance LIBRARY 78 (nn = 0 – 127)		
		4E	nn	1	-		Performance LIBRARY 79 (nn = 0 – 127)		
		4F	nn	1	-		Performance LIBRARY 80 (nn = 0 – 127)		
		50	nn	1	-		Performance LIBRARY 81		
		51	nn	1	-		Performance LIBRARY 82		

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
		52	nn	1	-	Bulk Footer	Performance LIBRARY 83		
		53	nn	1	-		Performance LIBRARY 84		
		54	nn	1	-		Performance LIBRARY 85		
		55	nn	1	-		Performance LIBRARY 86		
		56	nn	1	-		Performance LIBRARY 87		
		57	nn	1	-		Performance LIBRARY 88		
		58	nn	1	-		Performance LIBRARY 89		
		59	nn	1	-		Performance LIBRARY 90		
		5A	nn	1	-		Performance LIBRARY 91		
		5B	nn	1	-		Performance LIBRARY 92		
		5C	nn	1	-		Performance LIBRARY 93		
		5D	nn	1	-		Performance LIBRARY 94		
		5E	nn	1	-		Performance LIBRARY 95		
		5F	nn	1	-		Performance LIBRARY 96		
		60	nn	1	-		Performance LIBRARY 97		
		61	nn	1	-		Performance LIBRARY 98		
		62	nn	1	-		Performance LIBRARY 99		
		63	nn	1	-		Performance LIBRARY 100		
		64	nn	1	-		Performance LIBRARY 101		
		65	nn	1	-		Performance LIBRARY 102		
		66	nn	1	-		Performance LIBRARY 103		
		67	nn	1	-		Performance LIBRARY 104		
		68	nn	1	-		Performance LIBRARY 105		
		69	nn	1	-		Performance LIBRARY 106		
		6A	nn	1	-		Performance LIBRARY 107		
		6B	nn	1	-		Performance LIBRARY 108		
		6C	nn	1	-		Performance LIBRARY 109		
		6D	nn	1	-		Performance LIBRARY 110		
		6E	nn	1	-		Performance LIBRARY 111		
		6F	nn	1	-		Performance LIBRARY 112		
		70	nn	1	-		Performance LIBRARY 113		
		71	nn	1	-		Performance LIBRARY 114		
		72	nn	1	-		Performance LIBRARY 115		
		73	nn	1	-		Performance LIBRARY 116		
		74	nn	1	-		Performance LIBRARY 117		
		75	nn	1	-		Performance LIBRARY 118		
		76	nn	1	-		Performance LIBRARY 119		
		77	nn	1	-		Performance LIBRARY 120		
	04	00	00	1	-		Performance Edit Buffer		
		01	nn	1	-		Performance Edit Buffer Part nn (nn = 0 – 15)		
		02	00	1	-		Performance Edit Buffer Common		
	05	00	00	1	-		Curve Edit Buffer		
	06	00	00	1	-		Live Set Edit Buffer		
		10	0p	1	-		Live Set Edit Buffer Page p (p = 0 – 15)		
	07	0b	00	1	-		Live Set User Bank b (b = 0 – 7)		
		1b	0p	1	-		Live Set User Bank b Page p (b = 0 – 8, p = 0 – 15)		
	08	0b	00	1	-		Live Set Library Bank b (b = 0 – 7)		
		1b	0p	1	-		Live Set Library Bank b Page p (b = 0 – 15, p = 0 – 15)		
		2b	00	1	-		Live Set Library Bank 16 + b (b = 0 – 7)		
		3b	0p	1	-		Live Set Library Bank 16 + b Page p (b = 0 – 7, p = 0 – 15)		

MIDI PARAMETER CHANGE TABLE (SYSTEM)

Group Number =7F 1C, Model ID = 0D

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
00	00	00	00	2	00 00 – 00 7F	Tone Generator Volume	0 – 127	00 7F	MIDI Master Volume
			02	2	00 28 – 00 58	Tone Generator Note Shift	–24 – +24 semi	00 40	
			04	2	00 00 – 0F 7F	Tone Generator Tune	–102.4 – +102.3 MSB bit6-0 → bit13-7 LSB bit6-0 → bit6-0	08 00	MIDI Master Tuning
			06	2	00 00 – 00 01	Controller Reset	Hold, Reset	00 01	
			08	2	00 00 – 00 01	Local Control	Off, On	00 01	
			0A	2	00 00 – 00 01	Touch Panel Sound Switch	Off, On	00 01	
			0C	2	00 00 – 00 03	Analog Output L&R Output Gain	00: –6dB, 01:+0dB, 02: +6dB, 03: +12dB	00 01	
			0E	2	00 00 – 00 03	Assignable Output L&R Output Gain	00: –6dB, 01:+0dB, 02: +6dB, 03: +12dB	00 01	
			10	2	00 00 – 00 03	USB Main L&R Output Gain	00: –6dB, 01:+0dB, 02: +6dB, 03: +12dB	00 01	
			12	2	00 00 – 00 03	USB Individual Output Gain	00: –6dB, 01:+0dB, 02: +6dB, 03: +12dB	00 01	
			14	2	00 00 – 00 06	Keyboard Velocity Curve	Normal, Soft 1, Soft 2, Hard 1, Hard 2, Wide, Fixed	00 00	
			16	2	00 01 – 00 7F	Keyboard Fixed Velocity	1 – 127	00 40	
			18	2	00 00 – 00 01	Receive/Transmit Bank Select	Off, On	00 01	
			1A	2	00 00 – 00 01	Receive/Transmit Program Change	Off, On	00 01	
			1C	2	00 00 – 00 66	FS Assign Control Number	Off, 1 – 95, Arp SW, MS SW, Play/Stop, Live Set +, Live Set –, Oct reset, Tap Tempo	00 60	
			1E	2	00 00 – 00 5F	Super Knob Control Number	Off, 1 – 95	00 5F	
			20	2	00 00 – 00 5F	Scene Select Control Number	Off, 1 – 95	00 5C	
			22	2	00 00 – 00 01	MIDI IN/OUT	MIDI, USB	00 01	
			24	2	00 00 – 00 01	Audition Lock	Off, On	00 00	
			26	2	00 00 – 00 01	Power on Mode	Perform, Live Set	00 01	
			28	2	00 00 – 00 12	Bulk Interval	0 – 900ms	00 01	
			2A	2	00 00 – 00 20	Power on Live Set Bank	Preset, User1, – User 8, Library 1, –Library 16, Library 17, – Library24	00 01	
			2C	2	00 00 – 00 0F	Power on Live Set Page	Page 1 – Page 16	00 00	
			2E	2	00 00 – 00 0F	Power on Live Set Slot	Slot 1 – Slot 16	00 00	
			30	2	00 00 – 00 01	A/D Input Gain	Mic, Line	00 01	
			32	2	00 00 – 00 7F	USB Input Volume	0 – 127	00 7F	
			34	2	00 00 – 00 02	LED Half Glow Brightness	Off, 1/4, 1/2	00 01	
			36	2	00 00 – 00 01	Direct Monitor Switch	Off, On	00 01	
			38	2	00 00 – 00 0F	MIDI I/O Channel	Ch1, – Ch16	00 00	
			3A	2	00 00 – 01 54	Global Micro Tuning Scale	Equal Temperament, Pure Major, Pure Minor, Werckmeister, Kirnberger, Valloti&Young, 1/4 Shift, 1/4 tone, 1/8 tone, Indian, Arabic 1, Arabic 2, Arabic 3, User1 – 8, Library1-1 – 16-8, Library17-1 – Library24-8	00 00	
			3C	2	00 00 – 00 0B	Global Micro Tuning Root	C – B	00 00	
			3E	2	00 00 – 00 02	Sustain Pedal Select	FC3A (Half On), FC3A (Half Off), FC4A/FC5, Reverse Polarity	00 00	
			40	2	00 00 – 00 02	After Touch MIDI Out	Off / Ch. / Poly	00 00	
			42	2	00 00 – 00 04	After Touch Curve	Normal, Soft 1, Soft 2, Hard 1, Hard 2	00 00	
			44	2	00 00 – 00 1F	Global SSS Time	0s–30s, Hold	00 1F	
			46	2	00 00 - 00 80	reserved		01 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			48	2	00 00 - 00 80	reserved		01 00	
			4A	2	00 00 - 00 10	reserved		00 10	
			4C	2	00 00 - 00 0B	reserved		00 0B	

TOTAL SIZE = 78 4E (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
00	00	01	00	2	00 00 – 00 03	Click Mode	Off, Rec, Rec/Play, Always	00 01	for SEQ
			02	2	00 00 – 00 5F	Click Output Select	0: MainL&R, 8: AsgnL&R (=Off), 9 – 23: USB1&2 – USB29&30 (USB9&10 – USB29&30 =Off), 64 – 95: AsgnL (=Off), AsgnR (=Off), USB1 – USB30 (USB9 – USB30 =Off)	00 00	〃
			04	2	00 00 – 00 7F	Click Volume	0 – 127	00 64	〃
			06	2	00 00 – 00 09	Click Type	1 – 10	00 00	〃
			08	2	00 00 – 00 04	Click Beat	16th, 8th, 4th, 2nd, Whole	00 02	〃
			0A	2	00 00 – 00 08	Recording Count	Off, 1 – 8meas	00 01	〃
			0C	2	00 00 – 00 01	Transmit Sequencer Control	Off, On	00 00	〃
			0E	2	00 00 – 00 01	Receive Sequencer Control	Off, On	00 00	〃
			10	2	00 00 – 00 02	Song Event Chase	Off, PC, PC+PB+Ctrl	00 00	〃
			12	2	00 00 – 00 02	MIDI Sync	Internal, MIDI, A/D In	00 01	〃
			14	2	00 00 – 00 01	MIDI Clock Out	Off, On	00 00	〃

TOTAL SIZE = 22 16 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
00	00	02	00	2	00 35 – 00 4B	Keyboard Transpose	–11 – +11 semi	00 40	
			02	2	00 3D – 00 43	Keyboard Octave Shift	–3 – +3	00 40	
			04	2	00 00 – 00 01	Global Micro Tuning Switch	Off, On	00 00	

TOTAL SIZE = 6 06 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
00	00	03	00	2	00 00 – 00 03	DAW Type	0=Cubase, 1=Logic, 2=ProTools, 3=AbletonLive	00 00	
			02	2	00 00 – 00 03	Remote Control Mode	0=Track, 1=Plugin, 2=Transport, 3=ESP Control	00 00	
			04	2	00 01 – 00 5F	Super Knob Control Number	1 – 95	00 5F	
			06	2	00 01 – 00 5F	Assignable Knob 1 Control Number	1 – 95	00 11	
			08	2	00 01 – 00 5F	Assignable Knob 2 Control Number	1 – 95	00 12	
			0A	2	00 01 – 00 5F	Assignable Knob 3 Control Number	1 – 95	00 13	
			0C	2	00 01 – 00 5F	Assignable Knob 4 Control Number	1 – 95	00 14	
			0E	2	00 01 – 00 5F	Assignable Knob 5 Control Number	1 – 95	00 15	
			10	2	00 01 – 00 5F	Assignable Knob 6 Control Number	1 – 95	00 16	
			12	2	00 01 – 00 5F	Assignable Knob 7 Control Number	1 – 95	00 17	
			14	2	00 01 – 00 5F	Assignable Knob 8 Control Number	1 – 95	00 18	
			16	2	00 01 – 00 5F	Slider 1 Control Number	1 – 95	00 46	
			18	2	00 01 – 00 5F	Slider 2 Control Number	1 – 95	00 47	
			1A	2	00 01 – 00 5F	Slider 3 Control Number	1 – 95	00 48	
			1C	2	00 01 – 00 5F	Slider 4 Control Number	1 – 95	00 49	
			1E	2	00 01 – 00 5F	Slider 5 Control Number	1 – 95	00 4A	
			20	2	00 01 – 00 5F	Slider 6 Control Number	1 – 95	00 4B	
			22	2	00 01 – 00 5F	Slider 7 Control Number	1 – 95	00 4C	
			24	2	00 01 – 00 5F	Slider 8 Control Number	1 – 95	00 4D	
			26	2	00 01 – 00 5F	Scene 1 Control Number	1 – 95	00 19	
			28	2	00 01 – 00 5F	Scene 2 Control Number	1 – 95	00 1A	
			2A	2	00 01 – 00 5F	Scene 3 Control Number	1 – 95	00 1B	
			2C	2	00 01 – 00 5F	Scene 4 Control Number	1 – 95	00 1C	
			2E	2	00 01 – 00 5F	Scene 5 Control Number	1 – 95	00 1D	
			30	2	00 01 – 00 5F	Scene 6 Control Number	1 – 95	00 1E	
			32	2	00 01 – 00 5F	Scene 7 Control Number	1 – 95	00 1F	
			34	2	00 01 – 00 5F	Scene 8 Control Number	1 – 95	00 55	
			36	2	00 01 – 00 5F	Ribbon Controller Control Number	1 – 95	00 10	
			38	2	00 01 – 00 5F	Foot Switch Control Number	1 – 95	00 58	
			3A	2	00 01 – 00 5F	Foot Controller 1 Control Number	1 – 95	00 0B	
			3C	2	00 01 – 00 5F	Foot Controller 2 Control Number	1 – 95	00 5F	
			3E	2	00 01 – 00 5F	Assignable Switch 1 Control Number	1 – 95	00 56	
			40	2	00 01 – 00 5F	Assignable Switch 2 Control Number	1 – 95	00 57	
			42	2	00 01 – 00 5F	Motion Seq Trigger Switch Control Number	1 – 95	00 59	
			44	2	00 01 – 00 5F	Time Control Number	1 – 95	00 05	
			46	2	00 01 – 00 5F	Portamento Switch Control Number	1 – 95	00 41	
			48	2	00 01 – 00 5F	Display Knob 1 Control Number	1 – 95	00 4E	
			4A	2	00 01 – 00 5F	Display Knob 2 Control Number	1 – 95	00 4F	
			4C	2	00 01 – 00 5F	Display Knob 3 Control Number	1 – 95	00 50	
			4E	2	00 01 – 00 5F	Display Knob 4 Control Number	1 – 95	00 51	
			50	2	00 01 – 00 5F	Display Knob 5 Control Number	1 – 95	00 52	
			52	2	00 01 – 00 5F	Display Knob 6 Control Number	1 – 95	00 53	
			54	2	00 00 – 00 01	Ribbon Controller Mode	Hold, Reset	00 01	
			56	2	00 00 – 00 01	Foot Switch Mode	Momentary, Latch	00 01	
			58	2	00 00 – 00 01	Assignable Switch 1 Mode	Momentary, Latch	00 01	
			5A	2	00 00 – 00 01	Assignable Switch 2 Mode	Momentary, Latch	00 01	
			5C	2	00 00 – 00 01	Motion Seq Trigger Switch Mode	Momentary, Latch	00 01	
			5E	2	00 00 – 00 01	Scene 1 Switch Mode	Momentary, Latch	00 00	
			60	2	00 00 – 00 01	Scene 2 Switch Mode	Momentary, Latch	00 00	
			62	2	00 00 – 00 01	Scene 3 Switch Mode	Momentary, Latch	00 00	
			64	2	00 00 – 00 01	Scene 4 Switch Mode	Momentary, Latch	00 00	
			66	2	00 00 – 00 01	Scene 5 Switch Mode	Momentary, Latch	00 00	
			68	2	00 00 – 00 01	Scene 6 Switch Mode	Momentary, Latch	00 00	
			6A	2	00 00 – 00 01	Scene 7 Switch Mode	Momentary, Latch	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			6C	2	00 00 – 00 01	Scene 8 Switch Mode	Momentary, Latch	00 00	
			6E	2	00 00 – 00 01	Portamento Switch Mode	Momentary, Latch	00 01	

TOTAL SIZE = 112 70 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
00	01	0n	00	2	00 1D – 01 63	Micro Tuning C	–99 – 0 – +99 [cent]	01 00	
			02	2	00 1D – 01 63	Micro Tuning C#	〃	01 00	
			04	2	00 1D – 01 63	Micro Tuning D	〃	01 00	
			06	2	00 1D – 01 63	Micro Tuning D#	〃	01 00	
			08	2	00 1D – 01 63	Micro Tuning E	〃	01 00	
			0A	2	00 1D – 01 63	Micro Tuning F	〃	01 00	
			0C	2	00 1D – 01 63	Micro Tuning F#	〃	01 00	
			0E	2	00 1D – 01 63	Micro Tuning G	〃	01 00	
			10	2	00 1D – 01 63	Micro Tuning G#	〃	01 00	
			12	2	00 1D – 01 63	Micro Tuning A	〃	01 00	
			14	2	00 1D – 01 63	Micro Tuning A#	〃	01 00	
			16	2	00 1D – 01 63	Micro Tuning B	〃	01 00	

TOTAL SIZE = 24 18 (HEX)
n = user table number
00 – 07 Table 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
00	02	0n	00	1	00, 20 – 7E	Micro Tuning Table Name 1	0, 32 – 126 (ASCII)	Init Tuning 1 – 8 (same as the table number)	
			01	1	00, 20 – 7E	Micro Tuning Table Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Micro Tuning Table Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Micro Tuning Table Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Micro Tuning Table Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Micro Tuning Table Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Micro Tuning Table Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Micro Tuning Table Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Micro Tuning Table Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Micro Tuning Table Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Micro Tuning Table Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Micro Tuning Table Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Micro Tuning Table Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Micro Tuning Table Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Micro Tuning Table Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Micro Tuning Table Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Micro Tuning Table Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Micro Tuning Table Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Micro Tuning Table Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Micro Tuning Table Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)
n = user table number
00 – 07 Table 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
00	00	7F	00	2	00 – 7F	Soundmondo Format Version Major		01	
				2	00 – 7F	Soundmondo Format Version Minor		02	
				2	00 – 7F	Soundmondo Format Version Bugfix		00	

TOTAL SIZE = 6 006 (Hex)

MIDI PARAMETER CHANGE TABLE (CURVE)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
01	00	nn	00	1	00, 20 – 7E	Curve Name 1	0, 32 – 126 (ASCII)	Init Curve 1-32 (same as the table number)	
			01	1	00, 20 – 7E	Curve Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Curve Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Curve Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Curve Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Curve Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Curve Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Curve Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Curve Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Curve Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Curve Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Curve Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Curve Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Curve Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Curve Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Curve Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Curve Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Curve Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Curve Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Curve Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

nn = user curve number
00 – 1F User Curve 1 – 32

Address				Size	Data Range MSB/LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
01	01	nn	00	2	00 00	Curve Input 1	0	00 00	Fixed to "0"
			02	2	00 01 – 07 79	Curve Input 2	1 – 1017	01 12	
			04	2	00 02 – 07 7A	Curve Input 3	2 – 1018	02 24	
			06	2	00 03 – 07 7B	Curve Input 4	3 – 1019	03 36	
			08	2	00 04 – 07 7C	Curve Input 5	4 – 1020	04 48	
			0A	2	00 05 – 07 7D	Curve Input 6	5 – 1021	05 5A	
			0C	2	00 06 – 07 7E	Curve Input 7	6 – 1022	06 6C	
			0E	2	00 07 – 07 7F	Curve Input 8	7 – 1023	07 7F	Fixed to 07 7F in the Linear Mode
			10	2	00 00 – 07 7F	Curve Output 1	0 – 1023	00 00	
			12	2	00 00 – 07 7F	Curve Output 2	0 – 1023	01 12	
			14	2	00 00 – 07 7F	Curve Output 3	0 – 1023	02 24	
			16	2	00 00 – 07 7F	Curve Output 4	0 – 1023	03 36	
			18	2	00 00 – 07 7F	Curve Output 5	0 – 1023	04 48	
			1A	2	00 00 – 07 7F	Curve Output 6	0 – 1023	05 5A	
			1C	2	00 00 – 07 7F	Curve Output 7	0 – 1023	06 6C	
			1E	2	00 00 – 07 7F	Curve Output 8	0 – 1023	07 7F	
			20	2	00 00 – 00 01	Curve Type	00 = Linear, 01 = Step	00 00	

TOTAL SIZE = 34 22 (HEX)

MIDI PARAMETER CHANGE TABLE (LIVE SET)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
03	00	00	00	1	00, 20 – 7E	Live Set Bank Name 1	0, 32 – 126 (ASCII)	User 1-8 (same as the bank number)	
			01	1	00, 20 – 7E	Live Set Bank Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Live Set Bank Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Live Set Bank Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Live Set Bank Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Live Set Bank Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Live Set Bank Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Live Set Bank Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Live Set Bank Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Live Set Bank Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Live Set Bank Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Live Set Bank Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Live Set Bank Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Live Set Bank Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Live Set Bank Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Live Set Bank Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Live Set Bank Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Live Set Bank Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Live Set Bank Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Live Set Bank Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
03	1p	00	00	1	00, 20 – 7E	Live Set Page Name 1	0, 32 – 126 (ASCII)	Live Set Page 1-16 (same as the page number)	
			01	1	00, 20 – 7E	Live Set Page Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Live Set Page Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Live Set Page Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Live Set Page Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Live Set Page Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Live Set Page Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Live Set Page Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Live Set Page Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Live Set Page Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Live Set Page Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Live Set Page Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Live Set Page Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Live Set Page Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Live Set Page Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Live Set Page Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Live Set Page Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Live Set Page Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Live Set Page Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Live Set Page Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

p = Page number
00 – 0F Page 1 – 16

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
03	2p	0s	00	1	00, 20 – 7E	Live Set Slot Name 1	0, 32 – 126 (ASCII)		
			01	1	00, 20 – 7E	Live Set Slot Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Live Set Slot Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Live Set Slot Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Live Set Slot Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Live Set Slot Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Live Set Slot Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Live Set Slot Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Live Set Slot Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Live Set Slot Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Live Set Slot Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Live Set Slot Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Live Set Slot Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Live Set Slot Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Live Set Slot Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Live Set Slot Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Live Set Slot Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Live Set Slot Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Live Set Slot Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Live Set Slot Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

p = Page number
00 – 0F Page 1 – 16

s = Slot number
00 – 0F Slot 1 – 16

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
03	3p	0s	00	2	00 00 – 00 0F	Live Set Slot Color	Black, Red, Yellow, Green, Blue, Azure, Pink, Orange, Purple, Sakura, Cream, Lime, Aqua, Beige, Mint, Lilac	00 00	
			02	2	00 00 – 00 7F	Bank Select MSB	0 – 127	00 3F	
			04	2	00 00 – 00 7F	Bank Select LSB	0 – 127	00 00	
			06	2	00 00 – 00 7F	Performance Number	1 – 128	00 00	
			08	2	00 00 – 00 7F	Performance Volume	0 – 127	00 64	
			0A	2	00 00 – 00 01	Slot Switch	OFF, ON	00 00	
			0C	2	00 00 – 00 03	Slot Type	Performance, Song, Audio, Pattern	00 00	
			0E	2	00 00 – 00 7F	Content Number	1 – 128	00 00	
			10	2	00 00 – 00 20	SSS Time	0s–30s, Hold, System	00 1F	

TOTAL SIZE = 18 12 (HEX)

p = Page number
00 – 0F Page 1 – 16

s = Slot number
00 – 0F Slot 1 – 16

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
03	4p	0s	00	256	00, 20 – 7E	Audio File Path	0, 32 – 126 (ASCII)	00	

TOTAL SIZE = 256 100 (HEX)

p = Page number
00 – 0F Page 1 – 16

s = Slot number
00 – 0F Slot 1 – 16

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
03	5p	0s	00	32	00, 30 – 39, 61 – 66	Identifier	''0' – '9', 'a' – 'f'	00	md5sum for the device information of the USB flash drive

TOTAL SIZE = 32 20 (HEX)

p = Page number
00 – 0F Page 1 – 16

s = Slot number
00 – 0F Slot 1 – 16

MIDI PARAMETER CHANGE TABLE (PERFORMANCE COMMON)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	00	00	1	00, 20 – 7E	Performance Name 1	0, 32 – 126 (ASCII)	Initialized Perform	
			01	1	00, 20 – 7E	Performance Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Performance Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Performance Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Performance Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Performance Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Performance Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Performance Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Performance Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Performance Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Performance Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Performance Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Performance Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Performance Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Performance Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Performance Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Performance Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Performance Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Performance Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Performance Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	01	00	1	00 – 01	Portamento Switch	Off, On	00	
			01	1	00 – 01	Assignable Switch 1 Mode	Momentary, Latch	01	
			02	1	00 – 01	Assignable Switch 2 Mode	Momentary, Latch	01	
			03	1	00 – 01	Scene Mixing / AEG Value Mode	Absolute, Offset	01	
			04	1	00 – 01	Ribbon Controller Mode	Hold, Reset	01	
			05	1	00 – 01	Reverb Switch	Off, On	01	
			06	1	00 – 01	Variation Switch	Off, On	01	
			07	1	00 – 01	Master EQ Switch	Off, On	01	
			08	1	00 – 01	Master Effect Switch	Off, On	00	
			09	1	00 – 01	Arpeggio Master Switch	Off, On	00	
			0A	1	00 – 01	Motion Seq Master Switch	Off, On	00	
			0B	1	00 – 01	Assignable Knob1 Link Switch	Off, On	01	
			0C	1	00 – 01	Assignable Knob2 Link Switch	Off, On	01	
			0D	1	00 – 01	Assignable Knob3 Link Switch	Off, On	01	
			0E	1	00 – 01	Assignable Knob4 Link Switch	Off, On	01	
			0F	1	00 – 01	Assignable Knob5 Link Switch	Off, On	01	
			10	1	00 – 01	Assignable Knob6 Link Switch	Off, On	01	
			11	1	00 – 01	Assignable Knob7 Link Switch	Off, On	01	
			12	1	00 – 01	Assignable Knob8 Link Switch	Off, On	01	
			13	1	00 – 01	A/D Part Insertion FX A Switch	Off, On	01	
			14	1	00 – 01	A/D Part Insertion FX B Switch	Off, On	01	
			15	1	00 – 01	A/D Part Motion Seq Part Switch	Off, On	01	
			16	1	00 – 01	Super Knob Motion Seq Switch	Off, On	00	
			17	1	00 – 01	Super Knob Motion Seq FX Receive	Off, On	01	
			18	1	00 – 01	Super Knob Motion Seq Trigger Receive	Off, On	00	
			19	1	00 – 01	Super Knob Motion Seq Loop	Off, On	01	
			1A	1	00 – 01	reserved		00	
			1B	1	00 – 01	Smart Morph Super Knob Link	Off, On	00	
			1C	1	00 – 01	Slider Direction Part 1 – 8	Normal, Reverse	00	

TOTAL SIZE = 29 1D (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	02	00	2	00 00 – 00 10	Performance Main Category	0 – 16 Refer to Performance Category List	00 10 (NoAsg)	
			02	2	00 00 – 00 07	Performance Sub Category	0 – 7 Refer to Performance Category List	00 00 (--)	
			04	2	00 00 – 00 10	Selected Part	1 – 16, Common	00 10	
			06	2	00 00 – 00 7F	Performance Volume	0 – 127	00 7F	
			08	2	00 01 – 00 7F	Performance Pan	L63 – C – R63	00 40	
			0A	2	00 00 – 00 7F	AEG Attack Time	–64 – +63	00 40	
			0C	2	00 00 – 00 7F	AEG Decay Time	–64 – +63	00 40	
			0E	2	00 00 – 00 7F	AEG Sustain Level	–64 – +63	00 40	
			10	2	00 00 – 00 7F	AEG Release Time	–64 – +63	00 40	
			12	2	00 00 – 00 7F	FEG Attack Time	–64 – +63	00 40	
			14	2	00 00 – 00 7F	FEG Decay Time	–64 – +63	00 40	
			16	2	00 00 – 00 7F	FEG Release Time	–64 – +63	00 40	
			18	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 40	
			1A	2	00 00 – 00 7F	Cutoff Frequency	–64 – +63	00 40	
			1C	2	00 00 – 00 7F	Resonance	–64 – +63	00 40	
			1E	2	00 05 – 02 2C	Tempo	5 – 300	00 78	
			20	2	00 00 – 00 7F	Portamento Time	–64 – +63	00 40	
			22	2	00 00 – 00 7F	USB Main Monitor Volume	0 – 127	00 7F	
			24	2	00 00 – 00 7F	USB Assign Monitor Volume	0 – 127	00 7F	
			26	2	00 08 – 01 78	Swing Offset	–120 – 0 – +120	01 00	
			28	2	00 00 – 00 09	Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%	00 03	
			2A	2	00 00 – 00 07	Scene Select	1 – 8	00 00	
			2C	2	00 01 – 50 7F	Audition Phrase Number	Preset (1 – 2320), User, Library (see the Audition Number Table)	00 01	
			2E	2	00 28 – 00 58	Audition Note Shift	–24 – 24	00 40	
			30	2	00 00 – 00 7F	Audition Velocity Shift	–64 – 63	00 40	
			32	2	00 00 – 00 7F	Reverb Return	0 – 127	00 40	
			34	2	00 01 – 00 7F	Reverb Pan	L63 – C – R63	00 40	
			36	2	00 00 – 00 11, 00 7F	Variation Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17: Master, 127: Off	00 7F	
			38	2	00 00 – 00 7F	Variation Return	0 – 127	00 60	
			3A	2	00 01 – 00 7F	Variation Pan	L63 – C – R63	00 40	
			3C	2	00 00 – 00 7F	Send Variation To Reverb	0 – 127	00 00	
			3E	2	00 00 – 00 11, 00 7F	Insertion-A Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17: Master, 127: Off	00 7F	
			40	2	00 00 – 00 11, 00 7F	Insertion-B Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17: Master, 127: Off	00 7F	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			42	2	00 00 – 00 11, 00 7F	Master Effect Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17: Master, 127: Off	00 7F	
			44	2	00 10 – 00 70	Master Effect Envelope Follower Gain	–24dB – 0dB – +24dB	00 40	
			46	2	00 00 – 00 13	Master Effect Envelope Follower Attack	1ms – 40ms	00 10	
			48	2	00 00 – 00 0F	Master Effect Envelope Follower Release	10ms – 680ms	00 07	
			4A	2	00 00 – 00 01	VCM Rotary Speaker Switch	Off, On	00 00	
			4C	2	00 00 – 00 03	Split Points	Off, 1, 2, 3	00 00	
			4E	2	00 01 – 00 7D	Split Point 1	C#-2 – F8	00 3C	
			50	2	00 02 – 00 7E	Split Point 2	D-2 – F#8	00 48	
			52	2	00 03 – 00 7F	Split Point 3	D#-2 – G8	00 54	
			54	2	00 10 – 00 70	Performance Note Shift	-48 – +48[semitones]	00 40	

TOTAL SIZE = 86 56 (HEX)

Audition Number Table

Bank	Data Range	Description
User	8192 – 8319	001 – 128
Library1	8320 – 8447	001 – 128
Library2	8448 – 8575	001 – 128
Library3	8576 – 8703	001 – 128
Library4	8704 – 8831	001 – 128
Library5	8832 – 8959	001 – 128
Library6	8960 – 9087	001 – 128
Library7	9088 – 9215	001 – 128
Library8	9216 – 9343	001 – 128
Library9	9344 – 9471	001 – 128
Library10	9472 – 9599	001 – 128
Library11	9600 – 9727	001 – 128
Library12	9728 – 9855	001 – 128
Library13	9856 – 9983	001 – 128
Library14	9984 – 10111	001 – 128
Library15	10112 – 10239	001 – 128
Library16	10240 – 10367	001 – 128
Library17	10368 – 10495	001 – 128
Library18	10496 – 10623	001 – 128
Library19	10624 – 10751	001 – 128
Library20	10752 – 10879	001 – 128
Library21	10880 – 11007	001 – 128
Library22	11008 – 11135	001 – 128
Library23	11136 – 11263	001 – 128
Library24	11264 – 11391	001 – 128

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	03	00	2	00 00 – 00 5F	Ribbon Controller Control Number	Off,1 – 95	00 10	
			02	2	00 00 – 00 5F	Breath Controller Control Number	Off,1 – 95	00 02	
			04	2	00 00 – 00 60	Foot Controller 1 Control Number	Off,1 – 95, Super Knob	00 0B	
			06	2	00 00 – 00 60	Foot Controller 2 Control Number	Off,1 – 95, Super Knob	00 60	
			08	2	00 00 – 00 5F	Assignable Switch 1 Control Number	Off,1 – 95	00 56	
			0A	2	00 00 – 00 5F	Assignable Switch 2 Control Number	Off,1 – 95	00 57	
			0C	2	00 00 – 00 07	Knob Mode for MODX M	Tone, FEG, AEG, EQ, FX, Arp/MS, Assign 1-4, Assign 5-8	00 00	
			0E	2	00 00 – 00 5F	Motion Seq Trigger Switch Control Number	Off,1 – 95	00 59	
			10	2	00 00 – 00 5F	Assignable Knob 1 Control Number	Off,1 – 95	00 11	
			12	2	00 00 – 00 5F	Assignable Knob 2 Control Number	Off,1 – 95	00 12	
			14	2	00 00 – 00 5F	Assignable Knob 3 Control Number	Off,1 – 95	00 13	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			16	2	00 00 – 00 5F	Assignable Knob 4 Control Number	Off,1 – 95	00 14	
			18	2	00 00 – 00 5F	Assignable Knob 5 Control Number	Off,1 – 95	00 15	
			1A	2	00 00 – 00 5F	Assignable Knob 6 Control Number	Off,1 – 95	00 16	
			1C	2	00 00 – 00 5F	Assignable Knob 7 Control Number	Off,1 – 95	00 17	
			1E	2	00 00 – 00 5F	Assignable Knob 8 Control Number	Off,1 – 95	00 18	
			20	2	00 00 – 07 7F	Assignable Knob 1 Value	0 – 1023	04 00	
			22	2	00 00 – 07 7F	Assignable Knob 2 Value	0 – 1023	04 00	
			24	2	00 00 – 07 7F	Assignable Knob 3 Value	0 – 1023	04 00	
			26	2	00 00 – 07 7F	Assignable Knob 4 Value	0 – 1023	04 00	
			28	2	00 00 – 07 7F	Assignable Knob 5 Value	0 – 1023	04 00	
			2A	2	00 00 – 07 7F	Assignable Knob 6 Value	0 – 1023	04 00	
			2C	2	00 00 – 07 7F	Assignable Knob 7 Value	0 – 1023	04 00	
			2E	2	00 00 – 07 7F	Assignable Knob 8 Value	0 – 1023	04 00	
			30	2	00 00 – 00 03	reserved		00 03	
			32	2	00 00 – 00 0E	reserved		00 01	
			34	2	00 00 – 00 04	reserved		00 00	
			36	2	00 00 – 00 07	reserved		00 00	
			38	2	00 00 – 00 11	reserved		00 00	
			3A	2	00 00 – 00 0E	reserved		00 00	
			3C	2	00 00 – 00 15	reserved		00 00	
			3E	2	00 00 – 00 1F	reserved		00 00	
			40	2	00 00 – 00 02	Ribbon Grid Mode	Continuous, 5 steps, 3 steps	00 00	
			42	2	00 00 – 00 10	Ribbon Grid Control Part	1 – 16, Common	00 10	
			44	2	00 00 – 7F 7F	Ribbon Grid Control Destination	Complies with Controller Box Destination	00 00	
			46	2	00 00 – 7F 7F	Ribbon Grid Step Value 1	Depends on the Destination	00 00	
			48	2	00 00 – 7F 7F	Ribbon Grid Step Value 2	Depends on the Destination	00 00	
			4A	2	00 00 – 7F 7F	Ribbon Grid Step Value 3	Depends on the Destination	00 00	
			4C	2	00 00 – 7F 7F	Ribbon Grid Step Value 4	Depends on the Destination	00 00	
			4E	2	00 00 – 7F 7F	Ribbon Grid Step Value 5	Depends on the Destination	00 00	
			50	2	00 00 – 00 01	Slider Mode	Part Control, Elem./ Op./Osc. Control	00 00	
			52	2	00 00 – 00 06	View Mode	Default, Part Info, Smart Morph, Motion Seq, Part-Note, Velocity-Note, Ribbon	00 00	
			54	2	00 00 – 7F 7F	reserved		00 00	

TOTAL SIZE = 84 54 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	04	00	2	00 00 – 7F 7F	Insertion-A Type	Refer to Effect Parameter List	00 00	for A/D Part
			02	2	00 00 – 7F 7F	Insertion-A Template Number		00 00	〃
			04	2	00 00 – 7F 7F	Insertion-A Parameter 1	Refer to Effect Parameter List	00 00	〃
			06	2	00 00 – 7F 7F	Insertion-A Parameter 2	〃	00 00	〃
			08	2	00 00 – 7F 7F	Insertion-A Parameter 3	〃	00 00	〃
			0A	2	00 00 – 7F 7F	Insertion-A Parameter 4	〃	00 00	〃
			0C	2	00 00 – 7F 7F	Insertion-A Parameter 5	〃	00 00	〃
			0E	2	00 00 – 7F 7F	Insertion-A Parameter 6	〃	00 00	〃
			10	2	00 00 – 7F 7F	Insertion-A Parameter 7	〃	00 00	〃
			12	2	00 00 – 7F 7F	Insertion-A Parameter 8	〃	00 00	〃
			14	2	00 00 – 7F 7F	Insertion-A Parameter 9	〃	00 00	〃
			16	2	00 00 – 7F 7F	Insertion-A Parameter 10	〃	00 00	〃
			18	2	00 00 – 7F 7F	Insertion-A Parameter 11	〃	00 00	〃
			1A	2	00 00 – 7F 7F	Insertion-A Parameter 12	〃	00 00	〃
			1C	2	00 00 – 7F 7F	Insertion-A Parameter 13	〃	00 00	〃
			1E	2	00 00 – 7F 7F	Insertion-A Parameter 14	〃	00 00	〃
			20	2	00 00 – 7F 7F	Insertion-A Parameter 15	〃	00 00	〃
			22	2	00 00 – 7F 7F	Insertion-A Parameter 16	〃	00 00	〃
			24	2	00 00 – 7F 7F	Insertion-A Parameter 17	〃	00 00	〃
			26	2	00 00 – 7F 7F	Insertion-A Parameter 18	〃	00 00	〃
			28	2	00 00 – 7F 7F	Insertion-A Parameter 19	〃	00 00	〃
			2A	2	00 00 – 7F 7F	Insertion-A Parameter 20	〃	00 00	〃
			2C	2	00 00 – 7F 7F	Insertion-A Parameter 21	〃	00 00	〃
			2E	2	00 00 – 7F 7F	Insertion-A Parameter 22	〃	00 00	〃
			30	2	00 00 – 7F 7F	Insertion-A Parameter 23	〃	00 00	〃
			32	2	00 00 – 7F 7F	Insertion-A Parameter 24	〃	00 00	〃

TOTAL SIZE = 52 34 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	05	00	2	00 00 – 7F 7F	Insertion-B Type	Refer to Effect Parameter List	00 00	for A/D Part
			02	2	00 00 – 7F 7F	Insertion-B Preset Number		00 00	〃
			04	2	00 00 – 7F 7F	Insertion-B Parameter 1	Refer to Effect Parameter List	00 00	〃
			06	2	00 00 – 7F 7F	Insertion-B Parameter 2	〃	00 00	〃
			08	2	00 00 – 7F 7F	Insertion-B Parameter 3	〃	00 00	〃
			0A	2	00 00 – 7F 7F	Insertion-B Parameter 4	〃	00 00	〃
			0C	2	00 00 – 7F 7F	Insertion-B Parameter 5	〃	00 00	〃
			0E	2	00 00 – 7F 7F	Insertion-B Parameter 6	〃	00 00	〃
			10	2	00 00 – 7F 7F	Insertion-B Parameter 7	〃	00 00	〃
			12	2	00 00 – 7F 7F	Insertion-B Parameter 8	〃	00 00	〃
			14	2	00 00 – 7F 7F	Insertion-B Parameter 9	〃	00 00	〃
			16	2	00 00 – 7F 7F	Insertion-B Parameter 10	〃	00 00	〃
			18	2	00 00 – 7F 7F	Insertion-B Parameter 11	〃	00 00	〃
			1A	2	00 00 – 7F 7F	Insertion-B Parameter 12	〃	00 00	〃
			1C	2	00 00 – 7F 7F	Insertion-B Parameter 13	〃	00 00	〃
			1E	2	00 00 – 7F 7F	Insertion-B Parameter 14	〃	00 00	〃
			20	2	00 00 – 7F 7F	Insertion-B Parameter 15	〃	00 00	〃
			22	2	00 00 – 7F 7F	Insertion-B Parameter 16	〃	00 00	〃
			24	2	00 00 – 7F 7F	Insertion-B Parameter 17	〃	00 00	〃
			26	2	00 00 – 7F 7F	Insertion-B Parameter 18	〃	00 00	〃
			28	2	00 00 – 7F 7F	Insertion-B Parameter 19	〃	00 00	〃
			2A	2	00 00 – 7F 7F	Insertion-B Parameter 20	〃	00 00	〃
			2C	2	00 00 – 7F 7F	Insertion-B Parameter 21	〃	00 00	〃
			2E	2	00 00 – 7F 7F	Insertion-B Parameter 22	〃	00 00	〃
			30	2	00 00 – 7F 7F	Insertion-B Parameter 23	〃	00 00	〃
			32	2	00 00 – 7F 7F	Insertion-B Parameter 24	〃	00 00	〃

TOTAL SIZE = 52 34 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	06	00	2	00 00 – 00 07	Arpeggio Select	1 – 8	00 00	
			02	2	00 00 – 00 07	Arpeggio Synchro Quantize Value	Off, 60, 80, 120, 160, 240, 320, 480	00 00	
			04	2	00 1C – 01 64	Arpeggio Quantize Strength Offset	–100 – +100	01 00	
			06	2	00 1C – 01 64	Arpeggio Gate Time Rate Offset	–100 – 0 – +100	01 00	
			08	2	00 1C – 01 64	Arpeggio Velocity Rate Offset	〃	01 00	
			0A	2	00 3A – 00 46	Arpeggio Octave Range Offset	–6 – +6	00 40	
			0C	2	00 2C – 00 54	Arpeggio Output Octave Shift Offset	–20 – +20	00 40	

TOTAL SIZE = 14 0E (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/LSB (HEX)	Notes
06	00	07	00	2	00 00 – 7F 7F	Reverb Type	Refer to Effect Parameter List	01 00	
			02	2	00 00 – 7F 7F	Reverb Preset Number		00 00	
			04	2	00 00 – 7F 7F	Reverb Parameter 1	Refer to Effect Parameter List	init value for Rev-X Hall / Basic	
			06	2	00 00 – 7F 7F	Reverb Parameter 2	〃	init value for Rev-X Hall / Basic	
			08	2	00 00 – 7F 7F	Reverb Parameter 3	〃	init value for Rev-X Hall / Basic	
			0A	2	00 00 – 7F 7F	Reverb Parameter 4	〃	init value for Rev-X Hall / Basic	
			0C	2	00 00 – 7F 7F	Reverb Parameter 5	〃	init value for Rev-X Hall / Basic	
			0E	2	00 00 – 7F 7F	Reverb Parameter 6	〃	init value for Rev-X Hall / Basic	
			10	2	00 00 – 7F 7F	Reverb Parameter 7	〃	init value for Rev-X Hall / Basic	
			12	2	00 00 – 7F 7F	Reverb Parameter 8	〃	init value for Rev-X Hall / Basic	
			14	2	00 00 – 7F 7F	Reverb Parameter 9	〃	init value for Rev-X Hall / Basic	
			16	2	00 00 – 7F 7F	Reverb Parameter 10	〃	init value for Rev-X Hall / Basic	
			18	2	00 00 – 7F 7F	Reverb Parameter 11	〃	init value for Rev-X Hall / Basic	
			1A	2	00 00 – 7F 7F	Reverb Parameter 12	〃	init value for Rev-X Hall / Basic	
			1C	2	00 00 – 7F 7F	Reverb Parameter 13	〃	init value for Rev-X Hall / Basic	
			1E	2	00 00 – 7F 7F	Reverb Parameter 14	〃	init value for Rev-X Hall / Basic	
			20	2	00 00 – 7F 7F	Reverb Parameter 15	〃	init value for Rev-X Hall / Basic	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/LSB (HEX)	Notes
			22	2	00 00 – 7F 7F	Reverb Parameter 16	〃	init value for Rev-X Hall / Basic	
			24	2	00 00 – 7F 7F	Reverb Parameter 17	〃	init value for Rev-X Hall / Basic	
			26	2	00 00 – 7F 7F	Reverb Parameter 18	〃	init value for Rev-X Hall / Basic	
			28	2	00 00 – 7F 7F	Reverb Parameter 19	〃	init value for Rev-X Hall / Basic	
			2A	2	00 00 – 7F 7F	Reverb Parameter 20	〃	init value for Rev-X Hall / Basic	
			2C	2	00 00 – 7F 7F	Reverb Parameter 21	〃	init value for Rev-X Hall / Basic	
			2E	2	00 00 – 7F 7F	Reverb Parameter 22	〃	init value for Rev-X Hall / Basic	
			30	2	00 00 – 7F 7F	Reverb Parameter 23	〃	init value for Rev-X Hall / Basic	
			32	2	00 00 – 7F 7F	Reverb Parameter 24	〃	init value for Rev-X Hall / Basic	

TOTAL SIZE = 52 34 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/LSB (HEX)	Notes
06	00	08	00	2	00 00 – 7F 7F	Variation Type	Refer to Effect Parameter List	03 00	
			02	2	00 00 – 7F 7F	Variation Preset Number		00 00	
			04	2	00 00 – 7F 7F	Variation Parameter 1	Refer to Effect Parameter List	init value for G Chorus / Baisc	
			06	2	00 00 – 7F 7F	Variation Parameter 2	〃	init value for G Chorus / Baisc	
			08	2	00 00 – 7F 7F	Variation Parameter 3	〃	init value for G Chorus / Baisc	
			0A	2	00 00 – 7F 7F	Variation Parameter 4	〃	init value for G Chorus / Baisc	
			0C	2	00 00 – 7F 7F	Variation Parameter 5	〃	init value for G Chorus / Baisc	
			0E	2	00 00 – 7F 7F	Variation Parameter 6	〃	init value for G Chorus / Baisc	
			10	2	00 00 – 7F 7F	Variation Parameter 7	〃	init value for G Chorus / Baisc	
			12	2	00 00 – 7F 7F	Variation Parameter 8	〃	init value for G Chorus / Baisc	
			14	2	00 00 – 7F 7F	Variation Parameter 9	〃	init value for G Chorus / Baisc	
			16	2	00 00 – 7F 7F	Variation Parameter 10	〃	init value for G Chorus / Baisc	
			18	2	00 00 – 7F 7F	Variation Parameter 11	〃	init value for G Chorus / Baisc	
			1A	2	00 00 – 7F 7F	Variation Parameter 12	〃	init value for G Chorus / Baisc	
			1C	2	00 00 – 7F 7F	Variation Parameter 13	〃	init value for G Chorus / Baisc	
			1E	2	00 00 – 7F 7F	Variation Parameter 14	〃	init value for G Chorus / Baisc	
			20	2	00 00 – 7F 7F	Variation Parameter 15	〃	init value for G Chorus / Baisc	
			22	2	00 00 – 7F 7F	Variation Parameter 16	〃	init value for G Chorus / Baisc	
			24	2	00 00 – 7F 7F	Variation Parameter 17	〃	init value for G Chorus / Baisc	
			26	2	00 00 – 7F 7F	Variation Parameter 18	〃	init value for G Chorus / Baisc	
			28	2	00 00 – 7F 7F	Variation Parameter 19	〃	init value for G Chorus / Baisc	
			2A	2	00 00 – 7F 7F	Variation Parameter 20	〃	init value for G Chorus / Baisc	
			2C	2	00 00 – 7F 7F	Variation Parameter 21	〃	init value for G Chorus / Baisc	
			2E	2	00 00 – 7F 7F	Variation Parameter 22	〃	init value for G Chorus / Baisc	
			30	2	00 00 – 7F 7F	Variation Parameter 23	〃	init value for G Chorus / Baisc	
			32	2	00 00 – 7F 7F	Variation Parameter 24	〃	init value for G Chorus / Baisc	

TOTAL SIZE = 52 34 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/LSB (HEX)	Notes
06	00	09	00	2	06 40 – 06 42	VCM Rotary Speaker Type	Refer to Effect Parameter List	06 42	
			02	2	00 00 – 7F 7F	VCM Rotary Speaker Preset Number		00 00	
			04	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 1	Refer to Effect Parameter List	init value for VCM Rotary Speaker Studio/Basic	
			06	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 2	〃	init value for VCM Rotary Speaker Studio/Basic	
			08	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 3	〃	init value for VCM Rotary Speaker Studio/Basic	
			0A	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 4	〃	init value for VCM Rotary Speaker Studio/Basic	
			0C	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 5	〃	init value for VCM Rotary Speaker Studio/Basic	
			0E	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 6	〃	init value for VCM Rotary Speaker Studio/Basic	
			10	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 7	〃	init value for VCM Rotary Speaker Studio/Basic	
			12	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 8	〃	init value for VCM Rotary Speaker Studio/Basic	
			14	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 9	〃	init value for VCM Rotary Speaker Studio/Basic	
			16	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 10	〃	init value for VCM Rotary Speaker Studio/Basic	
			18	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 11	〃	init value for VCM Rotary Speaker Studio/Basic	
			1A	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 12	〃	init value for VCM Rotary Speaker Studio/Basic	
			1C	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 13	〃	init value for VCM Rotary Speaker Studio/Basic	
			1E	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 14	〃	init value for VCM Rotary Speaker Studio/Basic	
			20	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 15	〃	init value for VCM Rotary Speaker Studio/Basic	
			22	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 16	〃	init value for VCM Rotary Speaker Studio/Basic	
			24	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 17	〃	init value for VCM Rotary Speaker Studio/Basic	
			26	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 18	〃	init value for VCM Rotary Speaker Studio/Basic	
			28	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 19	〃	init value for VCM Rotary Speaker Studio/Basic	
			2A	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 20	〃	init value for VCM Rotary Speaker Studio/Basic	
			2C	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 21	〃	init value for VCM Rotary Speaker Studio/Basic	
			2E	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 22	〃	init value for VCM Rotary Speaker Studio/Basic	
			30	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 23	〃	init value for VCM Rotary Speaker Studio/Basic	
			32	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 24	〃	init value for VCM Rotary Speaker Studio/Basic	
			34	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 25	〃	init value for VCM Rotary Speaker Studio/Basic	
			36	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 26	〃	init value for VCM Rotary Speaker Studio/Basic	
			38	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 27	〃	init value for VCM Rotary Speaker Studio/Basic	
			3A	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 28	〃	init value for VCM Rotary Speaker Studio/Basic	
			3C	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 29	〃	init value for VCM Rotary Speaker Studio/Basic	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/LSB (HEX)	Notes
			3E	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 30	〃	init value for VCM Rotary Speaker Studio/Basic	
			40	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 31	〃	init value for VCM Rotary Speaker Studio/Basic	
			42	2	00 00 – 7F 7F	VCM Rotary Speaker Parameter 32	〃	init value for VCM Rotary Speaker Studio/Basic	

TOTAL SIZE = 68 44 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0A	00	2	00 34 – 00 4C	Master EQ Low Gain	–12 – +12 [dB]	00 40	
			02	2	00 04 – 00 28	Master EQ Low Frequency	32 – 2000 [Hz]	00 0C	
			04	2	00 01 – 00 78	Master EQ Low Q	0. 1 – 12.0	00 07	This is not available when "shelving" is selected.
			06	2	00 00 – 00 01	Master EQ Low Shape	Shelf, Peak	00 00	
			08	2	00 34 – 00 4C	Master EQ Low Mid Gain	–12 – +12 [dB]	00 40	
			0A	2	00 0E – 00 36	Master EQ Low Mid Frequency	100 – 10.0 [kHz]	00 14	
			0C	2	00 01 – 00 78	Master EQ Low Mid Q	0.1 – 12.0	00 07	
			0E	2	00 34 – 00 4C	Master EQ Mid Gain	–12 – +12 [dB]	00 40	
			10	2	00 0E – 00 36	Master EQ Mid Frequency	100 – 10.0 [kHz]	00 1C	
			12	2	00 01 – 00 78	Master EQ Mid Q	0.1 – 12.0	00 07	
			14	2	00 34 – 00 4C	Master EQ High Mid Gain	–12 – +12 [dB]	00 40	
			16	2	00 0E – 00 36	Master EQ High Mid Frequency	100 – 10.0 [kHz]	00 2C	
			18	2	00 01 – 00 78	Master EQ High Mid Q	0.1 – 12.0	00 07	
			1A	2	00 34 – 00 4C	Master EQ High Gain	–12 – +12 [dB]	00 40	
			1C	2	00 1C – 00 3A	Master EQ High Frequency	0.5 – 16.0 [kHz]	00 34	
			1E	2	00 01 – 00 78	Master EQ High Q	0.1 – 12.0	00 07	This is not available when "shelving" is selected.
			20	2	00 00 – 00 01	Master EQ High Shape	Shelf, Peak	00 00	

TOTAL SIZE = 34 22 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0B	00	2	00 00 – 7F 7F	Master Effect Type	Refer to Effect Parameter List	08 20	
			02	2	00 00 – 7F 7F	Master Effect Preset Number		00 00	
			04	2	00 00 – 7F 7F	Master Effect Parameter 1	Refer to Effect Parameter List	init value for Multi Band Comp / Basic	
			06	2	00 00 – 7F 7F	Master Effect Parameter 2	〃	init value for Multi Band Comp / Basic	
			08	2	00 00 – 7F 7F	Master Effect Parameter 3	〃	init value for Multi Band Comp / Basic	
			0A	2	00 00 – 7F 7F	Master Effect Parameter 4	〃	init value for Multi Band Comp / Basic	
			0C	2	00 00 – 7F 7F	Master Effect Parameter 5	〃	init value for Multi Band Comp / Basic	
			0E	2	00 00 – 7F 7F	Master Effect Parameter 6	〃	init value for Multi Band Comp / Basic	
			10	2	00 00 – 7F 7F	Master Effect Parameter 7	〃	init value for Multi Band Comp / Basic	
			12	2	00 00 – 7F 7F	Master Effect Parameter 8	〃	init value for Multi Band Comp / Basic	
			14	2	00 00 – 7F 7F	Master Effect Parameter 9	〃	init value for Multi Band Comp / Basic	
			16	2	00 00 – 7F 7F	Master Effect Parameter 10	〃	init value for Multi Band Comp / Basic	
			18	2	00 00 – 7F 7F	Master Effect Parameter 11	〃	init value for Multi Band Comp / Basic	
			1A	2	00 00 – 7F 7F	Master Effect Parameter 12	〃	init value for Multi Band Comp / Basic	
			1C	2	00 00 – 7F 7F	Master Effect Parameter 13	〃	init value for Multi Band Comp / Basic	
			1E	2	00 00 – 7F 7F	Master Effect Parameter 14	〃	init value for Multi Band Comp / Basic	
			20	2	00 00 – 7F 7F	Master Effect Parameter 15	〃	init value for Multi Band Comp / Basic	
			22	2	00 00 – 7F 7F	Master Effect Parameter 16	〃	init value for Multi Band Comp / Basic	
			24	2	00 00 – 7F 7F	Master Effect Parameter 17	〃	init value for Multi Band Comp / Basic	
			26	2	00 00 – 7F 7F	Master Effect Parameter 18	〃	init value for Multi Band Comp / Basic	
			28	2	00 00 – 7F 7F	Master Effect Parameter 19	〃	init value for Multi Band Comp / Basic	
			2A	2	00 00 – 7F 7F	Master Effect Parameter 20	〃	init value for Multi Band Comp / Basic	
			2C	2	00 00 – 7F 7F	Master Effect Parameter 21	〃	init value for Multi Band Comp / Basic	
			2E	2	00 00 – 7F 7F	Master Effect Parameter 22	〃	init value for Multi Band Comp / Basic	
			30	2	00 00 – 7F 7F	Master Effect Parameter 23	〃	init value for Multi Band Comp / Basic	
			32	2	00 00 – 7F 7F	Master Effect Parameter 24	〃	init value for Multi Band Comp / Basic	

TOTAL SIZE = 52 34 (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0C	00	2	00 00 – 00 07	Motion Seq Select	1 – 8	00 00	
			02	2	00 01 – 01 7F	Motion Seq Amplitude Performance Offset	–127 – +127	01 00	
			04	2	00 0E – 00 72	Motion Seq Pulse Shape Performance Offset	–100, –98, – 0, – +98, +100	00 40	
			06	2	00 01 – 01 7F	Motion Seq Smoothness Performance Offset	–127 – +127	01 00	
			08	2	00 01 – 01 7F	Motion Seq Random Performance Offset	–127 – +127	01 00	
			0A	2	00 00 – 00 04	Motion Seq View Lane Common	Super Knob, 1, 2, 3, 4	00 00	

TOTAL SIZE = 12 0C (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0D	00	2	00 00 – 07 7F	Super Knob Value	0 – 1023	04 00	
			02	2	00 00 – 07 7E	Super Knob Mid Position	Off, 1 – 1022	00 00	
			04	2	00 00 – 07 7F	Assignable Knob 1 Destination Left Value	0 – 1023	00 00	
			06	2	00 00 – 07 7F	Assignable Knob 1 Destination Mid Value	0 – 1023	04 00	
			08	2	00 00 – 07 7F	Assignable Knob 1 Destination Right Value	0 – 1023	07 7F	
			0A	2	00 00 – 07 7F	Assignable Knob 2 Destination Left Value	0 – 1023	00 00	
			0C	2	00 00 – 07 7F	Assignable Knob 2 Destination Mid Value	0 – 1023	04 00	
			0E	2	00 00 – 07 7F	Assignable Knob 2 Destination Right Value	0 – 1023	07 7F	
			10	2	00 00 – 07 7F	Assignable Knob 3 Destination Left Value	0 – 1023	00 00	
			12	2	00 00 – 07 7F	Assignable Knob 3 Destination Mid Value	0 – 1023	04 00	
			14	2	00 00 – 07 7F	Assignable Knob 3 Destination Right Value	0 – 1023	07 7F	
			16	2	00 00 – 07 7F	Assignable Knob 4 Destination Left Value	0 – 1023	00 00	
			18	2	00 00 – 07 7F	Assignable Knob 4 Destination Mid Value	0 – 1023	04 00	
			1A	2	00 00 – 07 7F	Assignable Knob 4 Destination Right Value	0 – 1023	07 7F	
			1C	2	00 00 – 07 7F	Assignable Knob 5 Destination Left Value	0 – 1023	00 00	
			1E	2	00 00 – 07 7F	Assignable Knob 5 Destination Mid Value	0 – 1023	04 00	
			20	2	00 00 – 07 7F	Assignable Knob 5 Destination Right Value	0 – 1023	07 7F	
			22	2	00 00 – 07 7F	Assignable Knob 6 Destination Left Value	0 – 1023	00 00	
			24	2	00 00 – 07 7F	Assignable Knob 6 Destination Mid Value	0 – 1023	04 00	
			26	2	00 00 – 07 7F	Assignable Knob 6 Destination Right Value	0 – 1023	07 7F	
			28	2	00 00 – 07 7F	Assignable Knob 7 Destination Left Value	0 – 1023	00 00	
			2A	2	00 00 – 07 7F	Assignable Knob 7 Destination Mid Value	0 – 1023	04 00	
			2C	2	00 00 – 07 7F	Assignable Knob 7 Destination Right Value	0 – 1023	07 7F	
			2E	2	00 00 – 07 7F	Assignable Knob 8 Destination Left Value	0 – 1023	00 00	
			30	2	00 00 – 07 7F	Assignable Knob 8 Destination Mid Value	0 – 1023	04 00	
			32	2	00 00 – 07 7F	Assignable Knob 8 Destination Right Value	0 – 1023	07 7F	
			34	2	00 00 – 00 2C	Super Knob LED Pattern	Off, Type 1, Type 2-1, Type 2-2, Type 3-1, Type 3-2, Type 4-1, Type 4-2, Type 5-1, Type 5-2, Type 6, Type 7-1, Type 7-2, Type 8-1, Type 8-2, Type 9, Type 10, Type 11, Type 1B, Type 2-1B, Type 2-2B, Type 3-1B, Type 3-2B, Type 4-1B, Type 4-2B, Type 5-1B, Type 5-2B, Type 6B, Type 7-1B, Type 7-2B, Type 8-1B, Type 8-2B, Type 9B, Type 10B, Type 11B, Rotary 1, Rotary 2, Rotary 3, Rotary 4, Rotary 5, Rotary 6, Rotary 7, Rotary 8, Rotary 9, Rotary 10	00 01	
			36	2	00 00 – 00 7F	Super Knob Motion Seq Random	0 – 127	00 00	
			38	2	00 00 – 00 06	Number of Waypoints	0 – 6	00 00	
			3A	2	00 00 – 00 1F	Start X	1 – 32	00 00	
			3C	2	00 00 – 00 1F	Start Y	1 – 32	00 00	
			3E	2	00 00 – 00 1F	End X	1 – 32	00 1F	
			40	2	00 00 – 00 1F	End Y	1 – 32	00 1F	
			42	2	00 00 – 00 1F	Waypoint 1 X	1 – 32	00 0F	
			44	2	00 00 – 00 1F	Waypoint 1 Y	1 – 32	00 07	
			46	2	00 00 – 00 1F	Waypoint 2 X	1 – 32	00 17	
			48	2	00 00 – 00 1F	Waypoint 2 Y	1 – 32	00 07	
			4A	2	00 00 – 00 1F	Waypoint 3 X	1 – 32	00 17	
			4C	2	00 00 – 00 1F	Waypoint 3 Y	1 – 32	00 0F	
			4E	2	00 00 – 00 1F	Waypoint 4 X	1 – 32	00 0F	
			50	2	00 00 – 00 1F	Waypoint 4 Y	1 – 32	00 17	
			52	2	00 00 – 00 1F	Waypoint 5 X	1 – 32	00 07	
			54	2	00 00 – 00 1F	Waypoint 5 Y	1 – 32	00 17	
			56	2	00 00 – 00 1F	Waypoint 6 X	1 – 32	00 07	
			58	2	00 00 – 00 1F	Waypoint 6 Y	1 – 32	00 0F	

TOTAL SIZE = 90 5A (HEX)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0E	00	2	00 00 – 00 03	A/D Part Input Mode	L Mono, R Mono, L+R Mono, Stereo	00 03	
			02	2	00 00 – 00 7F	A/D Part Volume	0 – 127	00 64	
			04	2	00 01 – 00 7F	A/D Part Pan	L63 – C – R63	00 40	
			06	2	00 00 – 00 7F	A/D Part Reverb Send	0 – 127	00 00	
			08	2	00 00 – 00 7F	A/D Part Variation Send	0 – 127	00 00	
			0A	2	00 01 – 00 02	A/D Part Insertion Connect Type	Ins A→B, Ins B→A	00 01	
			0C	2	00 00 – 00 5F, 00 7D	A/D Part Output Select	0: MainL&R, 8: AsgnL&R (=Off), 9 – 23: USB1&2 – USB29&30 (USB9&10 – USB29&30 =Off), 64 – 95: AsgnL (=Off), AsgnR (=Off), USB1 – USB30 (USB9 – USB30 =Off), 125: Off	00 00	
			0E	2	00 00 – 00 7F	A/D Part Dry Level	0 – 127	00 7F	
			10	2	00 10 – 00 70	A/D Part Envelope Follower Gain	–24dB – 0dB – +24dB	00 40	
			12	2	00 00 – 00 13	A/D Part Envelope Follower Attack	1ms – 40ms	00 10	
			14	2	00 00 – 00 0F	A/D Part Envelope Follower Release	10ms – 680ms	00 07	
			16	2	00 00 – 00 05	A/D Part 2-band EQ 1 Type	Thru, LPF, HPF, Low Shelf Hi Shelf, Peak/ Dip	00 00	
			18	2	00 30 – 01 74	A/D Part 2-band EQ 1 Frequency	63.0 – 18.0k	00 30	
			1A	2	00 28 – 00 58	A/D Part 2-band EQ 1 Gain	–12.00dB – +12.00dB	00 40	
			1C	2	00 01 – 00 78	A/D Part 2-band EQ 1 Q	0.1 – 12.0	00 01	
			1E	2	00 00 – 00 05	A/D Part 2-band EQ 2 Type	Thru, LPF, HPF, Low Shelf Hi Shelf, Peak/ Dip	00 00	
			20	2	00 30 – 01 74	A/D Part 2-band EQ 2 Frequency	63.0 – 18.0k	00 30	
			22	2	00 28 – 00 58	A/D Part 2-band EQ 2 Gain	–12.00dB – +12.00dB	00 40	
			24	2	00 01 – 00 78	A/D Part 2-band EQ 2 Q	0.1 – 12.0	00 01	
			26	2	00 28 – 00 58	A/D Part 2-band EQ Output Level	–12.00dB – +12.00dB	00 40	
			28	2	00 00 – 00 7F	A/D Part Motion Seq Random	0 – 127	00 00	

TOTAL SIZE = 42 2A

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	0F	00	2	00 00 – 00 03	Digital Part Input Mode	L Mono, R Mono, L+R Mono, Stereo	00 03	
			02	2	00 00 – 00 7F	Digital Part Volume	0 – 127	00 64	
			04	2	00 01 – 00 7F	Digital Part Pan	L63 – C – R63	00 40	
			06	2	00 00 – 00 7F	Digital Part Reverb Send	0 – 127	00 00	
			08	2	00 00 – 00 7F	Digital Part Variation Send	0 – 127	00 00	
			0A	2	00 00 – 00 7F	Digital Part Dry Level	0 – 127	00 7F	
			0C	2	00 00 – 00 5F, 00 7D	Digital Part Output Select	0: MainL&R, 8: AsgnL&R (=Off), 9 – 23: USB1&2 – USB29&30 (USB9&10 – USB29&30 =Off), 64 – 95: AsgnL (=Off), AsgnR (=Off), USB1 – USB30 (USB9 – USB30 =Off), 125: Off	00 00	

TOTAL SIZE = 14 0E (HEX)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	10	00	-		FM-X Smart Morph Data	File Dump of FM-X Smart Morph Data		

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	11	00	-		FM-X Smart Morph PNG Data	File Dump of FM-X Smart Morph PNG Data		

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	00	12	00	2	00 00 – 00 02	Super Knob Motion Seq Sync	Off, Tempo, Beat	00 00	
			02	2	00 00 – 00 7F	Super Knob Motion Seq Speed	0 – 127	00 3F	This is available only when Sync is set to Off.
			04	2	00 00 – 00 11	Super Knob Motion Seq Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%, 600%, 800%, 1200%, 1600%, 2400%, 3200%, 6400%, Common	00 03	This is not available when Sync is set to Off.
			06	2	00 00 – 00 02	Super Knob Motion Seq Key On Reset	Off, Each-On, 1st-On	00 00	This is not available when Sync is set to Arp.
			08	2	00 01 – 00 7F	Super Knob Motion Seq Velocity Limit Low	1 – 127	00 01	
			0A	2	00 01 – 00 7F	Super Knob Motion Seq Velocity Limit High	1 – 127	00 7F	
			0C	2	00 00 – 00 7F	Super Knob Motion Seq Lane Key On Delay Time Length	0 – 127	00 00	
			0E	2	00 00 – 00 20	Super Knob Motion Seq Lane Key On Delay Step Length	0 – 32	00 00	
			10	2	00 00 – 00 7F	Super Knob Motion Seq Lane Fade In Time Length	0 – 127	00 00	
			12	2	00 00 – 00 20	Super Knob Motion Seq Lane Fade In Step Length	0 – 32	00 00	

TOTAL SIZE = 20 14 (HEX)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	20	00	-		AN-X Smart Morph Data	File Dump of AN-X Smart Morph Data		

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	00	21	00	-		AN-X Smart Morph PNG Data	File Dump of AN-X Smart Morph PNG Data		

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	01	0m	00	2	00 00 – 00 7F	Super Knob Motion Seq Amplitude	0 – 127	00 7F	
			02	2	00 00 – 00 7F	Super Knob Motion Seq Smoothness	0 – 127	00 00	
			04	2	00 00 – 00 0F	Super Knob Motion Seq Length	1 – 16	00 0F	
			06	2	00 00 – 00 01	Super Knob Motion Seq Polarity	Unipolar, Bipolar	00 00	
			08	2	00 01 – 00 07	Motion Seq Grid	60, 80, 120, 160, 240, 320, 480	00 03	
			0A	2	00 00 – 00 0F	Super Knob Motion Seq Loop Start	1 – 16	00 00	This is not available when Loop is set to Off. Loop Start is less than or equal to Length.
			0C	2	00 00	reserved		00 00	
			0E	2	00 00 – 00 7F	Super Knob Motion Seq Step 1 Value	0 – 127	00 40	
			10	2	00 00 – 00 7F	Super Knob Motion Seq Step 2 Value	0 – 127	00 40	
			12	2	00 00 – 00 7F	Super Knob Motion Seq Step 3 Value	0 – 127	00 40	
			14	2	00 00 – 00 7F	Super Knob Motion Seq Step 4 Value	0 – 127	00 40	
			16	2	00 00 – 00 7F	Super Knob Motion Seq Step 5 Value	0 – 127	00 40	
			18	2	00 00 – 00 7F	Super Knob Motion Seq Step 6 Value	0 – 127	00 40	
			1A	2	00 00 – 00 7F	Super Knob Motion Seq Step 7 Value	0 – 127	00 40	
			1C	2	00 00 – 00 7F	Super Knob Motion Seq Step 8 Value	0 – 127	00 40	
			1E	2	00 00 – 00 7F	Super Knob Motion Seq Step 9 Value	0 – 127	00 40	
			20	2	00 00 – 00 7F	Super Knob Motion Seq Step 10 Value	0 – 127	00 40	
			22	2	00 00 – 00 7F	Super Knob Motion Seq Step 11 Value	0 – 127	00 40	
			24	2	00 00 – 00 7F	Super Knob Motion Seq Step 12 Value	0 – 127	00 40	
			26	2	00 00 – 00 7F	Super Knob Motion Seq Step 13 Value	0 – 127	00 40	
			28	2	00 00 – 00 7F	Super Knob Motion Seq Step 14 Value	0 – 127	00 40	
			2A	2	00 00 – 00 7F	Super Knob Motion Seq Step 15 Value	0 – 127	00 40	
			2C	2	00 00 – 00 7F	Super Knob Motion Seq Step 16 Value	0 – 127	00 40	
			2E	2	00 00 – 00 03	Super Knob Motion Seq Step 1 Type	A, B, Reverse A, Reverse B	00 00	
			30	2	00 00 – 00 03	Super Knob Motion Seq Step 2 Type	A, B, Reverse A, Reverse B	00 00	
			32	2	00 00 – 00 03	Super Knob Motion Seq Step 3 Type	A, B, Reverse A, Reverse B	00 00	
			34	2	00 00 – 00 03	Super Knob Motion Seq Step 4 Type	A, B, Reverse A, Reverse B	00 00	
			36	2	00 00 – 00 03	Super Knob Motion Seq Step 5 Type	A, B, Reverse A, Reverse B	00 00	
			38	2	00 00 – 00 03	Super Knob Motion Seq Step 6 Type	A, B, Reverse A, Reverse B	00 00	
			3A	2	00 00 – 00 03	Super Knob Motion Seq Step 7 Type	A, B, Reverse A, Reverse B	00 00	
			3C	2	00 00 – 00 03	Super Knob Motion Seq Step 8 Type	A, B, Reverse A, Reverse B	00 00	
			3E	2	00 00 – 00 03	Super Knob Motion Seq Step 9 Type	A, B, Reverse A, Reverse B	00 00	
			40	2	00 00 – 00 03	Super Knob Motion Seq Step 10 Type	A, B, Reverse A, Reverse B	00 00	
			42	2	00 00 – 00 03	Super Knob Motion Seq Step 11 Type	A, B, Reverse A, Reverse B	00 00	
			44	2	00 00 – 00 03	Super Knob Motion Seq Step 12 Type	A, B, Reverse A, Reverse B	00 00	
			46	2	00 00 – 00 03	Super Knob Motion Seq Step 13 Type	A, B, Reverse A, Reverse B	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			48	2	00 00 – 00 03	Super Knob Motion Seq Step 14 Type	A, B, Reverse A, Reverse B	00 00	
			4A	2	00 00 – 00 03	Super Knob Motion Seq Step 15 Type	A, B, Reverse A, Reverse B	00 00	
			4C	2	00 00 – 00 03	Super Knob Motion Seq Step 16 Type	A, B, Reverse A, Reverse B	00 00	
			4E	2	00 00 – 00 19	Super Knob Motion Seq Step Curve A Bank	0 = Preset, 1 = User, 2 = Library1, – 17 = Library16, – 25 = Library24	00 00	
			50	2	00 00 – 00 1F	Super Knob Motion Seq Step Curve A Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			52	2	00 00 – 00 7F	Super Knob Motion Seq Step Curve A Parameter 1	0 – 127	00 05	
			54	2	00 00 – 00 7F	Super Knob Motion Seq Step Curve A Parameter 2	0 – 127	00 00	
			56	2	00 00 – 00 01	Super Knob Motion Seq Step Curve A Shape Control SW1	Off, On	00 01	
			58	2	00 00 – 00 01	Super Knob Motion Seq Step Curve A Shape Control SW2	Off, On	00 00	
			5A	2	00 00 – 00 19	Super Knob Motion Seq Step Curve B Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			5C	2	00 00 – 00 1F	Super Knob Motion Seq Step Curve B Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			5E	2	00 00 – 00 7F	Super Knob Motion Seq Step Curve B Parameter 1	0 – 127	00 05	
			60	2	00 00 – 00 7F	Super Knob Motion Seq Step Curve B Parameter 2	0 – 127	00 00	
			62	2	00 00 – 00 01	Super Knob Motion Seq Step Curve B Shape Control SW1	Off, On	00 01	
			64	2	00 00 – 00 01	Super Knob Motion Seq Step Curve B Shape Control SW2	Off, On	00 00	

TOTAL SIZE = 102 66 (HEX)
m = motionSeq number
0 – 7 MotionSeq 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	02	0c	00	1	00 – 01	Scene Arpeggio Master Switch	Off, On	00	
			01	1	00 – 01	Scene Motion Seq Master Switch	Off, On	00	
			02	1	00 – 01	Scene Arpeggio Memorize Switch	Off, On	00	
			03	1	00 – 01	Scene Motion Seq Memorize Switch	Off, On	00	
			04	1	00 – 01	Scene Super Knob Memorize Switch	Off, On	00	
			05	1	00 – 01	Scene Mixing Memorize Switch	Off, On	00	
			06	1	00 – 01	Scene AEG Memorize Switch	Off, On	00	
			07	1	00 – 01	Scene Arp/MS FX Memorize Switch	Off, On	00	
			08	1	00 – 01	Scene Super Knob Link Memorize Switch	Off, On	00	
			09	1	00 – 01	Scene Super Knob Link Switch1	Off, On	01	
			0A	1	00 – 01	Scene Super Knob Link Switch2	Off, On	01	
			0B	1	00 – 01	Scene Super Knob Link Switch3	Off, On	01	
			0C	1	00 – 01	Scene Super Knob Link Switch4	Off, On	01	
			0D	1	00 – 01	Scene Super Knob Link Switch5	Off, On	01	
			0E	1	00 – 01	Scene Super Knob Link Switch6	Off, On	01	
			0F	1	00 – 01	Scene Super Knob Link Switch7	Off, On	01	
			10	1	00 – 01	Scene Super Knob Link Switch8	Off, On	01	
			11	1	00 – 01	Scene Keyboard Control Switch Memorize Switch	Off, On	00	
			12	1	00 – 01	Scene Note Range Memorize Switch	Off, On	00	

TOTAL SIZE = 19 13 (HEX)
c = scene number
0 – 7 Scene 1 – 8

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	03	0c	00	2	00 00 – 00 07	Scene Arpeggio Select	1 – 8	00 00	
			02	2	00 00 – 00 07	Scene Motion Seq Select	1 – 8	00 00	
			04	2	00 00 – 07 7F	Scene Super Knob Value	0 – 1023	04 00	
			06	2	00 00	reserved		00 00	
			08	2	00 01 – 00 7F	Pan	L63 – C – R63	00 40	
			0A	2	00 00 – 00 7F	Reverb Return	0 – 127	00 40	
			0C	2	00 00 – 00 7F	Variation Return	0 – 127	00 60	
			0E	2	00 00 – 00 7F	Filter Cutoff Frequency	–64 – +63	00 40	
			10	2	00 00 – 00 7F	Filter Resonance/Width	–64 – +63	00 40	
			12	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 40	
			14	2	00 00 – 00 7F	AEG Attack Time	–64 – +63	00 40	
			16	2	00 00 – 00 7F	AEG Decay Time	–64 – +63	00 40	
			18	2	00 00 – 00 7F	AEG Sustain Level	–64 – +63	00 40	
			1A	2	00 00 – 00 7F	AEG Release Time	–64 – +63	00 40	
			1C	2	00 08 – 01 78	Swing	–120 – 0 – +120	01 00	
			1E	2	00 00 – 00 09	Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%	00 03	
			20	2	00 1C – 01 64	Arpeggio Gate Time Rate Offset	–100 – 0 – +100	01 00	
			22	2	00 1C – 01 64	Arpeggio Velocity Rate Offset	–100 – 0 – +100	01 00	
			24	2	00 01 – 01 7F	Motion Seq Amplitude Performance Offset	–127 – +127	01 00	
			26	2	00 0E – 00 72	Motion Seq Pulse Shape Performance Offset	–100, –98, – 0, – +98, +100	00 40	
			28	2	00 01 – 01 7F	Motion Seq Smoothness Performance Offset	–127 – +127	01 00	
			2A	2	00 01 – 01 7F	Motion Seq Random Performance Offset	–127 – +127	01 00	

TOTAL SIZE = 44 2C (HEX)
c = scene number
0 – 7 Scene 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	04	0k	00	1	00, 20 – 7E	Assignable Knob Name 1	0, 32 – 126 (ASCII)	Assign 1-8 (same as the knob number)	
			01	1	00, 20 – 7E	Assignable Knob Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Assignable Knob Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Assignable Knob Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Assignable Knob Name 5	0 ,32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Assignable Knob Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Assignable Knob Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Assignable Knob Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Assignable Knob Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Assignable Knob Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Assignable Knob Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Assignable Knob Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Assignable Knob Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Assignable Knob Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Assignable Knob Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Assignable Knob Name 16	0, 32 – 126 (ASCII)		

TOTAL SIZE = 16 10 (HEX)
k = knob number
0 – 7 Knob 1 – 8

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	05	bb	00	2	00 00 – 00 01	Controller Set Switch	Off, On	00 00	
			02	2	00 08 – 00 0F, 00 12 – 00 27	Controller Set Source	8 – 15, 18 – 39 (Refer to Controller Box Source of Control List)	00 08	
			04	2	00 01 – 02 76	Controller Set Destination	1 – 393 (Refer to Controller Box Destination of Control List)	00 01	
			06	2	00 00 – 00 19	Controller Set Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			08	2	00 00 – 00 1F	Controller Set Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			0A	2	00 00 – 00 7F	Controller Set Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset
			0C	2	00 00 – 00 7F	Controller Set Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset
			0E	2	00 00 – 00 01	Controller Set Polarity	Unipolar, Bipolar	00 00	
			10	2	00 00 – 01 7F	Controller Set Ratio	–128 – +127	01 40	

TOTAL SIZE = 18 12 (HEX)

bb = box number
0 – 31 Box 1 – 32

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	06	L0	00	1	00 – 01	AD Part Motion Seq Lane Switch	Off, On	00	
			01	1	00 – 01	AD Part Motion Seq Lane FX Receive	Off, On	01	
			02	1	00 – 01	AD Part Motion Seq Lane Trigger Receive	Off, On	00	
			03	1	00 – 01	AD Part Motion Seq Lane Loop	Off, On	01	

TOTAL SIZE = 4 04 (HEX)

L = lane number
0 – 3 Lane 1 – 4

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	07	L0	00	2	00 00 – 00 03	AD Part Motion Seq Lane Sync	Off, Tempo, Beat, Lane1	00 00	Lane 1 is not available for Lane 1.
			02	2	00 00 – 00 7F	AD Part Motion Seq Lane Speed	0 – 127	00 3F	This is available only when Sync is set to Off.
			04	2	00 00 – 00 11	AD Part Motion Seq Lane Unit	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%, 600%, 800%, 1200%, 1600%, 2400%, 3200%, 6400%, Common	00 03	This is not available when Sync is set to Off.
			06	2	00 00 – 00 02	AD Part Motion Seq Lane Key On Reset	Off, Each-On, 1st-On	00 00	
			08	2	00 01 – 00 7F	AD Part Motion Seq Lane Velocity Limit Low	1 – 127	00 01	
			0A	2	00 01 – 00 7F	AD Part Motion Seq Lane Velocity Limit High	1 – 127	00 7F	
			0C	2	00 00 – 00 7F	AD Part Motion Seq Lane Key On Delay Time Length	0 – 127	00 00	
			0E	2	00 00 – 00 20	AD Part Motion Seq Lane Key On Delay Step Length	0 – 32	00 00	
			10	2	00 00 – 00 7F	AD Part Motion Seq Lane Fade In Time Length	0 – 127	00 00	
			12	2	00 00 – 00 20	AD Part Motion Seq Lane Fade In Step Length	0 – 32	00 00	

TOTAL SIZE = 20 14 (HEX)

L = lane number
0 – 3 Lane 1 – 4

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
06	08	Lm	00	2	00 00 – 00 7F	AD Part Motion Seq Amplitude	0 – 127	00 40	
			02	2	00 00 – 00 7F	AD Part Motion Seq Smoothness	0 – 127	00 00	
			04	2	00 00 – 00 0F	AD Part Motion Seq Length	1 – 16	00 0F	
			06	2	00 00 – 00 01	AD Part Motion Seq Polarity	Unipolar, Bipolar	00 00	
			08	2	00 01 – 00 07	Motion Seq Grid	60, 80, 120, 160, 240, 320, 480	00 03	
			0A	2	00 00 – 00 0F	Lane Motion Seq Loop Start	1 – 16	00 00	This is not available when Loop is set to Off. Loop Start is less than or equal to Length.
			0C	2	00 00	reserved		00 00	
			0E	2	00 00 – 00 7F	AD Part Motion Seq Step 1 Value	0 – 127	00 40	
			10	2	00 00 – 00 7F	AD Part Motion Seq Step 2 Value	0 – 127	00 40	
			12	2	00 00 – 00 7F	AD Part Motion Seq Step 3 Value	0 – 127	00 40	
			14	2	00 00 – 00 7F	AD Part Motion Seq Step 4 Value	0 – 127	00 40	
			16	2	00 00 – 00 7F	AD Part Motion Seq Step 5 Value	0 – 127	00 40	
			18	2	00 00 – 00 7F	AD Part Motion Seq Step 6 Value	0 – 127	00 40	
			1A	2	00 00 – 00 7F	AD Part Motion Seq Step 7 Value	0 – 127	00 40	
			1C	2	00 00 – 00 7F	AD Part Motion Seq Step 8 Value	0 – 127	00 40	
			1E	2	00 00 – 00 7F	AD Part Motion Seq Step 9 Value	0 – 127	00 40	
			20	2	00 00 – 00 7F	AD Part Motion Seq Step 10 Value	0 – 127	00 40	
			22	2	00 00 – 00 7F	AD Part Motion Seq Step 11 Value	0 – 127	00 40	
			24	2	00 00 – 00 7F	AD Part Motion Seq Step 12 Value	0 – 127	00 40	
			26	2	00 00 – 00 7F	AD Part Motion Seq Step 13 Value	0 – 127	00 40	
			28	2	00 00 – 00 7F	AD Part Motion Seq Step 14 Value	0 – 127	00 40	
			2A	2	00 00 – 00 7F	AD Part Motion Seq Step 15 Value	0 – 127	00 40	
			2C	2	00 00 – 00 7F	AD Part Motion Seq Step 16 Value	0 – 127	00 40	
			2E	2	00 00 – 00 03	AD Part Motion Seq Step 1 Type	A, B, Reverse A, Reverse B	00 00	
			30	2	00 00 – 00 03	AD Part Motion Seq Step 2 Type	A, B, Reverse A, Reverse B	00 00	
			32	2	00 00 – 00 03	AD Part Motion Seq Step 3 Type	A, B, Reverse A, Reverse B	00 00	
			34	2	00 00 – 00 03	AD Part Motion Seq Step 4 Type	A, B, Reverse A, Reverse B	00 00	
			36	2	00 00 – 00 03	AD Part Motion Seq Step 5 Type	A, B, Reverse A, Reverse B	00 00	
			38	2	00 00 – 00 03	AD Part Motion Seq Step 6 Type	A, B, Reverse A, Reverse B	00 00	
			3A	2	00 00 – 00 03	AD Part Motion Seq Step 7 Type	A, B, Reverse A, Reverse B	00 00	
			3C	2	00 00 – 00 03	AD Part Motion Seq Step 8 Type	A, B, Reverse A, Reverse B	00 00	
			3E	2	00 00 – 00 03	AD Part Motion Seq Step 9 Type	A, B, Reverse A, Reverse B	00 00	
			40	2	00 00 – 00 03	AD Part Motion Seq Step 10 Type	A, B, Reverse A, Reverse B	00 00	
			42	2	00 00 – 00 03	AD Part Motion Seq Step 11 Type	A, B, Reverse A, Reverse B	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			44	2	00 00 – 00 03	AD Part Motion Seq Step 12 Type	A, B, Reverse A, Reverse B	00 00	
			46	2	00 00 – 00 03	AD Part Motion Seq Step 13 Type	A, B, Reverse A, Reverse B	00 00	
			48	2	00 00 – 00 03	AD Part Motion Seq Step 14 Type	A, B, Reverse A, Reverse B	00 00	
			4A	2	00 00 – 00 03	AD Part Motion Seq Step 15 Type	A, B, Reverse A, Reverse B	00 00	
			4C	2	00 00 – 00 03	AD Part Motion Seq Step 16 Type	A, B, Reverse A, Reverse B	00 00	
			4E	2	00 00 – 00 19	AD Part Motion Seq Step Curve A Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			50	2	00 00 – 00 1F	AD Part Motion Seq Step Curve A Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			52	2	00 00 – 00 7F	AD Part Motion Seq Step Curve A Parameter 1	0 – 127	00 05	
			54	2	00 00 – 00 7F	AD Part Motion Seq Step Curve A Parameter 2	0 – 127	00 00	
			56	2	00 00 – 00 01	AD Part Motion Seq Step Curve A Shape Control SW1	Off, On	00 01	
			58	2	00 00 – 00 01	AD Part Motion Seq Step Curve A Shape Control SW2	Off, On	00 00	
			5A	2	00 00 – 00 19	AD Part Motion Seq Step Curve B Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			5C	2	00 00 – 00 1F	AD Part Motion Seq Step Curve B Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			5E	2	00 00 – 00 7F	AD Part Motion Seq Step Curve B Parameter 1	0 – 127	00 05	
			60	2	00 00 – 00 7F	AD Part Motion Seq Step Curve B Parameter 2	0 – 127	00 00	
			62	2	00 00 – 00 01	AD Part Motion Seq Step Curve B Shape Control SW1	Off, On	00 01	
			64	2	00 00 – 00 01	AD Part Motion Seq Step Curve B Shape Control SW2	Off, On	00 00	

TOTAL SIZE = 102 66 (HEX)

L = lane number
0 – 3 Lane 1 – 4

m = motionSeq number
0 – 7 MotionSeq 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
06	09	00	00	2	00 – 01	Motion Control Flag	Off, On	00	
			02	2		Reserved			
			04	2		Reserved			
			06	2		Reserved			

TOTAL SIZE = 8 08 (HEX)

MIDI PARAMETER CHANGE TABLE (PERFORMANCE PART)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
1p	00	00	00	1	00, 20 – 7E	Part Name 1	0, 32 – 126 (ASCII)	Initialized Part	
			01	1	00, 20 – 7E	Part Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Part Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Part Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Part Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Part Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Part Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Part Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Part Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Part Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Part Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Part Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Part Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Part Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Part Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Part Name 16	0, 32 – 126 (ASCII)		
			10	1	00, 20 – 7E	Part Name 17	0, 32 – 126 (ASCII)		
			11	1	00, 20 – 7E	Part Name 18	0, 32 – 126 (ASCII)		
			12	1	00, 20 – 7E	Part Name 19	0, 32 – 126 (ASCII)		
			13	1	00, 20 – 7E	Part Name 20	0, 32 – 126 (ASCII)		

TOTAL SIZE = 20 14 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
1p	00	01	00	1	00 – 01	Part Switch	Off, On	01	
			01	1	00 – 01	Part Mode	Internal, External	00	
			02	1	00 – 01	Keyboard Control Switch	Off, On	01	Fixed to "Off" for Part 9 or later.
			03	1	00 – 01	Mute Switch	Off, On	00	
			04	1	00 – 01	Insertion FX A Switch	Off, On	01	
			05	1	00 – 01	Insertion FX B Switch	Off, On	01	
			06	1	00 – 01	Element Pan Switch	Off, On	01	
			07	1	00 – 01	Motion Seq Part Switch	Off, On	01	
			08	1	00 – 01	Key Assign Mode	Single, Multi	01	Not available for Drum Part
			09	1	00 – 01	Mono/Poly Mode	Mono, Poly	01	Not available for Drum Part
			0A	1	00 – 01	Portamento Switch	Off, On	01	Not available for Drum Part
			0B	1	00 – 01	Receive Pitch Bend	Off, On	01	
			0C	1	00 – 01	Receive After Touch	Off, On	01	
			0D	1	00 – 01	Receive PAT	Off, On	01	
			0E	1	00 – 01	Receive Program Change	Off, On	01	
			0F	1	00 – 01	Receive Bank Select	Off, On	01	
			10	1	00 – 01	Receive Control Change	Off, On	01	
			11	1	00 – 01	Receive Assignable Knob 1	Off, On	01	
			12	1	00 – 01	Receive Assignable Knob 2	Off, On	01	
			13	1	00 – 01	Receive Assignable Knob 3	Off, On	01	
			14	1	00 – 01	Receive Assignable Knob 4	Off, On	01	
			15	1	00 – 01	Receive Assignable Knob 5	Off, On	01	
			16	1	00 – 01	Receive Assignable Knob 6	Off, On	01	
			17	1	00 – 01	Receive Assignable Knob 7	Off, On	01	
			18	1	00 – 01	Receive Assignable Knob 8	Off, On	01	
			19	1	00 – 01	Receive Foot Controller 1	Off, On	01	
			1A	1	00 – 01	Receive Foot Controller 2	Off, On	01	
			1B	1	00 – 01	Receive Modulation Wheel	Off, On	01	
			1C	1	00 – 01	Receive Sustain / Sostenuto	Off, On	01	
			1D	1	00 – 01	Receive Pan	Off, On	01	
			1E	1	00 – 01	Receive Volume / Expression	Off, On	01	
			1F	1	00 – 01	Receive Ribbon Controller	Off, On	01	
			20	1	00 – 01	Receive Breath Controller	Off, On	01	
			21	1	00 – 01	Receive Foot Switch	Off, On	01	
			22	1	00 – 01	Receive Assignable Function 1	Off, On	01	
			23	1	00 – 01	Receive Assignable Function 2	Off, On	01	

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
			24	1	00 – 01	Insertion Effect Assign Sw for MODX M	Off, On	01 (part9-16: 00)	Part 1-8 are fixed On, Part 9-16 can be turned On up to 4parts at the same time.
			25	1	00 – 01	Receive Motion Seq Trigger	Off, On	01	
			26	1	00 – 01	Receive Portamento Switch	Off, On	01	
			27	1	00 – 01	Receive Portamento Time	Off, On	01	
			28	1	00 – 01	LFO Tempo Sync	Off, On	00	
			29	1	00 – 01	LFO Loop Switch	On, Off	00	
			2A	1	00 – 01	Transmit Pitch Bend	Off, On	01	
			2B	1	00 – 01	Transmit After Touch	Off, On	01	
			2C	1	00 – 01	Transmit PAT	Off, On	01	
			2D	1	00 – 01	Transmit Program Change	Off, On	01	
			2E	1	00 – 01	Transmit Bank Select	Off, On	01	
			2F	1	00 – 01	Transmit Control Change	Off, On	01	
			30	1	00 – 01	Transmit Assignable Knob 1	Off, On	01	
			31	1	00 – 01	Transmit Assignable Knob 2	Off, On	01	
			32	1	00 – 01	Transmit Assignable Knob 3	Off, On	01	
			33	1	00 – 01	Transmit Assignable Knob 4	Off, On	01	
			34	1	00 – 01	Transmit Assignable Knob 5	Off, On	01	
			35	1	00 – 01	Transmit Assignable Knob 6	Off, On	01	
			36	1	00 – 01	Transmit Assignable Knob 7	Off, On	01	
			37	1	00 – 01	Transmit Assignable Knob 8	Off, On	01	
			38	1	00 – 01	Transmit Foot Controller 1	Off, On	01	
			39	1	00 – 01	Transmit Foot Controller 2	Off, On	01	
			3A	1	00 – 01	Transmit Modulation Wheel	Off, On	01	
			3B	1	00 – 01	Transmit Sustain/Sostenuto	Off, On	01	
			3C	1	00 – 01	Transmit Pan	Off, On	01	
			3D	1	00 – 01	Transmit Volume/Expression	Off, On	01	
			3E	1	00 – 01	Transmit Ribbon Controller	Off, On	01	
			3F	1	00 – 01	Transmit Breath Controller	Off, On	01	
			40	1	00 – 01	Transmit Foot Switch	Off, On	01	
			41	1	00 – 01	Transmit Assignable Function 1	Off, On	01	
			42	1	00 – 01	Transmit Assignable Function 2	Off, On	01	
			43	1	00	reserved		00	
			44	1	00 – 01	Transmit Motion Seq Trigger	Off, On	01	
			45	1	00 – 01	Transmit Portamento Switch	Off, On	01	
			46	1	00 – 01	Transmit Portamento Time	Off, On	01	
			47	1	00 – 01	Part Arp Switch	Off, On	01	
			48	1	00 – 01	Arp Play Only	Off, On	00	
			49	1	00 – 01	Arp Fixed SD/BD	Off, On	00	Not available expect for Drum Part
			4A	1	00 – 01	Arp Loop	Off, On	01	
			4B	1	00 – 01	Arp Accent Start Quantize	Off, On	01	
			4C	1	00 – 01	Arp Random SFX	Off, On	01	
			4D	1	00 – 01	Arp Random SFX Key On Control	Off, On	01	
			4E	1	00 – 01	Slider Direction	Normal, Reverse	00	
			4F	1	00 – 01	Expression Type	Normal, Pre FX	00	
			50	1	00 – 01	Extended Element Switch	Off, On	00	

TOTAL SIZE = 81 51 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	02	00	2	00 00 – 00 10	Part Main Category	0 – 16 Refer to Performance Category List	00 10 (NoAsg)	Refer to Performance Category List.
			02	2	00 00 – 00 07	Part Sub Category	0 – 7 Refer to Performance Category List	00 00 (--)	Refer to Performance Category List.
			04	2	00 01 – 00 7F	Velocity Limit Low	1 – 127	00 01	
			06	2	00 01 – 00 7F	Velocity Limit High	1 – 127	00 7F	
			08	2	00 00 – 00 7F	Note Limit Low	C-2 – G8	00 00	
			0A	2	00 00 – 00 7F	Note Limit High	C-2 – G8	00 7F	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			0C	2	00 00 – 00 7F	Velocity Sensitivity Depth	0 – 127	00 40	
			0E	2	00 00 – 00 7F	Velocity Sensitivity Offset	0 – 127	00 40	
			10	2	00 00 – 00 7F	Volume	0 – 127	00 64	
			12	2	00 01 – 00 7F	Pan	L63 – C – R63	00 40	
			14	2	00 00 – 00 7F	Reverb Send	0 – 127	00 00	
			16	2	00 00 – 00 7F	Variation Send	0 – 127	00 00	
			18	2	00 00 – 00 7F	Dry Level	0 – 127	00 7F	
			1A	2	00 10 – 00 70	Envelope Follower Gain	–24dB – 0dB – +24dB	00 40	
			1C	2	00 00 – 00 13	Envelope Follower Attack	1ms – 40ms	00 10	
			1E	2	00 00 – 00 0F	Envelope Follower Release	10ms – 680ms	00 07	
			20	2	00 00 – 00 7F	Part Output Select	0: MainL&R, 8: AsgnL&R (=Off), 9 – 23: USB1&2 – USB29&30 (USB9&10 – USB29&30 =Off), 64 – 95: AsgnL (=Off), AsgnR (=Off), USB1 – USB30 (USB9 – USB30 =Off), 125: Off, 127: Drum	00 00	For parts other than the Drum Part, "Drum" is displayed as "MainL&R."
			22	2	00 00 – 00 7F	AEG Attack Time	–64 – +63	00 40	
			24	2	00 00 – 00 7F	AEG Decay Time	–64 – +63	00 40	
			26	2	00 00 – 00 7F	AEG Sustain Level	–64 – +63	00 40	Not available for Drum Part
			28	2	00 00 – 00 7F	AEG Release Time	–64 – +63	00 40	Not available for Drum Part
			2A	2	00 00 – 00 7F	FEG Attack Time	–64 – +63	00 40	Available only for AWM Normal Part
			2C	2	00 00 – 00 7F	FEG Decay Time	–64 – +63	00 40	Available only for AWM Normal Part
			2E	2	00 00 – 00 7F	FEG Sustain Level	–64 – +63	00 40	Available only for AWM Normal Part
			30	2	00 00 – 00 7F	FEG Release Time	–64 – +63	00 40	Available only for AWM Normal Part
			32	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 40	Not available for Drum Part
			34	2	00 00 – 00 7F	Filter Cutoff Frequency	–64 – +63	00 40	
			36	2	00 00 – 00 7F	Filter Resonance/ Width	–64 – +63	00 40	
			38	2	00 00 – 07 7F	Assignable Knob 1 Value	0 – 1023	04 00	
			3A	2	00 00 – 07 7F	Assignable Knob 2 Value	0 – 1023	04 00	
			3C	2	00 00 – 07 7F	Assignable Knob 3 Value	0 – 1023	04 00	
			3E	2	00 00 – 07 7F	Assignable Knob 4 Value	0 – 1023	04 00	
			40	2	00 00 – 07 7F	Assignable Knob 5 Value	0 – 1023	04 00	
			42	2	00 00 – 07 7F	Assignable Knob 6 Value	0 – 1023	04 00	
			44	2	00 00 – 07 7F	Assignable Knob 7 Value	0 – 1023	04 00	
			46	2	00 00 – 07 7F	Assignable Knob 8 Value	0 – 1023	04 00	
			48	2	00 08 – 01 78	Swing	–120 – 0 – +120	01 00	
			4A	2	00 01 – 01 7F	Motion Seq Amplitude	–127 – +127	01 00	
			4C	2	00 0E – 00 72	Motion Seq Pulse Shape	–100, –98, – 0, – +98, +100	00 40	
			4E	2	00 01 – 01 7F	Motion Seq Smooth	–127 – +127	01 00	
			50	2	00 00 – 00 7F	Motion Seq Random	0 – 127	00 00	
			52	2	00 00 – 00 03	MotionSeq View Lane	1 – 4	00 00	
			54	2	00 00 – 00 01	Expression Curve	Normal, Organ	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			56	2	00 08 – 01 00	Element Count	8 – 128	00 08	
			58	2	00 00 – 00 10	Pitch Control Group	Off, A, B, – P	00 00	
			5A	2	00 00 – 00 10	Arpeggio Group	Off, A, B, – P	00 00	
			5C	2	00 00 – 00 0F	Note Range Group	bit 3: OFF, ON Group D bit 2: OFF, ON Group C bit 1: OFF, ON Group B bit 0: OFF, ON Group A	00 00	

TOTAL SIZE = 94 5E (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	03	00	2	00 10 – 00 58	Pitch Bend Range Upper	–48 – +24	00 42	
			02	2	00 10 – 00 58	Pitch Bend Range Lower	–48 – +24	00 3E	
			04	2	00 00 – 01 7F	Detune	–12.8 – +12.7 [Hz]	01 00	
			06	2	00 10 – 00 70	Note Shift	–48 – +48 [semitones]	00 40	
			08	2	00 00 – 00 7F	Portamento Time	0 – 127	00 40	Not available for Drum Part
			0A	2	00 00 – 00 01	Portamento Mode	Fingered, Full-time	00 01	Not available for Drum Part
			0C	2	00 00 – 00 03	Portamento Time Mode	Rate 1, Time 1, Rate 2, Time 2	00 00	Not available for Drum Part
			0E	2	00 00 – 01 54	Micro Tuning Scale	Equal Temperament, Pure Major, Pure Minor, Werckmeister, Kirnberger, Valloti&Young, 1/4 Shift, 1/4 tone, 1/8 tone, Indian, Arabic 1, Arabic 2, Arabic 3, User1 – 8, Library1-1 – 16-8, Library17-1 – Library24-8	00 00	Not available for Drum Part
			10	2	00 00 – 00 0B	Micro Tuning Root	C – B	00 00	Not available for Drum Part
			12	2	00 00 – 00 07	Legato Slope	0 – 7	00 00	Not available for Drum, FM-X and AN-X
			14	2	00 00 – 00 02	Insertion Connection Type	Parallel, Ins A→B, Ins B→A	00 01	Parallel is not available for FM-X and AN-X
			16	2	00 00 – 00 7F	Insertion to Reverb Send Level	0 – 127	00 00	Drum Part only.
			18	2	00 00 – 00 7F	Insertion to Variation Send Level	0 – 127	00 00	Drum Part only.
			1A	2	00 2E – 01 36	3-band EQ Low Frequency	50.1 – 2.00k	00 36	
			1C	2	00 20 – 00 60	3-band EQ Low Gain	–12.00dB – +12.00dB	00 40	
			1E	2	00 53 – 01 71	3-band EQ Mid Frequency	139.7 – 10.1k	01 0D	
			20	2	00 20 – 00 60	3-band EQ Mid Gain	–12.00dB – +12.00dB	00 40	
			22	2	00 00 – 00 1F	3-band EQ Mid Q	0.7 – 10.3	00 00	
			24	2	01 03 – 01 7F	3-band EQ High Frequency	503.8 – 14.0k	01 67	
			26	2	00 20 – 00 60	3-band EQ High Gain	–12.00dB – +12.00dB	00 40	
			28	2	00 00 – 00 05	2-band EQ 1 Type	Thru, LPF, HPF, Low Shelf Hi Shelf, Peak/ Dip	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			2A	2	00 30 – 01 74	2-band EQ 1 Frequency	63.0 – 18.0k	00 30	
			2C	2	00 28 – 00 58	2-band EQ 1 Gain	–12.00dB – +12.00dB	00 40	
			2E	2	00 01 – 00 78	2-band EQ 1 Q	0.1 – 12.0	00 01	
			30	2	00 00 – 00 05	2-band EQ 2 Type	Thru, LPF, HPF, Low Shelf Hi Shelf, Peak/ Dip	00 00	
			32	2	00 30 – 01 74	2-band EQ 2 Frequency	63.0 – 18.0k	00 30	
			34	2	00 28 – 00 58	2-band EQ 2 Gain	–12.00dB – +12.00dB	00 40	
			36	2	00 01 – 00 78	2-band EQ 2 Q	0.1 – 12.0	00 01	
			38	2	00 28 – 00 58	2-band EQ Output Level	–12.00dB – +12.00dB	00 40	
			3A	2	00 00 – 00 11, 00 7F	Insertion-A Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17:Master 127: Off	00 7F	
			3C	2	00 00 – 00 11, 00 7F	Insertion-B Side Chain Part	0: Part 1, 1: Part 2 – 15: Part 16, 16: A/D, 17:Master 127: Off	00 7F	

TOTAL SIZE = 62 3E (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	04	00	2	00 00 – 7F 7F	Insertion-A Type	Refer to Effect Parameter List	00 00	
			02	2	00 00 – 7F 7F	Insertion-A Preset Number		00 00	
			04	2	00 00 – 7F 7F	Insertion-A Parameter 1	Refer to Effect Parameter List	00 00	
			06	2	00 00 – 7F 7F	Insertion-A Parameter 2	〃	00 00	
			08	2	00 00 – 7F 7F	Insertion-A Parameter 3	〃	00 00	
			0A	2	00 00 – 7F 7F	Insertion-A Parameter 4	〃	00 00	
			0C	2	00 00 – 7F 7F	Insertion-A Parameter 5	〃	00 00	
			0E	2	00 00 – 7F 7F	Insertion-A Parameter 6	〃	00 00	
			10	2	00 00 – 7F 7F	Insertion-A Parameter 7	〃	00 00	
			12	2	00 00 – 7F 7F	Insertion-A Parameter 8	〃	00 00	
			14	2	00 00 – 7F 7F	Insertion-A Parameter 9	〃	00 00	
			16	2	00 00 – 7F 7F	Insertion-A Parameter 10	〃	00 00	
			18	2	00 00 – 7F 7F	Insertion-A Parameter 11	〃	00 00	
			1A	2	00 00 – 7F 7F	Insertion-A Parameter 12	〃	00 00	
			1C	2	00 00 – 7F 7F	Insertion-A Parameter 13	〃	00 00	
			1E	2	00 00 – 7F 7F	Insertion-A Parameter 14	〃	00 00	
			20	2	00 00 – 7F 7F	Insertion-A Parameter 15	〃	00 00	
			22	2	00 00 – 7F 7F	Insertion-A Parameter 16	〃	00 00	
			24	2	00 00 – 7F 7F	Insertion-A Parameter 17	〃	00 00	
			26	2	00 00 – 7F 7F	Insertion-A Parameter 18	〃	00 00	
			28	2	00 00 – 7F 7F	Insertion-A Parameter 19	〃	00 00	
			2A	2	00 00 – 7F 7F	Insertion-A Parameter 20	〃	00 00	
			2C	2	00 00 – 7F 7F	Insertion-A Parameter 21	〃	00 00	
			2E	2	00 00 – 7F 7F	Insertion-A Parameter 22	〃	00 00	
			30	2	00 00 – 7F 7F	Insertion-A Parameter 23	〃	00 00	
			32	2	00 00 – 7F 7F	Insertion-A Parameter 24	〃	00 00	

TOTAL SIZE = 52 34 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	05	00	2	00 00 – 7F 7F	Insertion-B Type	Refer to Effect Parameter List	00 00	
			02	2	00 00 – 7F 7F	Insertion-B Preset Number		00 00	
			04	2	00 00 – 7F 7F	Insertion-B Parameter 1	Refer to Effect Parameter List	00 00	
			06	2	00 00 – 7F 7F	Insertion-B Parameter 2	〃	00 00	
			08	2	00 00 – 7F 7F	Insertion-B Parameter 3	〃	00 00	
			0A	2	00 00 – 7F 7F	Insertion-B Parameter 4	〃	00 00	
			0C	2	00 00 – 7F 7F	Insertion-B Parameter 5	〃	00 00	
			0E	2	00 00 – 7F 7F	Insertion-B Parameter 6	〃	00 00	
			10	2	00 00 – 7F 7F	Insertion-B Parameter 7	〃	00 00	
			12	2	00 00 – 7F 7F	Insertion-B Parameter 8	〃	00 00	
			14	2	00 00 – 7F 7F	Insertion-B Parameter 9	〃	00 00	
			16	2	00 00 – 7F 7F	Insertion-B Parameter 10	〃	00 00	
			18	2	00 00 – 7F 7F	Insertion-B Parameter 11	〃	00 00	
			1A	2	00 00 – 7F 7F	Insertion-B Parameter 12	〃	00 00	
			1C	2	00 00 – 7F 7F	Insertion-B Parameter 13	〃	00 00	
			1E	2	00 00 – 7F 7F	Insertion-B Parameter 14	〃	00 00	
			20	2	00 00 – 7F 7F	Insertion-B Parameter 15	〃	00 00	
			22	2	00 00 – 7F 7F	Insertion-B Parameter 16	〃	00 00	
			24	2	00 00 – 7F 7F	Insertion-B Parameter 17	〃	00 00	
			26	2	00 00 – 7F 7F	Insertion-B Parameter 18	〃	00 00	
			28	2	00 00 – 7F 7F	Insertion-B Parameter 19	〃	00 00	
			2A	2	00 00 – 7F 7F	Insertion-B Parameter 20	〃	00 00	
			2C	2	00 00 – 7F 7F	Insertion-B Parameter 21	〃	00 00	
			2E	2	00 00 – 7F 7F	Insertion-B Parameter 22	〃	00 00	
			30	2	00 00 – 7F 7F	Insertion-B Parameter 23	〃	00 00	
			32	2	00 00 – 7F 7F	Insertion-B Parameter 24	〃	00 00	

TOTAL SIZE = 52 34 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	06	00	2	00 00 – 00 02	Arp Hold	Sync-Off, Off, On	00 01	
			02	2	00 00 – 00 0A	Arp Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%, common	00 03	
			04	2	00 00 – 00 7F	Arp Note Limit Low	C-2 – G8	00 00	
			06	2	00 00 – 00 7F	Arp Note Limit High	C-2 – G8	00 7F	
			08	2	00 01 – 00 7F	Arp Velocity Limit Low	1 – 127	00 01	
			0A	2	00 01 – 00 7F	Arp Velocity Limit High	1 – 127	00 7F	
			0C	2	00 00 – 00 04	Arp Key Mode	Sort, Thru, Direct, Sort+Drct, Thru+Drct	00 00	
			0E	2	00 00 – 00 01	Arp Velocity Mode	Original, Thru	00 00	
			10	2	00 00 – 00 01	Arp Change Timing	Real-time, Measure	00 01	
			12	2	00 01 – 00 07	Arp Quantize Value	60, 80, 120, 160, 240, 320, 480	00 03	
			14	2	00 00 – 00 64	Arp Quantize Strength	0 – 100%	00 00	
			16	2	00 00 – 01 48	Arp Velocity Rate	0 – 200%	00 64	
			18	2	00 00 – 01 48	Arp Gate Time Rate	0 – 200%	00 64	
			1A	2	00 00 – 00 7F	Arp Accent Velocity Threshold	Off, 1 – 127	00 40	
			1C	2	00 3D – 00 43	Arp Octave Range	–3 – 0 – +3	00 40	
			1E	2	00 36 – 00 4A	Arp Output Octave Shift	–10 – 0 – +10	00 40	
			20	2	00 00 – 00 01	Arp Trigger Mode	Gate, Toggle	00 00	
			22	2	00 00 – 00 7F	Arp Random SFX Velocity Offset	–64 – 0 – +63	00 40	
			24	2	00 1C – 01 64	Arp 1 Velocity Rate Offset	–100 – 0 – +100	01 00	
			26	2	00 1C – 01 64	Arp 1 Gate Time Rate Offset	〃	01 00	
			28	2	00 1C – 01 64	Arp 2 Velocity Rate Offset	〃	01 00	
			2A	2	00 1C – 01 64	Arp 2 Gate Time Rate Offset	〃	01 00	
			2C	2	00 1C – 01 64	Arp 3 Velocity Rate Offset	〃	01 00	
			2E	2	00 1C – 01 64	Arp 3 Gate Time Rate Offset	〃	01 00	
			30	2	00 1C – 01 64	Arp 4 Velocity Rate Offset	〃	01 00	
			32	2	00 1C – 01 64	Arp 4 Gate Time Rate Offset	〃	01 00	
			34	2	00 1C – 01 64	Arp 5 Velocity Rate Offset	〃	01 00	
			36	2	00 1C – 01 64	Arp 5 Gate Time Rate Offset	〃	01 00	
			38	2	00 1C – 01 64	Arp 6 Velocity Rate Offset	〃	01 00	
			3A	2	00 1C – 01 64	Arp 6 Gate Time Rate Offset	〃	01 00	
			3C	2	00 1C – 01 64	Arp 7 Velocity Rate Offset	〃	01 00	
			3E	2	00 1C – 01 64	Arp 7 Gate Time Rate Offset	〃	01 00	
			40	2	00 1C – 01 64	Arp 8 Velocity Rate Offset	〃	01 00	
			42	2	00 1C – 01 64	Arp 8 Gate Time Rate Offset	〃	01 00	
			44	2	00 00 – 7F 7F	Arp 1 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			46	2	00 00 – 7F 7F	Arp 2 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			48	2	00 00 – 7F 7F	Arp 3 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			4A	2	00 00 – 7F 7F	Arp 4 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			4C	2	00 00 – 7F 7F	Arp 5 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			4E	2	00 00 – 7F 7F	Arp 6 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table	00 00	
			50	2	00 00 – 7F 7F	Arp 7 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			52	2	00 00 – 7F 7F	Arp 8 Number	Preset (0=Off, 1 – 10239), User, Library (see the Arpeggio Number Table)	00 00	
			54	2	00 00 – 10 00	Arp 1 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			56	2	00 00 – 10 00	Arp 2 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			58	2	00 00 – 10 00	Arp 3 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			5A	2	00 00 – 10 00	Arp 4 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			5C	2	00 00 – 10 00	Arp 5 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			5E	2	00 00 – 10 00	Arp 6 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			60	2	00 00 – 10 00	Arp 7 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	
			62	2	00 00 – 10 00	Arp 8 Number Extra	0=Library16-256, 1 … 2048=Library17-1 … Library24-256	00 00	

TOTAL SIZE = 100 64 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Arpeggio Number Table

Bank	Arp 1-8 Number	Arp 1-8 Number Extra	Description
	Data Range	Data Range	
User	12032 – 12287	0	001 – 256
Library1	12288 – 12543	0	001 – 256
Library2	12544 – 12799	0	001 – 256
Library3	12800 – 13055	0	001 – 256
Library4	13056 – 13311	0	001 – 256
Library5	13312 – 13567	0	001 – 256
Library6	13568 – 13823	0	001 – 256
Library7	13824 – 14079	0	001 – 256
Library8	14080 – 14335	0	001 – 256
Library9	14336 – 14591	0	001 – 256
Library10	14592 – 14847	0	001 – 256
Library11	14848 – 15103	0	001 – 256
Library12	15104 – 15359	0	001 – 256
Library13	15360 – 15615	0	001 – 256
Library14	15616 – 15871	0	001 – 256
Library15	15872 – 16127	0	001 – 256
Library16	16128 – 16382	0	001 – 255
Library16	16383	0	256
Library17	16383	1 – 256	001 – 256
Library18	16383	257 – 512	001 – 256
Library19	16383	513 – 768	001 – 256
Library20	16383	769 – 1024	001 – 256
Library21	16383	1025 – 1280	001 – 256
Library22	16383	1281 – 1536	001 – 256
Library23	16383	1537 – 1792	001 – 256
Library24	16383	1793 – 2048	001 – 256

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	07	00	2	00 00 – 00 05	LFO Phase	0, 90, 120, 180, 240, 270	00 00	LFO-related parameters hereinafter are not available for Drum Part.
			02	2	00 00 – 00 0C	LFO Wave	Triangle, Triangle+, Saw Up, Saw Down, Squ1/4, Squ1/3, Square, Squ2/3, Squ3/4, Trapezoid, S/H1, S/H2, User	00 00	
			04	2	00 00 – 00 3F	LFO Speed	0 – 63	00 20	This is available only when Tempo Sync is set to Off.
			06	2	00 05 – 00 18	LFO Tempo Speed	5 – 24 (16th, 8th/3, 16th., 8th, 4th/3, 8th., 4th, 2th/3, 4th., 2nd, Whole/3, 2nd., 4thX4, 4thX5, 4thX6, 4thX7, 4thX8, 4thX16, 4thX32, 4thX64)	00 0B	This is available only when Tempo Sync is set to On.
			08	2	00 00 – 00 7F	LFO Delay Time	0 – 127	00 00	
			0A	2	00 00 – 00 7F	LFO Fade In Time	0 – 127	00 00	
			0C	2	00 00 – 00 7F	LFO Hold Time	0 – 126, Hold	00 7F	
			0E	2	00 00 – 00 7F	LFO Fade Out Time	0 – 127	00 40	
			10	2	00 00 – 00 02	LFO Key On Reset	Off, Each-On, 1st-On	00 02	
			12	2	00 00 – 00 45	LFO Destination 1	0 – 69 (Refer to LFO Box Destination of Control List)	00 02	
			14	2	00 00 – 00 7F	LFO Depth 1	0 – 127	00 00	
			16	2	00 00 – 00 45	LFO Destination 2	0 – 69 (Refer to LFO Box Destination of Control List)	00 04	
			18	2	00 00 – 00 7F	LFO Depth 2	0 – 127	00 00	
			1A	2	00 00 – 00 45	LFO Destination 3	0 – 69 (Refer to LFO Box Destination of Control List)	00 04	
			1C	2	00 00 – 00 7F	LFO Depth 3	0 – 127	00 00	
			1E	2	00 00 – 00 06	User LFO Cycle	2 steps, 3 steps, 4 steps, 6 steps, 8 steps, 12 steps, 16 steps	00 06	
			20	2	00 00 – 00 03	User LFO Slope	Off, Up, Down, Up&Down	00 00	
			22	2	00 00 – 00 7F	User LFO Step Value 1	–64 – +63	00 40	
			24	2	00 00 – 00 7F	User LFO Step Value 2	–64 – +63	00 40	
			26	2	00 00 – 00 7F	User LFO Step Value 3	–64 – +63	00 40	
			28	2	00 00 – 00 7F	User LFO Step Value 4	–64 – +63	00 40	
			2A	2	00 00 – 00 7F	User LFO Step Value 5	–64 – +63	00 40	
			2C	2	00 00 – 00 7F	User LFO Step Value 6	–64 – +63	00 40	
			2E	2	00 00 – 00 7F	User LFO Step Value 7	–64 – +63	00 40	
			30	2	00 00 – 00 7F	User LFO Step Value 8	–64 – +63	00 40	
			32	2	00 00 – 00 7F	User LFO Step Value 9	–64 – +63	00 40	
			34	2	00 00 – 00 7F	User LFO Step Value 10	–64 – +63	00 40	
			36	2	00 00 – 00 7F	User LFO Step Value 11	–64 – +63	00 40	
			38	2	00 00 – 00 7F	User LFO Step Value 12	–64 – +63	00 40	
			3A	2	00 00 – 00 7F	User LFO Step Value 13	–64 – +63	00 40	
			3C	2	00 00 – 00 7F	User LFO Step Value 14	–64 – +63	00 40	
			3E	2	00 00 – 00 7F	User LFO Step Value 15	–64 – +63	00 40	
			40	2	00 00 – 00 7F	User LFO Step Value 16	–64 – +63	00 40	
			42	2	00 00 – 00 7F	Part LFO Random Speed Depth	0 – 127	00 00	This is available only when Tempo Sync is set to Off.

TOTAL SIZE = 68 44 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	08	00	2	00 00 – 00 0F	MIDI Transmit Channel	Ch1 – 16	00 0p	This is available only when Part Mode is set to External.
				2	00 00 – 00 0F, 00 7F	MIDI Tx/Rx Channel	Ch1 – 16, Off	00 0p	This is available only when Part Mode is set to Internal and Keyboard Control Switch is set to Off.
			04	2	00 3D – 00 43	Zone Octave Shift	–3 – +3	00 40	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			06	2	00 35 – 00 4B	Zone Transpose	–11 – +11 (semitones)	00 40	
			08	2	00 01 – 00 7F	Zone Velocity Limit Low	1 – 127	00 01	
			0A	2	00 01 – 00 7F	Zone Velocity Limit High	1 – 127	00 7F	
			0C	2	00 00 – 00 7F	Zone Note Limit Low	C-2 – G8	00 00	
			0E	2	00 00 – 00 7F	Zone Note Limit High	C-2 – G8	00 7F	
			10	2	00 00 – 00 7F	MIDI Volume	0 – 127	00 64	
			12	2	00 00 – 00 7F	MIDI Pan	L64 – C – R63	00 40	
			14	2	00 00 – 00 7F	MIDI Bank	0 – 127	00 00	
			16	2	00 00 – 00 7F	MIDI Bank LSB	0 – 127	00 00	
			18	2	00 00 – 00 7F	MIDI Program Number	1 – 128	00 00	

TOTAL SIZE = 26 1A (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	00	09	00	2	00 00 – 00 01	Key Controller Set 1 Switch	Off, On	00 00	
			02	2	00 01 – 00 3A	Key Controller Set 1 Destination	1 – 58	00 01	
			04	2	00 00 – 00 19	Key Controller Set 1 Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			06	2	00 00 – 00 1F	Key Controller Set 1 Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			08	2	00 00 – 00 7F	Key Controller Set 1 Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset.
			0A	2	00 00 – 00 7F	Key Controller Set 1 Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset.
			0C	2	00 00 – 00 01	Key Controller Set 1 Polarity	Unipolar, Bipolar	00 00	
			0E	2	00 00 – 01 7F	Key Controller Set 1 Ratio	–128 – +127	01 40	
			00	2	00 00 – 00 01	Key Controller Set 2 Switch	Off, On	00 00	
			12	2	00 01 – 00 3A	Key Controller Set 2 Destination	1 – 58	00 01	
			14	2	00 00 – 00 19	Key Controller Set 2 Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			16	2	00 00 – 00 1F	Key Controller Set 2 Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			18	2	00 00 – 00 7F	Key Controller Set 2 Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset.
			1A	2	00 00 – 00 7F	Key Controller Set 2 Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset.
			1C	2	00 00 – 00 01	Key Controller Set 2 Polarity	Unipolar, Bipolar	00 00	
			1E	2	00 00 – 01 7F	Key Controller Set 2 Ratio	–128 – +127	01 40	
			00	2	00 00 – 00 01	Key Controller Set 3 Switch	Off, On	00 00	
			22	2	00 01 – 00 3A	Key Controller Set 3 Destination	1 – 58	00 01	
			24	2	00 00 – 00 19	Key Controller Set 3 Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			26	2	00 00 – 00 1F	Key Controller Set 3 Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			28	2	00 00 – 00 7F	Key Controller Set 3 Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset.
			2A	2	00 00 – 00 7F	Key Controller Set 3 Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset.
			2C	2	00 00 – 00 01	Key Controller Set 3 Polarity	Unipolar, Bipolar	00 00	
			2E	2	00 00 – 01 7F	Key Controller Set 3 Ratio	–128 – +127	01 40	
			00	2	00 00 – 00 01	Key Controller Set 4 Switch	Off, On	00 00	
			32	2	00 01 – 00 3A	Key Controller Set 4 Destination	1 – 58	00 01	
			34	2	00 00 – 00 19	Key Controller Set 4 Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			36	2	00 00 – 00 1F	Key Controller Set 4 Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			38	2	00 00 – 00 7F	Key Controller Set 4 Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset.
			3A	2	00 00 – 00 7F	Key Controller Set 4 Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset.
			3C	2	00 00 – 00 01	Key Controller Set 4 Polarity	Unipolar, Bipolar	00 00	
			3E	2	00 00 – 01 7F	Key Controller Set 4 Ratio	–128 – +127	01 40	

TOTAL SIZE = 64 40 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	03	0c	00	2	00 00 – 00 01	Part Mute	Off, On	00 00	
			02	2	00 00 – 00 7F	Volume	0 – 127	00 64	Available for Internal
			04	2	00 01 – 00 7F	Pan	L63 – C – R63	00 40	Available for Internal
			06	2	00 00 – 00 7F	Reverb Send	0 – 127	00 00	
			08	2	00 00 – 00 7F	Variation Send	0 – 127	00 00	
			0A	2	00 00 – 00 7F	Dry Level	0 – 127	00 7F	
			0C	2	00 00 – 00 7F	Filter Cutoff Frequency	–64 – +63	00 40	This is not available for FM-X or AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			0E	2	00 00 – 00 7F	Filter Resonance/ Width	–64 – +63	00 40	This is not available for FM-X or AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			10	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 40	This is not available for FM-X or AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			12	2	00 00 – 00 7F	AEG Attack Time	–64 – +63	00 40	This is not available for AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			14	2	00 00 – 00 7F	AEG Decay Time	–64 – +63	00 40	This is not available for AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			16	2	00 00 – 00 7F	AEG Sustain Level	–64 – +63	00 40	This is not available for AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			18	2	00 00 – 00 7F	AEG Release Time	–64 – +63	00 40	This is not available for AN-X when "Scene Mixing / AEG Value Mode" is set to "Offset."
			1A	2	00 00 – 07 7F	FM-X Filter Cutoff Frequency	0 – 1023	07 7F	This is available only for FM-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			1C	2	00 00 – 00 7F	FM-X Filter Resonance/Width	0 – 127	00 0A	This is available only for FM-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			1E	2	00 00 – 00 7F	FM-X FEG Depth	–64 – +63	00 68	This is available only for FM-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			20	2	00 00 – 07 7F	AN-X Filter Cutoff Frequency	14.3 – 21172.5 [Hz]	07 7F	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			22	2	00 00 – 01 7F	AN-X Filter Resonance	–6 – +42 [dB], 0.1875 [dB] step	00 00	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			24	2	00 40 – 03 40	AN-X FEG Depth	–9600 – +9600 [cent], 50 [cent] step	02 00	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			26	2	00 00 – 01 7F	AN-X AEG Attack Time	1 [ms] – 62 [s]	00 00	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			28	2	00 00 – 01 7F	AN-X AEG Decay Time	1 [ms] – 62 [s]	01 20	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			2A	2	00 00 – 03 7F	AN-X AEG Sustain Level	0 – 511	03 7F	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			2C	2	00 00 – 01 7F	AN-X AEG Release Time	1 [ms] – 62 [s]	01 20	This is available only for AN-X when "Scene Mixing / AEG Value Mode" is set to "Absolute."
			2E	2	00 00 – 00 01	Keyboard Control Switch	Off, On	00 00	Fixed to "Off" for Part 9 or later.
			30	2	00 08 – 01 78	Swing	–120 – 0 – +120	01 00	
			32	2	00 00 – 00 0A	Arp Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%, common	00 03	
			34	2	00 00 – 01 48	Arp Gate Time Rate	0 – 200%	00 64	
			36	2	00 00 – 01 48	Arp Velocity Rate	0 – 200%	00 64	
			38	2	00 01 – 01 7F	Motion Seq Amplitude Part Offset	–127 – +127	01 00	
			3A	2	00 0E – 00 72	Motion Seq Pulse Shape Part Offset	–100, –98, – 0, – +98, +100	00 40	
			3C	2	00 01 – 01 7F	Motion Seq Smoothness Part Offset	–127 – +127	01 00	
			3E	2	00 00 – 00 7F	Motion Seq Random	0 – 127	00 00	
			40	2	00 00 – 00 7F	MIDI Volume	0 – 127	00 64	Available for External
			42	2	00 00 – 00 7F	MIDI Pan	L64 – C – R63	00 40	Available for External
			44	2	00 00 – 00 7F	Note Limit Low	C-2 – G8	00 00	Available for External
			46	2	00 00 – 00 7F	Note Limit High	C-2 – G8	00 7F	Available for External
			48	2	00 00 – 00 70	Note Shift	–48 – +48 [semitones]	00 40	Available for External
			4A	2	00 00 – 00 7F	Zone Note Limit Low	C-2 – G8	00 00	Available for External
			4C	2	00 00 – 00 7F	Zone Note Limit High	C-2 – G8	00 7F	Available for External
			4E	2	00 00 – 00 6F	Zone Note Shift	–47 – +47 [semitones]	00 40	Available for External

TOTAL SIZE = 80 50 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

c = Scene number
0 – 7 Scene 1 – 8

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
1p	04	0k	00	1	00, 20 – 7E	Assignable Knob 1 Name 1	0, 32 – 126 (ASCII)	Assign 1-8 (same as the knob number)	
			01	1	00, 20 – 7E	Assignable Knob 1 Name 2	0, 32 – 126 (ASCII)		
			02	1	00, 20 – 7E	Assignable Knob 1 Name 3	0, 32 – 126 (ASCII)		
			03	1	00, 20 – 7E	Assignable Knob 1 Name 4	0, 32 – 126 (ASCII)		
			04	1	00, 20 – 7E	Assignable Knob 1 Name 5	0, 32 – 126 (ASCII)		
			05	1	00, 20 – 7E	Assignable Knob 1 Name 6	0, 32 – 126 (ASCII)		
			06	1	00, 20 – 7E	Assignable Knob 1 Name 7	0, 32 – 126 (ASCII)		
			07	1	00, 20 – 7E	Assignable Knob 1 Name 8	0, 32 – 126 (ASCII)		
			08	1	00, 20 – 7E	Assignable Knob 1 Name 9	0, 32 – 126 (ASCII)		
			09	1	00, 20 – 7E	Assignable Knob 1 Name 10	0, 32 – 126 (ASCII)		
			0A	1	00, 20 – 7E	Assignable Knob 1 Name 11	0, 32 – 126 (ASCII)		
			0B	1	00, 20 – 7E	Assignable Knob 1 Name 12	0, 32 – 126 (ASCII)		
			0C	1	00, 20 – 7E	Assignable Knob 1 Name 13	0, 32 – 126 (ASCII)		
			0D	1	00, 20 – 7E	Assignable Knob 1 Name 14	0, 32 – 126 (ASCII)		
			0E	1	00, 20 – 7E	Assignable Knob 1 Name 15	0, 32 – 126 (ASCII)		
			0F	1	00, 20 – 7E	Assignable Knob 1 Name 16	0, 32 – 126 (ASCII)		

TOTAL SIZE = 16 10 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

k = knob number
00 – 07 Knob 1 – 8

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	05	bb	00	2	00 00 – 00 01	Controller Set Switch	Off, On	00 00	
			02	2	00 00 – 00 27	Controller Set Source	0 – 39 (Refer to Controller Box Source of Control List)	00 01	
			04	2	00 01 – 03 1D	Controller Set Destination	1 – 413 (Refer to Controller Box Destination of Control List)	00 01	
			06	2	00 00 – 00 19	Controller Set Curve Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			08	2	00 00 – 00 1F	Controller Set Curve Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			0A	2	00 00 – 00 7F	Controller Set Curve Parameter 1	0 – 127	00 05	Fixed to "0" except when Bank is set to Preset.
			0C	2	00 00 – 00 7F	Controller Set Curve Parameter 2	0 – 127	00 00	Fixed to "0" except when Bank is set to Preset.
			0E	2	00 00 – 00 01	Controller Set Polarity	Unipolar, Bipolar	00 00	
			10	2	00 00 – 01 7F	Controller Set Ratio	–128 – +127	01 40	

TOTAL SIZE = 18 12 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

bb = box number
00 – 7F Controller Box 1 – 32

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
1p	06	L0	00	1	00 – 01	Lane Switch	Off, On	00	
			01	1	00 – 01	Lane FX Receive	Off, On	01	
			02	1	00 – 01	Lane Trigger Receive	Off, On	00	
			03	1	00 – 01	Lane Loop	Off, On	01	

TOTAL SIZE = 4

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

L = Lane number
00 – 03 Lane 1 – 4

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	07	L0	00	2	00 00 – 00 04	Lane Sync	Off, Tempo, Beat, Arp, Lane1	00 00	Lane 1 is not available for Lane 1.
			02	2	00 00 – 00 7F	Lane Speed	0 – 127	00 3F	This is available only when Sync is set to Off.
			04	2	00 00 – 00 12	Lane Unit Multiply	50%, 66%, 75%, 100%, 133%, 150%, 200%, 266%, 300%, 400%, 600%, 800%, 1200%, 1600%, 2400%, 3200%, 6400%, Common, Arp	00 03	This is not available when Sync is set to Off.
			06	2	00 00 – 00 02	Lane Key On Reset	Off, Each-On, 1st-On	00 00	This is not available when Sync is set to Arp.
			08	2	00 01 – 00 7F	Lane Velocity Limit Low	1 – 127	00 01	
			0A	2	00 01 – 00 7F	Lane Velocity Limit High	1 – 127	00 7F	
			0C	2	00 00 – 00 7F	Lane Key On Delay Time Length	0 – 127	00 00	
			0E	2	00 00 – 00 20	Lane Key On Delay Step Length	0 – 32	00 00	
			10	2	00 00 – 00 7F	Lane Fade In Time Length	0 – 127	00 00	
			12	2	00 00 – 00 20	Lane Fade In Step Length	0 – 32	00 00	

TOTAL SIZE = 20 14 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

L = Lane number
00 – 03 Lane 1 – 4

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
1p	08	Lm	00	2	00 00 – 00 7F	Lane Motion Seq Amplitude	0 – 127	00 7F	
			02	2	00 00 – 00 7F	Lane Motion Seq Smoothness	0 – 127	00 00	
			04	2	00 00 – 00 0F	Lane Motion Seq Length	1 – 16	00 0F	
			06	2	00 00 – 00 01	Lane Motion Seq Polarity	Unipolar, Bipolar	00 00	
			08	2	00 01 – 00 07	Motion Seq Grid	60, 80, 120, 160, 240, 320, 480	00 03	
			0A	2	00 00 – 00 0F	Lane Motion Seq Loop Start	1 – 16	00 00	This is not available when Loop is set to Off. Loop Start is less than or equal to Length.
			0C	2	00 00	reserved		00 00	
			0E	2	00 00 – 00 7F	Lane Motion Seq Step 1 Value	0 – 127	00 40	
			10	2	00 00 – 00 7F	Lane Motion Seq Step 2 Value	0 – 127	00 40	
			12	2	00 00 – 00 7F	Lane Motion Seq Step 3 Value	0 – 127	00 40	
			14	2	00 00 – 00 7F	Lane Motion Seq Step 4 Value	0 – 127	00 40	
			16	2	00 00 – 00 7F	Lane Motion Seq Step 5 Value	0 – 127	00 40	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			18	2	00 00 – 00 7F	Lane Motion Seq Step 6 Value	0 – 127	00 40	
			1A	2	00 00 – 00 7F	Lane Motion Seq Step 7 Value	0 – 127	00 40	
			1C	2	00 00 – 00 7F	Lane Motion Seq Step 8 Value	0 – 127	00 40	
			1E	2	00 00 – 00 7F	Lane Motion Seq Step 9 Value	0 – 127	00 40	
			20	2	00 00 – 00 7F	Lane Motion Seq Step 10 Value	0 – 127	00 40	
			22	2	00 00 – 00 7F	Lane Motion Seq Step 11 Value	0 – 127	00 40	
			24	2	00 00 – 00 7F	Lane Motion Seq Step 12 Value	0 – 127	00 40	
			26	2	00 00 – 00 7F	Lane Motion Seq Step 13 Value	0 – 127	00 40	
			28	2	00 00 – 00 7F	Lane Motion Seq Step 14 Value	0 – 127	00 40	
			2A	2	00 00 – 00 7F	Lane Motion Seq Step 15 Value	0 – 127	00 40	
			2C	2	00 00 – 00 7F	Lane Motion Seq Step 16 Value	0 – 127	00 40	
			2E	2	00 00 – 00 03	Lane Motion Seq Step 1 Type	A, B, Reverse A, Reverse B	00 00	
			30	2	00 00 – 00 03	Lane Motion Seq Step 2 Type	A, B, Reverse A, Reverse B	00 00	
			32	2	00 00 – 00 03	Lane Motion Seq Step 3 Type	A, B, Reverse A, Reverse B	00 00	
			34	2	00 00 – 00 03	Lane Motion Seq Step 4 Type	A, B, Reverse A, Reverse B	00 00	
			36	2	00 00 – 00 03	Lane Motion Seq Step 5 Type	A, B, Reverse A, Reverse B	00 00	
			38	2	00 00 – 00 03	Lane Motion Seq Step 6 Type	A, B, Reverse A, Reverse B	00 00	
			3A	2	00 00 – 00 03	Lane Motion Seq Step 7 Type	A, B, Reverse A, Reverse B	00 00	
			3C	2	00 00 – 00 03	Lane Motion Seq Step 8 Type	A, B, Reverse A, Reverse B	00 00	
			3E	2	00 00 – 00 03	Lane Motion Seq Step 9 Type	A, B, Reverse A, Reverse B	00 00	
			40	2	00 00 – 00 03	Lane Motion Seq Step 10 Type	A, B, Reverse A, Reverse B	00 00	
			42	2	00 00 – 00 03	Lane Motion Seq Step 11 Type	A, B, Reverse A, Reverse B	00 00	
			44	2	00 00 – 00 03	Lane Motion Seq Step 12 Type	A, B, Reverse A, Reverse B	00 00	
			46	2	00 00 – 00 03	Lane Motion Seq Step 13 Type	A, B, Reverse A, Reverse B	00 00	
			48	2	00 00 – 00 03	Lane Motion Seq Step 14 Type	A, B, Reverse A, Reverse B	00 00	
			4A	2	00 00 – 00 03	Lane Motion Seq Step 15 Type	A, B, Reverse A, Reverse B	00 00	
			4C	2	00 00 – 00 03	Lane Motion Seq Step 16 Type	A, B, Reverse A, Reverse B	00 00	
			4E	2	00 00 – 00 19	Lane Motion Seq Step Curve A Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			50	2	00 00 – 00 1F	Lane Motion Seq Step Curve A Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			52	2	00 00 – 00 7F	Lane Motion Seq Step Curve A Parameter 1	0 – 127	00 05	
			54	2	00 00 – 00 7F	Lane Motion Seq Step Curve A Parameter 2	0 – 127	00 00	
			56	2	00 00 – 00 01	Lane Motion Seq Step Curve A Shape Control SW1	Off, On	00 01	
			58	2	00 00 – 00 01	Lane Motion Seq Step Curve A Shape Control SW2	Off, On	00 00	
			5A	2	00 00 – 00 19	Lane Motion Seq Step Curve B Bank	0 = Preset, 1 = User, 2 = Library1, – 17= Library16, – 25=Library24	00 00	
			5C	2	00 00 – 00 1F	Lane Motion Seq Step Curve B Type	0 – 31 (0 – 17 when Bank is set to Preset)	00 00	
			5E	2	00 00 – 00 7F	Lane Motion Seq Step Curve B Parameter 1	0 – 127	00 05	
			60	2	00 00 – 00 7F	Lane Motion Seq Step Curve B Parameter 2	0 – 127	00 00	
			62	2	00 00 – 00 01	Lane Motion Seq Step Curve B Shape Control SW1	Off, On	00 01	
			64	2	00 00 – 00 01	Lane Motion Seq Step Curve B Shape Control SW2	Off, On	00 00	

TOTAL SIZE = 102 66 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Normal, Drum, FM-X, AN-X)

L = Lane number
00 – 03 Lane 1 – 4

m = sequence number
0 – 7 Sequence 1 – 8

MIDI PARAMETER CHANGE TABLE (NORMAL PART ELEMENT)

Group Number =7F 1C, Model ID = 0D

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
2p	00	ee	00	1	00 – 01	Element Switch	Off, On	01 (EL1 only)	
			01	1	00 – 01	Key On Delay Tempo Sync Switch	Off, On	00	
			02	1	00 – 01	Half Damper Switch	Off, On	00	
			03	1	00 – 01	LFO Box1 Switch	Off, On	01	
			04	1	00 – 01	LFO Box2 Switch	Off, On	01	
			05	1	00 – 01	LFO Box3 Switch	Off, On	01	
			06	1	00 – 01	LFO Speed Range	Normal, Extended	01	
			07	1	00 – 01	Controller Set 1 Switch	Off, On	01	
			08	1	00 – 01	Controller Set 2 Switch	Off, On	01	
			09	1	00 – 01	Controller Set 3 Switch	Off, On	01	
			0A	1	00 – 01	Controller Set 4 Switch	Off, On	01	
			0B	1	00 – 01	Controller Set 5 Switch	Off, On	01	
			0C	1	00 – 01	Controller Set 6 Switch	Off, On	01	
			0D	1	00 – 01	Controller Set 7 Switch	Off, On	01	
			0E	1	00 – 01	Controller Set 8 Switch	Off, On	01	
			0F	1	00 – 01	Controller Set 9 Switch	Off, On	01	
			10	1	00 – 01	Controller Set 10 Switch	Off, On	01	
			11	1	00 – 01	Controller Set 11 Switch	Off, On	01	
			12	1	00 – 01	Controller Set 12 Switch	Off, On	01	
			13	1	00 – 01	Controller Set 13 Switch	Off, On	01	
			14	1	00 – 01	Controller Set 14 Switch	Off, On	01	
			15	1	00 – 01	Controller Set 15 Switch	Off, On	01	
			16	1	00 – 01	Controller Set 16 Switch	Off, On	01	
			17	1	00 – 01	Controller Set 17 Switch	Off, On	01	
			18	1	00 – 01	Controller Set 18 Switch	Off, On	01	
			19	1	00 – 01	Controller Set 19 Switch	Off, On	01	
			1A	1	00 – 01	Controller Set 20 Switch	Off, On	01	
			1B	1	00 – 01	Controller Set 21 Switch	Off, On	01	
			1C	1	00 – 01	Controller Set 22 Switch	Off, On	01	
			1D	1	00 – 01	Controller Set 23 Switch	Off, On	01	
			1E	1	00 – 01	Controller Set 24 Switch	Off, On	01	
			1F	1	00 – 01	Controller Set 25 Switch	Off, On	01	
			20	1	00 – 01	Controller Set 26 Switch	Off, On	01	
			21	1	00 – 01	Controller Set 27 Switch	Off, On	01	
			22	1	00 – 01	Controller Set 28 Switch	Off, On	01	
			23	1	00 – 01	Controller Set 29 Switch	Off, On	01	
			24	1	00 – 01	Controller Set 30 Switch	Off, On	01	
			25	1	00 – 01	Controller Set 31 Switch	Off, On	01	
			26	1	00 – 01	Controller Set 32 Switch	Off, On	01	
			27	1	00 – 01	Key Controller Set 1 Switch	Off, On	01	
			28	1	00 – 01	Key Controller Set 2 Switch	Off, On	01	
			29	1	00 – 01	Key Controller Set 3 Switch	Off, On	01	
			2A	1	00 – 01	Key Controller Set 4 Switch	Off, On	01	

TOTAL SIZE = 36 24 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal)

ee = Element number
0 – 127 Element 1 – 128 (Normal)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
2p	01	ee	00	2	00 00 – 00 19	Wave Select	0=Preset, 1=User, 2–17=Library1–16, 18-25=Library17–24	00 00	
			02	2	00 00 – 00 07	Element Group Number	1 – 8	00 00	
			04	2	00 01 – 3B 44	Wave Number	1 – 7620 (USR, Library: 1 – 1024)	00 06	
			06	2	00 01	(reserved) Receive Note Off	on	00 01	Fixed to "on"
			08	2	00 01	(reserved) Key Assign	1=multi	00 01	Fixed to "multi"
			0A	2	00 00	(reserved) Alternate Group	0=off	00 00	Fixed to "off"
			0C	2	00 01 – 00 7F	Element Pan	L63 – C – R63	00 40	
			0E	2	00 00 – 00 7F	Random Pan Depth	0 – 127	00 00	
			10	2	00 00 – 00 7F	Alternate Pan Depth	L64 – C – R63	00 40	
			12	2	00 00 – 00 7F	Scaling Pan Depth	–64 – +63	00 40	
			14	2	00 00 – 00 07	XA Control	Normal, Legato, Key Off, Cycle, Random, A.SW Off, A.SW1 On, A.SW2 On	00 00	
			16	2	00 00 – 00 7F	Note Limit Low	C-2 – G8	00 00	
			18	2	00 00 – 00 7F	Note Limit High	C-2 – G8	00 7F	
			1A	2	00 01 – 00 7F	Velocity Limit Low	1 – 127	00 01	
			1C	2	00 01 – 00 7F	Velocity Limit High	1 – 127	00 7F	
			1E	2	00 00 – 00 7F	Velocity Cross Fade	0 – 127	00 00	
			20	2	00 00 – 00 7F	Key On Delay Time Length	0 – 127	00 00	This is available only when Tempo Sync is set to Off.
			22	2	00 00 – 00 02	Element Connection Switch	Thru, InsA, InsB	00 01	
			24	2	00 00	(reserved) Output Select	0=stereo out	00 00	Fixed to "stereo out"
			26	2	00 05 – 00 15	Key On Delay Note Length	5 – 21 (16th, 8th/3, 16th., 8th, 4th/3, 8th., 4th, 2th/3, 4th., 2nd, Whole/3, 2nd., 4thX4, 4thX5, 4thX6, 4thX7, 4thX8)	00 0B	This is available only when Tempo Sync is set to On.

TOTAL SIZE = 40 28 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal)

ee = Element number
0 – 127 Element 1 – 128 (Normal)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
2p	02	ee	00	2	00 00 – 00 7F	Element Level	0 – 127	00 7F	
			02	2	00 00 – 00 7F	Level Velocity Sensitivity	–64 – +63	00 40	
			04	2	00 00 – 00 7F	Level Velocity Offset	0 – 127	00 00	
			06	2	00 00 – 00 04	Level Sensitivity Key Curve	00 – 04	00 03	
			08	2	00 00 – 00 7F	AEG Attack Time	0 – 127	00 00	
			0A	2	00 00 – 00 7F	AEG Decay 1 Time	0 – 127	00 40	
			0C	2	00 00 – 00 7F	AEG Decay 2 Time	0 – 127	00 40	
			0E	2	00 00 – 00 7F	Half Damper Time	0 – 127	00 7F	
			10	2	00 00 – 00 7F	AEG Release Time	0 – 127	00 32	
			12	2	00 00 – 00 7F	AEG Initial Level	0 – 127	00 00	
			14	2	00 00 – 00 7F	AEG Attack Level	0 – 127	00 7F	
			16	2	00 00 – 00 7F	AEG Decay 1 Level	0 – 127	00 7F	
			18	2	00 00 – 00 7F	AEG Decay 2 Level	0 – 127	00 7F	
			1A	2	00 00 – 00 04	AEG Time Velocity Segment	Attack, Atk+Dcy, Decay, Atk+Rls, All	00 04	
			1C	2	00 00 – 00 7F	AEG Time Velocity Sensitivity	–64 – +63	00 40	
			1E	2	00 00 – 00 7F	AEG Time Key Follow Sensitivity	–64 – +63	00 40	
			20	2	00 00 – 00 7F	AEG Time Key Follow Center Note	C-2 – G8	00 18	
			22	2	00 00 – 00 7C	Level Scaling Break Point 1	C-2 – E8	00 24	BP1<BP 2<BP3< BP4
			24	2	00 01 – 00 7D	Level Scaling Break Point 2	C#-2 – F8	00 30	BP1<BP 2<BP3< BP4
			26	2	00 02 – 00 7E	Level Scaling Break Point 3	D-2 – F#8	00 3C	BP1<BP 2<BP3< BP4
			28	2	00 03 – 00 7F	Level Scaling Break Point 4	D#-2 – G8	00 48	BP1<BP 2<BP3< BP4
			2A	2	00 00 – 01 7F	Level Scaling Offset 1	–128 – +127	01 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			2C	2	00 00 – 01 7F	Level Scaling Offset 2	〃	01 00	
			2E	2	00 00 – 01 7F	Level Scaling Offset 3	〃	01 00	
			30	2	00 00 – 01 7F	Level Scaling Offset 4	〃	01 00	
			32	2	00 00 – 00 7F	Level Key Follow Sensitivity	–64 – +63	00 40	
			34	2	00 00 – 00 7F	AEG Time Key Follow Sensitivity Release Adjustment	0 – 127	00 40	

TOTAL SIZE = 54 36 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal)

ee = Element number
0 – 127 Element 1 – 128 (Normal)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
2p	03	ee	00	2	00 10 – 00 70	Coarse Tune	–48 – +48	00 40	
			02	2	00 00 – 00 7F	Fine Tune	–64 – +63	00 40	
			04	2	00 00 – 00 7F	Pitch Velocity Sensitivity	–64 – +63	00 40	
			06	2	00 00 – 00 7F	Random Pitch Depth	0 – 127	00 00	
			08	2	00 00 – 00 7F	Pitch Key Follow Sensitivity	–200% – +200%	00 60	
			0A	2	00 00 – 00 7F	Pitch Key Follow Sensitivity Center Note	C-2 – G8	00 3C	
			0C	2	00 00 – 00 7F	Fine Tune Key Follow Scaling Sensitivity	–64 – +63	00 40	
			0E	2	00 00 – 00 7F	PEG Hold Time	0 – 127	00 00	
			10	2	00 00 – 00 7F	PEG Attack Time	0 – 127	00 28	
			12	2	00 00 – 00 7F	PEG Decay 1 Time	0 – 127	00 40	
			14	2	00 00 – 00 7F	PEG Decay 2 Time	0 – 127	00 40	
			16	2	00 00 – 00 7F	PEG Release Time	0 – 127	00 40	
			18	2	00 00 – 01 7F	PEG Hold Level	–128 – +127 (–4800 – +4800 [cent])	01 00	
			1A	2	00 00 – 01 7F	PEG Attack Level	〃	01 00	
			1C	2	00 00 – 01 7F	PEG Decay 1 Level	〃	01 00	
			1E	2	00 00 – 01 7F	PEG Decay 2 Level	〃	01 00	
			20	2	00 00 – 01 7F	PEG Release Level	〃	01 00	
			22	2	00 00 – 00 7F	PEG Depth	–64 – +63	00 54	
			24	2	00 00 – 00 04	PEG Time Velocity Sensitivity Segment	Attack, Atk+Dcy, Decay, Atk+Rls, All	00 04	
			26	2	00 00 – 00 7F	PEG Time Velocity Sensitivity	–64 – +63	00 40	
			28	2	00 00 – 00 7F	PEG Depth Velocity Sensitivity	–64 – +63	00 40	
			2A	2	00 00 – 00 04	PEG Depth Velocity Sensitivity Curve	00 – 04 ⟋⟍⟋⟍⟋	00 02	
			2C	2	00 00 – 00 7F	PEG Time Key Follow Sensitivity	–64 – +63	00 40	
			2E	2	00 00 – 00 7F	PEG Time Key Follow Sensitivity Center Note	C-2 – G8	00 3C	

TOTAL SIZE = 48 30 (HEX)

p = Part number
0 – F Part 1 – 16 (Normal)

ee = Element number
0 – 127 Element 1 – 128 (Normal)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
2p	04	ee	00	2	00 00 – 00 15	Filter Type	LPF24D, LPF24A, LPF18, LPF18s, LPF12+HPF12, LPF6+HPF12, HPF24D, HPF12, BPF12D, BPFw, BPF6, BEF12, BEF6, DualLPF, DualHPF, DualBPF, DualBEF, LPF12+BPF6, Thru	00 04	
			02	2	00 00 – 07 7F	Filter Cutoff Frequency	0 – 1023	05 00	
			04	2	00 00 – 00 7F	Filter Cutoff Velocity Sensitivity	–64 – +63	00 40	
			06	2	00 00 – 00 7F	Filter Resonance/ Width	0 – 127	00 00	Not available for LPF6+HPF12.
			08	2	00 00 – 00 7F	Filter Resonance Velocity Sensitivity	–64 – +63	00 40	
			0A	2	00 00 – 07 7F	HPF Cutoff Frequency	0 – 1023	00 00	
			0C	2	00 00 – 01 7F	Distance	–128 – +127	01 00	This is available when Filter Type is set to Dual.
			0E	2	00 00 – 01 7F	Filter Gain	0 – 255	01 66	
			10	2	00 00 – 00 7F	FEG Hold Time	0 – 127	00 00	
			12	2	00 00 – 00 7F	FEG Attack Time	0 – 127	00 00	
			14	2	00 00 – 00 7F	FEG Decay 1 Time	0 – 127	00 40	
			16	2	00 00 – 00 7F	FEG Decay 2 Time	0 – 127	00 40	
			18	2	00 00 – 00 7F	FEG Release Time	0 – 127	00 50	
			1A	2	00 00 – 01 7F	FEG Hold Level	–128 – +127 (–9600 – +9600 [cent])	01 00	
			1C	2	00 00 – 01 7F	FEG Attack Level	〃	01 7F	
			1E	2	00 00 – 01 7F	FEG Decay 1 Level	〃	01 7F	
			20	2	00 00 – 01 7F	FEG Decay 2 Level	〃	01 7F	
			22	2	00 00 – 01 7F	FEG Release Level	〃	01 00	
			24	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 68	
			26	2	00 00 – 00 04	FEG Time Velocity Sensitivity Segment	Attack, Atk+Dcy, Decay, Atk+Rls, All	00 04	
			28	2	00 00 – 00 7F	FEG Time Velocity Sensitivity	–64 – +63	00 40	
			2A	2	00 00 – 00 7F	FEG Depth Velocity Sensitivity	–64 – +63	00 40	
			2C	2	00 00 – 00 04	FEG Depth Velocity Sensitivity Curve	00 – 04 ⟋⟍⟋⟍⟋	00 02	
			2E	2	00 00 – 00 7F	FEG Time Key Follow Sensitivity	–64 – +63	00 40	
			30	2	00 00 – 00 7F	FEG Time Key Follow Sensitivity Center Note	C-2 – G8	00 18	
			32	2	00 00 – 00 7C	Filter Cutoff Scaling Break Point 1	C-2 – E8	00 24	BP1<BP 2<BP3< BP4
			34	2	00 01 – 00 7D	Filter Cutoff Scaling Break Point 2	C#-2 – F8	00 30	BP1<BP 2<BP3< BP4
			36	2	00 02 – 00 7E	Filter Cutoff Scaling Break Point 3	D-2 – F#8	00 3C	BP1<BP 2<BP3< BP4
			38	2	00 03 – 00 7F	Filter Cutoff Scaling Break Point 4	D#-2 – G8	00 48	BP1<BP 2<BP3< BP4
			3A	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 1	–128 – +127	01 00	
			3C	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 2	〃	01 00	
			3E	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 3	〃	01 00	
			40	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 4	〃	01 00	
			42	2	00 00 – 00 7F	Filter Cutoff Key Follow Sensitivity	–200% – +200%	00 4A	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			44	2	00 00 – 00 7F	HPF Cutoff Key Follow Sensitivity	–200% – +200%	00 40	
			46	2	00 00 – 00 05	EQ Type	2-band, P.EQ, Boost6, Boost12, Boost18, Thru	00 00	
			48	2	00 00 – 00 1F	EQ Q	0.7 – 10.3	00 00	This is available only when P.EQ is selected for EQ Type.
			4A	2	00 2E – 00 B6 (2-band) 00 53 – 01 7B (P.EQ)	EQ 1 Frequency	50.1 – 2.00k (2-band) 139.7 – 12.9k (P.EQ)	00 36 (2-band) 01 1D (P.EQ)	This is available only when 2-band or P.EQ is selected for EQ Type.
			4C	2	00 20 – 00 60	EQ 1 Gain	–12.00dB – +12.00dB	00 40	
			4E	2	01 03 – 01 71	EQ 2 Frequency	503.8 – 10.1k	01 67	This is available only when 2-band is selected for EQ Type.
			50	2	00 20 – 00 60	EQ 2 Gain	–12.00dB – +12.00dB	00 40	
			52	2	00 00 – 00 02	LFO Wave	Saw, Triangle, Square	00 01	
			54	2	00 00 – 00 01	LFO Key On Reset	Off, On	00 01	
			56	2	00 00 – 00 7F	LFO Delay Time	0 – 127	00 00	
			58	2	00 00 – 00 3F	LFO Speed	0 – 63	00 26	This is available only when LFO Speed Range is set to Normal.
			5A	2	00 00 – 00 7F	LFO Amplitude Modulation Depth	0 – 127	00 00	
			5C	2	00 00 – 00 7F	LFO Pitch Modulation Depth	0 – 127	00 00	
			5E	2	00 00 – 00 7F	LFO Filter Modulation Depth	0 – 127	00 00	
			60	2	00 00 – 00 7F	LFO Fade In Time	0 – 127	00 00	
			62	2	00 00 – 00 05	Part LFO Phase Offset	+0, +90, +120, +180, +240, +270	00 00	
			64	2	00 00 – 00 7F	Part LFO Destination 1 Depth Ratio	0 – 127	00 7F	
			66	2	00 00 – 00 7F	Part LFO Destination 2 Depth Ratio	0 – 127	00 7F	
			68	2	00 00 – 00 7F	Part LFO Destination 3 Depth Ratio	0 – 127	00 7F	
			6A	2	00 00 – 03 1F	LFO Extended Speed	0 – 415	00 3C	This is available only when LFO Speed Range is set to Extended

TOTAL SIZE = 106 6A (HEX)

p = Part number
0 – F Part 1 – 16 (Normal)

ee = Element number
0 – 127 Element 1 – 128 (Normal)

MIDI PARAMETER CHANGE TABLE (DRUM VOICE KEY)

Group Number =7F 1C, Model ID = 0D

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
2p	10	kk	00	2	00 00 – 00 01	Drum Key Switch	Off, On	00 01	
			02	2	00 00 – 00 19	Wave Select	0=Preset, 1=User, 2–17=Library1–16, 18-25=Library17–24	00 00	
			04	2	00 00 – 00 01	Receive Note Off	Off, On	00 00	
			06	2	00 00 – 00 01	Key Assign Mode	Single, Multi	00 01	
			08	2	00 00 – 00 7F	Alternate Group	0:Off, 1 – 127	00 00	
			0A	2	00 01 – 3B 44	Wave Number	1 – 7620 (USR, Library:1 – 1024)	28 1C	
			0C	2	00 01 – 00 7F	Pan	L63 – C – R63	00 40	
			0E	2	00 00 – 00 7F	Random Pan Depth	0 – 127	00 00	
			10	2	00 00 – 00 7F	Alternate Pan Depth	L64 – C – R63	00 40	
			12	2	00 00 – 00 7F	Drum Key Reverb Send Level	0 – 127	00 5A	
			14	2	00 00 – 00 7F	Drum Key Variation Send Level	0 – 127	00 00	
			16	2	00 00 – 00 02	Drum Key Connection Switch	Thru, InsA, InsB	00 00	
			18	2	00 00 – 00 5F	Drum Key Output Select	0: MainL&R, 8: AsgnL&R (=Off), 9 – 23: USB1&2 – USB29&30 (USB9&10 – USB29&30 =Off), 64 – 95: AsgnL (=Off), AsgnR (=Off), USB1 – USB30 (USB9 – USB30 =Off)	00 00	
			1A	2	00 00 – 00 7F	Drum Key Level	0 – 127	00 7F	
			1C	2	00 00 – 00 7F	Level Velocity Sensitivity	–64 – +63	00 40	
			1E	2	00 00 – 00 7F	AEG Attack Time	0 – 127	00 00	
			20	2	00 00 – 00 7F	AEG Decay 1 Time	0 – 127	00 60	
			22	2	00 00 – 00 7F	AEG Decay 2 Time	0 – 126, Hold	00 50	
			24	2	00 00 – 00 7F	AEG Decay 1 Level	0 – 127	00 7F	
			26	2	00 10 – 00 70	Coarse Tune	–48 – +48	00 40	
			28	2	00 00 – 00 7F	Fine Tune	–64 – +63	00 40	
			2A	2	00 00 – 00 7F	Pitch Velocity Sensitivity	–64 – +63	00 40	
			2C	2	00 00 – 07 7F	LPF Cutoff Frequency	0 – 1023	07 7F	
			2E	2	00 00 – 00 7F	LPF Cutoff Velocity Sensitivity	–64 – +63	00 40	
			30	2	00 00 – 00 7F	LPF Resonance	0 – 127	00 00	
			32	2	00 00 – 07 7F	HPF Cutoff Frequency	0 – 1023	00 00	
			34	2	00 00 – 00 05	EQ Type	2 Band, P.EQ, Boost6, Boost12, Boost18, Thru	00 00	
			36	2	00 00 – 00 1F	EQ Q	0.7 – 10.3	00 00	
			38	2	00 2E – 00 B6 00 53 – 01 7B	EQ 1 Frequency	50.1 – 2.00k (2-band) 139.7 – 12.9k (P.EQ)	00 36 (2-band) 01 1D (P.EQ)	This is available only when 2-band or P.EQ is selected for EQ Type.
			3A	2	00 20 – 00 60	EQ 1 Gain	–12.00dB – +12.00dB	00 40	
			3C	2	01 03 – 01 71	EQ 2 Frequency	503.8 – 10.1k	01 67	This is available only when 2-band is selected for EQ Type.
			3E	2	00 20 – 00 60	EQ 2 Gain	–12.00dB – +12.00dB	00 40	

TOTAL SIZE = 64 40 (HEX)

p = Part number
00 – 0F Part 1 – 16 (Drum)

kk = Key number
00 – 48 Key C0 – C6

MIDI PARAMETER CHANGE TABLE (FM-X PART COMMON)

Group Number =7F 1C, Model ID = 0D

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
3p	00	00	00	2	00 00 – 00 7F	Random Pan Depth	0 – 127	00 00	
			02	2	00 00 – 00 7F	Alternate Pan Depth	L64 – C – R63	00 40	
			04	2	00 00 – 00 7F	Scaling Pan Depth	–64 – +63	00 40	
			06	2	00 00 – 00 7F	Key On Delay Time Length	0 – 127	00 00	This is available only when Tempo Sync is set to Off.
			08	2	00 00 – 00 01	Key On Delay Tempo Sync Switch	Off, On	00 00	
			0A	2	00 05 – 00 15	Key On Delay Note Length	5 – 21 (16th, 8th/3, 16th., 8th, 4th/3, 8th., 4th, 2th/3, 4th., 2nd, Whole/3, 2nd., 4thX4, 4thX5, 4thX6, 4thX7, 4thX8)	00 0E	This is available only when Tempo Sync is set to On.
			0C	2	00 00 – 00 7F	Pitch Velocity Sensitivity	–64 – +63	00 40	
			0E	2	00 00 – 00 7F	Random Pitch Depth	0 – 127	00 00	
			10	2	00 00 – 00 7F	Pitch Key Follow Sensitivity	–200% – +200%	00 60	
			12	2	00 00 – 00 7F	Pitch Key Follow Sensitivity Center Note	C-2 – G8	00 3C	
			14	2	00 00 – 00 64	PEG Initial Level	–50 – +50	00 32	
			16	2	00 00 – 00 64	PEG Attack Level	–50 – +50	00 32	
			18	2	00 00 – 00 64	PEG Decay 1 Level	–50 – +50	00 32	
			1A	2	00 00 – 00 64	PEG Decay 2 Level	–50 – +50	00 32	
			1C	2	00 00 – 00 64	PEG Release Level	–50 – +50	00 32	
			1E	2	00 00 – 00 63	PEG Attack Time	0 – 99	00 00	
			20	2	00 00 – 00 63	PEG Decay 1 Time	0 – 99	00 00	
			22	2	00 00 – 00 63	PEG Decay 2 Time	0 – 99	00 00	
			24	2	00 00 – 00 63	PEG Release Time	0 – 99	00 00	
			26	2	00 00 – 00 07	PEG Depth Velocity Sensitivity	0 – 7	00 00	
			28	2	00 00 – 00 03	PEG Depth	8 oct, 2 oct, 1 oct, 0.5 oct	00 00	
			2A	2	00 00 – 00 07	PEG Time Key Follow Sensitivity	0 – 7	00 00	
			2C	2	00 00 – 00 05	2nd LFO Wave	Triangle, Saw Down, Saw Up, Square, Sine, S/H	00 00	
			2E	2	00 00 – 00 63	2nd LFO Speed	0 – 99	00 1E	This is available only when LFO Speed Range is set to Normal.
			30	2	00 00 – 00 03	2nd LFO Phase	0°, 90°, 180°, 270°	00 00	
			32	2	00 00 – 00 63	2nd LFO Delay Time	0 – 99	00 00	
			34	2	00 00 – 00 01	2nd LFO Key On Reset	Off, On	00 00	
			36	2	00 00 – 00 63	2nd LFO Pitch Modulation Depth	0 – 99	00 00	
			38	2	00 00 – 00 63	2nd LFO Amplitude Modulation Depth	0 – 99	00 00	
			3A	2	00 00 – 00 63	2nd LFO Filter Modulation Depth	0 – 99	00 00	
			3C	2	00 00 – 00 57	Algorithm Number	1 – 88	00 44	
			3E	2	00 00 – 00 07	Feedback Level	0 – 7	00 00	
			40	2	00 00 – 00 01	LFO Speed Range	Normal, Extended	00 01	
			42	2	00 00 – 03 1F	LFO Extended Speed	0 – 415	00 3C	This is available only when LFO Speed Range is set to Extended.
			44	2	00 1D – 01 63	FM Depth	–99 – +99	01 00	
			46	2	00 1D – 01 63	FM Harmonics	–99 – +99	01 00	
			48	2	00 1D – 01 63	FM Attack	–99 – +99	01 00	
			4A	2	00 1D – 01 63	FM Decay	–99 – +99	01 00	
			4C	2	00 1D – 01 63	FM Sustain	–99 – +99	01 00	
			4E	2	00 1D – 01 63	FM Release	–99 – +99	01 00	
			50	2	00 1D – 01 63	FM Texture	–99 – +99	01 00	

TOTAL SIZE = 82 52 (HEX)

p = Part number
0 – F Part 1 – 16 (FM-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
3p	00	01	00	2	00 00 – 00 15	Filter Type	LPF24D, LPF24A, LPF18, LPF18s, LPF12+HPF12, LPF6+HPF12, HPF24D, HPF12, BPF12D, BPFw, BPF6, BEF12, BEF6, DualLPF, DualHPF, DualBPF, DualBEF, LPF12+BPF6, Thru	00 15	
			02	2	00 00 – 07 7F	Filter Cutoff Frequency	0 – 1023	07 7F	
			04	2	00 00 – 00 7F	Filter Cutoff Velocity Sensitivity	–64 – +63	00 40	
			06	2	00 00 – 00 7F	Filter Resonance/ Width	0 – 127	00 0A	Not available for LPF6+HPF 12.
			08	2	00 00 – 00 7F	Filter Resonance Velocity Sensitivity	–64 – +63	00 40	
			0A	2	00 00 – 07 7F	HPF Cutoff Frequency	0 – 1023	00 00	
			0C	2	00 00 – 01 7F	Distance	–128 – +127	01 00	This is available when Filter Type is set to Dual.
			0E	2	00 00 – 01 7F	Filter Gain	0 – 255	01 7F	
			10	2	00 00 – 00 7F	FEG Hold Time	0 – 127	00 00	
			12	2	00 00 – 00 7F	FEG Attack Time	0 – 127	00 00	
			14	2	00 00 – 00 7F	FEG Decay 1 Time	0 – 127	00 00	
			16	2	00 00 – 00 7F	FEG Decay 2 Time	0 – 127	00 00	
			18	2	00 00 – 00 7F	FEG Release Time	0 – 127	00 00	
			1A	2	00 00 – 01 7F	FEG Hold Level	–128 – +127 (–9600 – +9600 [cent])	01 00	
			1C	2	00 00 – 01 7F	FEG Attack Level	〃	01 00	
			1E	2	00 00 – 01 7F	FEG Decay 1 Level	〃	01 00	
			20	2	00 00 – 01 7F	FEG Decay 2 Level	〃	01 00	
			22	2	00 00 – 01 7F	FEG Release Level	〃	01 00	
			24	2	00 00 – 00 7F	FEG Depth	–64 – +63	00 68	
			26	2	00 00 – 00 04	FEG Time Velocity Sensitivity Segment	Attack, Atk+Dcy, Decay, Atk+Rls, All	00 04	
			28	2	00 00 – 00 7F	FEG Time Velocity Sensitivity	–64 – +63	00 40	
			2A	2	00 00 – 00 7F	FEG Depth Velocity Sensitivity	–64 – +63	00 40	
			2C	2	00 00 – 00 04	FEG Depth Velocity Sensitivity Curve	00 – 04 ⟋⟋⟋⟍⟍	00 02	
			2E	2	00 00 – 00 7F	FEG Time Key Follow Sensitivity	–64 – +63	00 40	
			30	2	00 00 – 00 7F	FEG Time Key Follow Sensitivity Center Note	C-2 – G8	00 18	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			32	2	00 00 – 00 7F	Filter Cutoff Key Follow Sensitivity	–200% – +200%	00 4A	
			34	2	00 00 – 00 7C	Filter Cutoff Scaling Break Point 1	C-2 – E8	00 24	BP1<BP2 <BP3<BP 4
			36	2	00 01 – 00 7D	Filter Cutoff Scaling Break Point 2	C#-2 – F8	00 30	BP1<BP2 <BP3<BP 4
			38	2	00 02 – 00 7E	Filter Cutoff Scaling Break Point 3	D-2 – F#8	00 3C	BP1<BP2 <BP3<BP 4
			3A	2	00 03 – 00 7F	Filter Cutoff Scaling Break Point 4	D#-2 – G8	00 48	BP1<BP2 <BP3<BP 4
			3C	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 1	–128 – +127	01 00	
			3E	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 2	〃	01 00	
			40	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 3	〃	01 00	
			42	2	00 00 – 01 7F	Filter Cutoff Scaling Offset 4	〃	01 00	
			44	2	00 00 – 00 7F	HPF Cutoff Key Follow Sensitivity	–200% – +200%	00 40	

TOTAL SIZE = 70 46 (HEX)

p = Part number
0 – F Part 1 – 16 (FM-X)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
3p	01	0o	00	1	00 – 01	Controller Set 1 Switch	Off, On	01	
			01	1	00 – 01	Controller Set 2 Switch	Off, On	01	
			02	1	00 – 01	Controller Set 3 Switch	Off, On	01	
			03	1	00 – 01	Controller Set 4 Switch	Off, On	01	
			04	1	00 – 01	Controller Set 5 Switch	Off, On	01	
			05	1	00 – 01	Controller Set 6 Switch	Off, On	01	
			06	1	00 – 01	Controller Set 7 Switch	Off, On	01	
			07	1	00 – 01	Controller Set 8 Switch	Off, On	01	
			08	1	00 – 01	Controller Set 9 Switch	Off, On	01	
			09	1	00 – 01	Controller Set 10 Switch	Off, On	01	
			0A	1	00 – 01	Controller Set 11 Switch	Off, On	01	
			0B	1	00 – 01	Controller Set 12 Switch	Off, On	01	
			0C	1	00 – 01	Controller Set 13 Switch	Off, On	01	
			0D	1	00 – 01	Controller Set 14 Switch	Off, On	01	
			0E	1	00 – 01	Controller Set 15 Switch	Off, On	01	
			0F	1	00 – 01	Controller Set 16 Switch	Off, On	01	
			10	1	00 – 01	Controller Set 17 Switch	Off, On	01	
			11	1	00 – 01	Controller Set 18 Switch	Off, On	01	
			12	1	00 – 01	Controller Set 19 Switch	Off, On	01	
			13	1	00 – 01	Controller Set 20 Switch	Off, On	01	
			14	1	00 – 01	Controller Set 21 Switch	Off, On	01	
			15	1	00 – 01	Controller Set 22 Switch	Off, On	01	
			16	1	00 – 01	Controller Set 23 Switch	Off, On	01	
			17	1	00 – 01	Controller Set 24 Switch	Off, On	01	
			18	1	00 – 01	Controller Set 25 Switch	Off, On	01	
			19	1	00 – 01	Controller Set 26 Switch	Off, On	01	
			1A	1	00 – 01	Controller Set 27 Switch	Off, On	01	
			1B	1	00 – 01	Controller Set 28 Switch	Off, On	01	
			1C	1	00 – 01	Controller Set 29 Switch	Off, On	01	
			1D	1	00 – 01	Controller Set 30 Switch	Off, On	01	
			1E	1	00 – 01	Controller Set 31 Switch	Off, On	01	
			1F	1	00 – 01	Controller Set 32 Switch	Off, On	01	
			20	1	00 – 01	Operator Key Controller Set 1 Switch	Off, On	01	
			21	1	00 – 01	Operator Key Controller Set 2 Switch	Off, On	01	
			22	1	00 – 01	Operator Key Controller Set 3 Switch	Off, On	01	
			23	1	00 – 01	Operator Key Controller Set 4 Switch	Off, On	01	
			24	1	00 – 01	LFO Box 1 Switch	Off, On	01	
			25	1	00 – 01	LFO Box 2 Switch	Off, On	01	
			26	1	00 – 01	LFO Box 3 Switch	Off, On	01	

TOTAL SIZE = 39 27 (HEX)

p = Part number
0 – F Part 1 – 16 (FM-X)

o = Operator number
0 – 7 Operator 1 – 8

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
3p	02	0o	00	2	00 00 – 00 01	Oscillator Key On Reset	Off, On	00 01	
			02	2	00 00 – 00 01	Oscillator Frequency Mode	Ratio, Fixed	00 00	
			04	2	00 00 – 00 1F	Tune Coarse	0 – 31	00 01	
			06	2	00 00 – 00 7F	Tune Fine	0 – 127	00 00	
			08	2	00 00 – 00 1E	Detune	–15 – 0 – 15	00 0F	
			0A	2	00 00 – 00 63	Pitch Key Follow Sensitivity	0 – 99	00 00	This is available when Oscillator Mode is set to Fixed.
			0C	2	00 00 – 00 0E	Pitch Velocity Sensitivity	–7 – 0 – +7	00 07	
			0E	2	00 00 – 00 06	Spectral Form	Sine, All 1, All 2, Odd 1, Odd 2, Res 1, Res 2	00 00	
			10	2	00 00 – 00 07	Spectral Skirt	0 – 7	00 00	
			12	2	00 00 – 00 63	Spectral Resonance	0 – 99	00 00	
			14	2	00 00 – 00 64	PEG Initial Level	–50 – 0 – +50	00 32	
			16	2	00 00 – 00 64	PEG Attack Level	–50 – 0 – +50	00 32	
			18	2	00 00 – 00 63	PEG Attack Time	0 – 99	00 00	
			1A	2	00 00 – 00 63	PEG Decay Time	0 – 99	00 00	
			1C	2	00 00 – 00 63	AEG Attack Level	0 – 99	00 63	
			1E	2	00 00 – 00 63	AEG Decay 1 Level	0 – 99	00 63	
			20	2	00 00 – 00 63	AEG Decay 2 Level	0 – 99	00 63	
			22	2	00 00 – 00 63	AEG Release (Hold) Level	0 – 99	00 00	
			24	2	00 00 – 00 63	AEG Attack Time	0 – 99	00 00	
			26	2	00 00 – 00 63	AEG Decay 1 Time	0 – 99	00 00	
			28	2	00 00 – 00 63	AEG Decay 2 Time	0 – 99	00 00	
			2A	2	00 00 – 00 63	AEG Release Time	0 – 99	00 28	
			2C	2	00 00 – 00 63	AEG Hold Time	0 – 99	00 00	
			2E	2	00 00 – 00 07	AEG Time Key Follow Sensitivity	0 – 7	00 00	
			30	2	00 00 – 00 63	Operator Level	0 – 99	00 00	When Operator number is "7," the initial value is 00 55.
			32	2	00 00 – 00 63	Level Scaling Break Point	A-1 – C8	00 27	
			34	2	00 00 – 00 63	Level Scaling Low Depth	0 – 99	00 00	
			36	2	00 00 – 00 63	Level Scaling High Depth	0 – 99	00 00	
			38	2	00 00 – 00 03	Level Scaling Low Curve	–Linear, –Exp, +Exp, +Linear	00 00	
			3A	2	00 00 – 00 03	Level Scaling High Curve	–Linear, –Exp, +Exp, +Linear	00 00	
			3C	2	00 00 – 00 0E	Level Velocity Sensitivity	–7 – 0 – +7	00 07	
			3E	2	00 00 – 00 07	2nd LFO Pitch Modulation Depth Offset	0 – 7	00 03	
			40	2	00 00 – 00 07	2nd LFO Amplitude Modulation Depth Offset	0 – 7	00 03	
			42	2	00 00 – 00 0E	Pitch Controller Sensitivity	–7 – 0 – 7	00 07	
			44	2	00 00 – 00 0E	Level Controller Sensitivity	–7 – 0 – 7	00 07	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			46	2	00 00 – 00 7F	Part LFO Destination 1 Depth Ratio	0 – 127	00 7F	
			48	2	00 00 – 00 7F	Part LFO Destination 2 Depth Ratio	0 – 127	00 7F	
			4A	2	00 00 – 00 7F	Part LFO Destination 3 Depth Ratio	0 – 127	00 7F	

TOTAL SIZE = 76 4C

p = Part number
0 – F Part 1 – 16 (FM-X)

o = Operator number
0 – 7 Operator 1 – 8

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
7p	01	0o	00	2	00 00 – 18 7F	Operator Ratio		00 00	
			02	2	00 00 – 15 7F	Operator Frequency		00 00	

TOTAL SIZE = 4 04

p = Part number
0 – F Part 1 – 16 (FM-X)

o = Operator number
0 – 7 Operator 1 – 8

MIDI PARAMETER CHANGE TABLE (AN-X PART)

Group Number =7F 1C, Model ID = 0D

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
4p	00	00	00	2	00 00 – 00 7F	Random Pan Depth	0 – 127	00 00	
			02	2	00 00 – 00 7F	Alternate Pan Depth	L64 – C – R63	00 40	
			04	2	00 00 – 00 7F	Scaling Pan Depth	–64 – +63	00 40	
			06	2	00 00 – 00 7F	Key On Delay Time Length	0 – 127	00 00	
			08	2	00 00 – 00 01	Key On Delay Tempo Sync Switch	Off, On	00 00	
			0A	2	00 05 – 00 15	Key On Delay Note Length	5 – 21 (16th, 8th, 3, 16th., 8th, 4th, 3, 8th., 4th, 2th, 3, 4th., 2nd, Whole, 3, 2nd., 4thX4, 4thX5, 4thX6, 4thX7, 4thX8)	00 0E	
			0C	2	00 00 – 00 02	Unison	Off, 2, 4	00 00	
			0E	2	00 00 – 00 0F	Unison Detune	0 – 15	00 00	
			10	2	00 00 – 00 0F	Unison Spread	0 – 15	00 00	
			12	2	00 01	reserved		00 01	
			14	2	00 00 – 00 03	OSC Reset	Off, Phase, Tune, Full	00 00	
				2	00 00 – 00 7F	Voltage Drift	0 – 127	00 40	
			18	2	00 00 – 01 48	Ageing	–100 – 0 – +100	00 64	
			1A	2	00 00 – 01 7F	Pitch EG Attack Time	0 – 255	00 00	
			1C	2	00 00 – 01 7F	Pitch EG Decay Time	0 – 255	01 20	
			1E	2	00 00 – 03 7F	Pitch EG Sustain Level	0 – 511	00 00	
			20	2	00 00 – 01 7F	Pitch EG Release Time	0 – 255	00 73	
			22	2	00 01 – 03 7F	Pitch EG Time Velocity Sensitivity	–255 – 0 – +255	02 00	
			24	2	00 00 – 00 04	Pitch LFO Wave	Saw, Square, Triangle, Sine, Random	00 02	
			26	2	00 00 – 03 1F	Pitch LFO Speed	0 – 415	01 50	
			28	2	00 00 – 00 01	Pitch LFO Key On Reset	Off, On	00 00	
			2A	2	00 00 – 00 0F	Pitch LFO Phase	0, 30, 45, 60, 90, 120, 135, 150, 180, 210, 225, 240, 270, 300, 315, 330 [°]	00 00	
			2C	2	00 00 – 00 7F	Pitch LFO Delay Time	0 – 127	00 00	
			2E	2	00 00 – 01 56	Pitch LFO Fade In Time	0 – 214	00 00	
			30	2	00 00 – 00 7F	Noise Generator Tone	0 – 64 – 127	00 40	
			32	2	00 00 – 00 01	Noise Generator Out Select	Filter, Amp	00 00	
			34	2	00 00 – 03 7F	Noise Generator Out Level	0 – 511	00 00	
			36	2	00 01 – 03 7F	Noise Generator Out Level Velocity Sensitivity	–255 – 0 – +255	02 00	
			38	2	00 00 – 01 7F	Filter Cutoff EG Attack Time	0 – 255	00 00	
			3A	2	00 00 – 01 7F	Filter Cutoff EG Decay Time	0 – 255	01 20	
			3C	2	00 00 – 03 7F	Filter Cutoff EG Sustain Level	0 – 511	00 00	
			3E	2	00 00 – 01 7F	Filter Cutoff EG Release Time	0 – 255	01 20	
			40	2	00 01 – 03 7F	Filter Cutoff EG Time Velocity Sensitivity	–255 – 0 – +255	02 00	
			42	2	00 00 – 00 04	Filter Cutoff LFO Wave	Saw, Square, Triangle, Sine, Random	00 02	
			44	2	00 00 – 03 1F	Filter Cutoff LFO Speed	0 – 415	01 50	
			46	2	00 00 – 00 01	Filter Cutoff LFO Key On Reset	Off, On	00 00	
			48	2	00 00 – 00 0F	Filter Cutoff LFO Phase	0, 30, 45, 60, 90, 120, 135, 150, 180, 210, 225, 240, 270, 300, 315, 330 [°]	00 00	
			4A	2	00 00 – 00 7F	Filter Cutoff LFO Delay Time	0 – 127	00 00	
			4C	2	00 00 – 01 56	Filter Cutoff LFO Fade In Time	0 – 214	00 00	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			4E	2	00 00 – 03 7F	Amplitude Level	0 – 511	03 2F	
			50	2	00 01 – 03 7F	Amplitude Level Velocity Sensitivity	–255 – 0 – +255	02 00	
			52	2	00 01 – 01 7F	Amplitude Level LFO Depth	–127 – +127	01 00	
			54	2	00 00 – 00 7F	Amplitude Level Key Follow	0 – 127	00 00	
			56	2	00 00 – 00 50	Amplitude Saturator Drive	0.0 – 60.0 [dB], 0.75 [dB] step	00 00	
			58	2	00 00 – 01 7F	Amplitude EG Attack Time	0 – 255	00 00	
			5A	2	00 00 – 01 7F	Amplitude EG Decay Time	0 – 255	01 20	
			5C	2	00 00 – 03 7F	Amplitude EG Sustain Level	0 – 511	03 7F	
			5E	2	00 00 – 01 7F	Amplitude EG Release Time	0 – 255	00 73	
			60	2	00 01 – 03 7F	Amplitude EG Time Velocity Sensitivity	–255 – 0 – +255	02 00	
			62	2	00 00 – 00 04	Amplitude LFO Wave	Saw, Square, Triangle, Sine, Random	00 02	
			64	2	00 00 – 03 1F	Amplitude LFO Speed	0 – 415	01 50	
			66	2	00 00 – 00 01	Amplitude LFO Key On Reset	Off, On	00 00	
			68	2	00 00 – 00 0F	Amplitude LFO Phase	0, 30, 45, 60, 90, 120, 135, 150, 180, 210, 225, 240, 270, 300, 315, 330 [°]	00 00	
			6A	2	00 00 – 00 7F	Amplitude LFO Delay Time	0 – 127	00 00	
			6C	2	00 00 – 01 56	Amplitude LFO Fade In Time	0 – 214	00 00	

TOTAL SIZE = 110 6E (HEX)

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
4p	01	0o	00	1	00 – 01	Oscillator Controller Set 1 Switch	Off, On	01	
			01	1	00 – 01	Oscillator Controller Set 2 Switch	Off, On	01	
			02	1	00 – 01	Oscillator Controller Set 3 Switch	Off, On	01	
			03	1	00 – 01	Oscillator Controller Set 4 Switch	Off, On	01	
			04	1	00 – 01	Oscillator Controller Set 5 Switch	Off, On	01	
			05	1	00 – 01	Oscillator Controller Set 6 Switch	Off, On	01	
			06	1	00 – 01	Oscillator Controller Set 7 Switch	Off, On	01	
			07	1	00 – 01	Oscillator Controller Set 8 Switch	Off, On	01	
			08	1	00 – 01	Oscillator Controller Set 9 Switch	Off, On	01	
			09	1	00 – 01	Oscillator Controller Set 10 Switch	Off, On	01	
			0A	1	00 – 01	Oscillator Controller Set 11 Switch	Off, On	01	
			0B	1	00 – 01	Oscillator Controller Set 12 Switch	Off, On	01	
			0C	1	00 – 01	Oscillator Controller Set 13 Switch	Off, On	01	
			0D	1	00 – 01	Oscillator Controller Set 14 Switch	Off, On	01	
			0E	1	00 – 01	Oscillator Controller Set 15 Switch	Off, On	01	
			0F	1	00 – 01	Oscillator Controller Set 16 Switch	Off, On	01	
			10	1	00 – 01	Oscillator Controller Set 17 Switch	Off, On	01	
			11	1	00 – 01	Oscillator Controller Set 18 Switch	Off, On	01	
			12	1	00 – 01	Oscillator Controller Set 19 Switch	Off, On	01	
			13	1	00 – 01	Oscillator Controller Set 20 Switch	Off, On	01	
			14	1	00 – 01	Oscillator Controller Set 21 Switch	Off, On	01	
			15	1	00 – 01	Oscillator Controller Set 22 Switch	Off, On	01	
			16	1	00 – 01	Oscillator Controller Set 23 Switch	Off, On	01	
			17	1	00 – 01	Oscillator Controller Set 24 Switch	Off, On	01	
			18	1	00 – 01	Oscillator Controller Set 25 Switch	Off, On	01	
			19	1	00 – 01	Oscillator Controller Set 26 Switch	Off, On	01	
			1A	1	00 – 01	Oscillator Controller Set 27 Switch	Off, On	01	
			1B	1	00 – 01	Oscillator Controller Set 28 Switch	Off, On	01	
			1C	1	00 – 01	Oscillator Controller Set 29 Switch	Off, On	01	
			1D	1	00 – 01	Oscillator Controller Set 30 Switch	Off, On	01	
			1E	1	00 – 01	Oscillator Controller Set 31 Switch	Off, On	01	
			1F	1	00 – 01	Oscillator Controller Set 32 Switch	Off, On	01	
			20	1	00 – 01	Oscillator Key Controller Set 1 Switch	Off, On	01	
			21	1	00 – 01	Oscillator Key Controller Set 2 Switch	Off, On	01	
			22	1	00 – 01	Oscillator Key Controller Set 3 Switch	Off, On	01	
			23	1	00 – 01	Oscillator Key Controller Set 4 Switch	Off, On	01	
			24	1	00 – 01	LFO Box 1 Switch	Off, On	01	
			25	1	00 – 01	LFO Box 2 Switch	Off, On	01	
			26	1	00 – 01	LFO Box 3 Switch	Off, On	01	

TOTAL SIZE = 39 27

o = Oscillator number
0 – 2 Oscillator 1 – 3

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
4p	02	0o	00	2	00 00 – 00 04	Oscillator Wave	Saw1, Saw2, Square, Triangle, Sine	00 00 (OSC 1, 2) 00 04 (OSC 3)	
			02	2	00 00 – 00 06	Oscillator Octave	64', 32', 16', 8', 4', 2', 1'	00 03	
			04	2	00 00 – 07 70	Oscillator Pitch	–1200 – 0 – +1200 [cent]	03 78	
			06	2	00 00 – 03 6E	Oscillator Pitch EG Depth	–4800 – 0 – +4800 [cent]	01 77	
			08	2	00 01 – 03 7F	Oscillator Pitch EG Depth Velocity Sensitivity	–255 – 0 – +255	02 00	
			0A	2	00 00 – 03 6E	Oscillator Pitch LFO Depth	–4800 – 0 – +4800 [cent]	01 77	
			0C	2	00 00 – 01 40	Oscillator Self Sync Pitch	0 – 4800 [cent] 25 [cent] step	00 00	
			0E	2	00 01 – 03 7F	Oscillator Self Sync Pitch Velocity Sensitivity	–255 – 0 – +255	02 00	
			10	2	00 40 – 03 40	Oscillator Self Sync EG Depth	–4800 – 0 – 4800 [cent], 25 [cent] step	02 00	
			12	2	00 40 – 03 40	Oscillator Self Sync LFO Depth	–4800 – 0 – 4800 [cent], 25 [cent] step	02 00	
			14	2	00 00 – 01 7F	Oscillator Pulse Width	1.0% – 50.0% – 99.0%	01 00	
			16	2	00 01 – 03 7F	Oscillator Pulse Width Velocity Sensitivity	–255 – 0 – +255	02 00	
			18	2	00 01 – 01 7F	Oscillator Pulse Width EG Depth	–127 – 0 – +127	01 00	
			1A	2	00 01 – 01 7F	Oscillator Pulse Width LFO Depth	–127 – 0 – +127	01 00	
			1C	2	00 00 – 01 7F	Oscillator Wave Shaper	0 – 255	00 00	This is not available when Wave is set to Square.
			1E	2	00 01 – 03 7F	Oscillator Wave Shaper Velocity Sensitivity	–255 – 0 – +255	02 00	This is not available when Wave is set to Square.

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			20	2	00 01 – 01 7F	Oscillator Wave Shaper EG Depth	–127 – 0 – +127	01 00	This is not available when Wave is set to Square.
			22	2	00 01 – 01 7F	Oscillator Wave Shaper LFO Depth	–127 – 0 – +127	01 00	This is not available when Wave is set to Square.
			24	2	00 00 – 01 7F	Oscillator FM Level	0 – 255	00 00	Not available for OSC3
			26	2	00 01 – 03 7F	Oscillator FM Level Velocity Sensitivity	–255 – 0 – +255	02 00	Not available for OSC3
			28	2	00 00 – 01 7F	Oscillator Ring Level	0 – 255	00 00	Not available for OSC3
			2A	2	00 01 – 03 7F	Oscillator Ring Level Velocity Sensitivity	–255 – 0 – +255	02 00	Not available for OSC3
			2C	2	00 00 – 00 01	Oscillator Out Select	Filter, Amp	00 00	
			2E	2	00 00 – 00 01	Oscillator Out Invert Enable	Off, On	00 00	
			30	2	00 00 – 03 7F	Oscillator Out Level	0 – 511	03 7F (OSC1) 00 00 (OSC 2, 3)	
			32	2	00 01 – 03 7F	Oscillator Out Level Velocity Sensitivity	–255 – 0 – +255	02 00	
			34	2	00 00 – 01 7F	Oscillator EG Attack Time	0 – 255	00 00	
			36	2	00 00 – 01 7F	Oscillator EG Decay Time	0 – 255	01 20	
			38	2	00 00 – 03 7F	Oscillator EG Sustain Level	0 – 511	00 00	
			3A	2	00 00 – 01 7F	Oscillator EG Release Time	0 – 255	01 20	
			3C	2	00 00 – 00 04	Oscillator LFO Wave	Saw, Square, Triangle, Sine, Random	00 02	
			3E	2	00 00 – 03 1F	Oscillator LFO Speed	0 – 415	01 50	
			40	2	00 00 – 00 01	Oscillator LFO Key On Reset	Off, On	00 00	
			42	2	00 00 – 00 0F	Oscillator LFO Phase	0, 30, 45, 60, 90, 120, 135, 150, 180, 210, 225, 240, 270, 300, 315, 330[°]	00 00	
			44	2	00 00 – 00 7F	Oscillator LFO Delay Time	0 – 127	00 00	
			46	2	00 00 – 01 56	Oscillator LFO Fade In Time	0 – 214	00 00	
			48	2	00 00 – 00 7F	Part LFO Destination 1 Depth Ratio	0 – 127	00 7F	
			4A	2	00 00 – 00 7F	Part LFO Destination 2 Depth Ratio	0 – 127	00 7F	
			4C	2	00 00 – 00 7F	Part LFO Destination 3 Depth Ratio	0 – 127	00 7F	

TOTAL SIZE = 78 4E (HEX)

o = Oscillator number
0 – 2 Oscillator 1 – 3

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Range (HEX)	Parameter Name	Description	Default (HEX)	Notes
4p	03	0f	00	1	00 – 01	Filter Controller Box1 Switch	Off, On	01	
			01	1	00 – 01	Filter Controller Box2 Switch	Off, On	01	
			02	1	00 – 01	Filter Controller Box3 Switch	Off, On	01	
			03	1	00 – 01	Filter Controller Box4 Switch	Off, On	01	
			04	1	00 – 01	Filter Controller Box5 Switch	Off, On	01	
			05	1	00 – 01	Filter Controller Box6 Switch	Off, On	01	
			06	1	00 – 01	Filter Controller Box7 Switch	Off, On	01	
			07	1	00 – 01	Filter Controller Box8 Switch	Off, On	01	
			08	1	00 – 01	Filter Controller Box9 Switch	Off, On	01	
			09	1	00 – 01	Filter Controller Box10 Switch	Off, On	01	
			0A	1	00 – 01	Filter Controller Box11 Switch	Off, On	01	
			0B	1	00 – 01	Filter Controller Box12 Switch	Off, On	01	
			0C	1	00 – 01	Filter Controller Box13 Switch	Off, On	01	
			0D	1	00 – 01	Filter Controller Box14 Switch	Off, On	01	
			0E	1	00 – 01	Filter Controller Box15 Switch	Off, On	01	
			0F	1	00 – 01	Filter Controller Box16 Switch	Off, On	01	
			10	1	00 – 01	Filter Controller Box17 Switch	Off, On	01	
			11	1	00 – 01	Filter Controller Box18 Switch	Off, On	01	
			12	1	00 – 01	Filter Controller Box19 Switch	Off, On	01	
			13	1	00 – 01	Filter Controller Box20 Switch	Off, On	01	
			14	1	00 – 01	Filter Controller Box21 Switch	Off, On	01	
			15	1	00 – 01	Filter Controller Box22 Switch	Off, On	01	
			16	1	00 – 01	Filter Controller Box23 Switch	Off, On	01	
			17	1	00 – 01	Filter Controller Box24 Switch	Off, On	01	
			18	1	00 – 01	Filter Controller Box25 Switch	Off, On	01	
			19	1	00 – 01	Filter Controller Box26 Switch	Off, On	01	
			1A	1	00 – 01	Filter Controller Box27 Switch	Off, On	01	
			1B	1	00 – 01	Filter Controller Box28 Switch	Off, On	01	
			1C	1	00 – 01	Filter Controller Box29 Switch	Off, On	01	
			1D	1	00 – 01	Filter Controller Box30 Switch	Off, On	01	
			1E	1	00 – 01	Filter Controller Box31 Switch	Off, On	01	
			1F	1	00 – 01	Filter Controller Box32 Switch	Off, On	01	
			20	1	00 – 01	Filter Key Controller Box1 Switch	Off, On	01	
			21	1	00 – 01	Filter Key Controller Box2 Switch	Off, On	01	
			22	1	00 – 01	Filter Key Controller Box3 Switch	Off, On	01	
			23	1	00 – 01	Filter Key Controller Box4 Switch	Off, On	01	
			24	1	00 – 01	LFO Box 1 Switch	Off, On	01	
			25	1	00 – 01	LFO Box 2 Switch	Off, On	01	
			26	1	00 – 01	LFO Box 3 Switch	Off, On	01	

TOTAL SIZE = 39 27

f = Filter number
0 – 1 Filter 1 – 2

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
4p	04	0f	00	2	00 00 – 00 0A	Filter Type	Thru, LPF24, LPF18, LPF12, LPF6, HPF24, HPF18, HPF12, HPF6, BPF12, BPF6	00 01 (Filter 1) 00 05 (Filter 2)	
			02	2	00 00 – 07 7F	Filter Cutoff	0 – 1023	07 7F (Filter 1) 00 00 (Filter 2)	
			04	2	00 01 – 03 7F	Filter Cutoff Velocity Sensitivity	–255 – 0 – +255	02 00	
			06	2	00 40 – 03 40	Filter Cutoff EG Depth	–9600 – +9600 [cent], 50 [cent] step	02 00	
			08	2	00 01 – 03 7F	Filter Cutoff EG Depth Velocity Sensitivity	–255 – 0 – +255	02 00	
			0A	2	00 40 – 03 40	Filter Cutoff LFO Depth	–9600 – +9600 [cent], 50 [cent] step	02 00	
			0C	2	00 00 – 00 05	Filter Cutoff Key Follow	Off, 1/3, 1/2, 2/3, 1, 2 [oct]	00 00	
			0E	2	00 00 – 01 7F	Filter Resonance	0 – 255	00 00	Not available for LPF6 and HPF6.
			10	2	00 01 – 03 7F	Filter Resonance Velocity Sensitivity	–255 – 0 – +255	02 00	Not available for LPF6 and HPF6.
			12	2	00 00 – 00 50	Filter Saturator Drive	0.0 – 60.0 [dB], 0.75 [dB] step	00 00	
			14	2	00 01 – 03 7F	Filter Saturator Drive Velocity Sensitivity	–255 – 0 – +255	02 00	
			16	2	00 20 – 00 60	Filter Out Level	–12.0 – +12.0 [dB], 0.375 [dB] step	00 40	

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
			18	2	00 00 – 00 7F	Part LFO Destination 1 Depth Ratio	0 – 127	00 7F	
			1A	2	00 00 – 00 7F	Part LFO Destination 2 Depth Ratio	0 – 127	00 7F	
			1C	2	00 00 – 00 7F	Part LFO Destination 3 Depth Ratio	0 – 127	00 7F	

TOTAL SIZE = 30 1E

f = Filter number
0 – 1 Filter 1 – 2

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
4p	05	00	00	2	00 00 – 01 7F	Modifier Wave Folder	0 – 255	00 00	
			02	2	00 01 – 03 7F	Modifier Wave Folder Velocity Sensitivity	–255 – 0 – +255	02 00	
			04	2	00 01 – 01 7F	Modifier Wave Folder EG Depth	–127 – 0 – +127	01 00	
			06	2	00 01 – 01 7F	Modifier Wave Folder LFO Depth	–127 – 0 – +127	01 00	
			08	2	00 00 – 01 7F	Modifier Wave Folder Texture	0 – 255	01 00	
			0A	2	00 00 – 00 01	Modifier Wave Folder Type	Soft, Hard	00 01	
			0C	2	00 00 – 01 7F	Modifier EG Attack Time	0 – 255	00 00	
			0E	2	00 00 – 01 7F	Modifier EG Decay Time	0 – 255	01 20	
			10	2	00 00 – 03 7F	Modifier EG Sustain Level	0 – 511	00 00	
			12	2	00 00 – 01 7F	Modifier EG Release Time	0 – 255	01 20	
			14	2	00 01 – 03 7F	Modifier EG Time Velocity Sensitivity	–255 – 0 – +255	02 00	
			16	2	00 00 – 00 04	Modifier LFO Wave	Saw, Square, Triangle, Sine, Random	00 02	
			18	2	00 00 – 03 1F	Modifier LFO Speed	0 – 415	01 50	
			1A	2	00 00 – 00 01	Modifier LFO Key On Reset	OFF, ON	00 00	
			1C	2	00 00 – 00 0F	Modifier LFO Phase	0, 30, 45, 60, 90, 120, 135, 150, 180, 210, 225, 240, 270, 300, 315, 330[°]	00 00	
			1E	2	00 00 – 00 7F	Modifier LFO Delay Time	0 – 127	00 00	
			20	2	00 00 – 01 56	Modifier LFO Fade In Time	0 – 214	00 00	

TOTAL SIZE = 34 22

p = Part number
0 – F Part 1 – 16 (AN-X)

Address				Size	Data Range MSB/ LSB (HEX)	Parameter Name	Description	Default MSB/ LSB (HEX)	Notes
7p	00	00	00	2	00 01 – 03 7F	Oscillator 1 Ring / FM	Ring 255 – 0 – FM 255	02 00	
			02	2	00 01 – 03 7F	Oscillator 2 Ring / FM	Ring 255 – 0 – FM 255	02 00	

TOTAL SIZE = 4 04

p = Part number
0 – F Part 1 – 16 (AN-X)

YAMAHA [Music Synthesizer - synthesizer part] Date :02-JUL-2025
Model MODX M6/M7/M8 MIDI Implementation Chart Version : 1.0

Function...		Transmitted	Recognized	Remarks
Basic Channel	Default	1 - 16	1 - 16	Memorized
	Changed	1 - 16	X	
Mode	Default	3	3	Memorized
	Messages	X	X	
	Altered	**********	X	
Note Number : True voice		0 - 127 **********	0 - 127 0 - 127	
Velocity	Note ON	O 9nH,v=1-127	O 9nH,v=1-127	
	Note OFF	X 9nH,v=0	X	
After Touch	Key's	X	O	
	Ch's	X	O *1	
Pitch Bend		O	O *1	
Control Change	0,32	O *1	O *1	Bank Select
	1,7,11	O	O *1	
	10	X	O *1	
	5	O	O *1	Portamento Time
	6,38	X	O *1	Data Entry
	64	O	O *1	Sustain Sw
	65	O	O *1	Portamento Sw
	66	X	O *1	Sostenuto
	71-75	O	O *1	Sound Controller
	91,94	O	O *1	Effect Depth
	96-97	X	O *1	RPN Inc,Dec
	100-101	X	O *1	RPN LSB,MSB
	1-95	O	O *1	Assignable Cntrl
	126,127	O	O	Mono/Poly Sw
Prog Change : True #		O 0 - 127 *1 **********	O 0 - 127 *1 0 - 127 *1	
System Exclusive		O	O	
Common	: Song Pos.	X	X	
	: Song Sel.	X	X	
	: Tune	X	X	
System Real Time	: Clock	X	O *2	
	: Commands	X	X	
Aux Mes-sages	: All Sound Off	X	O (120,126,127)	
	: Reset All Cntrls	X	O (121)	
	: Local ON/OFF	X	X	
	: All Notes OFF	X	O (123-125)	
	: Active Sense	O	O	
	: Reset	X	X	

Notes: *1 receive/transmit if switch is on.
*2 if MIDI Sync is MIDI.

Mode 1 : OMNI ON , POLY Mode 2 : OMNI ON ,MONO O : Yes
Mode 3 : OMNI OFF, POLY Mode 4 : OMNI OFF,MONO X : No

YAMAHA [Music Synthesizer - sequencer part] Date :02-JUL-2025
Model MODX M6/M7/M8 MIDI Implementation Chart Version : 1.0

Function...		Transmitted	Recognized	Remarks
Basic Channel	Default	1 - 16	1 - 16	Memorized
	Changed	X	X	
Mode	Default	X	X	
	Messages	X	X	
	Altered	**********	X	
Note Number : True voice		0 - 127 **********	0 - 127 0 - 127	
Velocity	Note ON	O 9nH,v=1-127	O 9nH,v=1-127	
	Note OFF	X 9nH,v=0	X	
After Touch	Key's	O	O	
	Ch's	O	O	
Pitch Bend		O	O	
Control Change	0-121	O	O	
Prog Change : True #		O 0 - 127 **********	O 0 - 127	
System Exclusive		O	O	
Common	: Song Pos.	O	O	
	: Song Sel.	X	X	
	: Tune	X	X	
System Real Time	: Clock	O *2	O *3	
	: Commands	O *1	O *1	
Aux Mes-sages	: All Sound Off	O	O	
	: Reset All Cntrls	O	O	
	: Local ON/OFF	O	O	
	: All Notes OFF	O	O	
	: Active Sense	X	X	
	: Reset	X	X	

Notes: *1 if Song Play/Stop Receive/Transmit is on.
*2 if MIDI Clock Out is on.
*3 if MIDI Sync is MIDI.

Mode 1 : OMNI ON , POLY Mode 2 : OMNI ON ,MONO O : Yes
Mode 3 : OMNI OFF, POLY Mode 4 : OMNI OFF,MONO X : No

MIDI Messages in UMP Format

UMP version: 1.1

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	**Note**
UTILITY	NOOP	0x0	res.	0x0				
	JR Clock			0x1				
	JR Timestamp			0x2				
	Delta Clockstamp Ticks Per Quarter Note			0x3				
	Delta Clockstamp			0x4				

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	
SYSTEM COMMON	MIDI Time Code	0x1	0xg	0xF1				
	Song Position Pointer			0xF2				
	Song Select			0xF3				
	Tune Request			0xF6				
	Timing Clock			0xF8		✓ *1	✓ *2	*1 if MIDI Clock Out is on. *2 if MIDI Sync is MIDI. *3 if Song Play/Stop Transmit is On *4 if Song Play/Stop Receive is On
	Start			0xFA		✓ *3	✓ *4	
	Continue			0xFB		✓ *3	✓ *4	
	Stop			0xFC		✓ *3	✓ *4	
	Active Sensing			0xFE		✓	✓	
	Reset			0xFF				

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	
MIDI 1.0 CHANNEL VOICE	Note Off	0x2	0xg	0x8	0xn		✓	See “MIDI Data Format (3-1) CHANNEL VOICE MESSAGES” for details on message.
	Note On			0x9	0xn		✓	
	Poly Pressure			0xA	0xn		✓	
	Control Change			0xB	0xn		✓	
	Program Change			0xC	0xn		✓	
	Channel Pressure			0xD	0xn		✓	
	Pitch Bend			0xE	0xn		✓	

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	
DATA 64 BIT	SysEx In 1 Packet	0x3	0xg	0x0	0xb	✓	✓	See “MIDI Data Format (3-5) SYSTEM EXCLUSIVE MESSAGE” for details on message.
	SysEx Start			0x1	0xb	✓	✓	
	SysEx Continue			0x2	0xb	✓	✓	
	SysEx End			0x3	0xb	✓	✓	

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	
MIDI 2.0 CHANNEL VOICE	Regist. Per-Note Ctrl.	0x4	0xg	0x0	0xn			
	Assign, Per-Note Ctrl.			0x1	0xn			
	Registerd Ctrl. (RPN)			0x2	0xn		✓	Only the following messages are supported. PITCH BEND SENS. (Bank:0x00, Index:0x00) FINE TUNING (Bank:0x01, Index:0x00) COARSE TUNING (Bank:0x02, Index:0x00)
	Assignable Ctrl. (NRPN)			0x3	0xn			
	Relative Regist. Ctrl.			0x4	0xn			
	Relative Assign. Ctrl.			0x5	0xn			
	Per-Note Pitch Bend			0x6	0xn			
	Note Off			0x8	0xn	✓	✓	Attribute type and value are not supported.
	Note On			0x9	0xn	✓	✓	Attribute type and value are not supported.
	Poly Pressure			0xA	0xn	✓*	✓	*Only MONTAGE M8x
	Control Change			0xB	0xn	✓	✓	See “MIDI Data Format (3-1-3) CONTROL CHANGE” for details on message.
	Program Change			0xC	0xn	✓	✓	
	Channel Pressure			0xD	0xn	✓	✓	
	Pitch Bend			0xE	0xn	✓	✓	
	Per-Note Management			0xF	0xn			

		Byte 1		Byte 2				
Message Type	**MIDI Message**	**4 bit MT**	**4 bit Group**	**Status**	**Channel / Other**	**Tx**	**Rx**	
DATA 128 BIT	SysEx8 in 1 Packet	0x5	0xg	0x0	#bytes			
	SysEx8 Start			0x1	#bytes			
	SysEx8 Continue			0x2	#bytes			
	SysEx8 End			0x3	#bytes			
	Mixed Data Set Header			0x8	mds id			
	Mixed Data Set Payload			0x9	mds id			

Message Type	MIDI Message	4 bit MT	2 bit form	Status	Channel / Other	Tx	Rx	
UMP Stream	Endpoint Discovery	0xF	0	0x00			✓	
	Endpoint Info Notification		0	0x01		✓		
	Device Identity Notification		0	0x02		✓		
	Endpoint Name Notification		0-3	0x03		✓		
	Product Instance Id Notification		0-3	0x04		✓		
	Stream Configuration Request		0	0x05			✓	
	Stream Configuration Notification		0	0x06		✓		
	Function Block Discovery		0	0x10			✓	
	Function Block Info Notification		0	0x11		✓		
	Function Block Name Notification		0-3	0x12		✓		
	Start of Clip		0	0x20				
	End of Clip		0	0x21				

MIDI Capability Inquiry (MIDI-CI)

Profile Configuration	Not Supported
Property Exchange	Not Supported
Process Inquiry	Not Supported

© 2025 Yamaha Corporation
Published 01/2026 MW-B0